



VALUE AT THE SPINDLE®

2023 Global Product Catalog



www.kyocera-sgstool.com

ISO 9001:2015 Certified



VALUE AT THE SPINDLE®

KYOCERA SGS Precision Tools (KSPT) is an ISO 9001:2015 Certified manufacturer of industry leading round solid carbide cutting tools. State of the art manufacturing and warehouse facilities have the capacity and processes to meet the quality and delivery demands of customers in all markets around the world. Complete inspections performed within its metallurgical lab and manufacturing quality departments ensure the use of high quality carbide and reliable manufacturing consistency regardless of when a cutting tool is produced.

KSPT is proud to have pioneered some of the world's most advanced cutting technologies due to rigorous testing of tools, coatings, and materials within its Global Innovation Center. It is this commitment to innovation that has launched patented products and technologies like the Z-Carb with its variable geometry and cutting edge preparation, Series 43 APR® and APF® ultra high performance aluminum cutting tools, and the JetStream coolant technology.

SGS has become an important part of the KYOCERA Precision Tools family, and while the name has changed, one thing has not. Its dedicated people and their relentless commitment to the customer. KSPT Technical Sales Engineers, Application Specialists, and Distribution Partners blanket the globe, delivering reliable service and support to all market segments. It is these people and products that drive innovative application strategies and cutting tool technologies into the end user, continually exceeding expectations and providing the most Value at the Spindle®.



Table of Contents

KYOCERA SGS Precision Tools	2
KYOCERA SGS Precision Tools Europe Ltd. . .	4
Global Innovation Center	5
Tooling Services.....	6
Tech Hub	7
Medical Division	8
Tool Wizard®	9

OVERVIEW

Common Legend.....	10
End Mill Legend.....	12
Drill Legend.....	13
Router Legend	14

COATINGS	15

MILLING

High Performance End Mills.....	16
End Mill Matrix.....	22
High Performance Aluminum End Mills . . .	128
General Application End Mills	272

HOLE MAKING

High Performance Drills	178
Drill Matrix	182
General Application Drills.....	332
General Application Countersinks	358
General Application Reamers	374

ROUTING

High Performance Routers.....	386
General Application Routers	396

TECHNICAL INFORMATION

EDP Index	400
KSPT Reference Information	421
Decimal Equivalent Chart	422
Hardness Conversion Chart	423





MORE THAN JUST ANOTHER CUTTING TOOL SUPPLIER

KYOCERA SGS PRECISION TOOLS EUROPE, LTD.

The state of the art KYOCERA SGS Precision Tools Europe facility is located in Wokingham, England and is focused on the manufacture of special cutting tools, high accuracy form tools, tool modifications and regrinds. A highly skilled team of professionals specialize in the supply and support of high performance tools for the Aerospace, Medical, Power Generation and Motorsport markets.



KYOCERA SGS Precision Tools Europe also offers a full range of end mill and drill products as follows:

- Multi-Million Euro Warehouse Stocking Full Range of Catalog Products
- Same Day Shipment on Stock Items
- Multi-Lingual Sales and Technical Support
- Online Portal for Stock Availability
- High Performance Product and Application Training, Including the New KYOCERA SGS Tool Clinic

Additional services provided at this facility include:

- A Fast Track for Special Tools Via Our Rapid Response Centre
- Inhouse PVD coating facility and R&D Centre
- Product Research and Development
- Product Engineering and Tool Application Support
- CAD/CAM Software Support





GLOBAL INNOVATION CENTER

CUTTING TOOL INNOVATION

One of the main goals of the KSPT Global Innovation Center is to bring value to the customer's spindle; one of the ways this is achieved is by producing innovative cutting tool geometries. Using the most advanced technology and techniques available in today's market, KSPT is dedicated to developing new products that will take the industry to the next level.

- State of the art cutting tool measuring and monitoring technology
- Continuous market research and training to stay up to date
- Unique and complex tool designs

TECHNICAL TRAINING & EDUCATION

The KSPT Global Innovation Center sets out to involve our trainees in engaging and challenging training regardless of where they are at in their career with a balance of demonstrations, presentations, and hands-on challenges.

- Our own KSPT team members go through the same core training we provide to our valued distribution partners
- Two levels of KSPT Campus tool clinics available
- On-site and online customer training

APPLICATION SUPPORT AND TESTING

At the KSPT Global Innovation Center, we understand that every application comes with its own challenges and at the end of the day, the customer wants to minimize the cost. This is where our R&D lab, engineers, and range of machining elements come into play. We can closely replicate the customer's application and provide feedback on how we suggest approaching it, all without the need to halt production in their own shop.

- A wide range of tool holding, fixturing, material, coolants/delivery methods, and machines
- Technical support and troubleshooting by phone, email, or web call
- Research and development



TOOLING SERVICES

KSPT is committed to providing superior tooling services in the areas of Reconditioning, Recoating, Regrinding, Specials and Alterations. These services are offered to provide unique solutions and enhanced tool life with involvement from the KSPT Technical Support Team.

KSPT proudly offers Tooling Services in North America and Europe.



KSPT TOOLING SERVICES FACILITIES

UNITED STATES OF AMERICA KSPT

150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146

KYOCERA SGS Precision Tools West Coast Service Center

1832 W. Collins Ave.
Orange, California 92867
phone: (714) 363-3701
fax: (714) 363-3711
email: sgswest@kyocera-sgstool.com

EUROPE KSPTE


10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com

KYOCERA SGS Precision Tools Tech Hub

149 Slayton Avenue
Danville, Virginia 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com



BEFORE

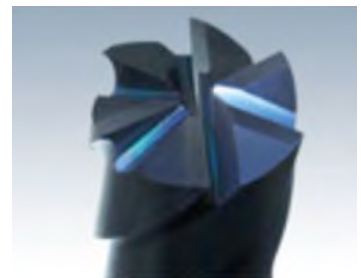



AFTER

KYOCERA SGS Tech Hub

The KYOCERA SGS Tech Hub (KSTH) is a purpose created division of KYOCERA SGS Precision Tools Inc. created to focus on designing custom high-performance cutting tool solutions to compliment the deep range of standard catalog tools KSPT provides. With KSTH having a sole focus and culture designed around prioritizing and understanding the unique challenges of special tailored tooling, KSPT is able to provide complete solutions that maximize your result.


CUSTOM CUTTING TOOL SOLUTIONS

- As part of the KSPT dedication to providing Value at the Spindle®, a multi-million dollar investment was made for a division solely focused on custom tailored special cutting tools
- The state of the art facility is completely designed, staffed, and committed to addressing blueprint special engineered solid carbide round tool solutions
- It was critical to build a facility with the culture built around agile capacity and know how to quote, build, and ship complex special tools with industry leading high performance tool designs
- Special tooling, the attention required and solutions needed, is not simply a department or isolated machines on the factory floor but rather a standalone division focused and prepared to react with effectiveness and efficiency

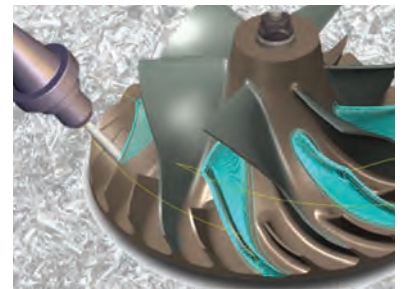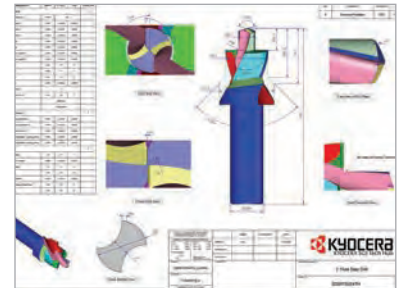

KYOCERA SGS Tech Hub

149 Slayton Avenue
Danville, Virginia 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com

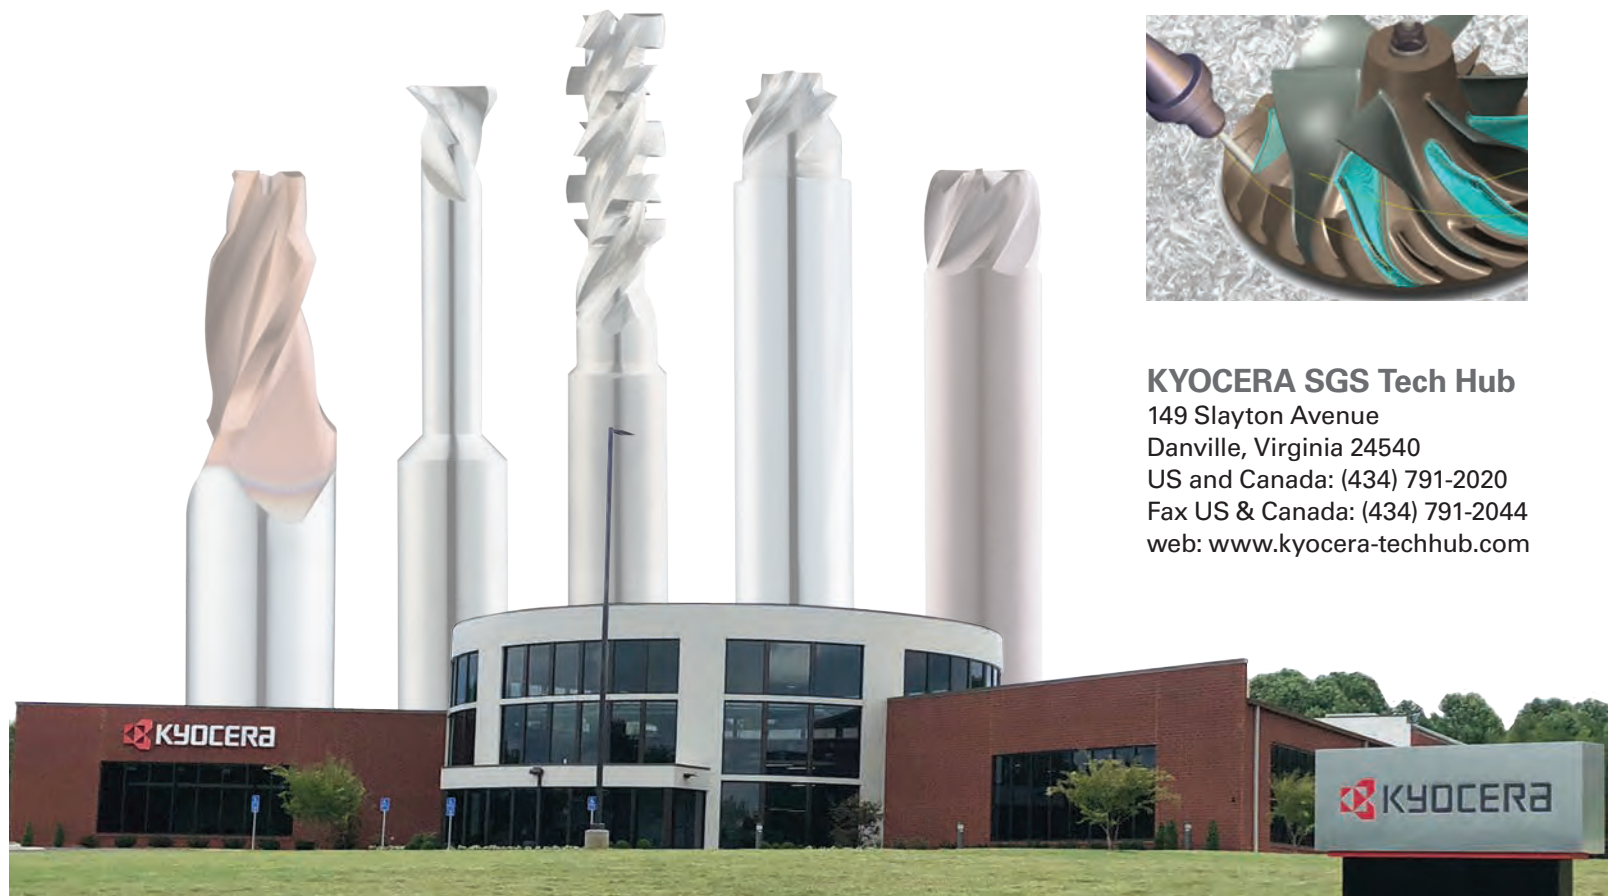



KYOCERA SGS Precision Tools Medical Division

WHO WE ARE

With over 20 years of industry experience, KSPT Medical produces unique, customer designed orthopedic devices using highly trained engineers dedicated to new technology. KSPT Medical is a division of KYOCERA SGS Precision Tools, who proudly pioneered some of the world's most advanced metal cutting technology and sells to more than 60 countries. With over 20 years of industry experience, KSPT Medical Division is ISO 13485:2016 Certified and is FDA Registered in the production of medical devices in the orthopedic marketplace.

ENGINEERING

We approach each opportunity as a project and manage it as such. We pride ourselves on engineering each project to the specific needs of our customers. Providing quotes often within 24 hours and following through with detailed drawings, solid models, process plans, and program simulations if needed. Our goal is to work hand in hand with the end user and maintain constant communication to customize our support to their needs.

MACHINING CAPABILITIES

- GRINDING
- MILLING
- TURNING
- PROFILING
- BENDING
- Services Offered; Welding, Various Coatings, Anodizing, Passivation, Electropolishing, Laser Etching and Heat Treating

KYOCERA SGS Precision Tools Medical Division

201 S. Towerview Dr.
Columbia City, Indiana 46725
phone: (260) 244-7677
fax: (260) 244-7466
www.ksptmedical.com

To Request a Quote:
rfq@kyocera-sgstool.com

Customer Service and Orders:
salesmd@kyocera-sgstool.com



REGISTERED ISO 13485:2016 Certified



VALUE AT THE SPINDLE®

An interactive and dynamic platform to help select the correct SGS tool for the operation and provide optimal machining parameters.

- A quick and reliable 3 step process:
 1. Choose the material
 2. Enter the application
 3. From the list of recommended results, choose the tool that best fits your machining needs
- Speed & Feed rates will be generated based on application parameters combined with the selected tool's capabilities in the desired material.

TO SIGN UP FOR THE TOOLWIZARD®:

1. Visit Toolwizard.kyocera-sgstool.com
2. Register for an account
3. Start calculating
4. Start saving!



Common Legend **Leyenda habitual** **Légende commune** **Gemeinsame Legende**

TO ORDER: Please specify quantity and EDP number.

PARA SU PEDIDO: Por favor especifique cantidad y número de EDP.

POUR COMMANDER: Veuillez préciser la quantité et le code article EDP.

BESTELLEN: Bitte Menge und EDV-Nummer angeben.

RETURN POLICY: An RMA number must accompany all product returns.
Contact your Customer Service Representative for an RMA number.

DEVOLUCIONES: Todo material devuelto debe ir acompañado de un número de RMA correspondiente.
Para solicitarlo, póngase en contacto con su Representante de Atención al Cliente.

POLITIQUE DE RETOUR: Tous les produits retournés doivent être accompagnés d'un numéro RMA.
Contacter votre interlocuteur commercial pour obtenir un numéro RMA.

RÜCKNAHMEGARANTIE: Eine RMA-Nummer (Rücksendegenehmigung) muss bei allen Produktrücksendungen beiliegen.
Wenden Sie sich bitte an Ihren Kundendienstmitarbeiter für RMA-Nummer.

REGULATION SAFETY GLASSES SHOULD ALWAYS BE WORN WHEN USING HIGH-SPEED CUTTING EQUIPMENT

DEBEN USARSE GAFAS PROTECTORAS CUANDO SE UTILICEN EQUIPOS DE ALTA VELOCIDAD

DES LUNETTES DE SÉCURITÉ DOIVENT ÊTRE IMPÉRATIVEMENT PORTÉES LORS D'UTILISATION D'OUTILS À GRANDE VITESSE

BEI SCHNELL LAUFENDEN SPANABHEBENDEN MASCHINEN MÜSSEN IMMER DIE VORGESCHRIEBENEN SICHERHEITSBRILLEN GETRAGEN WERDEN



WARNING: This product can expose you to chemicals including Cobalt, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov



ADVERTENCIA: Este producto puede exponerlo a químicos como el Cobalto, reconocido como cancerígeno en el estado de California. Para más información visite esta página web: www.p65warnings.ca.gov



ATTENTION: Ce produit vous expose aux produits chimiques incluant le Cobalt, qui est reconnu par l'Etat de Californie à être une cause de cancer. Pour plus d'information veuillez regarder sur: www.p65warnings.ca.gov



WARNUNG: Dieses Produkt kann Sie mit Chemikalien wie Kobalt aussetzen, das dem Staat Kalifornien als krebserregend bekannt ist. Für weitere Informationen, besuchen Sie: www.p65warnings.ca.gov

INTELLECTUAL PROPERTY
PROPIEDAD INTELECTUAL
PROPRIÉTÉ INTELLECTUELLE
GEISTIGES EIGENTUM

KYOCERA SGS Precision Tools holds more than 20 patents globally. Please visit our website at www.kyocera-sgstool.com to learn more.

KYOCERA SGS Precision Tools posee más de 20 patentes a nivel mundial. Para más información, visite nuestra página web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools possède plus de 20 brevets mondialement reconnus. Pour plus d'information, veuillez consulter notre site web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools besitzt mehr als 20 Patente weltweit. Bitte besuchen Sie unsere Webseite www.kyocera-sgstool.com für weitere Informationen.

Common Legend

Leyenda habitual

Légende commune

Gemeinsame Legende

MATERIALS MATERIALES MATÉRIAUX WERKSTOFFE



Steels (P)
Aceros
Aciers
Stähle



Stainless Steels (M)
Aceros Inoxidables
Aciers inoxydables
Nichtrostende Stähle



Cast Iron (K)
Acero de Fundición
Fonte
Grauguss



Non-Ferrous (N)
No Férricos
Non Ferreux
Nichteisenmetalle



High Temp Alloys (S)
Aleaciones Termorresistentes
Alliages hautes températures
Warmfeste Legierungen



Hardened Steels (H)
Aceros Endurecidos
Aciers Trempés
Gehärteter Stahl

TOOL LENGTH LONGITUDES DE HERRAMIENTAS LONGUEUR DE L'OUTIL WERKZEUGLÄNGE



Stub
Corta
Court
Kurze Bauform



Regular
Media
Moyen
Standard



Long
Larga
Long
Lang



Long Reach Neck
Larga con cuello
Détalonnage longue
portée
Freischliff



Extra Long
Extra-larga
Extra-long
Extra-Lang

FLUTES FILOS DENTS SCHNEIDEN



2 Flutes
2 Filos
2 Dents
2 Schneiden



3 Flutes
3 Filos
3 Dents
3 Schneiden



4 Flutes
4 Filos
4 Dents
4 Schneiden



5 Flutes
5 Filos
5 Dents
5 Schneiden



6 Flutes
6 Filos
6 Dents
6 Schneiden



7 Flutes
7 Filos
7 Dents
7 Schneiden



8 Flutes
8 Filos
8 Dents
8 Schneiden



9 Flutes
9 Filos
9 Dents
9 Schneiden



10 Flutes
10 Filos
10 Dents
10 Schneiden



11 Flutes
11 Filos
11 Dents
11 Schneiden



12 Flutes
12 Filos
12 Dents
12 Schneiden

End Mill Legend **Leyenda fresas** **Légende fraise** **Fräser-Legende**

END CONFIGURATIONS CONFIGURACIONES DE LA PUNTA FORME DE L'OUTIL EN BOUT ENDENAUSFÜHRUNG



Ball
Esférica
Boule
Kugelkopf



Corner
Plana con
borde romo
Rayon
mit Eckenradius



Square
Plana
Non rayonné
Scharfkantig



Linear taper
Perfil Cónico
Conique Droit
Linear Kegel



Tapered Circle
Segment
Perfil Cónico de
Segmento Circular
Conique Segment
de Cercle
Tonnen Segment



Picatinny Recoil
Groove
Fresa Riel Picatinny
Rainure Décalée
Picatinny
Picatinny Rückstoss
Nut



Picatinny Dovetail
Form
Fresa de Forma
Picatinny Cola de
Milano
Queue d'aronde
Picatinny
Picatinny Schwal-
benschwanz Form

SHANK TYPE TIPO DE VÁSTAGO TYPE DE QUEUE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade



WELDON
Drive Flat
Plano en el zanco
Entrainement
méplat
Spannfläche



DIN6535 HB
Drive Flat
DIN 6535 HB
Plano en el zanco
DIN 6535 HB
Entrainement
méplat DIN 6535 HB
Spannfläche
DIN 6535 HB



Right Spiral
Hélice con corte
a la derecha
Hélice droite
Rechtsspirale



Left Spiral
Hélice con corte
a la izquierda
Hélice gauche
Linksspirale



Variable Right Spiral
Hélice con corte a
la derecha y ángulo
variable
Hélice droite variable
Rechtsspirale,
variabel

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFOUILLISSEMENT KÜHLSCHMIERMittel-Optionen



Internal Coolant
Refrigeración interna
Refrigidissement
interne
Innenkühlung



JetStream Coolant
Slots
Ranuras de refrigeración
JetStream
Fentes de refroidissement
JetStream
JetStream-
Kühlmittelschlitze



Positive
Positivo
Positif
Positiv



Neutral
Neutro
Neutre
Neutral



Negative
Negativo
Négatif
Negativ



Variable
Variable
Variable
Variabel



Flute Spacing
Unequal
Espaciado
desigual de los
filos
Denture décalée
Nutenabstand
Ungleich



Chip Breaker
Rompevirutas
Brise-copeaux
Spanteiler

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE COUPE SPANWINKEL

ADDITIONAL GEOMETRY GEOMETRÍAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE WEITERE BAUFORMEN

All tools are in Right Cut Direction unless noted
Todas las herramientas son con corte a la derecha a menos que se indique lo contrario
Tous les outils ont une coupe à droite, sauf indications contraires
Alle Werkzeuge sind rechtsschneidend, soweit nicht anders angegeben

All tools are straight or non-tapered unless noted
Todas las herramientas son rectas o no cónicas a menos que se indique lo contrario
Tous les outils sont droits ou non coniques, sauf indication contraire
Alle Werkzeuge sind gerade oder nicht konisch, sofern nicht anders angegeben

Drill Legend

Leyenda brocas

Légende perçage

Bohrer-Legende

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade

REACH ALCANCE LONGUEUR NUTZLÄNGE

3xD

3xD Reach
Alcance 3xD
Longueur 3xD
3xD Nutzlänge

5xD

5xD Reach
Alcance 5xD
Longueur 5xD
5xD Nutzlänge

8xD

8xD Reach
Alcance 8xD
Longueur 8xD
8xD Nutzlänge

12xD

12xD Reach
Alcance 12xD
Longueur 12xD
12xD Nutzlänge

HELIX ANGLES ANGULOS DE LAS HELICES ANGLES DE L'HÉLICE SPANWINKEL



Right Spiral
Hélice con corte
a la derecha
Hélice à droite
Rechtsspirale



None
Ninguno
Aucun
gerade genutet

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFROIDISSEMENT KÜHLSCHMIERMittel-Optionen



Internal Coolant
Refrigeración interna
Refroidissement interne
Innenkühlung



External Coolant
Refrigeración externa
Refroidissement externe
Auskühlung

POINT ANGLE ÁNGULO DE PUNTA POINT D'ANGLE SPITZENWINKEL



Point Angle
Angulo de la Punta
Angle de pointe
Spitzenwinkel



Point Angles
Ángulos de punta
Angles de pointe
Spitzenwinkel

CHAMFER ANGLE ÁNGULO DE CHAFLÁN ANGLE DE CHANFREIN FASENWINKEL



Chamfer Angle
Ángulo de chaflán
Angle de chanfrein
Fasenwinkel

NUMBER OF MARGINS NÚMERO DE MÁRGENES NOMBRE DE MARGES ANZAHL DER RÄNDER



2 Margins
2 Márgenes
2 Marges
2 Ränder



3 Margins
3 Márgenes
3 Marges
3 Ränder



4 Margins
4 Márgenes
4 Marges
4 Ränder

NUMBER OF FLUTES FILOS DENTS SCHNEIDEN



1 Flute
1 Filo
1 Dent
1 Schneiden



2 Flutes
2 Filos
2 Dents
2 Schneiden



3 Flutes
3 Filos
3 Dents
3 Schneiden

Router Legend Leyenda ranuradores Légende détourage Konturenfräser-Legende

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Straight
 Recto
 Cylindrique
 Gerade

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE PENTE SPANWINKEL



Positive
 Positivo
 Positif
 Positiv



Neutral
 Neutro
 Neutre
 Neutral



Negative
 Negativo
 Négatif
 Negativ



Variable
 Variable
 Variable
 Variabel

HELIX ANGLES ANGULOS DE LAS HELICES ANGLES DE L'HELICE SPANWINKEL



Right Spiral
 Hélice con corte
 a la derecha
 Hélice à droite
 Rechtsspirale



Left Spiral
 Hélice con corte
 a la izquierda
 Hélice à gauche
 Linksspirale

ADDITIONAL GEOMETRY GEOMETRÍAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE WEITERE BAUFORMEN



Left Hand Cut Direction
 Fresado sentido izquierda
 Coupe vers la gauche
 Rechtsschneidend



Right Hand Cut Direction
 Fresado sentido derecha
 Coupe vers la droite
 Linksschneidend



Chip Breaker
 Rompevirutas
 Brise-copeaux
 Spanbrecher

Ti-NAMITE® and Di-NAMITE® Tool Coatings are specifically engineered for KSPT solid carbide rotary tools. The coating lineup includes proprietary processes that result in optimized tool life and increased speed and feed rates in a variety of applications.



	Coating	Identifying Color	Layer Structure	Thickness	Hardness (HV)	Coefficient of Friction (Fretting)	Thermal Stability	General Information
	Titanium Nitride (TiN)	gold	Multilayer	1–5 microns	2200	0.40–0.65	600°C / 1112°F	A general purpose coating with good adhesion and abrasion resistant properties. Suitable for a wide variety of materials.
	Aluminum Titanium Nitride (AlTiN)	dark grey	Nano structure	1–5 microns	3700	0.30	1100°C / 2010°F	Excellent thermal and chemical resistance allows for dry cutting and improvements in performance of carbide. The coating has a high hardness giving great protection against abrasive wear and erosion.
	Titanium DiBoride (TiB2)	light grey-silver	Monolayer	1–2 microns	4000	0.10–0.20	850°C / 1562°F	This ceramic based coating ensures a smooth surface and a low affinity to cold welding or edge build up, which makes it optimal for aluminum, copper, and other non-ferrous applications. It has high toughness and high hardness.
	Titanium Carbonitride (TiCN)	pink-red	Multilayer	1–5 microns	3000	0.30–0.45	400°C / 752°F	A very wear resistant coating with high toughness and shock resistance. Good in interrupted cuts found in applications like milling.
	Proprietary (TX)	black	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	The structural design of Ti-Namite-X is adapted to meet a diverse range of applications; everything from high- and low-alloy steels to hardened materials (up to 65 HRC core hardness). Ti-Namite-X is suitable for operations which require high cutting speeds, high temperatures at the cutting edge, and high metal removal rates.
	Crystalline Diamond (Diamond)	black	Monolayer	6–20 microns	>8000	0.15–0.20	800°C / 1470°F	This is the hardest coating available with the best abrasion resistance. Diamond coating is suitable for machining highly abrasive, non-ferrous materials such as CFRP and graphite.
	Proprietary (TM)	copper	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	Features include high wear resistance, reduced friction, and excellent prevention of edge build up. This coating provides superior material removal rates and tool life when used in high performance operations with difficult to machine materials like titanium.
	Proprietary (TH)	copper	Nano Composite	1–5 microns	3800	0.30	1100°C / 2010°F	This coating demonstrates a superior combination of hardness and adhesion in hard machining of molds and dies and machining high-alloy stainless steels for high temperature applications such as turbines. The smooth surface ensures optimum surface quality and decreases the temperature in the cutting zone by reducing friction.

Other coatings available upon request.

High Performance End Mills



Milling

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Z-Carb-HPR	Z5	5 Flute Rougher Square End Fractional	30	35
	Z5CR	5 Flute Rougher Corner Radius Fractional	30	35
	Z5MCR	5 Flute Rougher Corner Radius Metric	37	39
Z-Carb-AP	Z1PCR	4 Flute Variable Rake Corner Radius Fractional	41	46
	Z1PLC	4 Flute Variable Rake Long Reach Corner Radius Fractional	44	46
	Z1PLB	4 Flute Variable Rake Ball End Long Reach Fractional	45	46
	Z1MPCR	4 Flute Variable Rake Corner Radius Metric	48	51
	Z1MPIC	4 Flute Variable Rake Intermediate Reach Corner Radius Metric	50	51
	Z1MPLC	4 Flute Variable Rake Long Reach Corner Radius Metric	50	51
Z-Carb	Z1	4 Flute Variable Geometry Square End Fractional	41	46
	Z16CR	4 Flute Variable Geometry Corner Radius Fractional	41	46
	Z1B	4 Flute Variable Geometry Ball End Fractional	53	54
	Z1M	4 Flute Variable Geometry Square End Metric	48	51
	Z1MB	4 Flute Variable Geometry Ball End Metric	56	57
Z-Carb-HTA	ZH1CR	4 Flute Variable Geometry High Temp Alloys Corner Radius Fractional	59	60
	ZH1MCR	4 Flute Variable Geometry High Temp Alloys Corner Radius Metric	61	62
	ZH1MCRS	4 Flute Variable Geometry High Temp Alloys Stub Corner Radius Metric	61	62
Z-Carb-MD	ZD1CR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Fractional	63	64
	ZD1MCR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Metric	63	64
V-Carb	55	5 Flute Finisher & Semi-Finisher Square End Fractional	65	68
	55CR	5 Flute Finisher & Semi-Finisher Corner Radius Fractional	65	68
	55M	5 Flute Finisher & Semi-Finisher Square End Metric	70	74
	55MCR	5 Flute Finisher & Semi-Finisher Corner Radius Metric	70	74
	55B	5 Flute Finisher & Semi-Finisher Ball End Fractional	67	68
	55MB	5 Flute Finisher & Semi-Finisher Ball End Metric	73	74
T-Carb®	51	6 Flute High Speed Machining Square End Fractional	76	79
	51CR	6 Flute High Speed Machining Corner Radius Fractional	76	79
	51L	6 Flute High Speed Machining Square End Long Reach Fractional	77	79
	51LC	6 Flute High Speed Machining Long Reach Corner Radius Fractional	77	79
	51B	6 Flute High Speed Machining Ball End Fractional	78	79
	51LB	6 Flute High Speed Machining Ball End Long Reach Fractional	78	79
	51M	6 Flute High Speed Machining Square End Metric	81	84
	51MCR	6 Flute High Speed Machining Corner Radius Metric	81	84
	51ML	6 Flute High Speed Machining Square End Long Reach Metric	82	84
	51MLC	6 Flute High Speed Machining Long Reach Corner Radius Metric	82	84

Speed & Feed Recommendations listed after each series

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
H-Carb	51MB	6 Flute High Speed Machining Ball End Metric	83	84
	51MLB	6 Flute High Speed Machining Ball End Long Reach Metric	83	84
	77	7 Flute High Efficiency Square End Fractional	86	88
	77CR	7 Flute High Efficiency Corner Radius Fractional	86	88
	77M	7 Flute High Efficiency Square End Metric	90	92
	77MCR	7 Flute High Efficiency Corner Radius Metric	90	92
Multi-Carb	66	Multi-Flute Finisher Square End Fractional	94	95
	66CR	Multi-Flute Finisher Corner Radius Fractional	94	95
	66M	Multi-Flute Finisher Square End Metric	97	99
	66MCR	Multi-Flute Finisher Corner Radius Metric	97	99
Series 33	67B	Multi-Flute Finisher Tapered Circle Segment Barrel Tool Metric	101	102
	33CR	3 Flute Difficult to Machine Materials Corner Radius Fractional	103	104
	33MCR	3 Flute Difficult to Machine Materials Corner Radius Metric	106	107
Series 7	7	4 Flute Variable Geometry Long Length Square End Fractional	109	111
	7M	4 Flute Variable Geometry Long Length Square End Metric	112	113
	7B	4 Flute Variable Geometry Long Length Ball End Fractional	110	111
	7MB	4 Flute Variable Geometry Long Length Ball End Metric	112	113
Turbo-Carb	56B	2 Flute Contouring Long Reach Ball End Fractional	114	115
	56MB	2 Flute Contouring Long Reach Ball End Metric	114	115
Power-Carb®	57	6 Flute Finisher Square End Fractional	116	117
	57M	6 Flute Finisher Square End Metric	116	118
CFRP Slow Helix	27	4 Flute Slow Helix Square End Fractional	119	120
	27M	4 Flute Slow Helix Square End Metric	119	121
Picatinny Rail Tools	PRT	3 Flute Non-Ferrous Recoil Groove Tool Fractional	122	124
	PRT	5 Flute Non-Ferrous Dovetail Form Tool Fractional	125	127
	PRT	3 Flute Ferrous Recoil Groove Tool Fractional	122	123
	PRT	5 Flute Ferrous Dovetail Form Tool Fractional	125	126

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Z-Carb-HPR	Z5	5 filos, desbastador, punta cuadrada, fraccional	30	35
	Z5CR	5 filos, desbastador, radio angulado, fraccional	30	35
	Z5MCR	5 filos, desbastador, radio angulado, métrico	37	39
Z-Carb-AP	Z1PCR	4 filos, inclinación variable, radio angulado, fraccional	41	46
	Z1PLC	4 filos, inclinación variable, largo alcance, radio angulado, fraccional	44	46
	Z1PLB	4 filos, inclinación variable, punta esférica, largo alcance, fraccional	45	46
	Z1MPCR	4 filos, inclinación variable, radio angulado, métrico	48	51
	Z1MPIC	4 filos, inclinación variable, medio alcance, radio angulado, métrico	50	51
	Z1MPLC	4 filos, inclinación variable, largo alcance, radio angulado, métrico	50	51
	Z1	4 filos, geometría variable, punta cuadrada, fraccional	41	46
	Z16CR	4 filos, geometría variable, radio angulado, fraccional	41	46
Z-Carb	Z1B	4 filos, geometría variable, punta esférica, fraccional	53	54
	Z1M	4 filos, geometría variable, punta cuadrada, métrico	48	51
	Z1MB	4 filos, geometría variable, punta esférica, métrico	56	57
Z-Carb-HTA	ZH1CR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, fraccional	59	60
	ZH1MCR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, métrico	61	62
	ZH1MCRS	4 filos, geometría variable, aleaciones termorresistentes, versión corta, radio angulado, métrico	61	62
Z-Carb-MD	ZD1CR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, fraccional	63	64
	ZD1MCR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, métrico	63	64
V-Carb	55	5 filos, acabador y semiacabador, punta cuadrada, fraccional	65	68
	55CR	5 filos, acabador y semiacabador, radio angulado, fraccional	65	68
	55M	5 filos, acabador y semiacabador, punta cuadrada, métrico	70	74
	55MCR	5 filos, acabador y semiacabador, radio angulado, métrico	70	74
	55B	5 filos, acabador y semiacabador, punta esférica, fraccional	67	68
	55MB	5 filos, acabador y semiacabador, punta esférica, métrico	73	74
T-Carb®	51	6 filos, mecanizado de alta velocidad, punta cuadrada, fraccional	76	79
	51CR	6 filos mecanizado de alta velocidad, radio angulado, fraccional	76	79
	51L	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, fraccional	77	79
	51LC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, fraccional	77	79
	51B	6 filos, fresa esférica para mecanizados de alta velocidad, fraccional	78	79
	51LB	6 filos, fresa esférica larga para mecanizados de alta velocidad, fraccional	78	79
	51M	6 filos, mecanizado de alta velocidad, punta cuadrada, métrico	81	84
	51MCR	6 filos mecanizado de alta velocidad, radio angulado, métrico	81	84
	51ML	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, métrico	82	84
	51MLC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, métrico	82	84
	51MB	6 filos, fresa esférica para mecanizados de alta velocidad, métrico	83	84
	51MLB	6 filos, fresa esférica larga para mecanizados de alta velocidad, métrico	83	84
H-Carb	77	7 filos de alta eficiencia, punta cuadrada, fraccional	86	88
	77CR	7 filos de alta eficiencia, radio angulado, fraccional	86	88
	77M	7 filos métrica de alta eficiencia, punta cuadrada, métrico	90	92
	77MCR	7 filos métrica de alta eficiencia, radio angulado, métrico	90	92
Multi-Carb	66	Filo múltiple, acabador, punta cuadrada, fraccional	94	95
	66CR	Filo múltiple, acabador, radio angulado, fraccional	94	95
	66M	Filo múltiple, acabador, punta cuadrada, métrico	97	99
	66MCR	Filo múltiple, acabador, radio angulado, métrico	97	99
	67B	Fresa cónica circular multi-filos tipo barril, métrica	101	102
Serie 33	33CR	3 filos, materiales difíciles de mecanizar, radio angulado, fraccional	103	104
	33MCR	3 filos, materiales difíciles de mecanizar, radio angulado, métrico	106	107
Serie 7	7	4 filos, geometría variable, longitud larga, punta cuadrada, fraccional	109	111
	7M	4 filos, geometría variable, longitud larga, punta cuadrada, métrico	112	113
	7B	4 filos, geometría variable, longitud larga, punta esférica, fraccional	110	111
	7MB	4 filos, geometría variable, longitud larga, punta esférica, métrico	112	113
Turbo-Carb	56B	2 filos, contorneado, largo alcance, punta esférica, fraccional	114	115
	56MB	2 filos, contorneado, largo alcance, punta esférica, métrico	114	115
Power-Carb®	57	6 filos, acabador, punta cuadrada, fraccional	116	117
	57M	6 filos, acabador, punta cuadrada, métrico	116	118
Helicoidal de avance lento CFRP	27	4 filos, helicoidal de avance lento, punta cuadrada, fraccional	119	120
	27M	4 filos, helicoidal de avance lento, punta cuadrada, métrico	119	121
Herramientas de riel Picatinny	PRT	Herramienta de ranura de retroceso no ferrosa de 3 filos fraccional	122	124
	PRT	Herramienta de forma de cola de milano no ferrosa de 5 filos fraccional	125	127
	PRT	Herramienta de ranura de retroceso ferrosa de 3 filos fraccional	122	123
	PRT	Herramienta de cola de milano ferrosa de 5 filos fraccional	125	126

Recomendaciones de velocidades y avances mostradas tras cada serie


FRAISES A DETOURER UNIVERSELLES	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Z-Carb-HPR	Z5	5 dents non rayonné pour l'ébauche (fractionnel)	30	35
	Z5CR	5 dents rayonnée pour l'ébauche (fractionnel)	30	35
	Z5MCR	5 dents rayonnée pour l'ébauche (métrique)	37	39
Z-Carb-AP	Z1PCR	4 dents pas décalé et hélice variable rayonnés (fractionnel)	41	46
	Z1PLC	4 dents pas décalé et hélice variable rayonnés (fractionnel)	44	46
	Z1PLB	4 dents à vague de coupe variable longue portée à bout hémisphérique (fractionnel)	45	46
	Z1MPCR	4 dents pas décalé et hélice variable rayonnés (métrique)	48	51
	Z1MPIC	4 dents pas décalé, hélice variable, détalonné, rayonnés (métrique)	50	51
	Z1MPLC	4 dents pas décalé et hélice variable rayonnés (métrique)	50	51
	Z1	4 dents géométrie variable non rayonné (fractionnel)	41	46
	Z16CR	4 dents géométrie variable rayonné (fractionnel)	41	46
Z-Carb	Z1B	4 dents géométrie variable à bout hémisphérique (fractionnel)	53	54
	Z1M	4 dents géométrie variable non rayonné (métrique)	48	51
	Z1MB	4 dents géométrie variable à bout hémisphérique (métrique)	56	57
Z-Carb-HTA	ZH1CR	4 dents géométrie variable alliages haute température rayonné (fractionnel)	59	60
	ZH1MCR	4 dents géométrie variable alliages haute température rayonné (métrique)	61	62
	ZH1MCRS	4 dents géométrie variable, alliages haute température, longueur de l'outil court, rayonné (métrique)	61	62
Z-Carb-MD	ZD1CR	4 dents géométrie variable matériaux durs longue portée rayonné (fractionnel)	63	64
	ZD1MCR	4 dents géométrie variable matériaux durs longue portée rayonné (métrique)	63	64
V-Carb	55	5 dents en bout de finition et semi-finition plat (fractionnel)	65	68
	55CR	5 dents en bout de finition et semi-finition rayonné (fractionnel)	65	68
	55M	5 dents en bout de finition et semi-finition plat (métrique)	70	74
	55MCR	5 dents en bout de finition et semi-finition rayonné (métrique)	70	74
	55B	5 dents en bout de finition et semi-finition hémisphérique (fractionnel)	67	68
	55MB	5 dents en bout de finition et semi-finition hémisphérique (métrique)	73	74
T-Carb®	51	6 dents pour usinage grande vitesse non rayonné (fractionnel)	76	79
	51CR	6 dents pour usinage grande vitesse rayonné (fractionnel)	76	79
	51L	6 dents pour usinage grande vitesse non rayonné extra longue (fractionnel)	77	79
	51LC	6 dents pour usinage grande vitesse extra longue rayonné (fractionnel)	77	79
	51B	6 dents hémisphérique UGV dimensions cotes (fractionnel)	78	79
	51LB	6 dents hémisphérique détalonnée UGV dimensions cotes (fractionnel)	78	79
	51M	6 dents pour usinage grande vitesse non rayonné (métrique)	81	84
	51MCR	6 dents pour usinage grande vitesse rayonné (métrique)	81	84
	51ML	6 dents pour usinage grande vitesse non rayonné extra longue (métrique)	82	84
	51MLC	6 dents pour usinage grande vitesse extra longue rayonné (métrique)	82	84
	51MB	6 dents hémisphérique UGV dimensions cotes (métrique)	83	84
	51MLB	6 dents hémisphérique détalonnée UGV dimensions cotes (métrique)	83	84
H-Carb	77	7 dents hautes performances droite côtes (fractionnel)	86	88
	77CR	7 dents hautes performances torique côtes (fractionnel)	86	88
	77M	7 dents hautes performances droite côtes (métrique)	90	92
	77MCR	7 dents hautes performances torique côtes (métrique)	90	92
Multi-Carb	66	Multi-dents non rayonné pour finition (fractionnel)	94	95
	66CR	Multi-dents rayonné pour finition (fractionnel)	94	95
	66M	Multi-dents non rayonné pour finition (métrique)	97	99
	66MCR	Multi-dents rayonné pour finition (métrique)	97	99
	67B	Fraise tonneau à segments de cercle cotes (métrique)	101	102
Série 33	33CR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (fractionnel)	103	104
	33MCR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (métrique)	106	107
Série 7	7	4 dents géométrie variable à queue longue non rayonné (fractionnel)	109	111
	7M	4 dents géométrie variable à queue longue non rayonné (métrique)	112	113
	7B	4 dents géométrie variable à queue longue à bout hémisphérique (fractionnel)	110	111
	7MB	4 dents géométrie variable à queue longue à bout hémisphérique (métrique)	112	113
Turbo-Carb	56B	2 dents contournage longue portée à bout hémisphérique (fractionnel)	114	115
	56MB	2 dents contournage longue portée à bout hémisphérique (métrique)	114	115
Power-Carb®	57	6 dents en bout de finition plat (fractionnel)	116	117
	57M	6 dents en bout de finition plat (métrique)	116	118
CFRP hélice lente	27	4 dents hélice lente non rayonné (fractionnel)	119	120
	27M	4 dents hélice lente non rayonné (métrique)	119	121
Outils de rail Picatinny	PRT	Outil de rainure de recul non ferreux à 3 dents (fractionnel)	122	124
	PRT	Outil de forme en queue d'aronde non ferreux à 5 dents (fractionnel)	125	127
	PRT	Outil de rainure de recul ferreux à 3 dents (fractionnel)	122	123
	PRT	Outil en queue d'aronde ferreux à 5 dents (fractionnel)	125	126

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-SCHAFTFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Z-Carb-HPR	Z5	Zölliger Schruppfräser mit 5 Schneiden ohne Eckenradien	30	35
	Z5CR	Zölliger Schruppfräser mit 5 Schneiden und Eckenradien	30	35
	Z5MCR	Schruppfräser mit 5 Schneiden und Eckenradien	37	39
Z-Carb-AP	Z1PCR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	41	46
	Z1PLC	Zölliger Langlochfräser mit 4 variablen Schneiden und Eckenradien	44	46
	Z1PLB	Zölliger Radiuschaftfräser mit 4 Schneiden und variablem Spanwinkel	45	46
	Z1MPCR	Fräser mit 4 Schneiden und variablen Spanwinkel	48	51
	Z1MPIC	Fräser mittlerer Länge mit 4 variablen Schneiden und Eckenradien	50	51
	Z1MPLC	Langlochfräser mit 4 variablen Schneiden und Eckenradien	50	51
	Z1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	41	46
	Z16CR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	41	46
Z-Carb	Z1B	Zölliger Radiuschaftfräser mit 4 Schneiden und variabler Form	53	54
	Z1M	Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	48	51
	Z1MB	Radiuschaftfräser mit 4 Schneiden und variabler Form	56	57
Z-Carb-HTA	ZH1CR	Hochwarmfester zölliger Fräser mit 4 variablen Schneiden und Eckenradien	59	60
	ZH1MCR	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	61	62
	ZH1MCRS	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	61	62
Z-Carb-MD	ZD1CR	Zölliger Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	63	64
	ZD1MCR	Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	63	64
V-Carb	55	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	65	68
	55CR	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien	65	68
	55M	Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	70	74
	55MCR	Schlicht- und Halbschlichtfräser mit 5 Schneiden und Eckenradien	70	74
	55B	Schlicht- und Halbschlicht-Radiuschaftfräser mit 5 Schneiden ohne Eckenradien	67	68
	55MB	Schlicht- und Halbschlicht-Radiuschaftfräser mit 5 Schneiden und variabler Form	73	74
T-Carb®	51	Zölliger Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	76	79
	51CR	Zölliger Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	76	79
	51L	Zölliger Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	77	79
	51B	6-Schneider Vollradiusfräser für Hochgeschwindigkeitsbearbeitung	77	79
	51LB	6-Schneider Vollradiusfräser mit Freischliff für Hochgeschwindigkeitsbearbeitung	78	79
	51ML	Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	78	79
	51M	Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	81	84
	51MCR	Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien aus Schnellstahl	81	84
	51LC	Zölliger Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	82	84
	51MLC	Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	82	84
	51MB	6-Schneider Vollradiusfräser für Hochgeschwindigkeitsbearbeitung	83	84
	51MLB	6-Schneider Vollradiusfräser mit Freischliff für Hochgeschwindigkeitsbearbeitung	83	84
H-Carb	77	Zölliger Hocheffizienter mit 7 Schneiden ohne Eckenradien	86	88
	77CR	Zölliger Hocheffizienter mit 7 Schneiden und Eckenradien	86	88
	77M	Hocheffizienter mit 7 Schneiden ohne Eckenradien	90	92
	77MCR	Hocheffizienter mit 7 Schneiden und Eckenradien	90	92
Multi-Carb	66	Zölliger mehrschneidiger Schlichtfräser ohne Eckenradien	94	95
	66CR	Zölliger mehrschneidiger Schlichtfräser mit Eckenradien	94	95
	66M	mehrschneidiger Schlichtfräser ohne Eckenradien	97	99
	66MCR	mehrschneidiger Schlichtfräser mit Eckenradien	97	99
	67B	Metrischer mehrschneidiger Schlichtfräser, Tonnenfräser	101	102
Serie 33	33CR	Zölliger Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	103	104
	33MCR	Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	106	107
Serie 7	7	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	109	111
	7M	Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	112	113
	7B	Zölliger Langloch-Radiuschaftfräser mit 4 Schneiden und variabler Form	110	111
	7MB	Langloch-Radiuschaftfräser mit 4 Schneiden und variabler Form	112	113
Turbo-Carb	56B	Zölliger Langloch-Profil-Radiuschaftfräser mit 2 Schneiden	114	115
	56MB	Langloch-Profil-Radiuschaftfräser mit 2 Schneiden	114	115
Power-Carb®	57	Zölliger Schlichtfräser mit 6 Schneiden ohne Eckenradien	116	117
	57M	Schlichtfräser mit 6 Schneiden ohne Eckenradien	116	118
CFRP Slow Helix	27	Zölliger Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	119	120
	27M	Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	119	121
Picatinny	PRT	3 Flöte Nichteisen-Rückstoßnut Nut Grove Bruchteil	122	124
Schienenwerkzeuge	PRT	5 Flöte Nichteisen-Schwalbenschwanzform-Werkzeug Bruchteil	125	127
	PRT	3 Rillen-Eisenrückstoß-Nutwerkzeug fraktioniert	122	123
	PRT	5 Flöte Eisen Schwalbenschwanz Werkzeug gebrochen	125	126

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

End Mill Matrix

Preferred materials for each Series are designated below.			Coolant required in these materials Plunging not recommended in these materials																	
Cut depths (Ae & Ap) are based on a percentage of the cutter diameter (DC)  Material hardness and machinability affect speed, feed, and cut depths. Long flute or long reach tools require reduced rates and cut depths.			Material																	
						 								 						
			Low Carbon ≤ 20 HRC	Medium Carbon, Alloy 20 to 35 HRC	High Carbon, Alloy 35 to 45 HRC	Ferritic & Martensitic ≤ 45 HRC	Austenitic & Duplex ≤ 25 HRC	Precipitation Hardened ≤ 45 HRC	Low Alloy, Grey, Ductile ≤ 25 HRC	Med-High Alloy, Nodular 25 to 35 HRC	High Alloy, Nodular ≥ 35 HRC	Aluminum Alloys	Copper Alloys	Plastics, Composites	Titanium Alloys ≤ 45 HRC	Iron, Nickel, Cobalt Alloys ≤ 45 HRC	Refractory Alloys, Mo, Ta, W ≤ 35 HRC	High Carbon, Med Alloy 45 to 50 HRC	Tool, Mold & Die 45 to 55 HRC	Tool, Mold & Die 55 to 65 HRC
Name	Series	Page	Steel			Stainless Steel			Cast Iron			Non Ferrous			HRSA			Hard Steel		
Series 33	33	103	★	★	★	★	★	☆	★	★	☆				★	☆	☆	○	○	
Z-Carb-AP	Z1P	41	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Z-Carb-HTA	ZH1	59	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Series 7	7	109	★	★	★	★	★	★	★	★	★				★	★	☆	☆	○	
Z-Carb HPR	Z5	30	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
V-Carb	55	65	★	★	★	★	★	★	★	★	★				★	★	☆	○	○	
T-Carb®	51	76	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
H-Carb	77	86	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Multi Carb	66	94	★	★	★	★	☆	★	★	★	★				★	★	★	☆	○	
Multi Carb-B	67B	101	★	★	★	★	★	★	★	★	★				★	★	★	☆	○	
Picatinny Groove F	PRT	122	★	★	★	★	★	★							★					
Picatinny Dovetail F	PRT	125	★	★	★	★	★	★							★					
Turbo Carb	56B	114	★	★	★				★	★	★							★	★	★
Z-Carb-MD	ZD1	63			☆					☆	★							★	★	★
Power-Carb®	57	116									☆							★	★	★
Ski-Carb	44	173										★	☆	○						
S-Carb® 2 Flute	47	166										★	★	○						
S-Carb® 3 Flute	43	144										★	★	○						
S-Carb® APR-3	43APR-3	133										★	★	○						
S-Carb® APR-4	43APR-4	136										★	★	○						
S-Carb® APF	43APF	138										★	★	○						
S-Carb® APF-B	43APF-B	142										★	★	☆						
Picatinny Groove NF	PRT	122										★								
Picatinny Dovetail NF	PRT	125										★								
Slow Helix	27	119											☆	★						
CCR	20-CCR	386												★						
CCR Coarse	31-CCR	390												★						
Compression Router	25	393												★						
Up Cut Router	21	396										☆	○	★						
Down Cut Router	22	397										☆	○	★						

End Mill Matrix

	Preferred Cut Type for Series ★ Best ☆ Better ○ Good (blank) Not Recommended						Preferred Entry Method for Series			Preferred Tool Path for Series	
	Heavy	Moderate	Light	Fine	Finish-Wall	Finish - Floor	Plunge	Straight Ramp	Helical Ramp	For rough milling, HEM tool paths are usually preferred in most situations, however, Standard paths may be more efficient using suitable tools with moderate to heavy cut types.	
	Unless blank, a high quality wall or floor finish can be achieved with any Series with adjusted speed & feed.						Speed & Feed are based on ramp angle.				
	Ae = 1 to .4 x DC Ap ≤ 1 x DC	Ae = .4 to .25 x DC Ap ≤ 1.5 x DC	Ae = .25 to .1 x DC Ap ≤ 2.5 x DC	Ae = .1 to .02 x DC Ap ≤ 4.5 x DC	Ae ≤ .02 x DC any Ap	Ae ≥ .5 x DC Ap ≤ .02 x DC	Ap ≤ 1 x DC lower feed rates	Ap ≤ 2 x DC medium feed rates	Ap ≤ 4 x DC higher feed rates	Standard Path	HEM Path
											
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
○	○	○	★	★	☆			○	☆	○	☆
☆	★	★	☆	☆	☆	★		★	★	★	★
○	☆	★	★	★	★	★		○	☆	☆	★
○	○	☆	★	★	★	★		○	★	○	★
○	○	○	★	★	★	★		○	★	○	★
○	○	○	☆	★	★	★		○	★	○	★
			★	★				○	○	★	
★	★	★	★	★	★	★				★	
★	★	★	★	★	★	★				★	
○	○	☆	★	★			○	○	★	★	★
★	★	☆	☆	☆	☆	☆		☆	★	☆	★
○	○	☆	★	★	★	★		○	☆	☆	★
☆	☆	☆	★	★	☆	☆	☆	★	★	★	☆
★	★	☆	☆	○	☆	☆	☆	★	★	★	☆
★	★	☆	☆	☆	☆	★	☆	★	★	★	☆
★	★	☆	☆		★	★	☆	★	★	★	☆
★	★	☆	☆		★	★	☆	★	★	★	☆
○	○	☆	★	★	★	★	○	☆	★	☆	★
			★	★	☆		○	○		★	
★	★	★	★	★	★	★				★	
★	★	★	★	★	★	★				★	
○	○	☆	★	★	☆		○	☆	★	★	☆
★	★	☆	☆		☆		○	☆	★	★	☆
★	★	☆	☆		☆		○	☆	★	★	☆
○	○	☆	☆	★	☆		○	☆	★	★	☆
★	★	☆	☆	○	☆		○	☆	★	★	☆
○	○	☆	☆	☆	☆					★	☆

End Mill Matrix

Name	Series	Page	Flute Count	Cut Diameter Range inch mm	Cut Length Availability (x DC) **	Reach Option (x DC) **	End Styles Square Radius Ball	
Series 33	33	103	3	0.125 to 1 3 to 20	2.25 to 3	—	R	
Z-Carb-AP	Z1P	41	4	0.0156 to 1 1 to 25	1 to 3.25	2.5 to 8.5	S, R, B	
Z-Carb-HTA	ZH1	59	4	0.250 to 1 6 to 20	1.25 to 3	—	R	
Series 7	7	109	4	0.125 to 1 3 to 25	2.25 to 8.25	—	S, B	
Z-Carb HPR	Z5	30	5	0.125 – 1 6 – 25	1 to 3	—	S, R	
V-Carb	55	65	5	0.125 to 1 6 to 20	1.25 to 5	—	S, R, B	
T-Carb®	51	76	6	0.250 to 1 6 to 20	1.25 to 3	3.25 to 5.5	S, R	
H-Carb	77	86	7	0.250 to 1 6 to 25	2.5 to 4	—	S, R	
Multi Carb	66	94	7, 9, 11	0.188 to 1 6 to 25	1.5 to 3.25	—	S, R	
Multi Carb-B	67	101	4, 6, 8	— 6 to 16	1.2 to 1.9	—	B	
Picatinny Groove F	PRT	122	3	0.2100 —	0.56	—	S	
Picatinny Dovetail F	PRT	125	5	0.6050 —	0.68	—	S	
Turbo Carb	56B	114	2	0.031 to 0.750 1 to 20	1	2 to 2.25	B	
Z-Carb-MD	ZD1	63	4	0.118 to 0.750 5 to 20	1 to 1.25	2.25 to 5	R	
Power-Carb®	57	116	6	0.250 to 0.500 6 to 20	2 to 2.25	—	S	
Ski-Carb	44	173	2	0.250 to 1 3 to 20	1.25 to 7	—	S, R	
S-Carb® 2 Flute	47	166	2	0.125 to 1 3 to 25	1 to 3	3 to 9	S, B	
S-Carb® 3 Flute	43	144	3	0.125 to 1 3 to 25	1 to 7	2.25 to 8.5	S, R, B	
S-Carb® APR-3	43APR-3	133	3	0.750 to 1 12 to 26	1.25 to 1.75	3 to 4	S, R	
S-Carb® APR-4	43APR-4	136	4	20 to 25	1.25 to 1.75	2.25 to 3.5	S, R	
S-Carb® APF	43APF	138	4	0.500 to 0.750 6 to 25	2.5 to 4	3 to 5	S, R	
S-Carb® APF-B	43APF-B	142	3, 4	— 6 to 16	1.2 to 1.9	—	B	
Picatinny Groove NF	PRT	122	3	0.2100 —	0.56	—	S	
Picatinny Dovetail NF	PRT	125	3	0.6050 —	0.68	—	S	
Slow Helix	27	119	4	0.250 to 0.750 6 to 16	1.75 to 4	—	S	
CCR	20-CCR	386	5, 8, 10, 12	0.250 to 0.500 2 to 12	2.75 to 4	—	S	
CCR Coarse	31-CCR	390	5, 7, 8, 10	0.250 to 0.500 6 to 12	2.75 to 4	—	S	
Compression Router	25	393	4, 6, 8	0.250 to 0.500 6 to 12	2.75 to 4	—	S	
Up Cut Router	21	396	2	0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	
Down Cut Router	22	397	2	0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	

End Mill Matrix

	Chipbreaker Option	Shank Option Solid Round Weldon Flat Jet Stream Coolant Hole	Center Cutting	Helix Angle	Flute Index	Coating	Maximum Recommended Ramp Angle ***
	By Request	SR, WF	Yes	32 / 48	Unequal	Ti-NAMITE®-A	90
	By Request	SR, WF, JS	Yes	35 / 38	Unequal	Ti-NAMITE®-X	90
	By Request	SR, WF	Yes	38 / 41	Unequal	Ti-NAMITE®-A	20
	By Request	SR	Yes	38	Unequal	Ti-NAMITE®-A	1
	By Request	SR, WF, CH	No	37	Unequal	Ti-NAMITE®-M Ti-NAMITE®-A	7
	By Request	SR, WF	Yes	45	Unequal	Ti-NAMITE®-A	5
	By Request	SR	Yes	41	Unequal	Ti-NAMITE®-X	3
	In Stock Available	SR	No	37	Unequal	Ti-NAMITE®-M Ti-NAMITE®-A	1
	By Request	SR	No	35	Equal	Ti-NAMITE®-X	1
	By Request	SR	Yes	varies	Equal	Ti-NAMITE®-H	1
	Not Available	SR	Yes	35	Unequal	Ti-NAMITE®-M	–
	Not Available	SR	No	37	Unequal	Ti-NAMITE®-M	–
	By Request	SR	Yes	30	Equal	Ti-NAMITE®-X	25
	By Request	SR	Yes	42 / 45	Unequal	Ti-NAMITE®-X	2
	By Request	SR	Yes	45	Equal	Ti-NAMITE®-X	1
	By Request	SR, WF	Yes	45	Equal	uncoated or Ti-NAMITE®-B	90
	By Request	SR	Yes	35	Equal	uncoated or Ti-NAMITE®-B	90
	In Stock Available	SR	Yes	38	Equal	uncoated or Ti-NAMITE®-B	90
	Standard	CH	Yes	38	Unequal	Ti-NAMITE®-B	90
	Standard	CH	Yes	38 / 41	Unequal	Ti-NAMITE®-B	90
	By Request	CH	Yes	38 / 41	Unequal	Ti-NAMITE®-B	25
	By Request	SR	Yes	varies	Equal	Ti-NAMITE®-B	1
	Not Available	SR	Yes	38	Equal	Ti-NAMITE®-B	–
	Not Available	SR	No	38	Equal	Ti-NAMITE®-B	–
	By Request	SR	Yes	10, 12	Unequal	uncoated or Di-NAMITE®	5
	Standard	SR	Based upon end style	15	Equal	uncoated or Di-NAMITE®	5 (for end cut styles)
	Standard	SR	Based upon end style	15	Equal	uncoated or Di-NAMITE®	5 (for end cut styles)
	By Request	SR	Yes	30	Equal	uncoated or Di-NAMITE®	5
	By Request	SR	Yes	35	Equal	various optional	90
	By Request	SR	Yes	35	Equal	various optional	–

Application Tips

Tool	- Whenever possible, select an end mill with the largest diameter, shortest flute length, and shortest overall length for the best rigidity - Long flute tools are not intended for pocketing, slotting, or heavy profiling – limit Ae to .02D - High Performance tools minimize cycle time and extend tool life
Tool Holders	- Holders with adequate gripping pressure and TIR are required - Stub holders or zero length collet style holders are recommended for heavy stock removal - When using solid holders, hand ground screw flats are not recommended
Workpiece	Secure clamping of the workpiece will reduce chatter and deflection
Machine	- Spindle must be in optimum condition for precise TIR and maximum tool life - Sufficient horsepower is required to perform at recommended speeds and feeds - Reduce rates for low power machines to prevent workpiece and / or tool damage
Coolant	- Avoid re-milling chips through use of air blast or liquid coolant as necessary - Maintain clean coolant with appropriate concentration - General recommendations: —Water Soluble Oil or Air Blast: Tool Steels, Mold & Die Steels, Carbon or Alloy Steels —Water Soluble Oil: Stainless Steels, Titanium, High Temperature Alloys, Non-Ferrous Alloys
Methods	- Climb milling is generally preferred - Attention to programming details, tool holders, TIR, balance, fixturing, etc. improve cutting tool performance and extend tool life

END MILLING GUIDELINE

DC = cutting diameter APMX = flute length

Speeds and Feeds for Cut Types are based on Radial Width ($\overline{Ae}$) and Axial Depth ($\overline{Ap}$)

Reductions to Speeds and Feeds may be necessary when:

- Ae and Ap exceed recommendations
- Using long flute or extended reach tools
- Using long tool holders
- Machining materials harder than listed

ENTRY METHODS

Pre-Drilled Hole




Pre-drilling is the preferred entry method for most applications.

Helical Ramp



Straight Ramp



Alternative methods are helical and straight ramping. High ramp angles require reduced feed. Lower ramp angles will allow higher feed rates and extend tool life. Use slotting speeds and feeds for ramp angles of 1° to 2°. Reduce feed to 25% when ramp angles approach 6°. General purpose tools and/or difficult to machine materials will require lower ramp angles and reduced feed.

Plunge



Plunge only in non-ferrous and short-chipping materials using slotting speeds and 25% slotting feeds.

Herramientas	• Siempre que sea posible, seleccione la herramienta de mayor diámetro y menor longitud total y de filo para obtener una mayor rigidez. • Las herramientas con filos largos no son recomendadas para operaciones de apertura de cajas en el maquinado, operación de ranurado o perfilado pesado – limitar la profundidad radial (Ae) a .02D • Las herramientas de alto desempeño minimizan el tiempo de ciclo del maquinado y extienden la vida útil de la herramienta
Portaherramientas	• Los Portaherramientas deberán tener buena presión de amarre para la sujeción de la herramienta y una concentricidad máxima indicada (TIR) • Se recomienda usar portaherramientas de amarre directo cortos, o de boquilla con longitud cero para lograr un máximo arranque de viruta • Cuando se utilicen portaherramientas de amarre directo, no se recomienda hacer manualmente el plano para la sujeción del tornillo en el zanco de la herramienta
Pieza a maquinar	• La buena sujeción de la pieza a maquinar reducirá la vibración y la desviación de la herramienta
Máquina	• El husillo de la máquina debe estar en condiciones óptimas, para asegurar la concentricidad de giro (TIR) y asegurar el máximo rendimiento de la herramienta • Para lograr los avances y velocidades recomendados, se necesita suficiente potencia (HP) en la máquina • Reducir los parámetros de corte en máquinas de baja potencia (HP) para prevenir el daño en la herramienta o pieza de trabajo
Refrigeración	• Evite el re-maquinado de virutas usando aire a presión o líquido refrigeración según sea necesario • Mantener limpio la refrigeración con su concentración adecuada • Recomendaciones generales: –Para el maquinado de aceros de herramienta, para Moldes y Dados o Aleaciones de Bajo Carbón, utilice Aceite Soluble en Agua o aire a presión –Para el maquinado de Aleaciones Inoxidables, Aleaciones Termorresistentes, Titanio y Aleaciones No Ferrosas, utilice solamente Aceite Soluble en Agua
Métodos	• Se recomienda el maquinado en sentido ascendente o trepado • El cuidado en los detalles de la programación, la concentricidad de giro (TIR) el balance de los portaherramientas, la sujeción de la pieza a maquinar, etc. son factores que contribuyen a prolongar la vida de la herramienta

GUÍAS DE FRESADO

DC = diámetro de corte APMX = largo de filo

Las velocidades y avances para cortes están basados en la profundidad radial ($-\overrightarrow{Ae}-$), y profundidad axial ($\overrightarrow{Ap}$)

Reducciones en velocidades y avances serán necesarias cuando:

- Ae y Ap exceda las recomendaciones
- Se utilicen filos largos o herramientas de largo alcance
- Se utilicen portaherramientas largos
- Se maquinen materiales más duros que los recomendados

MÉTODOS DE ENTRADA

Barreno previo



Preferentemente usar un barreno previo como método de entrada para la mayor parte de las aplicaciones.

Rampa helicoidal



Rampa recta



Los métodos alternativos son las rampas helicoidales y rectas. Un ángulo elevado de rampa necesita un avance reducido. Un ángulo de rampa inferior permitirá tasas de avance más elevadas y una mayor duración de la herramienta. Usar velocidades y alcances de ranurado para ángulos de rampa de 1° a 2°. Disminuir el avance un 25% cuando los ángulos de rampa se aproximan a 6°. Las herramientas de uso general y/o materiales difíciles de mecanizar precisarán ángulos de rampa inferiores y un avance reducido.

Agujero o Barrenado



Este método se puede utilizar únicamente en materiales no ferrosos y materiales de formación de virutas cortas, usando la velocidad de ranurado y el 25% de su avance.

Conseils relatifs à l'application

Outil	• Chaque fois que possible, choisissez une fraise de plus grand diamètre possible, la plus courte possible, elle garantira la meilleure rigidité • Les outils longs ne sont pas optimum pour l'ébauche, le pocketing, le rainurage – Ae limité à 0,02 D • Les outils Haute performance optimisent les temps de cycle et de augmentent la durée de vie
Porte-outils	• Des attachements à serrage puissant et à faux rond précis sont recommandés • Attachements à méplats ou pinces à serrage nominale sont recommandées pour les ébauches • Lorsque vous utilisez des attachement rigides, les serrage de l'outil par vis ne sont pas recommandés
Pièce	• Le système de fixation et de bridage de la pièce devra permettre de réduire les vibrations et la déformation
Machine	• Broche doit être en bon état optimal au niveau de son faux rond • Suffisamment puissance est nécessaire pour effectuer à des vitesses recommandées et se nourrit • Réduire les efforts pour les machines de faible puissance pour éviter l'endommagement de la pièce et / ou de l'outil
Liquide de refroidissement	• Évitez les recyclage de copeaux par l'utilisation de soufflage d'air comprimé ou de liquide de refroidissement. • Maintenir le lubrifiant propre à la concentration appropriée • Recommandations générales – –Huile soluble ou Air comprimé: aciers à outils, aciers pour moules, aciers au carbone ou alliés –Huile soluble: aciers inoxydables, titane, alliages à haute température, alliages non ferreux
Méthodes	• L'usinage en avalant est généralement préconisé • Attention à la programmation, porte-outils, faux rond, équilibrage, fixation, etc améliorent les performances de l'outil en coupe et prolonge la durée de vie

GUIDE DU FRAISAGE

DC = diamètre de coupe APMX = longueur de coupe

Vitesses & avances pour ces cas d'usinage sont basées sur l'engagement radial ($\overline{Ae}$), et axial ($\overline{Ap}$)

La réduction de la vitesse et de l'avance doit être nécessaire quand:

- Les engagements Ae et Ap sont importants
- Des dentures longues ou des séries longues sont utilisées
- Des attachement longs sont utilisés
- Lors d'usinage de matériaux durs

TYPES D'ENTREE MATIERE

Preperçage




Le préperçage est la méthode préférable dans la plupart de applications.

Ramping hélicoïdal



Ramping droit



Les autres méthodes sont un ramping hélicoïdal et un ramping droit. Les angles de ramping élevés exigent une avance inférieure. Les angles de ramping inférieurs permettent les taux d'avance supérieurs et prolongeront la vie de l'outil. Utilisez des avances et vitesses de mortaisage pour les angles de ramping de 1° à 2°. Réduisez l'avance à 25 % lorsque les angles de ramping avoisinent 6°. Les outils tout usage et/ou les matériaux difficiles à usiner exigeront des angles de ramping inférieurs et une charge réduite.

Plongée



Plongée uniquement dans les non ferreux. Vitesse rainurage et avances réduites de 25%.

Werkzeug	• Wählen Sie möglichst immer den Schafffräser mit dem größten Durchmesser, der kürzesten Schneide und Gesamtlänge, um eine hohe Steifigkeit zu erhalten • Langlochschaftfräser sind nicht zum Taschen-, Schlitz- oder Profilfräsen bestimmt – die Dehnung auf $A_e 0,2$ der Streckgrenze nicht überschreiten • Hochleistungswerkzeuge minimieren die Bearbeitungszeit und verlängern die Werkzeugstandzeit
Werkzeughalter	• Es werden Spannzangen mit genauem Rundlauf benötigt • Steilkegel oder bündige Spannfutter werden bei hohem Materialabtrag empfohlen • Von der Verwendung fester handverschraubter Halterungen wird abgeraten
Werkstück	• Sicheres Werkzeugspannen verringert Vibrationen und das Auswandern aus der Spannvorrichtung
Werkzeugmaschine	• Die Spindel muss in optimalem Zustand sein, um einen genauen Rundlauf und maximale Standzeit zu erzielen • Für die empfohlenen Drehzahlen und Vorschubgeschwindigkeiten ist genügend Leistung bereitzustellen • Bei leistungsschwachen Antrieben sind die Werte zu verringern, um Beschädigungen am Werkstück und/oder Werkzeug zu vermeiden
Kühlmittel	• Das Stauen der Späne durch Luftstrahl oder flüssige Kühlmittel möglichst verhindern • Kühlmittel in geeigneter Konzentration verwenden • Allgemeine Empfehlungen: – Wasser-Öl-Emulsionen oder Luftstrahl: Werkzeugstähle, Form- und Schneidstähle, unlegierte oder legierte Stähle – Wasser-Öl-Emulsion: Nichtrostender Stahl, Titan, Warmfeste Legierungen, Nichteisenlegierungen
Verfahren	• Vorzugsweise Gleichlaufräsen anwenden • Das Beachten der Fräsparemeter, Werkzeughalter, Rundlauf, Auswuchten, Einspannen, usw. verbessert die Schnittleistung und verlängert die Standzeit

RICHTWERTE ZUM FRÄSEN

DC = Fräsdurchmesser APMX = Schnittlänge

Drehzahl und Vorschub für Fräsarbeiten hängen von Radialbreite (A_e) und Frästiefe (A_p) ab

Drehzahl und Vorschub müssen ggfs. verringert werden wenn:

- die empfohlenen Werte für A_e und A_p überschritten werden
- lange Schneiden oder Langschaftfräser verwendet werden
- lange Werkzeughalter verwendet werden
- die Werkstoffe härter als vorgesehen sind

VORBEREITUNGEN

Vorbohrung



Vorbohren ist in den meisten Fällen ratsam.

Zirkulareintauchfräsen



Schrägeintauchfräsen




Alternative Verfahren sind Zirkulareintauchen und Schrägeintauchen. Starke Tauchwinkel erfordern verringerte Vorschubgeschwindigkeiten. Geringe Tauchwinkel ermöglichen höhere Vorschubgeschwindigkeiten und verlängern die Standzeit. Verwenden Sie die Drehzahlen und Vorschübe zum Schlitzfräsen für Tauchwinkel von 1° bis 2° . Den Vorschub auf 25 % verringern, wenn der Tauchwinkel 6° erreicht. Standardwerkzeuge und / oder schwer zu bearbeitende Werkstoffe verlangen kleine Tauchwinkel und verringerte Vorschubgeschwindigkeiten.

Stechen




Stechen Sie in Nichteisenmetalle und kurzspanende Werkstoffe nur mit Schlitzfräsdrehzahl und 25 % der Schlitzvorschubgeschwindigkeit ein.

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

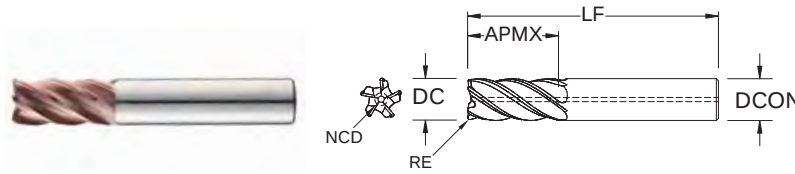

TOLERANCES (inch)

1/8–1/4 DIAMETER
DC = +0.0000/–0.0012
DCON = h_6
RE = +0.0000/–0.0020
>1/4–3/8 DIAMETER
DC = +0.0000/–0.0016
DCON = h_6
RE = +0.0000/–0.0020
>3/8–1 DIAMETER
DC = +0.0000/–0.0020
DCON = h_6
RE = +0.0000/–0.0020

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1/8	1/4	1-1/2	1/8	—	0.0440	38500	—	—	37000	—	—
1/8	1/4	1-1/2	1/8	0.010	0.0440	38771	—	—	38770	—	—
1/8	1/4	1-1/2	1/8	0.015	0.0440	38525	—	—	37001	—	—
1/8	1/4	1-1/2	1/8	0.030	0.0290	38773	—	—	38772	—	—
1/8	3/8	1-1/2	1/8	—	0.0440	37180	—	—	37002	—	—
1/8	3/8	1-1/2	1/8	0.010	0.0440	38775	—	—	38774	—	—
1/8	3/8	1-1/2	1/8	0.015	0.0440	37181	—	—	37003	—	—
1/8	3/8	1-1/2	1/8	0.030	0.0290	38777	—	—	38776	—	—
3/16	5/16	2	3/16	—	0.0660	38501	—	—	37004	—	—
3/16	5/16	2	3/16	0.010	0.0660	38779	—	—	38778	—	—
3/16	5/16	2	3/16	0.015	0.0660	38526	—	—	37005	—	—
3/16	5/16	2	3/16	0.030	0.0660	38781	—	—	38780	—	—
3/16	1/2	2	3/16	—	0.0660	37182	—	—	37006	—	—
3/16	1/2	2	3/16	0.010	0.0660	38783	—	—	38782	—	—
3/16	1/2	2	3/16	0.015	0.0660	37183	—	—	37007	—	—
3/16	1/2	2	3/16	0.030	0.0660	38785	—	—	38784	—	—
1/4	3/8	2-1/2	1/4	—	0.0880	38502	—	—	37008	—	—
1/4	3/8	2-1/2	1/4	0.010	0.0880	38787	—	—	38786	—	—
1/4	3/8	2-1/2	1/4	0.015	0.0880	38527	—	—	37009	—	—
1/4	3/8	2-1/2	1/4	0.030	0.0880	38528	—	—	37010	—	—
1/4	3/8	2-1/2	1/4	0.060	0.0880	38789	—	—	38788	—	—
1/4	1/2	2-1/2	1/4	—	0.0880	37184	—	—	37011	—	—
1/4	1/2	2-1/2	1/4	0.010	0.0880	38793	—	—	38792	—	—
1/4	1/2	2-1/2	1/4	0.015	0.0880	37185	—	—	37012	—	—
1/4	1/2	2-1/2	1/4	0.030	0.0880	37186	—	—	37013	—	—
1/4	1/2	2-1/2	1/4	0.060	0.0880	38795	—	—	38794	—	—
5/16	7/16	2-1/2	5/16	—	0.1090	38503	—	—	37014	—	—
5/16	7/16	2-1/2	5/16	0.010	0.1090	38799	—	—	38798	—	—

continued on next page

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6



RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

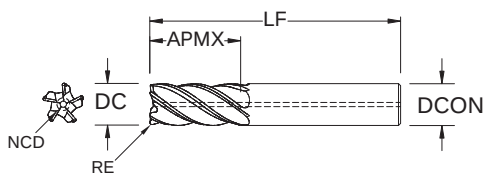


**Z5 •
Z5CR**
FRACTIONAL SERIES


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
5/16	7/16	2-1/2	5/16	0.015	0.1090	38529	—	—	37015	—	—
5/16	7/16	2-1/2	5/16	0.030	0.1090	38801	—	—	38800	—	—
5/16	7/16	2-1/2	5/16	0.060	0.1090	38803	—	—	38802	—	—
5/16	7/16	2-1/2	5/16	0.090	0.0640	38805	—	—	38804	—	—
5/16	5/8	2-1/2	5/16	—	0.1090	38504	—	—	37016	—	—
5/16	5/8	2-1/2	5/16	0.010	0.1090	38807	—	—	38806	—	—
5/16	5/8	2-1/2	5/16	0.015	0.1090	38530	—	—	37017	—	—
5/16	5/8	2-1/2	5/16	0.030	0.1090	38809	—	—	38808	—	—
5/16	5/8	2-1/2	5/16	0.060	0.1090	38811	—	—	38810	—	—
5/16	5/8	2-1/2	5/16	0.090	0.0640	38813	—	—	38812	—	—
3/8	1/2	2-1/2	3/8	—	0.1310	38505	—	—	37018	—	—
3/8	1/2	2-1/2	3/8	0.010	0.1310	38815	—	—	38814	—	—
3/8	1/2	2-1/2	3/8	0.015	0.1310	38531	—	—	37019	—	—
3/8	1/2	2-1/2	3/8	0.030	0.1310	38532	—	—	37020	—	—
3/8	1/2	2-1/2	3/8	0.060	0.1310	38817	—	—	38816	—	—
3/8	1/2	2-1/2	3/8	0.090	0.0830	38819	—	—	38818	—	—
3/8	3/4	2-1/2	3/8	—	0.1310	37187	—	—	37021	—	—
3/8	3/4	2-1/2	3/8	0.010	0.1310	38821	—	—	38820	—	—
3/8	3/4	2-1/2	3/8	0.015	0.1310	37188	—	—	37022	—	—
3/8	3/4	2-1/2	3/8	0.030	0.1310	37189	37174	—	37023	—	—
3/8	3/4	2-1/2	3/8	0.060	0.1310	38823	—	—	38822	—	—
3/8	3/4	2-1/2	3/8	0.090	0.0830	38825	—	—	38824	—	—
7/16	5/8	2-1/2	7/16	0.015	0.1530	37164	—	—	37160	—	—
7/16	5/8	2-1/2	7/16	0.030	0.1530	37165	—	—	37161	—	—
7/16	7/8	2-3/4	7/16	0.015	0.1530	37166	—	—	37162	—	—
7/16	7/8	2-3/4	7/16	0.030	0.1530	37167	—	—	37163	—	—
1/2	5/8	3	1/2	—	0.1750	38506	38512	37320	37024	37030	37321
1/2	5/8	3	1/2	0.010	0.1750	38827	38829	38831	38826	38828	38830

continued on next page

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

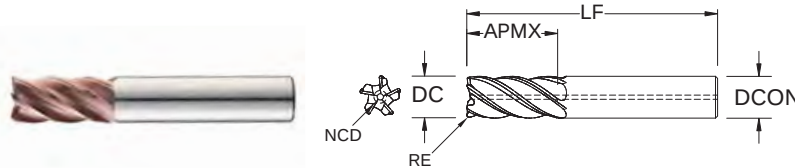

TOLERANCES (inch)

1/8–1/4 DIAMETER	
DC	= +0.0000/–0.0012
DCON = h ₆	
RE	= +0.0000/–0.0020
>1/4–3/8 DIAMETER	
DC	= +0.0000/–0.0016
DCON = h ₆	
RE	= +0.0000/–0.0020
>3/8–1 DIAMETER	
DC	= +0.0000/–0.0020
DCON = h ₆	
RE	= +0.0000/–0.0020

CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1/2	5/8	3	1/2	0.015	0.1750	38533	38578	37330	37025	37031	37331
1/2	5/8	3	1/2	0.030	0.1750	38534	38579	37332	37026	37032	37333
1/2	5/8	3	1/2	0.060	0.1750	38535	38580	37334	37027	37033	37335
1/2	5/8	3	1/2	0.090	0.1750	38536	38581	37337	37028	37034	37338
1/2	5/8	3	1/2	0.120	0.1750	38537	38582	37339	37029	37035	37340
1/2	1	3	1/2	—	0.1750	38507	38513	37322	37036	37042	37323
1/2	1	3	1/2	0.010	0.1750	38833	38835	38837	38832	38834	38836
1/2	1	3	1/2	0.015	0.1750	38538	38583	37341	37037	37043	37342
1/2	1	3	1/2	0.030	0.1750	38539	38584	37343	37038	37044	37344
1/2	1	3	1/2	0.060	0.1750	38540	38585	37345	37039	37045	37346
1/2	1	3	1/2	0.090	0.1750	38541	38586	37348	37040	37046	37349
1/2	1	3	1/2	0.120	0.1750	38542	38587	37350	37041	37047	37351
1/2	1-1/4	3-1/4	1/2	—	0.1750	37190	37194	37325	37048	37054	37324
1/2	1-1/4	3-1/4	1/2	0.010	0.1750	38839	38841	38843	38838	38840	38842
1/2	1-1/4	3-1/4	1/2	0.015	0.1750	37191	37195	37352	37049	37055	37353
1/2	1-1/4	3-1/4	1/2	0.030	0.1750	37192	37196	37354	37050	37056	37355
1/2	1-1/4	3-1/4	1/2	0.060	0.1750	37193	37197	37356	37051	37057	37357
1/2	1-1/4	3-1/4	1/2	0.090	0.1750	38543	38588	37359	37052	37058	37360
1/2	1-1/4	3-1/4	1/2	0.120	0.1750	38544	38589	37361	37053	37059	37362
5/8	3/4	3-1/2	5/8	—	0.2190	38508	38514	38518	37060	37067	37260
5/8	3/4	3-1/2	5/8	0.010	0.2190	38845	38847	38849	38844	38846	38848
5/8	3/4	3-1/2	5/8	0.015	0.2190	38545	38590	38623	37061	37068	37261
5/8	3/4	3-1/2	5/8	0.030	0.2190	38546	38591	38624	37062	37069	37262
5/8	3/4	3-1/2	5/8	0.060	0.2190	38547	38592	38625	37063	37070	37263
5/8	3/4	3-1/2	5/8	0.090	0.2190	38548	38593	38626	37064	37071	37264
5/8	3/4	3-1/2	5/8	0.120	0.2190	38549	38594	38627	37065	37072	37265
5/8	3/4	3-1/2	5/8	0.190	0.2190	38550	38595	38628	37066	37073	37266
5/8	1-1/4	3-1/2	5/8	—	0.2190	37198	37202	38519	37074	37081	37267
5/8	1-1/4	3-1/2	5/8	0.010	0.2190	38851	38853	38855	38850	38852	38854
5/8	1-1/4	3-1/2	5/8	0.015	0.2190	37199	37203	38629	37075	37082	37268

continued on next page

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6



RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020

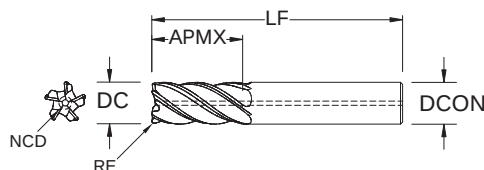


**Z5 •
Z5CR**
FRACTIONAL SERIES


inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
5/8	1-1/4	3-1/2	5/8	0.030	0.2190	37200	37204	38630	37076	37083	37269
5/8	1-1/4	3-1/2	5/8	0.060	0.2190	37201	37205	38631	37077	37084	37270
5/8	1-1/4	3-1/2	5/8	0.090	0.2190	38551	38596	38632	37078	37085	37271
5/8	1-1/4	3-1/2	5/8	0.120	0.2190	38552	38597	38633	37079	37086	37272
5/8	1-1/4	3-1/2	5/8	0.190	0.2190	38553	38598	38634	37080	37087	37273
3/4	7/8	4	3/4	—	0.2630	38509	38515	38520	37088	37095	37274
3/4	7/8	4	3/4	0.010	0.2630	38857	38859	38861	38856	38858	38860
3/4	7/8	4	3/4	0.030	0.2630	38554	38599	38635	37089	37096	37275
3/4	7/8	4	3/4	0.060	0.2630	38555	38600	38636	37090	37097	37276
3/4	7/8	4	3/4	0.090	0.2630	38556	38601	38637	37091	37098	37277
3/4	7/8	4	3/4	0.120	0.2630	38557	38602	38638	37092	37099	37278
3/4	7/8	4	3/4	0.190	0.2630	38558	38603	38639	37093	37100	37279
3/4	7/8	4	3/4	0.250	0.2630	38559	38604	38640	37094	37101	37280
3/4	1-1/2	4	3/4	—	0.2630	37206	37210	38521	37102	37109	37281
3/4	1-1/2	4	3/4	0.010	0.2630	38863	38865	38867	38862	38864	38866
3/4	1-1/2	4	3/4	0.030	0.2630	37207	37211	38641	37103	37110	37282
3/4	1-1/2	4	3/4	0.060	0.2630	37208	37212	38642	37104	37111	37283
3/4	1-1/2	4	3/4	0.090	0.2630	38560	38605	38643	37105	37112	37284
3/4	1-1/2	4	3/4	0.120	0.2630	37209	37213	38644	37106	37113	37285
3/4	1-1/2	4	3/4	0.190	0.2630	38561	38606	38645	37107	37114	37286
3/4	1-1/2	4	3/4	0.250	0.2630	38562	38607	38646	37108	37115	37287
3/4	1-5/8	4	3/4	0.030	0.2630	37222	—	—	37223	—	—
3/4	1-5/8	4	3/4	0.060	0.2630	37224	—	—	37225	—	—
3/4	1-5/8	4	3/4	0.090	0.2630	37226	—	—	37227	—	—
3/4	1-5/8	4	3/4	0.120	0.2630	37228	—	—	37229	—	—
3/4	2	4-1/2	3/4	0.030	0.2630	37230	—	—	37231	—	—
3/4	2	4-1/2	3/4	0.060	0.2630	37232	—	—	37233	—	—
3/4	2	4-1/2	3/4	0.090	0.2630	37234	—	—	37235	—	—
3/4	2	4-1/2	3/4	0.120	0.2630	37236	—	—	37237	—	—
1	1-1/8	4	1	—	0.3500	38510	38516	38522	37116	37123	37288

continued on next page

FRACTIONAL Z-Carb-HPR



Z5 • Z5CR FRACTIONAL SERIES

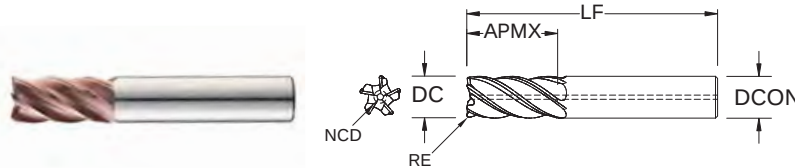

TOLERANCES (inch)

1/8–1/4 DIAMETER	
DC	= +0.0000/–0.0012
DCON = h ₆	
RE	= +0.0000/–0.0020
>1/4–3/8 DIAMETER	
DC	= +0.0000/–0.0016
DCON = h ₆	
RE	= +0.0000/–0.0020
>3/8–1 DIAMETER	
DC	= +0.0000/–0.0020
DCON = h ₆	
RE	= +0.0000/–0.0020


CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

inch						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
1	1-1/8	4	1	0.010	0.3500	38869	38871	38873	38868	38870	38872
1	1-1/8	4	1	0.030	0.3500	38563	38608	38647	37117	37124	37289
1	1-1/8	4	1	0.060	0.3500	38564	38609	38648	37118	37125	37290
1	1-1/8	4	1	0.090	0.3500	38565	38610	38649	37119	37126	37291
1	1-1/8	4	1	0.120	0.3500	38566	38611	38650	37120	37127	37292
1	1-1/8	4	1	0.190	0.3500	38567	38612	38651	37121	37128	37293
1	1-1/8	4	1	0.250	0.3500	38568	38613	38652	37122	37129	37294
1	1-1/2	4	1	—	0.3500	37214	37218	38523	37130	37137	37295
1	1-1/2	4	1	0.010	0.3500	38875	38877	38879	38874	38876	38878
1	1-1/2	4	1	0.030	0.3500	37215	37219	38653	37131	37138	37296
1	1-1/2	4	1	0.060	0.3500	37216	37220	38654	37132	37139	37297
1	1-1/2	4	1	0.090	0.3500	38569	38614	38655	37133	37140	37298
1	1-1/2	4	1	0.120	0.3500	37217	37221	38656	37134	37141	37299
1	1-1/2	4	1	0.190	0.3500	38570	38615	38657	37135	37142	37300
1	1-1/2	4	1	0.250	0.3500	38571	38616	38658	37136	37143	37301
1	2	4-1/2	1	—	0.3500	38511	38517	38524	37144	37151	37302
1	2	4-1/2	1	0.010	0.3500	38881	38883	38885	38880	38882	38884
1	2	4-1/2	1	0.030	0.3500	38572	38617	38659	37145	37152	37303
1	2	4-1/2	1	0.060	0.3500	38573	38618	38660	37146	37153	37304
1	2	4-1/2	1	0.090	0.3500	38574	38619	38661	37147	37154	37305
1	2	4-1/2	1	0.120	0.3500	38575	38620	38662	37148	37155	37306
1	2	4-1/2	1	0.190	0.3500	38576	38621	38663	37149	37156	37307
1	2	4-1/2	1	0.250	0.3500	38577	38622	38664	37150	37157	37308

Series Z5, Z5CR Fractional		Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	555 (444-666)	RPM	16961	8480	5654	4240	3392	2827	2120
						Fz	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
						Feed (ipm)	39.0	50.9	65.0	65.7	57.7	52.3	45.6	
		Slot 	1	≤ 1	440 (352-528)	RPM	13446	6723	4482	3362	2689	2241	1681	
						Fz	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
						Feed (ipm)	30.9	40.3	51.5	52.1	45.7	41.5	36.1	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	315 (252-378)	RPM	9626	4813	3209	2407	1925	1604	1203
						Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	16.4	21.7	27.3	27.7	25.0	22.5	19.3	
		Slot 	1	≤ 1	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955	
						Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	13.0	17.2	21.6	22.0	19.9	17.8	15.3	
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707	
					Fz	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026		
					Feed (ipm)	7.9	9.9	13.2	12.7	11.3	10.4	9.2		
	Slot 	1	≤ 1	145 (116-174)	RPM	4431	2216	1477	1108	886	739	554		
					Fz	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026		
					Feed (ipm)	6.2	7.8	10.3	10.0	8.9	8.1	7.2		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
						Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	25.5	33.7	42.4	43.1	38.9	34.9	29.9	
		Slot 	1	≤ 1	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490	
						Fz	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	20.3	26.8	33.8	34.3	31.0	27.8	23.8	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
						Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	14.0	18.2	24.2	23.4	20.8	19.0	16.2	
		Slot 	1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031	
						Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	11.1	14.4	19.3	18.6	16.5	15.1	12.9	
	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	310 (248-372)	RPM	9474	4737	3158	2368	1895	1579	1184
						Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	12.8	16.6	22.1	21.3	18.9	17.4	14.8	
		Slot 	1	≤ 1	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955	
						Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	10.3	13.4	17.8	17.2	15.3	14.0	11.9	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.5	≤ 1.5	445 (356-534)	RPM	13599	6800	4533	3400	2720	2267	1700
						Fz	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039	
						Feed (ipm)	28.6	37.4	47.6	47.6	42.2	38.5	33.1	
		Slot 	1	≤ 1	355 (284-426)	RPM	10849	5424	3616	2712	2170	1808	1356	
						Fz	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039	
						Feed (ipm)	22.8	29.8	38.0	38.0	33.6	30.7	26.4	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
						Fz	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029	
						Feed (ipm)	16.1	21.8	27.7	27.3	23.9	21.6	18.8	
		Slot 	1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031	
						Fz	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029	
						Feed (ipm)	12.8	17.3	22.0	21.7	19.0	17.2	15.0	

continued on next page

FRACTIONAL Z-Carb-HPR



Series Z5, Z5CR Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	80 (64-96)	RPM	2445	1222	815	611	489	407	306
							Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238
							Feed (ipm)	3.1	4.2	5.2	5.2	4.6	4.2	3.6
		Slot 	1	≤ 1	65 (52-78)	RPM	1986	993	662	497	397	331	248	
						Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238	
						Feed (ipm)	2.5	3.4	4.2	4.2	3.7	3.4	3.0	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	62 (50-74)	RPM	1895	947	632	474	379	316	237
							Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170
							Feed (ipm)	1.7	2.3	2.8	2.8	2.5	2.2	2.0
		Slot 	1	≤ 1	50 (40-60)	RPM	1528	764	509	382	306	255	191	
						Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170	
						Feed (ipm)	1.4	1.8	2.3	2.3	2.0	1.8	1.6	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
							Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
							Feed (ipm)	9.9	13.1	16.4	16.4	14.5	13.1	11.5
		Slot 	1	≤ 1	170 (136-204)	RPM	5195	2598	1732	1299	1039	866	649	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
						Feed (ipm)	7.8	10.4	13.0	13.0	11.4	10.4	9.1	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ 0.5	≤ 1.5	75 (60-90)	RPM	2292	1146	764	573	458	382	287
							Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
							Feed (ipm)	3.4	4.6	5.7	5.7	5.0	4.6	4.0
		Slot 	1	≤ 1	60 (48-72)	RPM	1834	917	611	458	367	306	229	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
						Feed (ipm)	2.8	3.7	4.6	4.6	4.0	3.7	3.2	

Bhn (Brinell) HRC (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoool.com)

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6


RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

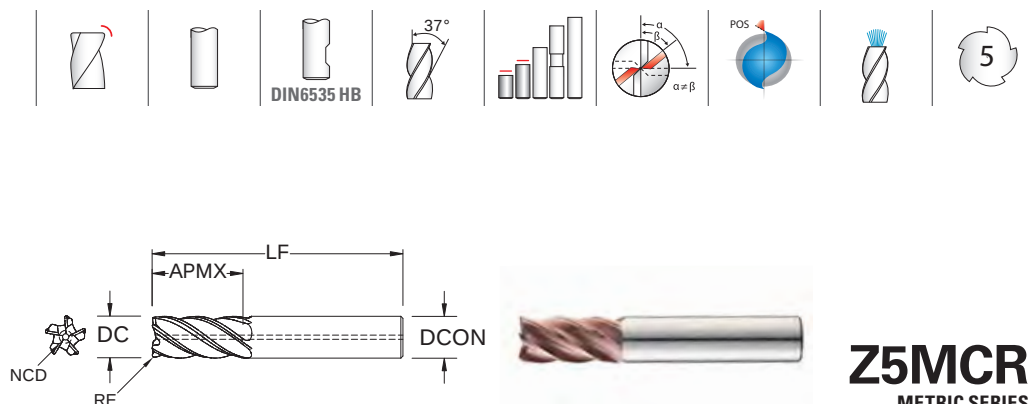

Z5MCR
METRIC SERIES

mm						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
6,0	9,0	54,0	6,0	0,5	2,11	48000	—	—	47000	—	—
6,0	13,0	57,0	6,0	0,3	2,11	48001	—	—	47001	—	—
6,0	13,0	57,0	6,0	0,5	2,11	47120	—	—	47002	—	—
6,0	13,0	57,0	6,0	1,0	2,11	48002	—	—	47003	—	—
6,0	13,0	57,0	6,0	1,5	2,11	48003	—	—	47004	—	—
8,0	11,0	58,0	8,0	0,5	2,79	48004	—	—	47005	—	—
8,0	18,0	63,0	8,0	0,5	2,79	47121	—	—	47006	—	—
8,0	18,0	63,0	8,0	1,0	2,79	47122	—	—	47007	—	—
8,0	18,0	63,0	8,0	1,5	2,79	48005	—	—	47008	—	—
8,0	18,0	63,0	8,0	2,0	2,79	48006	—	—	47009	—	—
10,0	13,0	66,0	10,0	1,0	3,51	48007	—	—	47010	—	—
10,0	22,0	72,0	10,0	0,5	3,51	47123	—	—	47011	—	—
10,0	22,0	72,0	10,0	1,0	3,51	47124	—	—	47012	—	—
10,0	22,0	72,0	10,0	1,5	3,51	48008	—	—	47013	—	—
10,0	22,0	72,0	10,0	2,0	3,51	48009	—	—	47014	—	—
10,0	22,0	72,0	10,0	2,5	3,51	48010	—	—	47015	—	—
12,0	15,0	73,0	12,0	1,0	4,19	48011	48029	—	47016	47024	—
12,0	26,0	83,0	12,0	0,5	4,19	47125	47128	47160	47017	47025	47161
12,0	26,0	83,0	12,0	0,76	4,19	47126	47129	47162	47018	47026	47163
12,0	26,0	83,0	12,0	1,0	4,19	47127	47130	47164	47019	47027	47165
12,0	26,0	83,0	12,0	1,5	4,19	48012	48030	47166	47020	47028	47167
12,0	26,0	83,0	12,0	2,0	4,19	48013	48031	47168	47021	47029	47169
12,0	26,0	83,0	12,0	2,5	4,19	48014	48032	47170	47022	47030	47171
12,0	26,0	83,0	12,0	3,0	4,19	48015	48033	47172	47023	47031	47173
16,0	19,0	82,0	16,0	1,0	5,59	48016	48034	48056	47032	47039	47046
16,0	19,0	82,0	16,0	1,5	5,59	48070	—	—	48071	—	—
16,0	35,0	92,0	16,0	1,0	5,59	47131	48035	47134	47033	47040	47047
16,0	35,0	92,0	16,0	1,5	5,59	48017	48036	48057	47034	47041	47048


continued on next page

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit www.ksptpatents.com

METRIC Z-Carb-HPR



Z5MCR METRIC SERIES

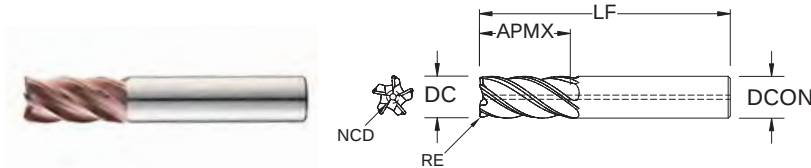

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.kspatents.com


mm						EDP NO.					
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA)	Ti-NAMITE®-A (TA) W/FLAT	Ti-NAMITE®-A (TA) W/INTERNAL COOLANT	Ti-NAMITE®-M (TM)	Ti-NAMITE®-M (TM) W/FLAT	Ti-NAMITE®-M (TM) W/INTERNAL COOLANT
16,0	35,0	92,0	16,0	2,0	5,59	47132	48037	47135	47035	47042	47049
16,0	35,0	92,0	16,0	2,5	5,59	48018	48038	48058	47036	47043	47050
16,0	35,0	92,0	16,0	3,0	5,59	47133	48039	47136	47037	47044	47051
16,0	35,0	92,0	16,0	4,0	5,59	48019	48040	48059	47038	47045	47052
20,0	23,0	92,0	20,0	1,0	7,01	48020	48041	48060	47053	47061	47069
20,0	43,0	104,0	20,0	1,0	7,01	47137	48042	47140	47054	47062	47070
20,0	43,0	104,0	20,0	1,5	7,01	48021	48043	48061	47055	47063	47071
20,0	43,0	104,0	20,0	2,0	7,01	47138	48044	47141	47056	47064	47072
20,0	43,0	104,0	20,0	2,5	7,01	48022	48045	48062	47057	47065	47073
20,0	43,0	104,0	20,0	3,0	7,01	47139	48046	47142	47058	47066	47074
20,0	43,0	104,0	20,0	4,0	7,01	48023	48047	48063	47059	47067	47075
20,0	43,0	104,0	20,0	5,0	7,01	48024	48048	48064	47060	47068	47076
25,0	28,0	100,0	25,0	1,0	8,76	48025	48049	48065	47077	47084	47091
25,0	53,0	121,0	25,0	1,0	8,76	47143	48050	47146	47078	47085	47092
25,0	53,0	121,0	25,0	2,0	8,76	47144	48051	47147	47079	47086	47093
25,0	53,0	121,0	25,0	2,5	8,76	48026	48052	48066	47080	47087	47094
25,0	53,0	121,0	25,0	3,0	8,76	47145	48053	47148	47081	47088	47095
25,0	53,0	121,0	25,0	4,0	8,76	48027	48054	48067	47082	47089	47096
25,0	53,0	121,0	25,0	5,0	8,76	48028	48055	48068	47083	47090	47097



Series Z5MCR Metric	Hardness			Vc (m/min)	DC • mm										
		6	8		10	12	16	20	25						
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	169 (135-203)	RPM	8967	6725	5380	4484	3363	2690	2152	
			Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108					
			Feed (mm/min)	1291	1650	1650	1668	1463	1327	1157					
		Slot 	1	≤ 1	134 (107-161)	RPM	7109	5332	4265	3555	2666	2133	1706		
						Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108		
						Feed (mm/min)	1024	1308	1308	1322	1160	1052	917		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	96 (77-115)	RPM	5089	3817	3054	2545	1909	1527	1221	
			Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080					
			Feed (mm/min)	550	692	692	702	635	570	489					
		Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969		
						Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080		
						Feed (mm/min)	436	549	549	557	504	452	388		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	RPM	2989	2242	1793	1495	1121	897	717	
			Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065					
			Feed (mm/min)	251	335	335	323	287	263	233					
		Slot 	1	≤ 1	44 (35-53)	RPM	2343	1757	1406	1171	879	703	562		
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065		
						Feed (mm/min)	197	262	262	253	225	206	183		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	149 (119-179)	RPM	7917	5938	4750	3958	2969	2375	1900
				Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080				
				Feed (mm/min)	855	1077	1077	1092	988	887	760				
			Slot 	1	≤ 1	119 (95-143)	RPM	6301	4726	3781	3151	2363	1890	1512	
							Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
							Feed (mm/min)	680	857	857	869	786	706	605	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318	
			Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063					
			Feed (mm/min)	461	615	615	593	527	483	412					
		Slot 	1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047		
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063		
						Feed (mm/min)	366	489	489	471	419	384	327		
STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450		≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	94 (76-113)	RPM	5009	3756	3005	2504	1878	1503	1202	
			Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063					
			Feed (mm/min)	421	561	561	541	481	441	376					
		Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969		
						Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063		
						Feed (mm/min)	339	452	452	436	388	355	303		
K		CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.5	≤ 1.5	136 (109-163)	RPM	7190	5392	4314	3595	2696	2157	1726
				Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098				
				Feed (mm/min)	949	1208	1208	1208	1070	978	841				
			Slot 	1	≤ 1	108 (87-130)	RPM	5736	4302	3441	2868	2151	1721	1377	
							Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
							Feed (mm/min)	757	964	964	964	853	780	671	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318	
			Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073					
			Feed (mm/min)	554	703	703	692	606	549	478					
		Slot 	1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047		
						Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073		
						Feed (mm/min)	440	558	558	550	482	436	380		

continued on next page

Z-Carb-HPR

Series Z5MCR Metric	Hardness			Vc (m/min)	DC • mm									
		Ae x DC	Ap x DC		6	8	10	12	16	20	25			
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 ≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.5	≤ 1.5	24 (20-29)	RPM	1293	969	776	646	485	388	310
						Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599	
						Feed (mm/min)	103	132	132	132	116	103	93	
			1	≤ 1	20 (16-24)	RPM	1050	788	630	525	394	315	252	
						Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599	
						Feed (mm/min)	84	107	107	107	94	84	75	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 ≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.5	≤ 1.5	19 (15-23)	RPM	1002	751	601	501	376	301	240
						Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420	
						Feed (mm/min)	56	72	72	71	63	56	50	
			1	≤ 1	15 (12-18)	RPM	808	606	485	404	303	242	194	
						Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420	
						Feed (mm/min)	45	58	58	57	50	45	41	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 ≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	66 (52-79)	RPM	3474	2605	2084	1737	1303	1042	834
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
						Feed (mm/min)	333	417	417	417	367	333	292	
			1	≤ 1	52 (41-62)	RPM	2747	2060	1648	1373	1030	824	659	
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
						Feed (mm/min)	264	330	330	330	290	264	231	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 ≤ 420 Bhn or ≤ 45 HRc	Profile	≤ 0.5	≤ 1.5	23 (18-27)	RPM	1212	909	727	606	454	364	291
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071	
						Feed (mm/min)	116	145	145	145	128	116	103	
			1	≤ 1	18 (15-22)	RPM	969	727	582	485	364	291	233	
						Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071	
						Feed (mm/min)	93	116	116	116	102	93	83	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoool.com)



FRACTIONAL Z-Carb-AP • Z-Carb



TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h_8

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h_8

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h_8

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h_8

RE = +0.000/-0.0020


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

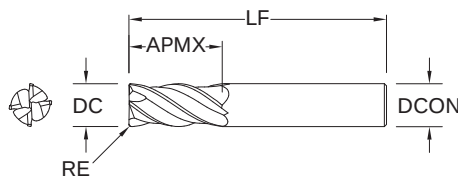

Z1PCR • Z1 • Z16CR FRACTIONAL SERIES

inch					EDP NO.			SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
1/64	1/32	1-1/2	1/8	0.002	36874*	—	—	Z1PCR
1/32	5/64	1-1/2	1/8	0.005	36875*	—	—	Z1PCR
3/64	7/64	1-1/2	1/8	0.005	36876*	—	—	Z1PCR
1/16	3/16	1-1/2	1/8	0.005	36872*	—	—	Z1PCR
5/64	3/16	1-1/2	1/8	0.005	36877*	—	—	Z1PCR
3/32	9/32	1-1/2	1/8	0.010	36873*	—	—	Z1PCR
7/64	3/8	1-1/2	1/8	0.010	36878*	—	—	Z1PCR
1/8	1/4	1-1/2	1/8	0.015	36505	—	—	Z16CR
1/8	3/8	1-1/2	1/8	—	36404	—	—	Z1
1/8	3/8	1-1/2	1/8	0.010	36370	—	—	Z1PCR
1/8	3/8	1-1/2	1/8	0.015	36851	—	—	Z1PCR
5/32	5/16	2	3/16	0.015	36506	—	—	Z16CR
5/32	7/16	2	3/16	—	36406	—	—	Z1
3/16	3/8	2	3/16	0.015	36507	—	—	Z16CR
3/16	7/16	2	3/16	—	36408	—	—	Z1
3/16	7/16	2	3/16	0.010	36371	—	—	Z1PCR
3/16	7/16	2	3/16	0.015	36852	—	—	Z1PCR
3/16	7/16	2	3/16	0.030	36722	—	—	Z1PCR
7/32	3/8	2	1/4	0.020	36508	—	—	Z16CR
7/32	7/16	2-1/2	1/4	—	36410	—	—	Z1
1/4	7/16	2	1/4	0.020	36509	—	—	Z16CR
1/4	1/2	2-1/2	1/4	—	36416	—	—	Z1
1/4	1/2	2-1/2	1/4	0.010	36372	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.015	36723	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.020	36853	—	—	Z1PCR
1/4	1/2	2-1/2	1/4	0.030	36373	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	—	36596	—	—	Z1
1/4	3/4	2-1/2	1/4	0.010	36599	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.015	36600	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.020	36854	—	—	Z1PCR
1/4	3/4	2-1/2	1/4	0.030	36601	—	—	Z1PCR
9/32	5/8	2-1/2	5/16	—	36418	—	—	Z1

*Variable flute spacing. Helix and rake do not vary.

continued on next page

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



Z1PCR • Z1 • Z16CR

FRACTIONAL SERIES

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.			SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
5/16	1/2	2	5/16	0.020	36511	—	—	Z16CR
5/16	13/16	2-1/2	5/16	—	36420	—	—	Z1
5/16	13/16	2-1/2	5/16	0.015	36724	—	—	Z1PCR
5/16	13/16	2-1/2	5/16	0.020	36855	—	—	Z1PCR
5/16	13/16	2-1/2	5/16	0.030	36374	—	—	Z1PCR
11/32	13/16	2-1/2	3/8	—	36422	—	—	Z1
3/8	5/8	2	3/8	0.020	36513	—	—	Z16CR
3/8	7/8	2-1/2	3/8	—	36424	36530	—	Z1
3/8	7/8	2-1/2	3/8	0.010	36375	36701	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.015	36725	36736	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.020	36856	36864	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.030	36376	36702	—	Z1PCR
3/8	7/8	2-1/2	3/8	0.060	36727	36738	—	Z1PCR
13/32	15/16	2-3/4	7/16	—	36426	36531	—	Z1
7/16	5/8	2-1/2	7/16	0.020	36515	—	—	Z16CR
7/16	1	2-3/4	7/16	—	36428	36532	—	Z1
7/16	1	2-3/4	7/16	0.020	36857	36865	—	Z1PCR
15/32	1	3	1/2	—	36430	36533	—	Z1
1/2	5/8	2-1/2	1/2	0.030	36517	—	—	Z16CR
1/2	1	3	1/2	—	36432	36534	36826	Z1
1/2	1	3	1/2	0.010	36378	36704	36804	Z1PCR
1/2	1	3	1/2	0.015	36729	36740	36810	Z1PCR
1/2	1	3	1/2	0.030	36858	36866	36805	Z1PCR
1/2	1	3	1/2	0.060	36380	36706	36811	Z1PCR
1/2	1	3	1/2	0.090	36381	36707	36812	Z1PCR
1/2	1	3	1/2	0.125	36731	36742	36813	Z1PCR
1/2	1-1/4	3-1/4	1/2	—	36597	36598	—	Z1
1/2	1-1/4	3-1/4	1/2	0.010	36602	36603	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.015	36604	36605	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.030	36859	36867	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.060	36610	36611	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.090	36612	36613	—	Z1PCR
1/2	1-1/4	3-1/4	1/2	0.125	36614	36615	—	Z1PCR
9/16	1-1/8	3-1/2	9/16	—	36436	36535	36827	Z1

TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h₆

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h₆

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h₆

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h₆

RE = +0.000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON



HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

continued on next page



FRACTIONAL Z-Carb-AP • Z-Carb

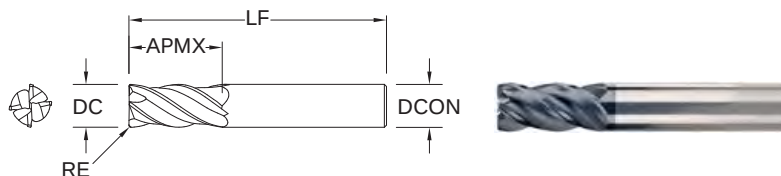

Z1PCR • Z1 • Z16CR FRACTIONAL SERIES

TOLERANCES (inch)

≤1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h_6

RE = +0.000/-0.0010

>1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h_6

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h_6

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h_6

RE = +0.000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


inch						EDP NO.			SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE		Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
9/16	1-1/8	3-1/2	9/16	0.030		36860	36868	36806	Z1PCR
5/8	3/4	3	5/8	0.040		36519	—	—	Z16CR
5/8	1-1/4	3-1/2	5/8	—		36440	36536	36828	Z1
5/8	1-1/4	3-1/2	5/8	0.030		36383	36709	36814	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.040		36861	36869	36807	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.060		36384	36710	36815	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.090		36385	36711	36816	Z1PCR
5/8	1-1/4	3-1/2	5/8	0.125		36733	36744	36817	Z1PCR
3/4	1	3	3/4	0.040		36520	—	—	Z16CR
3/4	1-1/2	4	3/4	—		36442	36537	36829	Z1
3/4	1-1/2	4	3/4	0.030		36386	36712	36818	Z1PCR
3/4	1-1/2	4	3/4	0.040		36862	36870	36808	Z1PCR
3/4	1-1/2	4	3/4	0.060		36387	36713	36819	Z1PCR
3/4	1-1/2	4	3/4	0.090		36388	36714	36820	Z1PCR
3/4	1-1/2	4	3/4	0.125		36389	36715	36821	Z1PCR
1	1-1/2	4	1	—		36444	36538	36830	Z1
1	1-1/2	4	1	0.030		36390	36716	36822	Z1PCR
1	1-1/2	4	1	0.040		36863	36871	36809	Z1PCR
1	1-1/2	4	1	0.060		36391	36717	36823	Z1PCR
1	1-1/2	4	1	0.090		36392	36718	36824	Z1PCR
1	1-1/2	4	1	0.125		36393	36719	36825	Z1PCR

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-AP



Z1PLC FRACTIONAL SERIES

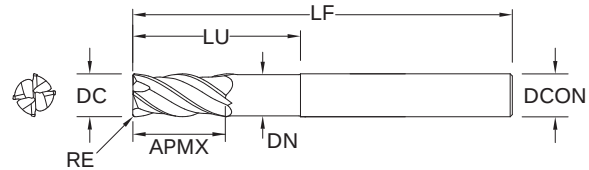

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch		REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	EDP NO.
			SHANK DIAMETER DCON					Ti-NAMITE®-X (TX)
1/4	1/2	2-1/2	1/4		1-1/8	.230	.020	36447
1/4	1/2	3-1/2	1/4		1-5/8	.230	.020	36448
1/4	1/2	4	1/4		1-1/4	.230	.020	36450
1/4	1/2	4	1/4		2-1/8	.230	.020	36449
5/16	13/16	3	5/16		1-3/8	.293	.020	36453
5/16	13/16	4	5/16		2	.293	.020	36454
5/16	13/16	4	5/16		1-5/8	.293	.020	36452
3/8	7/8	3	3/8		1-5/8	.355	.020	36457
3/8	7/8	5	3/8		1-7/8	.355	.020	36456
3/8	7/8	4	3/8		2-3/8	.355	.020	36458
7/16	1	6	7/16		2	.418	.020	36460
1/2	1	4	1/2		2	.480	.030	36463
1/2	1	5	1/2		3	.480	.030	36464
1/2	1	6	1/2		2-1/4	.480	.030	36462
9/16	1-1/8	6	9/16		2-1/2	.543	.030	36466
5/8	1-1/4	5	5/8		2-1/2	.605	.040	36468
5/8	1-1/4	6	5/8		3-3/4	.605	.040	36469
5/8	1-1/4	6	5/8		3	.605	.040	36470
3/4	1-1/2	6	3/4		3-1/2	.730	.040	36472
1	1-1/2	6	1		3	.980	.040	36475
1	1-1/2	6	1		4	.980	.040	36474

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000/-0.005

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000/-0.005

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000/-0.005



STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

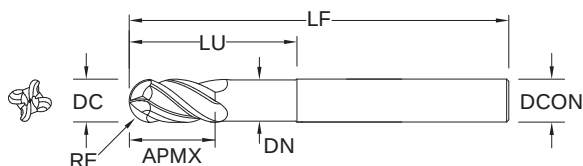

Z1PLB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0006

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0008

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0010

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
1/4	1/2	4	1/4	1-1/4	.230	36480
5/16	13/16	4	5/16	1-5/8	.293	36482
3/8	7/8	5	3/8	1-7/8	.355	36486
7/16	1	6	7/16	2	.418	38490
1/2	1	6	1/2	2-1/4	.480	38492
9/16	1-1/8	6	9/16	2-1/2	.543	38496
5/8	1-1/4	6	5/8	3	.605	36500
3/4	1-1/2	6	3/4	3-1/2	.730	36502
1	1-1/2	6	1	4	.980	36504

RE = 1/2 Cutting Diameter (DC)


- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Long reach design allows for deeper and faster cuts
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-AP



Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional								DC • in							
Hardness		Ae x DC	Ap x DC	Vc (sfm)		1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.5	≤ 1.5	555	RPM	135904	16961	8480	5654	4240	3392	2827	2120	
					(444-666)	Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
						Feed (ipm)	27.2	31.2	40.7	52.0	52.6	46.1	41.8	36.5	
		 Slot	1	≤ 1	440	RPM	107744	13446	6723	4482	3362	2689	2241	1681	
					(352-528)	Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
						Feed (ipm)	21.5	24.7	32.3	41.2	41.7	36.6	33.2	28.9	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.5	≤ 1.5	315	RPM	77135	9626	4813	3209	2407	1925	1604	1203	
					(252-378)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	12.3	13.1	17.3	21.8	22.1	20.0	18.0	15.4	
		 Slot	1	≤ 1	250	RPM	61218	7640	3820	2547	1910	1528	1273	955	
					(200-300)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
						Feed (ipm)	9.8	10.4	13.8	17.3	17.6	15.9	14.3	12.2	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.5	≤ 1.5	185	RPM	45301	5654	2827	1885	1413	1131	942	707	
					(148-222)	Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026	
						Feed (ipm)	5.4	6.3	7.9	10.6	10.2	9.0	8.3	7.3	
		 Slot	1	≤ 1	145	RPM	35506	4431	2216	1477	1108	886	739	554	
					(116-174)	Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026	
						Feed (ipm)	4.3	5.0	6.2	8.3	8.0	7.1	6.5	5.8	
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	490	RPM	119987	14974	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
							Feed (ipm)	19.2	20.4	27.0	33.9	34.4	31.1	28.0	24.0
			 Slot	1	≤ 1	390	RPM	95500	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032
							Feed (ipm)	15.3	16.2	21.5	27.0	27.4	24.8	22.2	19.1
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		 Profile	≤ 0.5	≤ 1.5	340	RPM	83256	10390	5195	3463	2598	2078	1732	1299	
					(272-408)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	10.0	11.2	14.5	19.4	18.7	16.6	15.2	13.0	
		 Slot	1	≤ 1	270	RPM	66115	8251	4126	2750	2063	1650	1375	1031	
					(216-324)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	7.9	8.9	11.6	15.4	14.9	13.2	12.1	10.3	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		 Profile	≤ 0.5	≤ 1.5	310	RPM	75910	9474	4737	3158	2368	1895	1579	1184	
					(248-372)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	9.1	10.2	13.3	17.7	17.1	15.2	13.9	11.8	
		 Slot	1	≤ 1	250	RPM	61218	7640	3820	2547	1910	1528	1273	955	
					(200-300)	Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
						Feed (ipm)	7.3	8.3	10.7	14.3	13.8	12.2	11.2	9.6	

continued on next page

Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional	Hardness			Vc (sfm)	DC • in									
		Ae x DC	Ap x DC		1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.5	≤ 1.5	445	RPM	108968	13599	6800	4533	3400	2720	2267	1700
					(356-534)	Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039
						Feed (ipm)	21.8	22.8	29.9	38.1	38.1	33.7	30.8	26.5
		 Slot	1	≤ 1	355	RPM	86929	10849	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039
						Feed (ipm)	17.4	18.2	23.9	30.4	30.4	26.9	24.6	21.2
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.5	≤ 1.5	340	RPM	83256	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
						Feed (ipm)	13.3	12.9	17.5	22.2	21.8	19.1	17.3	15.1
		 Slot	1	≤ 1	270	RPM	66115	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
						Feed (ipm)	10.6	10.2	13.9	17.6	17.3	15.2	13.8	12.0
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile	≤ 0.5	≤ 1.5	80	RPM	19590	2445	1222	815	611	489	407	306
					(64-96)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024
						Feed (ipm)	2.4	2.4	3.3	4.2	4.2	3.7	3.3	2.9
		 Slot	1	≤ 1	65	RPM	15917	1986	993	662	497	397	331	248
					(52-78)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024
						Feed (ipm)	1.9	2.0	2.7	3.4	3.4	3.0	2.7	2.4
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.5	≤ 1.5	62	RPM	15182	1895	947	632	474	379	316	237
					(50-74)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017
						Feed (ipm)	1.2	1.4	1.8	2.3	2.3	2.0	1.8	1.6
		 Slot	1	≤ 1	50	RPM	12244	1528	764	509	382	306	255	191
					(40-60)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017
						Feed (ipm)	1.0	1.1	1.5	1.8	1.8	1.6	1.4	1.3
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.5	≤ 1.5	215	RPM	52647	6570	3285	2190	1643	1314	1095	821
					(172-258)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	6.3	7.9	10.5	13.1	13.1	11.6	10.5	9.2
		 Slot	1	≤ 1	170	RPM	41628	5195	2598	1732	1299	1039	866	649
					(136-204)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	5.0	6.2	8.3	10.4	10.4	9.1	8.3	7.3
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	75	RPM	18365	2292	1146	764	573	458	382	287
					(60-90)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	2.2	2.8	3.7	4.6	4.6	4.0	3.7	3.2
		 Slot	1	≤ 1	60	RPM	14692	1834	917	611	458	367	306	229
					(48-72)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
						Feed (ipm)	1.8	2.2	2.9	3.7	3.7	3.2	2.9	2.6

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .25 x DC

maximum Profile Ae for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .20 x DC


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Z-Carb-AP • Z-Carb



Z1MPCR • Z1M

METRIC SERIES

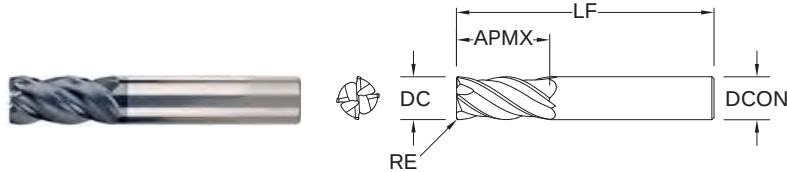

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.			SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
1,0	3,0	57,0	6,0	0,1	46873*	—	—	Z1MPCR
1,5	4,5	57,0	6,0	0,1	46849*	—	—	Z1MPCR
2,0	6,0	57,0	6,0	0,2	46850*	—	—	Z1MPCR
2,5	7,0	57,0	6,0	0,2	46874*	—	—	Z1MPCR
3,0	8,0	57,0	6,0	—	46357	—	—	Z1M
3,0	8,0	57,0	6,0	0,3	46851	—	—	Z1MPCR
3,0	8,0	57,0	6,0	0,5	46880	—	—	Z1MPCR
4,0	11,0	57,0	6,0	—	46358	—	—	Z1M
4,0	11,0	57,0	6,0	0,3	46852	—	—	Z1MPCR
4,0	11,0	57,0	6,0	0,5	46881	—	—	Z1MPCR
5,0	13,0	57,0	6,0	—	46359	—	—	Z1M
5,0	13,0	57,0	6,0	0,3	46853	—	—	Z1MPCR
6,0	13,0	57,0	6,0	—	46360	—	—	Z1M
6,0	13,0	57,0	6,0	0,25	46882	—	—	Z1MPCR
6,0	13,0	57,0	6,0	0,5	46854	—	—	Z1MPCR
6,0	13,0	57,0	6,0	1,0	46855	—	—	Z1MPCR
6,0	13,0	57,0	6,0	1,5	46884	—	—	Z1MPCR
8,0	19,0	63,0	8,0	—	46362	—	—	Z1M
8,0	19,0	63,0	8,0	0,5	46856	—	—	Z1MPCR
8,0	19,0	63,0	8,0	1,0	46857	—	—	Z1MPCR
8,0	19,0	63,0	8,0	1,5	46886	—	—	Z1MPCR
8,0	19,0	63,0	8,0	2,0	46887	—	—	Z1MPCR
10,0	22,0	72,0	10,0	—	46364	—	—	Z1M
10,0	22,0	72,0	10,0	0,5	46858	—	—	Z1MPCR
10,0	22,0	72,0	10,0	1,0	46859	—	—	Z1MPCR
10,0	22,0	72,0	10,0	1,5	46889	—	—	Z1MPCR
10,0	22,0	72,0	10,0	2,0	46890	—	—	Z1MPCR
10,0	22,0	72,0	10,0	2,5	46891	—	—	Z1MPCR
12,0	26,0	83,0	12,0	—	46366	—	—	Z1M
12,0	26,0	83,0	12,0	0,5	46860	46909	—	Z1MPCR
12,0	26,0	83,0	12,0	0,75	46861	46910	46493	Z1MPCR
12,0	26,0	83,0	12,0	1,0	46893	46911	—	Z1MPCR

*Variable flute spacing. Helix and rake do not vary.

continued on next page

TOLERANCES (mm)

<3 DIAMETER

DC = +0,012/−0,012

DCON = h_6

RE = +0,000/−0,025

>3–6 DIAMETER

DC = +0,000/−0,030

DCON = h_6

RE = +0,000/−0,050

>6–10 DIAMETER

DC = +0,000/−0,040

DCON = h_6

RE = +0,000/−0,050

>10–25 DIAMETER

DC = +0,000/−0,050

DCON = h_6



RE = +0,000/−0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com



METRIC Z-Carb-AP • Z-Carb

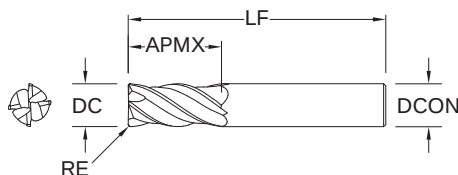

Z1MPCR • Z1M METRIC SERIES

TOLERANCES (mm)

<3 DIAMETER

DC = +0,012/-0,012

DCON = h_6

RE = +0,000/-0,025

>3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


mm					EDP NO.		SERIES	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream	
12,0	26,0	83,0	12,0	1,5	46894	46912	—	Z1MPCR
12,0	26,0	83,0	12,0	2,0	46895	46913	—	Z1MPCR
12,0	26,0	83,0	12,0	2,5	46896	46914	—	Z1MPCR
12,0	26,0	83,0	12,0	3,0	42718	46915	42719	Z1MPCR
14,0	26,0	83,0	14,0	—	46368	46506	—	Z1M
14,0	26,0	83,0	14,0	1,0	46862	46916	46494	Z1MPCR
16,0	32,0	92,0	16,0	—	46370	46507	—	Z1M
16,0	32,0	92,0	16,0	1,0	46863	46917	46495	Z1MPCR
16,0	32,0	92,0	16,0	1,5	46898	46918	—	Z1MPCR
16,0	32,0	92,0	16,0	2,0	46899	46919	—	Z1MPCR
16,0	32,0	92,0	16,0	2,5	46900	46920	—	Z1MPCR
16,0	32,0	92,0	16,0	3,0	46864	46921	42721	Z1MPCR
16,0	32,0	92,0	16,0	4,0	46867	46944	—	Z1MPCR
18,0	32,0	92,0	18,0	—	46372	46508	—	Z1M
20,0	38,0	104,0	20,0	—	46374	46509	—	Z1M
20,0	38,0	104,0	20,0	1,0	46865	46922	46497	Z1MPCR
20,0	38,0	104,0	20,0	1,5	46903	46923	—	Z1MPCR
20,0	38,0	104,0	20,0	2,0	46904	46924	—	Z1MPCR
20,0	38,0	104,0	20,0	2,5	46905	46925	—	Z1MPCR
20,0	38,0	104,0	20,0	3,0	42722	46926	42723	Z1MPCR
20,0	38,0	104,0	20,0	4,0	46868	46945	—	Z1MPCR
20,0	38,0	104,0	20,0	5,0	46869	46946	—	Z1MPCR
25,0	38,0	104,0	25,0	—	46376	46510	—	Z1M
25,0	38,0	104,0	25,0	1,0	46866	46927	46498	Z1MPCR

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



Z1MPIC • Z1MPLC

METRIC SERIES

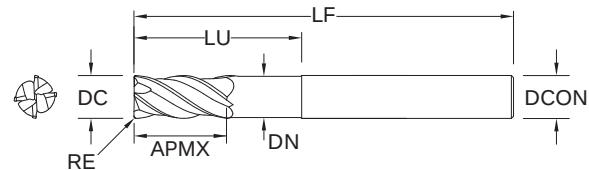

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT
6,0	8,0	75,0	6,0	24,0	5,49	0,5	46821	—
8,0	10,0	75,0	8,0	32,0	7,49	1,0	46822	—
8,0	10,0	75,0	8,0	32,0	7,49	2,0	46823	—
10,0	12,0	100,0	10,0	40,0	9,50	1,0	46824	—
10,0	12,0	100,0	10,0	40,0	9,50	2,0	46825	—
12,0	15,0	100,0	12,0	48,0	11,48	1,0	46826	46928
12,0	15,0	100,0	12,0	48,0	11,48	1,5	46827	46929
12,0	15,0	100,0	12,0	48,0	11,48	2,0	46828	46930
12,0	15,0	100,0	12,0	48,0	11,48	3,0	46829	46931
12,0	26,0	83,0	12,0	36,0	11,48	2,5	—	42731
12,0	26,0	83,0	12,0	36,0	11,48	3,0	—	42732
12,0	26,0	83,0	12,0	36,0	11,48	4,0	—	42733
16,0	32,0	92,0	16,0	42,0	15,49	2,5	—	42734
16,0	32,0	92,0	16,0	42,0	15,49	4,0	—	42735
16,0	32,0	92,0	16,0	42,0	15,49	6,0	—	42736
16,0	20,0	115,0	16,0	65,0	15,49	1,0	46830	46932
16,0	20,0	115,0	16,0	65,0	15,49	1,5	46831	46933
16,0	20,0	115,0	16,0	65,0	15,49	2,0	46832	46934
16,0	20,0	115,0	16,0	65,0	15,49	3,0	46833	46935
16,0	20,0	115,0	16,0	65,0	15,49	4,0	46834	46936
16,0	20,0	115,0	16,0	65,0	15,49	5,0	46835	46937
20,0	24,0	140,0	20,0	80,0	19,48	1,0	46836	46938
20,0	24,0	140,0	20,0	80,0	19,48	1,5	46837	46939
20,0	24,0	140,0	20,0	80,0	19,48	2,0	46838	46940
20,0	24,0	140,0	20,0	80,0	19,48	3,0	46839	46941
20,0	24,0	140,0	20,0	80,0	19,48	4,0	46840	46942
20,0	24,0	140,0	20,0	80,0	19,48	5,0	46841	46943
20,0	38,0	104,0	20,0	52,0	19,48	2,5	—	42737
20,0	38,0	104,0	20,0	52,0	19,48	4,0	—	42738
20,0	38,0	104,0	20,0	52,0	19,48	6,0	—	42739

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/−0,030

DCON = h_6

RE = +0,000/−0,050

>6–10 DIAMETER

DC = +0,000/−0,040

DCON = h_6

RE = +0,000/−0,050

>10–20 DIAMETER


DC = +0,000/−0,050

DCON = h_6

RE = +0,000/−0,050


	STEELS
	STAINLESS STEELS
	CAST IRON
	HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric							DC • mm										
Hardness		Ae x DC	Ap x DC	Vc (m/min)		1	3	6	8	10	12	16	20	25			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.5	≤ 1.5	169	RPM	53803	17934	8967	6725	5380	4484	3363	2690	2152		
					(135-203)	Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108		
					Feed (mm/min)	646	782	1040	1318	1313	1327	1170	1065	930			
		 Slot	1	≤ 1	134	RPM	42654	14218	7109	5332	4265	3555	2666	2133	1706		
					(107-161)	Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108		
					Feed (mm/min)	512	620	825	1045	1041	1052	928	845	737			
		≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	96	RPM	30537	10179	5089	3817	3054	2545	1909	1527	1221	
						(77-115)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	281	330	448	550	550	560	511	458	391		
			 Slot	1	≤ 1	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969	
						(61-91)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
						Feed (mm/min)	223	262	355	436	436	444	406	364	310		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.5	≤ 1.5	56	RPM	17934	5978	2989	2242	1793	1495	1121	897	717	
						(45-68)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065	
						Feed (mm/min)	129	158	203	269	265	257	229	212	187		
			 Slot	1	≤ 1	44	RPM	14057	4686	2343	1757	1406	1171	879	703	562	
						(35-53)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065	
						Feed (mm/min)	101	124	159	211	208	201	179	166	146		
		TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.5	≤ 1.5	149	RPM	47501	15834	7917	5938	4750	3958	2969	2375	1900
							(119-179)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
							Feed (mm/min)	437	513	697	855	855	871	796	713	608	
				 Slot	1	≤ 1	119	RPM	37807	12602	6301	4726	3781	3151	2363	1890	1512
							(95-143)	Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080
							Feed (mm/min)	348	408	555	681	681	693	633	567	484	
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc		 Profile	≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318	
						(83-124)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	237	281	374	494	488	472	420	389	332		
			 Slot	1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047	
						(66-99)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	188	223	297	393	387	375	334	309	264		
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	 Profile	≤ 0.5	≤ 1.5	94	RPM	30052	10017	5009	3756	3005	2504	1878	1503	1202	
						(76-113)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	216	256	341	451	445	431	383	355	303		
			 Slot	1	≤ 1	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969	
						(61-91)	Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
						Feed (mm/min)	174	207	275	364	359	347	309	286	244		

continued on next page

Z-Carb-AP

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric				Vc (m/min)	DC • mm											
		Hardness	Ae x DC		Ap x DC	1	3	6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	136	RPM	43139	14380	7190	5392	4314	3595	2696	2157	1726
						(109-163)	Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098
						Feed (mm/min)	483	569	748	971	966	963	852	785	676	
		 Slot	1	≤ 1	108	RPM	34414	11471	5736	4302	3441	2868	2151	1721	1377	
					(87-130)	Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
					Feed (mm/min)	385	454	597	774	771	769	680	626	540		
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074
						Feed (mm/min)	264	325	439	560	567	549	486	442	390	
		 Slot	1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047	
					(66-99)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074	
					Feed (mm/min)	209	258	349	445	450	436	386	351	310		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.5	≤ 1.5	24	RPM	7755	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
						Feed (mm/min)	56	63	83	105	105	106	93	82	74	
		 Slot	1	≤ 1	20	RPM	6301	2100	1050	788	630	525	394	315	252	
					(16-24)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060	
					Feed (mm/min)	45	51	67	85	86	86	76	67	60		
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.5	≤ 1.5	19	RPM	6010	2003	1002	751	601	501	376	301	240
						(15-23)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
						Feed (mm/min)	31	34	44	57	58	56	50	44	40	
		 Slot	1	≤ 1	15	RPM	4847	1616	808	606	485	404	303	242	194	
					(12-18)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042	
					Feed (mm/min)	25	28	36	46	47	45	40	36	33		
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.5	≤ 1.5	66	RPM	20842	6947	3474	2605	2084	1737	1303	1042	834
						(52-79)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
						Feed (mm/min)	167	197	264	333	333	333	292	267	233	
		 Slot	1	≤ 1	52	RPM	16480	5493	2747	2060	1648	1373	1030	824	659	
					(41-62)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
					Feed (mm/min)	132	156	209	264	264	264	231	211	185		
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.5	≤ 1.5	23	RPM	7271	2424	1212	909	727	606	454	364	291
						(18-27)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
						Feed (mm/min)	58	69	92	116	116	116	102	93	81	
		 Slot	1	≤ 1	18	RPM	5816	1939	969	727	582	485	364	291	233	
					(15-22)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070	
					Feed (mm/min)	47	55	74	93	93	93	81	74	65		

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .25 x DC


maximum Profile Ae for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .20 x DC

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

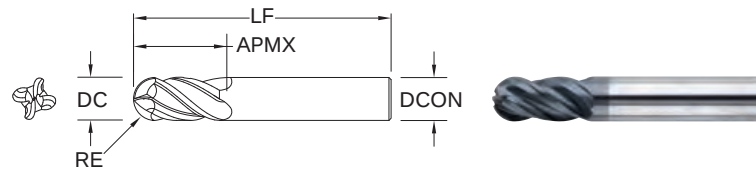

Z1B
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	Ti-NAMITE®-X (TX) W/FLAT	JetStream
1/8	3/8	1-1/2	1/8	36358	—	—
5/32	7/16	2	3/16	36357	—	—
3/16	7/16	2	3/16	36359	—	—
7/32	7/16	2-1/2	1/4	36361	—	—
1/4	1/2	2-1/2	1/4	36344	—	—
1/4	3/4	2-1/2	1/4	36590	—	—
9/32	5/8	2-1/2	5/16	36353	—	—
5/16	13/16	2-1/2	5/16	36345	—	—
11/32	13/16	2-1/2	3/8	36354	—	—
3/8	7/8	2-1/2	3/8	36346	36539	—
13/32	15/16	2-3/4	7/16	36355	36540	—
7/16	1	2-3/4	7/16	36347	36541	—
15/32	1	3	1/2	36356	36542	—
1/2	1	3	1/2	36348	36543	36846
1/2	1-1/4	3-1/4	1/2	36591	36592	—
9/16	1-1/8	3-1/2	9/16	36349	36544	36847
5/8	1-1/4	3-1/2	5/8	36350	36545	36848
3/4	1-1/2	4	3/4	36351	36546	36849
1	1-1/2	4	1	36352	36547	36850


RE = 1/2 Cutting Diameter (DC)

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series Z1B	Fractional	Hardness		Ae x DC	Ap x DC	Vc (sfm)	DC • in									
							1/8	1/4	3/8	1/2	5/8	3/4	1			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	555	RPM	16961	8480	5654	4240	3392	2827	2120		
						(444-666)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035		
						Feed (ipm)	25.8	33.9	43.0	42.4	42.1	36.5	29.7			
			Slot 	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681		
						(352-528)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035		
						Feed (ipm)	20.4	26.9	34.1	33.6	33.3	29.0	23.5			
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203	
							(252-378)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027	
							Feed (ipm)	10.8	15.4	18.0	18.3	18.5	16.0	13.0		
				Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955	
							(200-300)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027	
							Feed (ipm)	8.6	12.2	14.3	14.5	14.7	12.7	10.3		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707	
							(148-222)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
							Feed (ipm)	4.5	5.7	7.5	7.3	7.2	6.4	5.1		
				Slot 	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554	
							(116-174)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
							Feed (ipm)	3.5	4.4	5.9	5.8	5.7	5.0	4.0		
		M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
								(392-588)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
								Feed (ipm)	18.0	21.0	28.0	27.0	27.6	24.0	18.7	
					Slot 	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
								(312-468)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
								Feed (ipm)	14.3	16.7	22.2	21.5	21.9	19.1	14.9	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc			Profile 	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299	
							(272-408)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
							Feed (ipm)	8.3	12.5	15.2	14.5	15.0	13.2	10.4		
				Slot 	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031	
							(216-324)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
							Feed (ipm)	6.6	9.9	12.1	11.6	11.9	10.5	8.3		
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184	
							(248-372)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
							Feed (ipm)	7.6	11.4	13.9	13.3	13.6	12.0	9.5		
				Slot 	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955	
							(200-300)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
							Feed (ipm)	6.1	9.2	11.2	10.7	11.0	9.7	7.6		

continued on next page


Series	Z1B Fractional	Hardness			Vc (sfm)	DC • in								
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	 Profile	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
						(356-534)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (ipm)	19.0	27.2	32.6	32.6	28.1	23.1	
			 Slot	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (ipm)	15.2	21.7	26.0	26.0	22.4	18.4	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	12.5	14.5	19.4	18.7	16.6	13.0	
			 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (ipm)	9.9	11.6	15.4	14.9	15.2	13.2	10.3
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	 Profile	≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	2.2	2.0	2.6	2.4	2.5	2.3	1.8
			 Slot	1	≤ 1	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (ipm)	1.6	1.6	2.1	2.0	2.1	1.9	1.5
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	 Profile	≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
						(50-74)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (ipm)	0.8	1.1	1.3	1.3	1.2	1.1	0.9
			 Slot	1	≤ 1	50	RPM	1497	749	499	374	299	250	187
						(40-60)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (ipm)	0.6	0.9	1.0	1.0	1.0	0.9	0.7
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	 Profile	≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
						(172-258)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	5.3	6.6	8.8	8.5	8.4	7.4	5.9
			 Slot	1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649
						(136-204)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	4.2	5.2	6.9	6.8	6.6	5.9	4.7
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	 Profile	≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
						(60-90)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	1.8	2.3	3.1	3.0	2.9	2.6	2.1
			 Slot	1	≤ 1	60	RPM	1834	917	611	458	367	306	229
						(48-72)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (ipm)	1.5	1.8	2.4	2.4	2.3	2.1	1.7

Bhn (Brinell) HRc (Rockwell C)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 4 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



Z1MB

METRIC SERIES

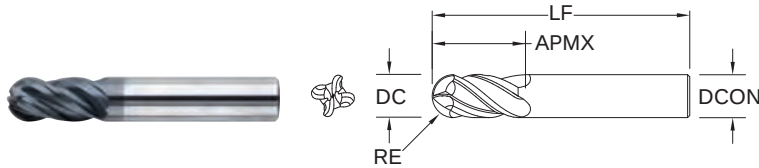

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials $\leq 45 \text{ HRc}$ ($\leq 420 \text{ Bhn}$)

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	JetStream
3,0	8,0	57,0	6,0	46354	—
4,0	11,0	57,0	6,0	46355	—
5,0	13,0	57,0	6,0	46356	—
6,0	13,0	57,0	6,0	46343	—
8,0	19,0	63,0	8,0	46344	—
10,0	22,0	72,0	10,0	46345	—
12,0	26,0	83,0	12,0	46346	—
14,0	26,0	83,0	14,0	46347	46518
16,0	32,0	92,0	16,0	46348	46519
18,0	32,0	92,0	18,0	46349	46520
20,0	38,0	104,0	20,0	46350	46521
25,0	38,0	104,0	25,0	46351	46522

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3–6 DIAMETER

DC = $+0,000/-0,030$

DCON = h_6

RE = $+0,000/-0,015$

>6–10 DIAMETER

DC = $+0,000/-0,040$

DCON = h_6

RE = $+0,000/-0,020$

>10–25 DIAMETER


DC = $+0,000/-0,050$


DCON = h_6

RE = $+0,000/-0,025$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com



Series Z1MB Metric	Hardness		Vc (m/min)	DC • mm											
				3	6	8	10	12	16	20	25				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.5	≤ 1.5	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
						(135-203)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
							Feed (mm/min)	654	861	1091	1090	1076	1067	927	753
		 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706	
					(107-161)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088	
						Feed (mm/min)	519	682	865	864	853	846	735	597	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 375 Bhn or ≤ 40 HRc	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
						(77-115)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
							Feed (mm/min)	274	391	456	456	464	469	407	330
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969	
					(61-91)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068	
						Feed (mm/min)	217	310	362	362	368	372	323	262	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 375 Bhn or ≤ 40 HRc	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
						(45-68)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	115	143	191	191	186	184	163	129
		 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562	
					(35-53)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
						Feed (mm/min)	90	112	150	150	146	144	127	101	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
						(119-179)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
							Feed (mm/min)	456	532	709	709	684	699	608	475
		 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512	
					(95-143)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063	
						Feed (mm/min)	363	423	565	565	544	557	484	378	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 275 Bhn or ≤ 28 HRc	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	211	316	387	387	369	380	334	264
		 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047	
					(66-99)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
						Feed (mm/min)	168	251	307	307	293	302	265	209	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 Profile	≤ 325 Bhn or ≤ 35 HRc	≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
						(76-113)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	192	288	353	353	337	346	305	240
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969	
					(61-91)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
						Feed (mm/min)	155	233	284	284	271	279	246	194	



continued on next page

METRIC Z-Carb



Series Z1MB Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
						3	6	8	10	12	16	20	25	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	483	690	828	828	828	828	713	587
		Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	385	551	661	661	661	661	569	468
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	316	369	492	492	475	485	422	330
		Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	251	293	391	391	377	385	335	262
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388	310
					(20-29)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
						Feed (mm/min)	55	50	66	53	62	65	58	47
		Slot 	1	≤ 1	20	RPM	2100	1050	788	630	525	394	315	252
					(16-24)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
						Feed (mm/min)	40	40	54	54	50	52	47	38
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301	240
					(15-23)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
						Feed (mm/min)	19	29	32	32	34	31	29	24
		Slot 	1	≤ 1	15	RPM	1583	792	594	475	396	297	238	190
					(12-18)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
						Feed (mm/min)	15	23	25	25	27	24	23	19
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042	834	
				(52-79)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	133	167	222	222	217	213	189	150	
	Slot 	1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824	659	
				(41-62)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	105	132	176	176	171	169	149	119	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364	291	
				(18-27)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	47	58	78	78	76	74	66	52	
	Slot 	1	≤ 1	18	RPM	1939	969	727	582	485	364	291	233	
				(15-22)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
					Feed (mm/min)	37	47	62	62	60	60	53	42	

Bhn (Brinell) HRc (Rockwell C)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 4 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

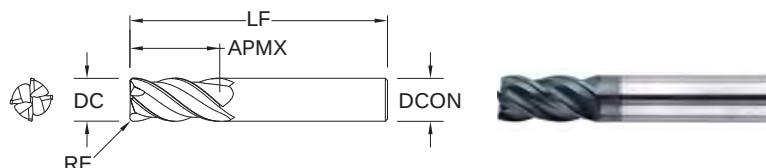

ZH1CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
1/4	1/2	2-1/2	1/4	.020	36570	—
1/4	3/4	2-1/2	1/4	.020	36616	—
5/16	13/16	2-1/2	5/16	.020	36571	—
3/8	7/8	2-1/2	3/8	.020	36572	36555
7/16	1	2-3/4	7/16	.020	36573	36556
1/2	1	3	1/2	.030	36574	36557
1/2	1-1/4	3-1/4	1/2	.030	36618	36617
9/16	1-1/8	3-1/2	9/16	.030	36575	36558
5/8	1-1/4	3-1/2	5/8	.040	36576	36559
3/4	1-1/2	4	3/4	.040	36577	36560
1	1-1/2	4	1	.040	36578	36561

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb-HTA

Series ZH1CR Fractional	Hardness			Vc (sfm)	Diameter (DC) (inch)							
		Ae x DC	Ap x DC		1/4	3/8	1/2	3/4	1			
HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC		≤ 0.5	≤ 1.5	85	RPM	1299	866	649	433	325	
					(68-102)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023	
						Feed (ipm)	3.6	4.2	4.4	3.5	3.0	
			1	≤ 1	70	RPM	1070	713	535	357	267	
					(56-84)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023	
						Feed (ipm)	3.0	3.4	3.6	2.9	2.5	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC		≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
						(56-84)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
							Feed (ipm)	2.1	2.6	2.6	2.0	1.7
				1	≤ 1	55	RPM	840	560	420	280	210
						(44-66)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
							Feed (ipm)	1.7	2.0	2.0	1.6	1.3
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 350 Bhn or ≤ 38 HRC		≤ 0.5	≤ 1.5	215	RPM	3285	2190	1643	1095	821
						(172-258)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	10.5	13.1	13.1	10.5	9.2
				1	≤ 1	170	RPM	2598	1732	1299	866	649
						(136-204)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	8.3	10.4	10.4	8.3	7.3
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRC		≤ 0.5	≤ 1.5	75	RPM	1146	764	573	382	287
						(60-90)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	3.7	4.6	4.6	3.7	3.2
				1	≤ 1	60	RPM	917	611	458	306	229
						(48-72)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (ipm)	2.9	3.7	3.7	2.9	2.6

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

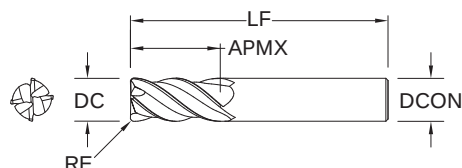

ZH1MCRS •
ZH1MCR
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
6,0	10,0	54,0	6,0	0,5	—	42712
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	12,0	58,0	8,0	0,5	—	42713
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	14,0	66,0	10,0	0,5	—	42714
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	16,0	73,0	12,0	0,7	—	42715
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	22,0	82,0	16,0	1,0	—	42716
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
16,0	32,0	92,0	16,0	4,0	46482	46483
20,0	26,0	92,0	20,0	1,0	—	42717
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

Z-Carb-HTA

Series ZH1MCRS, ZH1MCR Metric	Hardness			Vc (m/min)	DC • mm				
		Ae x DC	Ap x DC		6	10	12	20	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile ≤ 0.5 ≤ 1.5		26	RPM	1373	824	687	412
				(21-31)	Fz	0.017	0.032	0.041	0.053
					Feed (mm/min)	93	105	113	87
		 Slot 1 ≤ 1		21	RPM	1131	679	565	339
				(17-26)	Fz	0.017	0.032	0.041	0.053
					Feed (mm/min)	77	87	93	72
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile ≤ 0.5 ≤ 1.5		21	RPM	1131	679	565	339
				(17-26)	Fz	0.012	0.024	0.029	0.037
					Feed (mm/min)	54	65	66	50
		 Slot 1 ≤ 1		17	RPM	889	533	444	267
				(13-20)	Fz	0.012	0.024	0.029	0.037
					Feed (mm/min)	43	51	52	39
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile ≤ 0.5 ≤ 1.5		66	RPM	3474	2084	1737	1042
				(52-79)	Fz	0.019	0.041	0.049	0.057
					Feed (mm/min)	264	342	340	238
		 Slot 1 ≤ 1		52	RPM	2747	1648	1373	824
				(41-62)	Fz	0.019	0.041	0.049	0.057
					Feed (mm/min)	209	270	269	188
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile ≤ 0.5 ≤ 1.5		23	RPM	1212	727	606	364	
			(18-27)	Fz	0.019	0.041	0.049	0.057	
				Feed (mm/min)	92	119	119	83	
	 Slot 1 ≤ 1		18	RPM	969	582	485	291	
			(15-22)	Fz	0.019	0.041	0.049	0.057	
				Feed (mm/min)	74	95	95	66	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

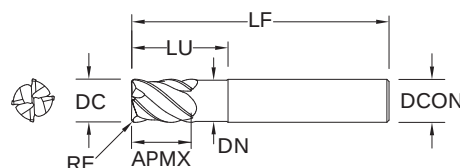

ZD1CR

FRACTIONAL SERIES

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.0000/-0.0020

>3/8-3/4 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

			inch				CORNER RADIUS RE	EDP NO. Ti-NAMITE®-X (TX)
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			
1/8	5/32	2-1/2	1/4	1/2	.110	.010		36780
3/16	7/32	2-1/2	1/4	3/4	.172	.020		36781
1/4	9/32	2-1/2	1/4	3/4	.235	.020		36782
5/16	13/32	2-1/2	5/16	1	.297	.040		36783
3/8	15/32	2-1/2	3/8	1	.360	.040		36784
7/16	9/16	2-3/4	7/16	1	.422	.040		36785
1/2	5/8	3	1/2	1-1/4	.485	.040		36786
1/2	5/8	4-1/2	1/2	2-1/4	.485	.040		36787
5/8	3/4	3-1/2	5/8	1-1/2	.610	.040		36788
5/8	3/4	4-1/2	5/8	2-1/4	.610	.040		36789
5/8	3/4	5-1/2	5/8	3-1/4	.610	.040		36790
3/4	15/16	4	3/4	1-3/4	.735	.060		36791
3/4	15/16	4-1/2	3/4	2-1/4	.735	.060		36792
3/4	15/16	5-1/2	3/4	3-1/4	.735	.060		36793

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

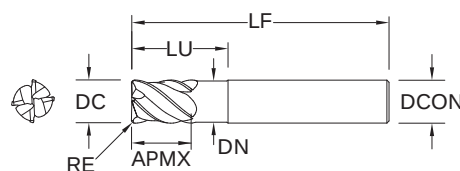

ZD1MCR

METRIC SERIES

TOLERANCES (mm)

3-6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000/-0,050

>10-20 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS


HARDENED STEELS

For patent
information visit
www.ksptpatents.com

			mm				CORNER RADIUS RE	EDP NO. Ti-NAMITE®-X (TX)
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			
3,0	4,0	57,0	6,0	15,0	2,62	0,2		46560
4,0	5,0	57,0	6,0	15,0	3,61	0,3		46561
5,0	6,0	57,0	6,0	15,0	4,60	0,5		46562
6,0	7,0	57,0	6,0	15,0	5,61	1,0		46563
8,0	10,0	63,0	8,0	25,0	7,62	1,0		46564
10,0	12,0	72,0	10,0	30,0	9,60	1,0		46565
12,0	15,0	83,0	12,0	35,0	11,61	1,0		46566
16,0	20,0	92,0	16,0	45,0	15,60	1,5		46567
20,0	24,0	104,0	20,0	55,0	19,61	2,0		46568

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

Z-Carb-MD

Series ZD1CR Fractional		Hardness			Vc (sfm)	Diameter (DC) (inch)							
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Profile	≤ 0.4	≤ 1	405	RPM	12377	6188	4126	3094	2475	2063
						(324-486)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
						Feed (ipm)	24.8	29.7	38.0	37.1	38.6	34.7	
		≤ 475 Bhn or ≤ 50 HRC	Slot	1	≤ 0.4	320	RPM	9779	4890	3260	2445	1956	1630
						(256-384)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
						Feed (ipm)	19.6	23.5	30.0	29.3	30.5	27.4	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRC	Profile	≤ 0.4	≤ 1	210	RPM	6418	3209	2139	1604	1284	1070
						(168-252)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
						Feed (ipm)	10.3	12.8	16.3	16.0	16.4	15.0	
		≤ 655 Bhn or ≤ 60 HRC	Slot	1	≤ 0.4	170	RPM	5195	2598	1732	1299	1039	866
						(136-204)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
						Feed (ipm)	8.3	10.4	13.2	13.0	13.3	12.1	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRC	Profile	≤ 0.4	≤ 1	90	RPM	2750	1375	917	688	550	458
						(72-108)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	2.2	2.8	3.7	3.6	3.7	3.3	
		≤ 655 Bhn or ≤ 60 HRC	Slot	1	≤ 0.4	70	RPM	2139	1070	713	535	428	357
						(56-84)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	1.7	2.1	2.9	2.8	2.9	2.6	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC


ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series ZD1MCR Metric		Hardness			Vc (m/min)	Diameter (DC) (mm)								
			Ae x DC	Ap x DC		3	6	8	10	12	16	20		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc		≤ 0.4	≤ 1	123	RPM	13087	6544	4908	3926	3272	2454	1963
						(99-148)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
						Feed (mm/min)	628	754	963	963	942	817	879	
		≤ 40 HRc		1	≤ 0.4	98	RPM	10340	5170	3878	3102	2585	1939	1551
						(78-117)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
						Feed (mm/min)	496	596	761	761	744	645	695	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc		≤ 0.4	≤ 1	64	RPM	6786	3393	2545	2036	1696	1272	1018
						(51-77)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
						Feed (mm/min)	261	326	413	413	407	347	380	
						52	RPM	5493	2747	2060	1648	1373	1030	824
						(41-62)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
						Feed (mm/min)	211	264	334	334	330	281	308	
		≤ 655 Bhn or ≤ 60 HRc		≤ 0.4	≤ 1	27	RPM	2908	1454	1091	872	727	545	436
						(22-33)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
						Feed (mm/min)	56	70	93	93	91	79	84	
						21	RPM	2262	1131	848	679	565	424	339
						(17-26)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
						Feed (mm/min)	43	54	72	72	71	62	65	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

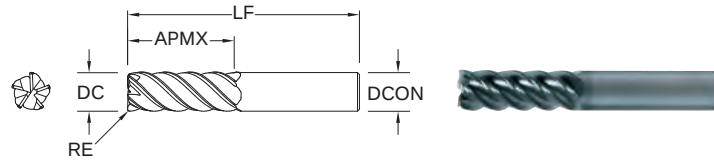

**55 •
55CR**
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020


STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AITIN)	Ti-NAMITE®-A (AITIN) W/FLAT
1/8	1/4	1-1/2	1/8	—	32672	—
1/8	1/4	1-1/2	1/8	.010	32606	—
1/8	1/2	1-1/2	1/8	—	32655	—
1/8	1/2	1-1/2	1/8	.010	32607	—
5/32	5/16	2	3/16	.010	32608	—
5/32	9/16	2	3/16	—	32656	—
5/32	9/16	2	3/16	.010	32609	—
3/16	5/16	2	3/16	—	32673	—
3/16	5/16	2	3/16	.010	32610	—
3/16	5/8	2	3/16	—	32657	—
3/16	5/8	2	3/16	.010	32611	—
7/32	3/8	2	1/4	.015	32612	—
7/32	3/4	2-1/2	1/4	.015	32613	—
7/32	3/4	2-1/2	1/4	—	32658	—
1/4	3/8	2	1/4	.015	32614	—
1/4	3/8	2	1/4	—	32674	—
1/4	3/4	2-1/2	1/4	—	32659	—
1/4	3/4	2-1/2	1/4	.015	32615	—
1/4	1-1/4	4	1/4	.015	32616	—
5/16	7/16	2	5/16	—	32675	—
5/16	7/16	2	5/16	.015	32619	—
5/16	13/16	2-1/2	5/16	—	32660	—
5/16	13/16	2-1/2	5/16	.015	32620	—
5/16	1-1/4	4	5/16	.015	32621	—
3/8	1/2	2	3/8	—	32676	32677
3/8	1/2	2	3/8	.015	32625	32591
3/8	1/2	2	3/8	.030	32592	32593
3/8	1	2-1/2	3/8	—	32661	32662
3/8	1	2-1/2	3/8	.015	32626	32628
3/8	1	2-1/2	3/8	.030	32573	32574
3/8	1-1/2	4	3/8	.015	32627	—
3/8	1-1/2	4	3/8	.030	32569	—

continued on next page

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



**55 •
55CR**
FRACTIONAL SERIES

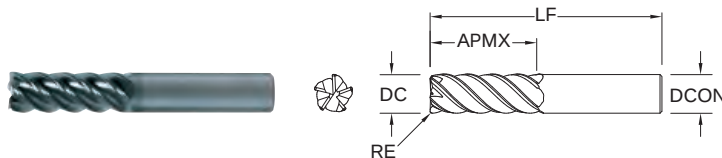

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
7/16	1	2-3/4	7/16	—	32663	—
7/16	1	2-3/4	7/16	.015	32632	—
7/16	2	4	7/16	.015	32633	—
1/2	5/8	2-1/2	1/2	—	32678	32679
1/2	5/8	2-1/2	1/2	.030	32594	32595
1/2	5/8	2-1/2	1/2	.060	32596	32597
1/2	1-1/4	3	1/2	—	32664	32665
1/2	1-1/4	3	1/2	.030	32575	32576
1/2	1-1/4	3	1/2	.060	32577	32578
1/2	2	4	1/2	.030	32685	—
1/2	2	4	1/2	.060	32686	—
5/8	3/4	3	5/8	—	32680	32681
5/8	3/4	3	5/8	.030	32598	32599
5/8	3/4	3	5/8	.060	32600	32601
5/8	1-5/8	3-1/2	5/8	—	32666	32667
5/8	1-5/8	3-1/2	5/8	.030	32579	32580
5/8	1-5/8	3-1/2	5/8	.060	32581	32582
5/8	2-1/2	5	5/8	.030	32570	—
5/8	2-1/2	5	5/8	.060	32687	—
3/4	1	3	3/4	—	32682	32683
3/4	1	3	3/4	.030	32602	32603
3/4	1	3	3/4	.060	32604	32605
3/4	1-5/8	4	3/4	—	32668	32669
3/4	1-5/8	4	3/4	.030	32583	32584
3/4	1-5/8	4	3/4	.060	32585	32586
3/4	3-1/4	6	3/4	.030	32571	—
3/4	3-1/4	6	3/4	.060	32688	—
1	1-1/2	4	1	—	32670	32671
1	1-1/2	4	1	.030	32587	32588
1	1-1/2	4	1	.060	32589	32590
1	2-5/8	6	1	.030	32572	—
1	2-5/8	6	1	.060	32689	—

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

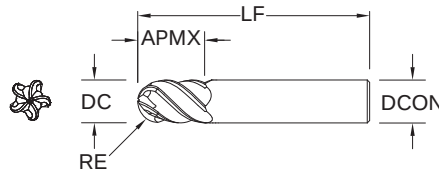

55B
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0005/-0.0010

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

	inch			EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-A (AlTiN)
1/4	3/4	2-1/2	1/4	32500
5/16	13/16	2-1/2	5/16	32501
3/8	1	2-1/2	3/8	32502
1/2	1-1/4	3	1/2	32503
5/8	1-5/8	3-1/2	5/8	32504
3/4	1-5/8	4	3/4	32505
1	1-1/2	4	1	32506


RE = 1/2 Cutting Diameter (DC)

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series 55, 55CR, 55B Fractional		Hardness			Vc (sfm)		DC • in								
			Ae x DC	Ap x DC			1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.25	≤ 1.5	385	RPM	11766	5883	3922	2941	2353	1961	1471	
						(308-462)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0028	0.0032	
						Feed (ipm)	20.6	26.5	33.3	33.8	34.1	27.5	23.5		
		≤ 275 Bhn or ≤ 28 HRc	 HSM	≤ 0.05	≤ 2	630	RPM	19253	9626	6418	4813	3851	3209	2407	
						(504-756)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0055	0.0064	
						Feed (ipm)	67.4	86.6	109.1	110.7	109.7	88.2	77.0		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.25	≤ 1.5	325	RPM	9932	4966	3311	2483	1986	1655	1242	
						(260-390)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0021	0.0024	
						Feed (ipm)	12.9	17.4	21.5	21.1	21.9	17.4	14.9		
		≤ 375 Bhn or ≤ 40 HRc	 HSM	≤ 0.05	≤ 2	530	RPM	16197	8098	5399	4049	3239	2699	2025	
						(424-636)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0041	0.0048	
						Feed (ipm)	42.1	56.7	70.2	68.8	69.6	55.3	48.6		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.25	≤ 1.5	175	RPM	5348	2674	1783	1337	1070	891	669	
						(140-210)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
						Feed (ipm)	5.3	6.7	8.9	8.7	8.6	7.6	6.0		
		≤ 375 Bhn or ≤ 40 HRc	 HSM	≤ 0.05	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108	
						(232-348)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
						Feed (ipm)	17.7	22.2	28.1	27.7	28.4	24.4	19.4		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.25	≤ 1.5	370	RPM	11307	5654	3769	2827	2261	1885	1413
							(296-444)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
							Feed (ipm)	14.7	19.8	24.5	24.0	24.9	21.7	17.0	
			≤ 275 Bhn or ≤ 28 HRc	 HSM	≤ 0.05	≤ 2	560	RPM	17114	8557	5705	4278	3423	2852	2139
							(448-672)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
							Feed (ipm)	44.5	59.9	74.2	72.7	73.6	62.7	51.3	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.25	≤ 1.5	255	RPM	7793	3896	2598	1948	1559	1299	974	
						(204-306)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023	
						Feed (ipm)	9.4	11.7	15.6	15.6	15.6	13.6	11.2		
		≤ 275 Bhn or ≤ 28 HRc	 HSM	≤ 0.05	≤ 2	385	RPM	11766	5883	3922	2941	2353	1961	1471	
						(308-462)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045	
						Feed (ipm)	28.2	38.2	47.1	47.1	47.1	40.2	33.1		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	 Profile	≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898	
						(188-282)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019	
						Feed (ipm)	7.5	10.8	12.0	12.6	12.2	10.8	8.5		
		≤ 325 Bhn or ≤ 35 HRc	 HSM	≤ 0.05	≤ 2	355	RPM	10849	5424	3616	2712	2170	1808	1356	
						(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
						Feed (ipm)	22.2	29.8	38.0	38.0	36.9	32.5	26.4		

continued on next page


Series 55, 55CR, 55B Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	470	RPM	14363	7182	4788	3591	2873	2394	1795
					(376-564)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (ipm)	25.1	32.3	40.7	41.3	41.7	35.9	28.7
			≤ 0.05	≤ 2	705	RPM	21545	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0059	0.0064
						Feed (ipm)	75.4	97.0	122.1	123.9	122.8	105.9	86.2
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	360	RPM	11002	5501	3667	2750	2200	1834	1375
					(288-432)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
						Feed (ipm)	14.3	19.3	23.8	23.4	24.2	21.1	16.5
			≤ 0.05	≤ 2	540	RPM	16502	8251	5501	4126	3300	2750	2063
					(432-648)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
						Feed (ipm)	42.9	57.8	71.5	70.1	71.0	60.5	49.5
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400		≤ 0.25	≤ 1.5	70	RPM	2139	1070	713	535	428	357	267
					(56-84)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
						Feed (ipm)	2.2	3.2	3.6	3.7	3.6	3.2	2.5
			≤ 0.05	≤ 2	107	RPM	3270	1635	1090	817	654	545	409
					(86-128)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (ipm)	6.7	9.0	11.4	11.4	11.1	9.8	8.0
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene		≤ 0.25	≤ 1.5	55	RPM	1681	840	560	420	336	280	210
					(44-66)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
						Feed (ipm)	1.3	1.7	2.2	2.1	2.2	2.0	1.6
			≤ 0.05	≤ 2	85	RPM	2598	1299	866	649	520	433	325
					(68-102)	Fz	0.0003	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
						Feed (ipm)	4.0	5.2	6.5	6.8	6.8	5.8	4.7
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898
					(188-282)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
						Feed (ipm)	7.2	10.8	14.4	14.4	14.4	12.6	10.3
			≤ 0.05	≤ 2	390	RPM	11918	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
						Feed (ipm)	29.8	38.7	47.7	47.7	47.7	40.7	33.5
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.25	≤ 1.5	85	RPM	2598	1299	866	649	520	433	325
					(68-102)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
						Feed (ipm)	2.6	3.9	5.2	5.2	5.2	4.5	3.7
			≤ 0.05	≤ 2	140	RPM	4278	2139	1426	1070	856	713	535
					(112-168)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0042	0.0045
						Feed (ipm)	10.7	13.9	17.1	17.1	17.1	15.0	12.0

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 5 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



55M • 55MCR

METRIC SERIES

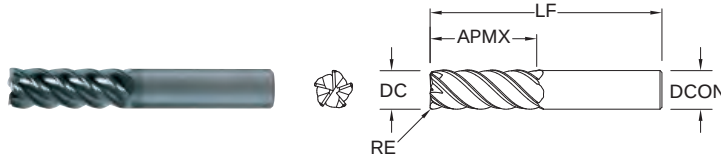

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
6,0	12,0	50,0	6,0	—	42606	—
6,0	12,0	50,0	6,0	0,5	42660	—
6,0	19,0	63,0	6,0	—	42607	—
6,0	19,0	63,0	6,0	0,25	42661	—
6,0	19,0	63,0	6,0	0,5	42662	—
6,0	19,0	63,0	6,0	1,0	42663	—
6,0	19,0	63,0	6,0	1,5	42664	—
6,0	25,0	75,0	6,0	—	42608	—
6,0	25,0	75,0	6,0	0,5	42665	—
8,0	12,0	50,0	8,0	—	42609	—
8,0	12,0	50,0	8,0	0,5	42666	—
8,0	20,0	63,0	8,0	—	42610	—
8,0	20,0	63,0	8,0	0,5	42667	—
8,0	20,0	63,0	8,0	1,0	42668	—
8,0	20,0	63,0	8,0	1,5	42669	—
8,0	20,0	63,0	8,0	2,0	42670	—
8,0	25,0	75,0	8,0	—	42611	—
8,0	25,0	75,0	8,0	0,5	42671	—
10,0	16,0	50,0	10,0	—	42612	—
10,0	16,0	50,0	10,0	0,5	42672	—
10,0	22,0	75,0	10,0	—	42622	42613
10,0	22,0	75,0	10,0	0,5	42673	—
10,0	22,0	75,0	10,0	1,0	42674	—
10,0	22,0	75,0	10,0	1,5	42675	—
10,0	22,0	75,0	10,0	2,0	42676	—
10,0	22,0	75,0	10,0	2,5	42677	—
10,0	38,0	100,0	10,0	—	42614	—
10,0	38,0	100,0	10,0	0,5	42678	—
12,0	19,0	63,0	12,0	—	42615	—
12,0	19,0	63,0	12,0	0,5	42679	—
12,0	25,0	75,0	12,0	—	42616	42623
12,0	25,0	75,0	12,0	0,5	42680	—
12,0	25,0	75,0	12,0	1,0	42681	—
12,0	25,0	75,0	12,0	1,5	42682	—
12,0	25,0	75,0	12,0	2,0	42683	—
12,0	25,0	75,0	12,0	2,5	42684	—

TOLERANCES (inch)

DC = +0.0000/-0.0020



DCON = h_6

RE = +0.0000/-0.0020



For patent information visit
www.ksptpatents.com

continued on next page

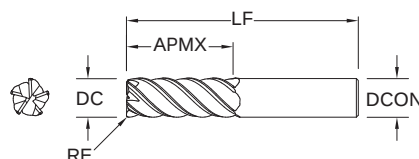

55M • 55MCR

METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050


STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
12,0	25,0	75,0	12,0	3,0	42685	—
12,0	50,0	100,0	12,0	—	42617	—
12,0	50,0	100,0	12,0	0,5	42686	—
12,0	50,0	100,0	12,0	3,0	42630	—
12,0	50,0	100,0	12,0	4,0	42631	—
16,0	32,0	89,0	16,0	—	42618	42624
16,0	32,0	89,0	16,0	1,0	42687	—
16,0	32,0	89,0	16,0	1,5	42688	—
16,0	32,0	89,0	16,0	2,0	42689	—
16,0	32,0	89,0	16,0	2,5	42690	—
16,0	32,0	89,0	16,0	3,0	42691	—
16,0	32,0	89,0	16,0	4,0	42692	—
16,0	50,0	100,0	16,0	—	42626	—
16,0	50,0	100,0	16,0	2,0	42656	—
16,0	50,0	100,0	16,0	2,5	42657	—
16,0	50,0	100,0	16,0	3,0	42658	—
16,0	50,0	100,0	16,0	4,0	42659	—
16,0	50,0	100,0	16,0	5,0	42628	—
16,0	75,0	150,0	16,0	—	42619	—
16,0	75,0	150,0	16,0	1,0	42693	—
16,0	75,0	150,0	16,0	3,0	42632	—
16,0	75,0	150,0	16,0	4,0	42633	—
20,0	38,0	100,0	20,0	—	42620	42625
20,0	38,0	100,0	20,0	1,0	42694	—
20,0	38,0	100,0	20,0	1,5	42695	—
20,0	38,0	100,0	20,0	2,0	42696	—
20,0	38,0	100,0	20,0	2,5	42697	—
20,0	38,0	100,0	20,0	3,0	42698	—
20,0	38,0	100,0	20,0	4,0	42699	—
20,0	38,0	100,0	20,0	5,0	42700	—
20,0	38,0	100,0	20,0	6,0	42648	—
20,0	50,0	100,0	20,0	—	42627	—
20,0	50,0	100,0	20,0	2,0	42649	—
20,0	50,0	100,0	20,0	2,5	42650	—
20,0	50,0	100,0	20,0	3,0	42651	—
20,0	50,0	100,0	20,0	4,0	42652	—


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

continued on next page



55M • 55MCR

METRIC SERIES

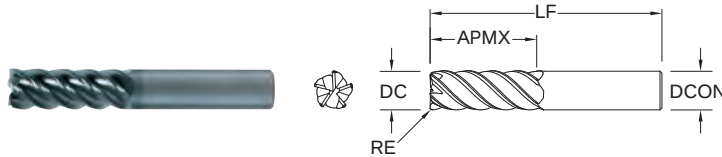


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)	Ti-NAMITE®-A (AlTiN) W/FLAT
20,0	50,0	100,0	20,0	5,0	42653	—
20,0	50,0	100,0	20,0	6,0	42654	—
20,0	75,0	150,0	20,0	—	42621	—
20,0	75,0	150,0	20,0	1,0	42701	—
20,0	75,0	150,0	20,0	2,0	42702	—
20,0	75,0	150,0	20,0	3,0	42703	—
20,0	75,0	150,0	20,0	4,0	42704	—
20,0	75,0	150,0	20,0	5,0	42705	—
20,0	75,0	150,0	20,0	6,0	42655	—

TOLERANCES (mm)

DC = $+0,000/-0,050$
 DCON = h_6
 RE = $+0,000/-0,050$



For patent
information visit
www.ksptpatents.com

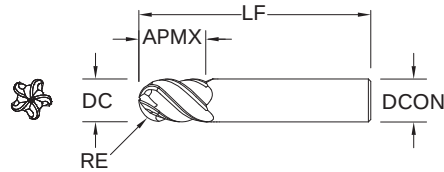

55MB
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON


HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-A (AlTiN)
6,0	13,0	57,0	6,0	42750
8,0	19,0	63,0	8,0	42751
10,0	22,0	72,0	10,0	42752
12,0	26,0	83,0	12,0	42753
16,0	32,0	92,0	16,0	42754
20,0	38,0	104,0	20,0	42755


RE = 1/2 Cutting Diameter (DC)

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




Series 55M, 55MCR, 55MB				Vc (m/min)	DC • mm							
Metric	Hardness	Ae x DC	Ap x DC		6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.25	≤ 1.5	117	RPM	6220	4665	3732	3110	2333	1866
					(94-141)	Fz	0.022	0.036	0.061	0.070	0.072	0.085
					Feed (mm/min)	672	846	1145	1082	836	796	
		 HSM	≤ 0.05	≤ 2	192	RPM	10179	7634	6107	5089	3817	3054
					(154-230)	Fz	0.043	0.073	0.123	0.137	0.141	0.154
					Feed (mm/min)	2198	2769	3746	3481	2687	2345	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.25	≤ 1.5	99	RPM	5251	3938	3151	2626	1969	1575
					(79-119)	Fz	0.017	0.028	0.045	0.053	0.054	0.064
					Feed (mm/min)	441	546	571	693	529	504	
		 HSM	≤ 0.05	≤ 2	162	RPM	8563	6422	5138	4282	3211	2569
					(129-194)	Fz	0.034	0.055	0.091	0.103	0.105	0.128
					Feed (mm/min)	1438	1781	2329	2209	1685	1644	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.25	≤ 1.5	53	RPM	2827	2121	1696	1414	1060	848
					(43-64)	Fz	0.012	0.021	0.035	0.038	0.044	0.048
					Feed (mm/min)	170	226	294	271	231	204	
		 HSM	≤ 0.05	≤ 2	88	RPM	4686	3514	2811	2343	1757	1406
					(71-106)	Fz	0.024	0.041	0.067	0.077	0.084	0.093
					Feed (mm/min)	562	712	937	900	742	656	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.25	≤ 1.5	113	RPM	5978	4484	3587	2989	2242	1793
					(90-135)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
					Feed (mm/min)	502	622	813	789	660	574	
		 HSM	≤ 0.05	≤ 2	171	RPM	9048	6786	5429	4524	3393	2714
					(137-205)	Fz	0.034	0.055	0.091	0.103	0.113	0.128
					Feed (mm/min)	1520	1882	2461	2334	1911	1737	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 0.25	≤ 1.5	78	RPM	4120	3090	2472	2060	1545	1236
					(62-93)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
					Feed (mm/min)	297	396	527	494	415	379	
		 HSM	≤ 0.05	≤ 2	117	RPM	6220	4665	3732	3110	2333	1866
					(94-141)	Fz	0.031	0.051	0.085	0.096	0.105	0.120
					Feed (mm/min)	970	1194	1592	1493	1224	1120	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 Profile	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
					(57-86)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
					Feed (mm/min)	273	304	425	387	328	289	
		 HSM	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.026	0.045	0.075	0.082	0.092	0.104
					Feed (mm/min)	757	964	1285	1170	991	895	

continued on next page



Series 55M, 55MCR, 55MB Metric		Ae Ap		Vc (m/min)	DC • mm								
Hardness		Ae x DC	Ap x DC		6	8	10	12	16	20			
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.25	≤ 1.5	143	RPM	7594	5695	4556	3797	2848	2278
						(115-172)	Fz	0.022	0.036	0.061	0.070	0.077	0.085
							Feed (mm/min)	820	1033	1397	1321	1093	972
		HSM 	≤ 0.05	≤ 2	215	RPM	11391	8543	6834	5695	4271	3417	
					(172-258)	Fz	0.043	0.073	0.123	0.137	0.151	0.171	
						Feed (mm/min)	2460	3099	4192	3895	3226	2916	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.25	≤ 1.5	110	RPM	5816	4362	3490	2908	2181	1745
						(88-132)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
							Feed (mm/min)	489	605	791	768	642	558
		HSM 	≤ 0.05	≤ 2	165	RPM	8725	6544	5235	4362	3272	2617	
					(132-198)	Fz	0.034	0.055	0.091	0.103	0.113	0.128	
						Feed (mm/min)	1466	1815	2373	2251	1843	1675	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.25	≤ 1.5	21	RPM	1131	848	679	565	424	339
						(17-26)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
							Feed (mm/min)	81	90	127	115	98	86
		HSM 	≤ 0.05	≤ 2	33	RPM	1729	1297	1037	864	648	519	
					(26-39)	Fz	0.026	0.045	0.075	0.082	0.092	0.104	
						Feed (mm/min)	228	290	387	353	299	270	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.25	≤ 1.5	17	RPM	889	666	533	444	333	267
						(13-20)	Fz	0.010	0.017	0.027	0.031	0.036	0.040
							Feed (mm/min)	43	57	71	69	60	53
		HSM 	≤ 0.05	≤ 2	26	RPM	1373	1030	824	687	515	412	
					(21-31)	Fz	0.019	0.032	0.056	0.062	0.069	0.077	
						Feed (mm/min)	132	165	231	214	178	159	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
						(57-86)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
							Feed (mm/min)	273	365	486	456	383	349
		HSM 	≤ 0.05	≤ 2	119	RPM	6301	4726	3781	3151	2363	1890	
					(95-143)	Fz	0.031	0.051	0.085	0.096	0.105	0.120	
						Feed (mm/min)	983	1210	1613	1512	1240	1134	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ 0.25	≤ 1.5	26	RPM	1373	1030	824	687	515	412
						(21-31)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
							Feed (mm/min)	99	132	176	165	138	126
		HSM 	≤ 0.05	≤ 2	43	RPM	2262	1696	1357	1131	848	679	
					(34-51)	Fz	0.031	0.051	0.085	0.096	0.108	0.120	
						Feed (mm/min)	353	434	579	543	456	407	


Bhn (Brinell) HRC (Rockwell C) HSM (High Speed Machining)
 rpm = (Vc x 1000) / (DC x 3.14)
 mm/min = Fz x 5 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



51 • 51CR

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

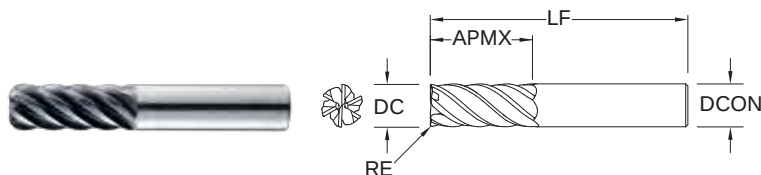


		inch			EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
1/4	3/4	2-1/2	1/4	—	35100
1/4	3/4	2-1/2	1/4	.015	35112
1/4	3/4	2-1/2	1/4	.030	35150
3/8	1	2-1/2	3/8	—	35101
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	—	35102
1/2	1-1/4	3	1/2	.015	35151
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.060	35152
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	—	35103
5/8	1-5/8	3-1/2	5/8	.015	35153
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.060	35154
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
5/8	1-5/8	3-1/2	5/8	.190	35155
3/4	1-5/8	4	3/4	—	35104
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.060	35156
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
3/4	1-5/8	4	3/4	.190	35157
3/4	1-5/8	4	3/4	.250	35158
1	2-5/8	6	1	—	35105
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.060	35159
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126
1	2-5/8	6	1	.190	35160
1	2-5/8	6	1	.250	35161

TOLERANCES (inch)



DC = +0.0000/-0.0020

DCON = h_6

RE = +0.0000/-0.0020



For patent
information visit
www.ksptpatents.com

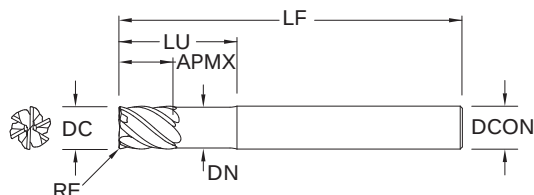
51L •
51LC
FRACTIONAL SERIES
TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆


RE = +0.0000/-0.0020

STEELS
STAINLESS STEELS
CAST IRON
HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
1/4	3/8	4	1/4	1-1/8	.237	—	35106
1/4	3/8	4	1/4	1-1/8	.237	.015	35127
1/4	3/8	4	1/4	1-1/8	.237	.030	35180
3/8	1/2	4	3/8	2-1/8	.356	—	35107
3/8	1/2	4	3/8	2-1/8	.356	.015	35128
3/8	1/2	4	3/8	2-1/8	.356	.030	35129
1/2	5/8	4	1/2	2-1/4	.475	—	35108
1/2	5/8	4	1/2	2-1/4	.475	.015	35181
1/2	5/8	4	1/2	2-1/4	.475	.030	35130
1/2	5/8	4	1/2	2-1/4	.475	.060	35182
1/2	5/8	4	1/2	2-1/4	.475	.090	35131
1/2	5/8	4	1/2	2-1/4	.475	.120	35132
5/8	3/4	5	5/8	2-1/2	.594	—	35109
5/8	3/4	5	5/8	2-1/2	.594	.015	35183
5/8	3/4	5	5/8	2-1/2	.594	.030	35133
5/8	3/4	5	5/8	2-1/2	.594	.060	35184
5/8	3/4	5	5/8	2-1/2	.594	.090	35134
5/8	3/4	5	5/8	2-1/2	.594	.120	35135
5/8	3/4	5	5/8	2-1/2	.594	.190	35185
3/4	1	6	3/4	3-3/8	.712	—	35110
3/4	1	6	3/4	3-3/8	.712	.030	35136
3/4	1	6	3/4	3-3/8	.712	.060	35186
3/4	1	6	3/4	3-3/8	.712	.090	35137
3/4	1	6	3/4	3-3/8	.712	.120	35138
3/4	1	6	3/4	3-3/8	.712	.190	35187
3/4	1	6	3/4	3-3/8	.712	.250	35188
1	1-1/4	6	1	3-3/8	.950	—	35111
1	1-1/4	6	1	3-3/8	.950	.030	35139
1	1-1/4	6	1	3-3/8	.950	.060	35189
1	1-1/4	6	1	3-3/8	.950	.090	35140
1	1-1/4	6	1	3-3/8	.950	.120	35141
1	1-1/4	6	1	3-3/8	.950	.190	35190
1	1-1/4	6	1	3-3/8	.950	.250	35191


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51B

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

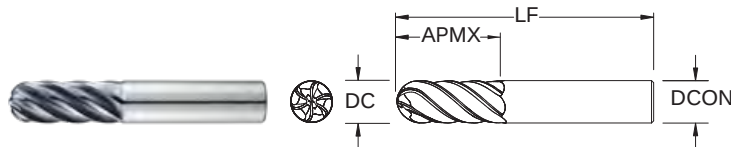

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/4	3/4	2-1/2	1/4	35220
3/8	1	2-1/2	3/8	35222
1/2	1-1/4	3	1/2	35224
5/8	1-5/8	3-1/2	5/8	35226
3/4	1-5/8	4	3/4	35228
1	2-5/8	6	1	35230

RE=1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = $+0.0000/-0.0016$

DCON = h_6


RE = $+0.0000/-0.0010$

1/2–1 DIAMETER

DC = $+0.000/-0.0020$

DCON = h_6

RE = $+0.0000/-0.0010$




For patent information visit www.ksptpatents.com

51LB

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

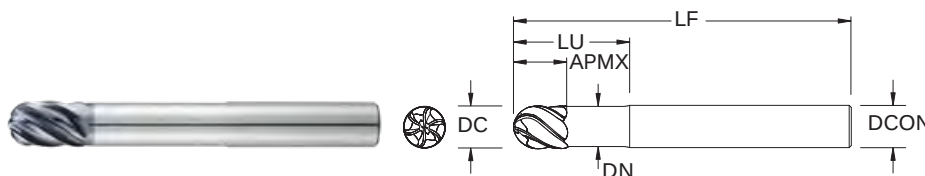

inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
1/4	3/8	4	1/4	1-1/8	.237	35221
3/8	1/2	4	3/8	2-1/8	.356	35223
1/2	5/8	4	1/2	2-1/4	.475	35225
5/8	3/4	5	5/8	2-1/2	.594	35227
3/4	1	6	3/4	3-3/8	.712	35229
1	1-1/4	6	1	3-3/4	.950	35231

RE=1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = $+0.0000/-0.0016$

DCON = h_6


RE = $+0.0000/-0.0010$

1/2–1 DIAMETER


DC = $+0.000/-0.0020$

DCON = h_6

RE = $+0.0000/-0.0010$




For patent information visit www.ksptpatents.com



51, 51CR, 51L, 51LC, 51B, 51LB Fractional						Vc (sfm)		DC • in						
Hardness		Ae x DC		Ap x DC				1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	720	RPM	11002	7334	5501	4401	3667	2750	
						(576-864)	Fz	0.0020	0.0035	0.0050	0.0055	0.0061	0.0071	
							Feed (ipm)	132	154	165	145	134	117	
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	915	RPM	13981	9321	6991	5592	4660	3495	
						(732-1098)	Fz	0.0028	0.0053	0.0070	0.0077	0.0085	0.0100	
							Feed (ipm)	235	296	294	258	238	210	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	490	RPM	7487	4991	3744	2995	2496	1872	
						(392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054	
							Feed (ipm)	67	87	85	75	69	61	
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	620	RPM	9474	6316	4737	3789	3158	2368	
						(496-744)	Fz	0.0021	0.0039	0.0052	0.0057	0.0062	0.0073	
							Feed (ipm)	119	148	148	130	117	104	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	240	RPM	3667	2445	1834	1467	1222	917	
						(192-288)	Fz	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043	
							Feed (ipm)	26	34	33	30	27	24	
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	305	RPM	4660	3107	2330	1864	1553	1165	
						(244-366)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
							Feed (ipm)	48	60	59	51	47	41	
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	510	RPM	7793	5195	3896	3117	2598	1948
							(459-561)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
								Feed (ipm)	70	87	89	77	70	62
			≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	650	RPM	9932	6621	4966	3973	3311	2483
							(585-715)	Fz	0.0021	0.0038	0.0051	0.0056	0.0061	0.0072
								Feed (ipm)	125	151	152	133	121	107
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	350	RPM	5348	3565	2674	2139	1783	1337	
						(315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042	
							Feed (ipm)	39	49	48	42	39	34	
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	450	RPM	6876	4584	3438	2750	2292	1719	
						(405-495)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
							Feed (ipm)	70	88	87	76	69	61	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.1	≤ 1	325	RPM	4966	3311	2483	1986	1655	1242	
						(293-358)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042	
							Feed (ipm)	36	46	45	39	36	31	
		≤ 325 Bhn or ≤ 35 HRc	HSM 	≤ 0.05	≤ 2	410	RPM	6265	4177	3132	2506	2088	1566	
						(369-451)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
							Feed (ipm)	64	80	79	69	63	55	

continued on next page



Series
51, 51CR, 51L,
51LC, 51B, 51LB
Fractional

Hardness

Ae x DC

Ap x DC



Vc
(sfm)

DC • in

1/4 3/8 1/2 5/8 3/4 1

						DC • in						
						1/4	3/8	1/2	5/8	3/4	1	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	575	RPM	8786	5857	4393	3514	2929	2197
					(460-690)	Fz	0.0018	0.0035	0.0045	0.0050	0.0055	0.0064
						Feed (ipm)	94.9	123.0	118.6	105.4	96.6	84.3
			≤ 0.05	≤ 2	730	RPM	11154	7436	5577	4462	3718	2789
					(584-876)	Fz	0.0025	0.0047	0.0064	0.0070	0.0076	0.0089
						Feed (ipm)	167.3	209.7	214.2	187.4	169.5	148.9
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	430	RPM	6570	4380	3285	2628	2190	1643
					(344-516)	Fz	0.0018	0.0035	0.0045	0.0050	0.0055	0.0064
						Feed (ipm)	71.0	92.0	88.7	78.8	72.3	63.1
			≤ 0.05	≤ 2	545	RPM	8328	5552	4164	3331	2776	2082
					(436-654)	Fz	0.0025	0.0047	0.0064	0.0070	0.0076	0.0089
						Feed (ipm)	124.9	156.6	159.9	139.9	126.6	111.2
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400		≤ 0.1	≤ 1	105	RPM	1604	1070	802	642	535	401
					(84-126)	Fz	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050
						Feed (ipm)	13	17	17	15	14	12
			≤ 0.05	≤ 2	130	RPM	1986	1324	993	795	662	497
					(104-156)	Fz	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067
						Feed (ipm)	19	29	29	25	23	20
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene		≤ 0.1	≤ 1	80	RPM	1222	815	611	489	407	306
					(64-96)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (ipm)	7	9	9	8	7	6
			≤ 0.05	≤ 2	100	RPM	1528	1019	764	611	509	382
					(80-120)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (ipm)	12	15	16	14	13	11
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.1	≤ 1	280	RPM	4278	2852	2139	1711	1426	1070
					(224-336)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (ipm)	26	31	32	28	25	22
			≤ 0.05	≤ 2	355	RPM	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (ipm)	42	54	55	48	44	38
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.1	≤ 1	155	RPM	2368	1579	1184	947	789	592
					(124-186)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (ipm)	14	17	18	15	14	12
			≤ 0.05	≤ 2	200	RPM	3056	2037	1528	1222	1019	764
					(160-240)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (ipm)	24	31	31	27	25	22

Bhn (Brinell) HRC (Rockwell C) HSM (High Speed Machining)
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 6 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

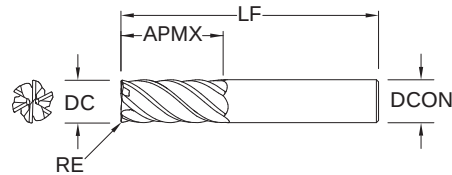

51M • 51MCR

METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.kspatents.com

	mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	—	45100
6,0	19,0	63,0	6,0	0,5	45112
6,0	19,0	63,0	6,0	1,0	45170
6,0	19,0	63,0	6,0	1,5	45171
8,0	20,0	63,0	8,0	—	45101
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
8,0	20,0	63,0	8,0	1,2	45150
8,0	20,0	63,0	8,0	1,5	45172
8,0	20,0	63,0	8,0	2,0	45173
10,0	22,0	75,0	10,0	—	45102
10,0	22,0	75,0	10,0	0,5	45174
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
10,0	22,0	75,0	10,0	2,5	45175
12,0	26,0	83,0	12,0	—	45103
12,0	26,0	83,0	12,0	0,5	45176
12,0	26,0	83,0	12,0	0,76	45177
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
12,0	26,0	83,0	12,0	2,5	45178
12,0	26,0	83,0	12,0	3,0	45179
16,0	32,0	92,0	16,0	—	45104
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
16,0	32,0	92,0	16,0	2,5	45180
16,0	32,0	92,0	16,0	3,0	45181
16,0	32,0	92,0	16,0	4,0	45182
20,0	38,0	104,0	20,0	—	45105
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126
20,0	38,0	104,0	20,0	2,5	45183
20,0	38,0	104,0	20,0	3,0	45184
20,0	38,0	104,0	20,0	4,0	45185
20,0	38,0	104,0	20,0	5,0	45186


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51ML • 51MLC

METRIC SERIES


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

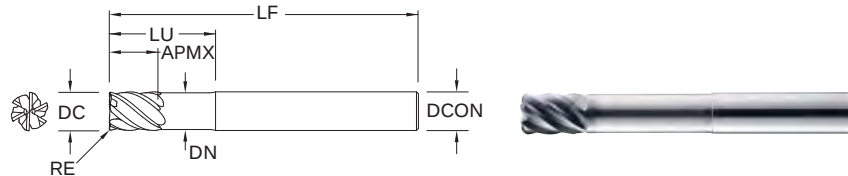



mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-X (TX)
6,0	8,0	75,0	6,0	32,0	5,69	—	45106
6,0	8,0	75,0	6,0	32,0	5,69	0,5	45127
6,0	8,0	75,0	6,0	32,0	5,69	1,0	45187
6,0	8,0	75,0	6,0	32,0	5,69	1,5	45188
8,0	10,0	75,0	8,0	32,0	7,59	—	45107
8,0	10,0	75,0	8,0	32,0	7,59	0,5	45128
8,0	10,0	75,0	8,0	32,0	7,59	1,0	45129
8,0	10,0	75,0	8,0	32,0	7,59	1,5	45189
8,0	10,0	75,0	8,0	32,0	7,59	2,0	45190
10,0	12,0	100,0	10,0	40,0	9,50	—	45108
10,0	12,0	100,0	10,0	40,0	9,50	0,5	45191
10,0	12,0	100,0	10,0	40,0	9,50	1,0	45130
10,0	12,0	100,0	10,0	40,0	9,50	1,5	45131
10,0	12,0	100,0	10,0	40,0	9,50	2,0	45132
10,0	12,0	100,0	10,0	40,0	9,50	2,5	45192
12,0	15,0	100,0	12,0	48,0	11,38	—	45109
12,0	15,0	100,0	12,0	48,0	11,38	0,5	45193
12,0	15,0	100,0	12,0	48,0	11,38	0,76	45194
12,0	15,0	100,0	12,0	48,0	11,38	1,0	45133
12,0	15,0	100,0	12,0	48,0	11,38	1,5	45134
12,0	15,0	100,0	12,0	48,0	11,38	2,0	45135
12,0	15,0	100,0	12,0	48,0	11,38	2,5	45195
12,0	15,0	100,0	12,0	48,0	11,38	3,0	45196
16,0	20,0	115,0	16,0	65,0	15,19	—	45110
16,0	20,0	115,0	16,0	65,0	15,19	1,0	45136
16,0	20,0	115,0	16,0	65,0	15,19	1,5	45137
16,0	20,0	115,0	16,0	65,0	15,19	2,0	45138
16,0	20,0	115,0	16,0	65,0	15,19	2,5	45197
16,0	20,0	115,0	16,0	65,0	15,19	3,0	45198
16,0	20,0	115,0	16,0	65,0	15,19	4,0	45199
20,0	24,0	150,0	20,0	80,0	19,00	—	45111
20,0	24,0	150,0	20,0	80,0	19,00	1,0	45139
20,0	24,0	150,0	20,0	80,0	19,00	1,5	45140
20,0	24,0	150,0	20,0	80,0	19,00	2,0	45141
20,0	24,0	150,0	20,0	80,0	19,00	2,5	45200
20,0	24,0	150,0	20,0	80,0	19,00	3,0	45201
20,0	24,0	150,0	20,0	80,0	19,00	4,0	45202
20,0	24,0	150,0	20,0	80,0	19,00	5,0	45203

TOLERANCES (mm)

DC = +0,000/−0,050
DCON = h₆
RE = +0,000/−0,050



For patent information visit
www.ksptpatents.com

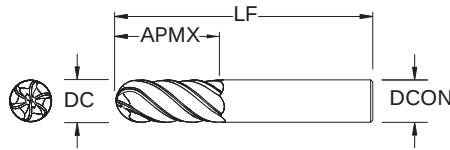

51MB
METRIC SERIES

TOLERANCES (mm)

6,0–10,0 DIAMETER

DC = +0,000/–0,040

DCON = h_6

RE = +0,000/–0,025

12,0–20,0 DIAMETER

DC = +0,000/–0,050

DCON = h_6

RE = +0,000/–0,025

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	45204
8,0	20,0	63,0	8,0	45206
10,0	22,0	75,0	10,0	45208
12,0	26,0	83,0	12,0	45210
16,0	32,0	92,0	16,0	45212
20,0	38,0	104,0	20,0	45214

RE=1/2 Cutting Diameter (DC)

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

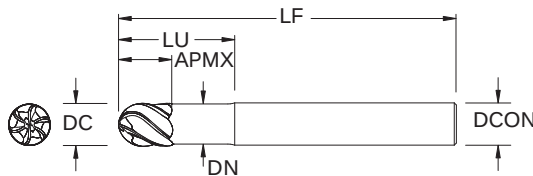

51MLB
METRIC SERIES

TOLERANCES (mm)

6,0–10,0 DIAMETER

DC = +0,000/–0,040

DCON = h_6

RE = +0,000/–0,025

12,0–20,0 DIAMETER

DC = +0,000/–0,050

DCON = h_6

RE = +0,000/–0,025

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

mm						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-X (TX)
6,0	8,0	75,0	6,0	32,0	5,68	45205
8,0	10,0	75,0	8,0	32,0	7,58	45207
10,0	12,0	100,0	10,0	40,0	9,49	45209
12,0	15,0	100,0	12,0	48,0	11,37	45211
16,0	20,0	115,0	16,0	65,0	15,18	45213
20,0	24,0	150,0	20,0	80,0	18,99	45215

RE=1/2 Cutting Diameter (DC)

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Faceted relief provides superior strength and smoother surface finish
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


Series
51M, 51MCR,
51ML, 51MLC,
51MB, 51MLB
Metric



51ML, 51MLC, 51MB, 51MLB Metric		Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	219	RPM	11633	8725	6980	5816	4362	3490	
						(176-263)	Fz	0.048	0.075	0.093	0.120	0.141	0.163	
						Feed (mm/min)	3350	3909	3909	4188	3685	3406		
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	279	RPM	14784	11088	8870	7392	5544	4435	
						(223-335)	Fz	0.067	0.113	0.141	0.168	0.197	0.227	
						Feed (mm/min)	5960	7523	7522	7450	6557	6032		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	149	RPM	7917	5938	4750	3958	2969	2375	
						(119-179)	Fz	0.036	0.062	0.077	0.091	0.108	0.123	
						Feed (mm/min)	1710	2204	2204	2166	1915	1748		
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	189	RPM	10017	7513	6010	5009	3756	3005	
						(151-227)	Fz	0.050	0.083	0.104	0.125	0.146	0.165	
						Feed (mm/min)	3029	3751	3750	3750	3289	2981		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	73	RPM	3878	2908	2327	1939	1454	1163	
						(59-88)	Fz	0.029	0.049	0.061	0.072	0.087	0.099	
						Feed (mm/min)	670	856	856	838	759	689		
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	93	RPM	4928	3696	2957	2464	1848	1478	
						(74-112)	Fz	0.041	0.068	0.085	0.101	0.118	0.133	
						Feed (mm/min)	1206	1514	1514	1490	1306	1183		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	155	RPM	8240	6180	4944	4120	3090	2472
							(140-171)	Fz	0.036	0.060	0.075	0.091	0.105	0.120
							Feed (mm/min)	1780	2215	2215	2254	1946	1780	
			≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	198	RPM	10502	7877	6301	5251	3938	3151
							(178-218)	Fz	0.050	0.081	0.101	0.122	0.143	0.163
							Feed (mm/min)	3176	3832	3831	3856	3387	3075	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	≤ 1	107	RPM	5655	4241	3393	2827	2121	1696	
						(96-117)	Fz	0.029	0.049	0.061	0.072	0.084	0.096	
						Feed (mm/min)	977	1249	1249	1221	1075	977		
		≤ 275 Bhn or ≤ 28 HRc	HSM 	≤ 0.05	≤ 2	137	RPM	7271	5453	4362	3635	2726	2181	
						(123-151)	Fz	0.041	0.068	0.085	0.101	0.118	0.133	
						Feed (mm/min)	1780	2234	2234	2198	1926	1745		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.1	≤ 1	99	RPM	5251	3938	3151	2626	1969	1575	
						(89-109)	Fz	0.029	0.049	0.061	0.072	0.084	0.096	
						Feed (mm/min)	907	1160	1159	1134	998	907		
		≤ 325 Bhn or ≤ 35 HRc	HSM 	≤ 0.05	≤ 2	125	RPM	6624	4968	3975	3312	2484	1987	
						(112-137)	Fz	0.041	0.068	0.085	0.101	0.118	0.133	
						Feed (mm/min)	1621	2035	2035	2003	1755	1590		

continued on next page

Series
51M, 51MCR,
51ML, 51MLC,
51MB, 51MLB
Metric




51ML, 51MLC, 51MB, 51MLB Metric				Vc (m/min)		DC • mm						
Hardness		Ae x DC	Ap x DC			6	8	10	12	16	20	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	575	RPM	9290	6968	5574	4645	3484	2787
					(460-690)	Fz	0.043	0.075	0.093	0.108	0.128	0.147
						Feed (mm/min)	2408	3122	3122	3010	2675	2453
			≤ 0.05	≤ 2	730	RPM	11795	8846	7077	5897	4423	3538
					(584-876)	Fz	0.060	0.100	0.125	0.154	0.179	0.203
						Feed (mm/min)	4246	5322	5322	5434	4755	4303
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	430	RPM	6947	5211	4168	3474	2605	2084
					(344-516)	Fz	0.043	0.075	0.093	0.108	0.128	0.147
						Feed (mm/min)	1801	2335	2334	2251	2001	1834
			≤ 0.05	≤ 2	545	RPM	8806	6604	5283	4403	3302	2642
					(436-654)	Fz	0.060	0.100	0.125	0.154	0.179	0.203
						Feed (mm/min)	3170	3974	3973	4057	3550	3212
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400		≤ 0.1	≤ 1	32	RPM	1696	1272	1018	848	636	509
					(26-38)	Fz	0.034	0.058	0.072	0.086	0.100	0.115
						Feed (mm/min)	342	440	440	440	381	350
			≤ 0.05	≤ 2	40	RPM	2100	1575	1260	1050	788	630
					(32-48)	Fz	0.038	0.077	0.096	0.115	0.136	0.155
						Feed (mm/min)	484	726	726	726	641	585
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene		≤ 0.1	≤ 1	24	RPM	1293	969	776	646	485	388
					(20-29)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	186	223	223	233	201	180
			≤ 0.05	≤ 2	30	RPM	1616	1212	969	808	606	485
					(24-37)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	302	388	388	395	344	318
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.1	≤ 1	85	RPM	4524	3393	2714	2262	1696	1357
					(68-102)	Fz	0.024	0.038	0.048	0.060	0.069	0.077
						Feed (mm/min)	651	782	782	814	704	630
			≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.031	0.053	0.067	0.082	0.095	0.109
						Feed (mm/min)	1074	1377	1377	1404	1222	1129
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.1	≤ 1	47	RPM	2504	1878	1503	1252	939	751	
				(38-57)	Fz	0.024	0.038	0.048	0.060	0.069	0.077	
					Feed (mm/min)	361	433	433	451	389	349	
		≤ 0.05	≤ 2	61	RPM	3231	2424	1939	1616	1212	969	
				(49-73)	Fz	0.031	0.053	0.067	0.082	0.095	0.109	
					Feed (mm/min)	605	776	776	791	689	636	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 6 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**77 •
77CR**
FRACTIONAL SERIES

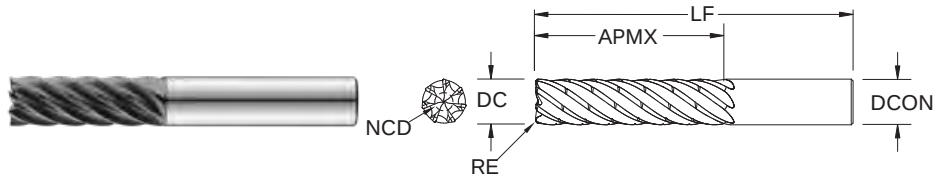

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

inch						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
1/4	5/8	2-1/2	1/4	—	0.0845	77100	77102	77101	77103
1/4	5/8	2-1/2	1/4	.015	0.0845	77104	77106	77105	77107
1/4	5/8	2-1/2	1/4	.030	0.0845	77108	77110	77109	77111
1/4	3/4	2-1/2	1/4	—	0.0845	77112	77114	77113	77115
1/4	3/4	2-1/2	1/4	.015	0.0845	77116	77118	77117	77119
1/4	3/4	2-1/2	1/4	.030	0.0845	77120	77122	77121	77123
1/4	1	3	1/4	—	0.0845	77124	77126	77125	77127
1/4	1	3	1/4	.015	0.0845	77128	77130	77129	77131
1/4	1	3	1/4	.030	0.0845	77132	77134	77133	77135
3/8	15/16	3	3/8	—	0.1268	77136	77138	77137	77139
3/8	15/16	3	3/8	.015	0.1268	77140	77142	77141	77143
3/8	15/16	3	3/8	.030	0.1268	77144	77146	77145	77147
3/8	1-1/8	3-1/4	3/8	—	0.1268	77148	77150	77149	77151
3/8	1-1/8	3-1/4	3/8	.015	0.1268	77152	77154	77153	77155
3/8	1-1/8	3-1/4	3/8	.030	0.1268	77156	77158	77157	77159
3/8	1-1/2	3-1/2	3/8	—	0.1268	77160	77162	77161	77163
3/8	1-1/2	3-1/2	3/8	.015	0.1268	77164	77166	77165	77167
3/8	1-1/2	3-1/2	3/8	.030	0.1268	77168	77170	77169	77171
1/2	1-1/4	3-1/4	1/2	—	0.1690	77172	77174	77173	77175
1/2	1-1/4	3-1/4	1/2	.030	0.1690	77176	77178	77177	77179
1/2	1-1/4	3-1/4	1/2	.060	0.1690	77180	77182	77181	77183
1/2	1-1/2	3-1/2	1/2	—	0.1690	77184	77186	77185	77187
1/2	1-1/2	3-1/2	1/2	.030	0.1690	77188	77190	77189	77191
1/2	1-1/2	3-1/2	1/2	.060	0.1690	77192	77194	77193	77195
1/2	2	4	1/2	—	0.1690	77196	77198	77197	77199
1/2	2	4	1/2	.030	0.1690	77200	77202	77201	77203
1/2	2	4	1/2	.060	0.1690	77204	77206	77205	77207
5/8	1-9/16	3-3/4	5/8	—	0.2113	77208	77210	77209	77211
5/8	1-9/16	3-3/4	5/8	.030	0.2113	77212	77214	77213	77215
5/8	1-9/16	3-3/4	5/8	.060	0.2113	77216	77218	77217	77219

continued on next page

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000 / -0.002

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000 / -0.002


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

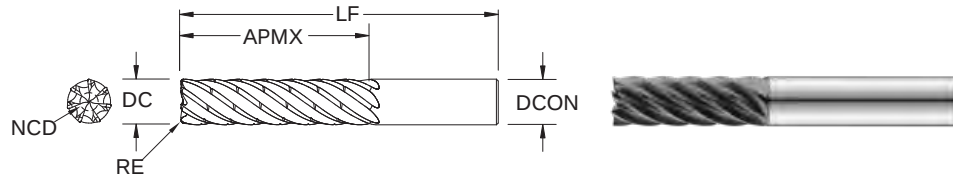

**77 •
77CR**
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h_6

RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h_6

RE = +0.000 / -0.002

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h_6

RE = +0.000 / -0.002

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com


inch						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
5/8	1-7/8	4	5/8	—	0.2113	77220	77222	77221	77223
5/8	1-7/8	4	5/8	.030	0.2113	77224	77226	77225	77227
5/8	1-7/8	4	5/8	.060	0.2113	77228	77230	77229	77231
5/8	2-1/2	4-1/2	5/8	—	0.2113	77232	77234	77233	77235
5/8	2-1/2	4-1/2	5/8	.030	0.2113	77236	77238	77237	77239
5/8	2-1/2	4-1/2	5/8	.060	0.2113	77240	77242	77241	77243
3/4	1-7/8	4	3/4	—	0.2535	77244	77246	77245	77247
3/4	1-7/8	4	3/4	.030	0.2535	77248	77250	77249	77251
3/4	1-7/8	4	3/4	.060	0.2535	77252	77254	77253	77255
3/4	1-7/8	4	3/4	.120	0.2535	77256	77258	77257	77259
3/4	2-1/4	4-1/2	3/4	—	0.2535	77260	77262	77261	77263
3/4	2-1/4	4-1/2	3/4	.030	0.2535	77264	77266	77265	77267
3/4	2-1/4	4-1/2	3/4	.060	0.2535	77268	77270	77269	77271
3/4	2-1/4	4-1/2	3/4	.120	0.2535	77272	77274	77273	77275
3/4	3	5-1/4	3/4	—	0.2535	77276	77278	77277	77279
3/4	3	5-1/4	3/4	.030	0.2535	77280	77282	77281	77283
3/4	3	5-1/4	3/4	.060	0.2535	77284	77286	77285	77287
3/4	3	5-1/4	3/4	.120	0.2535	77288	77290	77289	77291
1	2-1/2	5-1/2	1	—	0.3380	77292	77294	77293	77295
1	2-1/2	5-1/2	1	.030	0.3380	77296	77298	77297	77299
1	2-1/2	5-1/2	1	.060	0.3380	77300	77302	77301	77303
1	2-1/2	5-1/2	1	.120	0.3380	77304	77306	77305	77307
1	3	6	1	—	0.3380	77308	77310	77309	77311
1	3	6	1	.030	0.3380	77312	77314	77313	77315
1	3	6	1	.060	0.3380	77316	77318	77317	77319
1	3	6	1	.120	0.3380	77320	77322	77321	77323
1	4	7	1	—	0.3380	77324	77326	77325	77327
1	4	7	1	.030	0.3380	77328	77330	77329	77331
1	4	7	1	.060	0.3380	77332	77334	77333	77335
1	4	7	1	.120	0.3380	77336	77338	77337	77339

CONTINUED



Series 77, 77CR		Ae x DC		Vc		DC • inch									
Fractional	Hardness		Ap x DC	(sfm)		1/4	3/8	1/2	5/8	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	HSM 	2.5xD		816	RPM	11552	7701	5776	4621	3851	2888		
				≤ 0.2 ≤ APMX		(653-979)	Fz	0.0015	0.0024	0.0031	0.0035	0.0038	0.0042		
				Feed (ipm)		121	129	125	113	102	85				
			HSM 	3xD		845	Fz	0.0017	0.0027	0.0035	0.0040	0.0043	0.0047		
				≤ 0.15 ≤ APMX		(676-1014)	Feed (ipm)	136	146	140	129	116	95		
				4xD		756	Fz	0.0018	0.0028	0.0036	0.0041	0.0044	0.0049		
		≤ 0.1 ≤ APMX		(605-907)	Feed (ipm)	146	151	146	133	119	99				
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	HSM 	2.5xD		595	RPM	8419	5613	4210	3368	2806	2105	
					≤ 0.2 ≤ APMX		(476-714)	Fz	0.0009	0.0019	0.0026	0.0028	0.0031	0.0035	
					Feed (ipm)		53	75	77	66	61	52			
				HSM 	3xD		616	Fz	0.0010	0.0021	0.0030	0.0033	0.0035	0.0039	
					≤ 0.15 ≤ APMX		(493-739)	Feed (ipm)	59	83	88	78	69	57	
	4xD				551	Fz	0.0011	0.0022	0.0031	0.0034	0.0036	0.0041			
	≤ 0.1 ≤ APMX		(441-661)	Feed (ipm)	65	86	91	80	71	60					
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	HSM 	2.5xD		272	RPM	3851	2567	1925	1540	1284	963		
				≤ 0.2 ≤ APMX		(218-326)	Fz	0.0006	0.0011	0.0014	0.0017	0.0020	0.0024		
				Feed (ipm)		16	20	19	18	18	16				
			HSM 	3xD		282	Fz	0.0007	0.0012	0.0016	0.0019	0.0022	0.0027		
				≤ 0.15 ≤ APMX		(226-338)	Feed (ipm)	19	22	22	20	20	18		
				4xD		252	Fz	0.0007	0.0013	0.0017	0.0020	0.0023	0.0028		
			≤ 0.1 ≤ APMX		(202-302)	Feed (ipm)	19	23	23	22	21	19			
			STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	HSM 	2.5xD		646	RPM	9137	6092	4569	3655	3046	2284
						≤ 0.2 ≤ APMX		(517-775)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0032
						Feed (ipm)		58	72	74	64	60	51		
HSM 					3xD		669	Fz	0.0010	0.0019	0.0026	0.0029	0.0031	0.0036	
					≤ 0.15 ≤ APMX		(535-803)	Feed (ipm)	64	81	83	74	66	58	
	4xD				598	Fz	0.0011	0.0020	0.0027	0.0030	0.0033	0.0037			
≤ 0.1 ≤ APMX		(478-718)			Feed (ipm)	70	85	86	77	70	59				
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	HSM 			2.5xD		425	RPM	6020	4014	3010	2408	2007	1505	
					≤ 0.2 ≤ APMX		(340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030	
					Feed (ipm)		29	39	40	39	37	32			
		HSM 			3xD		440	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034	
					≤ 0.15 ≤ APMX		(352-528)	Feed (ipm)	34	45	44	42	41	36	
			4xD		394	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
		≤ 0.1 ≤ APMX		(315-473)	Feed (ipm)	34	45	46	44	42	37				
		STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc	HSM 	2.5xD		408	RPM	5776	3851	2888	2310	1925	1444	
					≤ 0.2 ≤ APMX		(326-490)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030	
					Feed (ipm)		28	38	38	37	35	30			
				HSM 	3xD		422	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034	
					≤ 0.15 ≤ APMX		(338-506)	Feed (ipm)	32	43	42	40	39	34	
4xD					378	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
≤ 0.1 ≤ APMX				(302-454)	Feed (ipm)	32	43	44	42	40	35				

continued on next page



Series 77, 77CR						DC • inch									
Fractional	Hardness			Vc		1/4	3/8	1/2	5/8	3/4	1				
		Ae x DC	Ap x DC	(sfm)											
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		2.5xD		714 (571-857)	RPM	10100	6733	5050	4040	3367	2525		
							Fz	0.0010	0.0018	0.0024	0.0028	0.0033	0.0037		
				≤ 0.2 ≤ APMX			Feed (ipm)	71	85	85	79	78	65		
				3xD		739 (591-887)	Fz	0.0011	0.0020	0.0027	0.0033	0.0037	0.0042		
				≤ 0.15 ≤ APMX			Feed (ipm)	78	94	95	93	87	73		
				4xD			661 (529-793)	Fz	0.0012	0.0021	0.0028	0.0034	0.0039	0.0043	
		≤ 0.1 ≤ APMX		Feed (ipm)	85	99		99	96	92	76				
		CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		2.5xD			425 (340-510)	RPM	6020	4014	3010	2408	2007	1505
							Fz		0.0007	0.0014	0.0019	0.0023	0.0026	0.0030	
					≤ 0.2 ≤ APMX		Feed (ipm)		29	39	40	39	37	32	
					3xD		440 (352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0037	
					≤ 0.15 ≤ APMX			Feed (ipm)	34	45	44	42	41	39	
	4xD				394 (315-473)	Fz		0.0008	0.0016	0.0022	0.0026	0.0030	0.0035		
	≤ 0.1 ≤ APMX		Feed (ipm)	34		45	46	44	42	37					
	S		HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc			2.5xD		136 (109-163)	RPM	1925	1284	963	770	642
							Fz	0.0006		0.0011	0.0016	0.0018	0.0021	0.0025	
					≤ 0.2 ≤ APMX		Feed (ipm)	8		10	11	10	9	8	
						3xD		141 (113-169)	Fz	0.0007	0.0012	0.0018	0.0021	0.0024	0.0028
						≤ 0.15 ≤ APMX			Feed (ipm)	9	11	12	11	11	9
		4xD				126 (101-151)	Fz		0.0007	0.0013	0.0018	0.0022	0.0025	0.0029	
		≤ 0.1 ≤ APMX		Feed (ipm)	9		12	12	12	11	10				
		HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene		≤ 400 Bhn or ≤ 43 HRc			2.5xD		85 (68-102)	RPM	1207	805	604	483	402
								Fz		0.0005	0.0009	0.0013	0.0015	0.0018	0.0022
						≤ 0.2 ≤ APMX		Feed (ipm)		4	5	5	5	5	5
						3xD		88 (70-106)	Fz	0.0005	0.0010	0.0015	0.0018	0.0020	0.0025
						≤ 0.15 ≤ APMX			Feed (ipm)	4	6	6	6	6	5
			4xD			79 (63-95)	Fz		0.0006	0.0011	0.0015	0.0018	0.0021	0.0026	
		≤ 0.1 ≤ APMX		Feed (ipm)	5		6	6	6	6	5				
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		2.5xD		289 (231-347)		RPM	4095	2730	2048	1638	1365	1024		
						Fz	0.0008	0.0015	0.0021	0.0024	0.0028	0.0032			
			≤ 0.2 ≤ APMX			Feed (ipm)	23	29	30	28	27	23			
			3xD		299 (239-359)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036			
			≤ 0.15 ≤ APMX			Feed (ipm)	26	32	33	29	27	26			
			4xD			268 (214-322)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037		
	≤ 0.1 ≤ APMX		Feed (ipm)	26	34		34	33	32	27					
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		2.5xD			170 (136-204)	RPM	2399	1599	1199	960	800	600	
						Fz		0.0008	0.0015	0.0021	0.0024	0.0028	0.0032		
				≤ 0.2 ≤ APMX		Feed (ipm)		13	17	18	16	16	13		
				3xD		176 (141-211)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036		
				≤ 0.15 ≤ APMX			Feed (ipm)	15	19	19	17	16	15		
4xD				157 (126-188)	Fz		0.0009	0.0018	0.0024	0.0029	0.0033	0.0037			
≤ 0.1 ≤ APMX		Feed (ipm)	15		20	20	19	18	16						

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC

ipm = Fz x 7 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



**77M •
77MCR**
METRIC SERIES

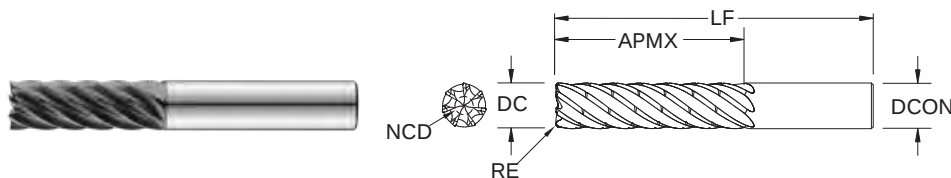

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

mm						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
6,0	15,0	63,0	6,0	—	2,03	74300	74302	74301	74303
6,0	15,0	63,0	6,0	0,3	2,03	74304	74306	74305	74307
6,0	15,0	63,0	6,0	0,5	2,03	74308	74310	74309	74311
6,0	18,0	63,0	6,0	—	2,03	74316	74318	74317	74319
6,0	18,0	63,0	6,0	0,3	2,03	74320	74322	74321	74323
6,0	18,0	63,0	6,0	0,5	2,03	74324	74326	74325	74327
6,0	24,0	75,0	6,0	—	2,03	74332	74334	74333	74335
6,0	24,0	75,0	6,0	0,3	2,03	74336	74338	74337	74339
6,0	24,0	75,0	6,0	0,5	2,03	74340	74342	74341	74343
8,0	20,0	75,0	8,0	—	2,71	74348	74350	74349	74351
8,0	20,0	75,0	8,0	0,5	2,71	74352	74354	74353	74355
8,0	20,0	75,0	8,0	1,0	2,71	74356	74358	74357	74359
8,0	20,0	75,0	8,0	2,0	2,71	74360	74362	74361	74363
8,0	24,0	75,0	8,0	—	2,71	74364	74366	74365	74367
8,0	24,0	75,0	8,0	0,5	2,71	74368	74370	74369	74371
8,0	24,0	75,0	8,0	1,0	2,71	74372	74374	74373	74375
8,0	24,0	75,0	8,0	2,0	2,71	74376	74378	74377	74379
8,0	32,0	85,0	8,0	—	2,71	74380	74382	74381	74383
8,0	32,0	85,0	8,0	0,5	2,71	74384	74386	74385	74387
8,0	32,0	85,0	8,0	1,0	2,71	74388	74390	74389	74391
8,0	32,0	85,0	8,0	2,0	2,71	74392	74394	74393	74395
10,0	25,0	75,0	10,0	—	3,38	74396	74398	74397	74399
10,0	25,0	75,0	10,0	0,5	3,38	74400	74402	74401	74403
10,0	25,0	75,0	10,0	1,0	3,38	74404	74406	74405	74407
10,0	30,0	80,0	10,0	—	3,38	74408	74410	74409	74411
10,0	30,0	80,0	10,0	0,5	3,38	74412	74414	74413	74415
10,0	30,0	80,0	10,0	1,0	3,38	74416	74418	74417	74419
10,0	40,0	100,0	10,0	—	3,38	74420	74422	74421	74423
10,0	40,0	100,0	10,0	0,5	3,38	74424	74426	74425	74427
10,0	40,0	100,0	10,0	1,0	3,38	74428	74430	74429	74431
12,0	30,0	83,0	12,0	—	4,06	74432	74434	74433	74435
12,0	30,0	83,0	12,0	0,5	4,06	74436	74438	74437	74439
12,0	30,0	83,0	12,0	1,0	4,06	74440	74442	74441	74443
12,0	30,0	83,0	12,0	2,0	4,06	74600	74601	74602	74603
12,0	30,0	83,0	12,0	3,0	4,06	74604	74605	74606	74607
12,0	36,0	83,0	12,0	—	4,06	74444	74446	74445	74447
12,0	36,0	83,0	12,0	0,5	4,06	74448	74450	74449	74451
12,0	36,0	83,0	12,0	1,0	4,06	74452	74454	74453	74455
12,0	36,0	83,0	12,0	2,0	4,06	74608	74609	74610	74611
12,0	36,0	83,0	12,0	3,0	4,06	74612	74613	74614	74615
12,0	48,0	100,0	12,0	—	4,06	74456	74458	74457	74459
12,0	48,0	100,0	12,0	0,5	4,06	74460	74462	74461	74463
12,0	48,0	100,0	12,0	1,0	4,06	74464	74466	74465	74467
12,0	48,0	100,0	12,0	2,0	4,06	74616	74617	74618	74619
12,0	48,0	100,0	12,0	3,0	4,06	74620	74621	74622	74623
16,0	40,0	92,0	16,0	—	5,41	74468	74470	74469	74471

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000 / -0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000 / -0,050

>10-25 DIAMETER

DC = +0,000/-0,050


DCON = h_6

RE = +0,000 / -0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

continued on next page

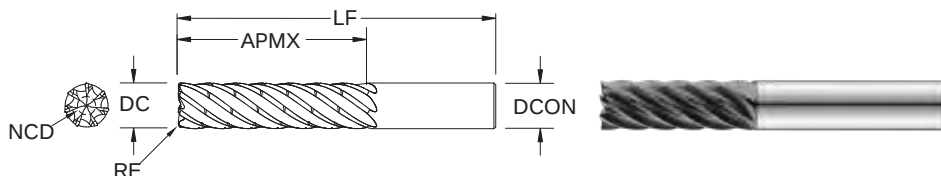

**77M •
77MCR**
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h_6

RE = +0,000 / -0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h_6

RE = +0,000 / -0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h_6

RE = +0,000 / -0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


mm						EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	Ti-NAMITE®-A (TA) EDP NO.	Ti-NAMITE®-A (TA) EDP NO. CHIP BREAKER	Ti-NAMITE®-M (TM) EDP NO.	Ti-NAMITE®-M (TM) EDP NO. CHIP BREAKER
16,0	40,0	92,0	16,0	0,5	5,41	74472	74474	74473	74475
16,0	40,0	92,0	16,0	1,0	5,41	74476	74478	74477	74479
16,0	40,0	92,0	16,0	2,0	5,41	74624	74625	74626	74627
16,0	40,0	92,0	16,0	3,0	5,41	74628	74629	74630	74631
16,0	48,0	100,0	16,0	—	5,41	74480	74482	74481	74483
16,0	48,0	100,0	16,0	0,5	5,41	74484	74486	74485	74487
16,0	48,0	100,0	16,0	1,0	5,41	74488	74490	74489	74491
16,0	48,0	100,0	16,0	2,0	5,41	74632	74633	74634	74635
16,0	48,0	100,0	16,0	3,0	5,41	74636	74637	74638	74639
16,0	64,0	115,0	16,0	—	5,41	74492	74494	74493	74495
16,0	64,0	115,0	16,0	0,5	5,41	74496	74498	74497	74499
16,0	64,0	115,0	16,0	1,0	5,41	74500	74502	74501	74503
16,0	64,0	115,0	16,0	2,0	5,41	74640	74641	74642	74643
16,0	64,0	115,0	16,0	3,0	5,41	74644	74645	74646	74647
20,0	50,0	100,0	20,0	—	6,76	74504	74506	74505	74507
20,0	50,0	100,0	20,0	0,5	6,76	74508	74510	74509	74511
20,0	50,0	100,0	20,0	1,0	6,76	74512	74514	74513	74515
20,0	50,0	100,0	20,0	2,0	6,76	74516	74518	74517	74519
20,0	50,0	100,0	20,0	3,0	6,76	74648	74649	74650	74651
20,0	50,0	100,0	20,0	4,0	6,76	74652	74653	74654	74655
20,0	60,0	115,0	20,0	—	6,76	74520	74522	74521	74523
20,0	60,0	115,0	20,0	0,5	6,76	74524	74526	74525	74527
20,0	60,0	115,0	20,0	1,0	6,76	74528	74530	74529	74531
20,0	60,0	115,0	20,0	2,0	6,76	74532	74534	74533	74535
20,0	60,0	115,0	20,0	3,0	6,76	74656	74657	74658	74659
20,0	60,0	115,0	20,0	4,0	6,76	74660	74661	74662	74663
20,0	80,0	140,0	20,0	—	6,76	74536	74538	74537	74539
20,0	80,0	140,0	20,0	0,5	6,76	74540	74542	74541	74543
20,0	80,0	140,0	20,0	1,0	6,76	74544	74546	74545	74547
20,0	80,0	140,0	20,0	2,0	6,76	74548	74550	74549	74551
20,0	80,0	140,0	20,0	3,0	6,76	74664	74665	74666	74667
20,0	80,0	140,0	20,0	4,0	6,76	74668	74669	74670	74671
25,0	63,0	135,0	25,0	—	8,45	74552	74554	74553	74555
25,0	63,0	135,0	25,0	1,0	8,45	74556	74558	74557	74559
25,0	63,0	135,0	25,0	2,0	8,45	74560	74562	74561	74563
25,0	63,0	135,0	25,0	3,0	8,45	74564	74566	74565	74567
25,0	75,0	150,0	25,0	—	8,45	74568	74570	74569	74571
25,0	75,0	150,0	25,0	1,0	8,45	74572	74574	74573	74575
25,0	75,0	150,0	25,0	2,0	8,45	74576	74578	74577	74579
25,0	75,0	150,0	25,0	3,0	8,45	74580	74582	74581	74583
25,0	100,0	170,0	25,0	—	8,45	74584	74586	74585	74587
25,0	100,0	170,0	25,0	1,0	8,45	74588	74590	74589	74591
25,0	100,0	170,0	25,0	2,0	8,45	74592	74594	74593	74595
25,0	100,0	170,0	25,0	3,0	8,45	74596	74598	74597	74599

CONTINUED




Series 77M, 77MCR Metric		Hardness	Ae Ap		Vc (m/min)	DC • mm										
			Ae x DC	Ap x DC		6	8	10	12	16	20	25				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc		2.5xD		284	RPM	12208	9156	7325	6104	4578	3662	2930		
				≤ 0.2	≤ APMX	(227-341)	Fz	0.0413	0.0411	0.0640	0.0711	0.0889	0.1013	0.1050		
				Feed (mm/min)		3529	2634	3282	3038	2849	2597	2154				
				3xD		257	Fz	0.0347	0.0461	0.0717	0.0797	0.0996	0.1135	0.1176		
				≤ 0.15	≤ APMX	(206-308)	Feed (mm/min)	2965	2955	3676	3405	3192	2910	2412		
				4xD		230	Fz	0.0362	0.0480	0.0747	0.0830	0.1037	0.1182	0.0919		
		≤ 0.1	≤ APMX	(184-276)	Feed (mm/min)	3094	3076	3830	3546	3323	3030	1885				
					RPM	8068	6051	4841	4034	3025	2420	1936				
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc		2.5xD		132	Fz	0.0213	0.0285	0.0512	0.0610	0.0711	0.0827	0.0875	
					≤ 0.2	≤ APMX	(106-159)	Feed (mm/min)	1203	1207	1735	1723	1506	1401	1186	
					3xD		138	Fz	0.0239	0.0319	0.0574	0.0683	0.0797	0.0926	0.0980	
				≤ 0.15	≤ APMX	(111-166)	Feed (mm/min)	1350	1351	1945	1929	1688	1569	1328		
				4xD		152	Fz	0.0249	0.0332	0.0597	0.0711	0.0830	0.0964	0.1021		
				≤ 0.1	≤ APMX	(122-182)	Feed (mm/min)	1406	1406	2023	2008	1758	1633	1384		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc				RPM	4087	3065	2452	2044	1533	1226	981			
				2.5xD		83	Fz	0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625		
				≤ 0.2	≤ APMX	(66-100)	Feed (mm/min)	401	393	505	509	490	481	429		
					3xD		86	Fz	0.0157	0.0205	0.0330	0.0398	0.0512	0.0627	0.0700	
			≤ 0.15		≤ APMX	(69-103)	Feed (mm/min)	449	440	566	569	549	538	481		
			4xD		77	Fz	0.0163	0.0213	0.0344	0.0415	0.0533	0.0653	0.0729			
		≤ 0.1	≤ APMX	(62-92)	Feed (mm/min)	466	457	590	594	572	560	501				
		M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc				RPM	9660	7245	5796	4830	3623	2898	2318	
						2.5xD		197	Fz	0.0216	0.0285	0.0448	0.0533	0.0635	0.0747	0.0800
						≤ 0.2	≤ APMX	(158-236)	Feed (mm/min)	1461	1445	1818	1803	1610	1515	1298
						3xD		204	Fz	0.0242	0.0319	0.0502	0.0598	0.0711	0.0837	0.0896
					≤ 0.15	≤ APMX	(163-245)	Feed (mm/min)	1636	1618	2037	2022	1803	1698	1454	
	4xD				182	Fz	0.0252	0.0332	0.0523	0.0622	0.0741	0.0871	0.0933			
≤ 0.1	≤ APMX		(146-218)	Feed (mm/min)	1704	1684	2122	2104	1879	1767	1514					
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc					RPM	6369	4777	3822	3185	2389	1911	1529			
				2.5xD		130	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750		
				≤ 0.2	≤ APMX	(104-156)	Feed (mm/min)	749	739	993	963	976	927	803		
					3xD		134	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840	
			≤ 0.15		≤ APMX	(107-161)	Feed (mm/min)	838	829	1113	1079	1095	1039	899		
		4xD			120	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875			
≤ 0.1	≤ APMX	(96-144)	Feed (mm/min)	874	863	1158	1124	1140	1082	936						
STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	≤ 325 Bhn or ≤ 35 HRc				RPM	6104	4578	3662	3052	2289	1831	1465				
			2.5xD		124	Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750			
			≤ 0.2	≤ APMX	(99-149)	Feed (mm/min)	718	708	952	923	936	888	769			
				3xD		129	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840		
		≤ 0.15		≤ APMX	(103-155)	Feed (mm/min)	803	795	1066	1034	1050	996	861			
		4xD		115	Fz	0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875				
≤ 0.1	≤ APMX	(92-138)	Feed (mm/min)	837	827	1110	1077	1093	1037	897						

continued on next page




Series 77M, 77MCR				Vc		DC • mm								
Metric	Hardness	Ae x DC		Ap x DC		(m/min)	6	8	10	12	16	20	25	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		2.5xD		218 (174-262)	RPM	10722	8041	6433	5361	4021	3217	2573
				≤ 0.2 ≤ APMX			Fz	0.0239	0.0315	0.0474	0.0559	0.0762	0.0880	0.0925
				Feed (mm/min)			1794	1773	2135	2098	2145	1981	1666	
				3xD		225 (180-270)	Fz	0.0268	0.0353	0.0531	0.0626	0.0854	0.0986	0.1036
				≤ 0.15 ≤ APMX			Feed (mm/min)	2011	1987	2391	2349	2404	2220	1866
				4xD			202 (162-242)	Fz	0.0279	0.0368	0.0553	0.0652	0.0889	0.1027
	≤ 0.1 ≤ APMX		Feed (mm/min)	2094	2071	2490		2447	2502	2312	1944			
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		2.5xD		130 (104-156)		RPM	6369	4777	3822	3185	2389	1911
				≤ 0.2 ≤ APMX			Fz	0.0168	0.0221	0.0371	0.0432	0.0584	0.0693	0.0750
				Feed (mm/min)			749	739	993	963	976	927	803	
				3xD		134 (107-161)	Fz	0.0188	0.0248	0.0416	0.0484	0.0655	0.0777	0.0840
				≤ 0.15 ≤ APMX			Feed (mm/min)	838	829	1113	1079	1095	1039	899
4xD				120 (96-144)	Fz		0.0196	0.0258	0.0433	0.0504	0.0682	0.0809	0.0875	
≤ 0.1 ≤ APMX		Feed (mm/min)	874		863	1158	1124	1140	1082	936				
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc			2.5xD		41 (33-49)	RPM	2017	1513	1210	1008	756	605
				≤ 0.2 ≤ APMX		Fz		0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625
				Feed (mm/min)		198		194	249	251	242	237	212	
				3xD		43 (34-52)	Fz	0.0157	0.0205	0.0330	0.0398	0.0512	0.0627	0.0700
				≤ 0.15 ≤ APMX			Feed (mm/min)	222	217	280	281	271	266	237
				4xD			38 (30-46)	Fz	0.0163	0.0213	0.0344	0.0415	0.0533	0.0653
	≤ 0.1 ≤ APMX		Feed (mm/min)	230	226	291		293	282	277	247			
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		2.5xD		26 (21-31)		RPM	1274	955	764	637	478	382
				≤ 0.2 ≤ APMX			Fz	0.0114	0.0152	0.0243	0.0305	0.0381	0.0480	0.0550
				Feed (mm/min)			102	102	130	136	127	128	118	
				3xD		27 (22-32)	Fz	0.0128	0.0171	0.0273	0.0342	0.0427	0.0538	0.0616
				≤ 0.15 ≤ APMX			Feed (mm/min)	114	114	146	152	143	144	132
4xD				24 (19-29)	Fz		0.0133	0.0178	0.0284	0.0356	0.0445	0.0560	0.0642	
≤ 0.1 ≤ APMX		Feed (mm/min)	119		119	152	159	149	150	137				
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		2.5xD		88 (70-106)	RPM	4352	3264	2611	2176	1632	1306	1045	
			≤ 0.2 ≤ APMX			Fz	0.0191	0.0254	0.0397	0.0483	0.0635	0.0747	0.0800	
			Feed (mm/min)			582	580	726	736	725	683	585		
			3xD		91 (73-109)	Fz	0.0213	0.0285	0.0445	0.0541	0.0711	0.0837	0.0896	
			≤ 0.15 ≤ APMX			Feed (mm/min)	649	651	813	824	812	765	655	
			4xD			82 (66-98)	Fz	0.0222	0.0296	0.0463	0.0563	0.0741	0.0871	0.0933
≤ 0.1 ≤ APMX		Feed (mm/min)	676	676	846		858	847	796	682				
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		2.5xD		52 (42-62)		RPM	2548	1911	1529	1274	955	764	611
			≤ 0.2 ≤ APMX			Fz	0.0163	0.0254	0.0397	0.0483	0.0635	0.0747	0.0800	
			Feed (mm/min)			291	340	425	431	425	400	342		
			3xD		54 (43-65)	Fz	0.0182	0.0285	0.0445	0.0541	0.0711	0.0837	0.0896	
			≤ 0.15 ≤ APMX			Feed (mm/min)	325	381	476	482	476	448	384	
			4xD			48 (38-58)	Fz	0.0190	0.0296	0.0463	0.0563	0.0741	0.0871	0.0933
≤ 0.1 ≤ APMX		Feed (mm/min)	339	396	495		502	496	466	399				

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = (Vc x 1000) / (DC x 3.14)
 mm/min = Fz x 7 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



**66 •
66CR**
FRACTIONAL SERIES

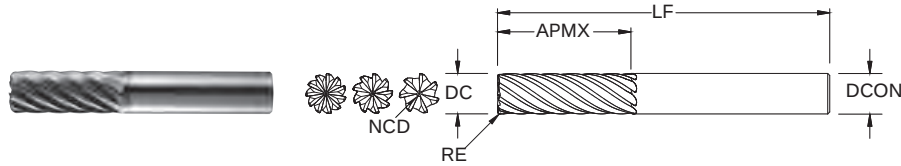


- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X (TX)
3/16	5/8	2	3/16	—	0.0550	7	36620
3/16	5/8	2	3/16	.010	0.0550	7	36627
1/4	3/4	2-1/2	1/4	—	0.0650	7	36621
1/4	3/4	2-1/2	1/4	.015	0.0650	7	36628
3/8	1	3	3/8	—	0.0810	7	36622
3/8	1	3	3/8	.015	0.0810	7	36629
1/2	1-1/4	3	1/2	—	0.1340	9	36623
1/2	1-1/4	3	1/2	.030	0.1340	9	36630
1/2	1-1/4	3	1/2	.090	0.1340	9	36631
1/2	1-1/4	3	1/2	.120	0.1340	9	36632
5/8	1-5/8	3-1/2	5/8	—	0.1150	9	36624
5/8	1-5/8	3-1/2	5/8	.030	0.1150	9	36633
5/8	1-5/8	3-1/2	5/8	.090	0.1150	9	36634
5/8	1-5/8	3-1/2	5/8	.120	0.1150	9	36635
3/4	1-5/8	4	3/4	—	0.1750	11	36625
3/4	1-5/8	4	3/4	.030	0.1750	11	36636
3/4	1-5/8	4	3/4	.090	0.1750	11	36637
3/4	1-5/8	4	3/4	.120	0.1750	11	36638
1	2	6	1	—	0.3000	11	36626
1	2	6	1	.030	0.3000	11	36639
1	2	6	1	.090	0.3000	11	36640
1	2	6	1	.120	0.3000	11	36641


Neck Option Available

TOLERANCES (inch)

DC = $+0.0000/-0.0020$
DCON = h_6
RE = $+0.0000/-0.0020$




For patent information visit www.ksptpatents.com



	Series 66, 66CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in						
						3/16	1/4	3/8	1/2	5/8	3/4	1
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	635	RPM	12937	9703	6469	4851	3881	2426
					(508-762)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038
						Feed (ipm)	72.4	81.5	99.6	131.0	129.2	135.2
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	762	RPM	15524	11643	7762	5822	4657	3881
					(610-914)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030
						Feed (ipm)	69.5	78.2	95.6	125.7	124.1	129.8
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05	≤ 1	360	RPM	7334	5501	3667	2750	2200	1834
					(288-432)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
						Feed (ipm)	30.8	34.7	43.6	56.9	57.4	60.5
		≤ 40 HRc	Finish ≤ 0.02	≤ 2	432	RPM	8801	6601	4401	3300	2640	2200
					(346-518)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	29.6	33.3	41.9	54.7	55.1	58.1
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile ≤ 0.05	≤ 1	290	RPM	5908	4431	2954	2216	1772	1477
					(232-348)	Fz	0.0004	0.0006	0.0012	0.0016	0.0020	0.0021
						Feed (ipm)	16.5	18.6	24.8	31.9	31.9	34.1
		≤ 40 HRc	Finish ≤ 0.02	≤ 2	348	RPM	7090	5317	3545	2659	2127	1772
					(278-418)	Fz	0.0003	0.0005	0.0010	0.0013	0.0016	0.0017
						Feed (ipm)	15.9	17.9	23.8	30.6	30.6	32.8
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	560	RPM	11409	8557	5705	4278	3423	2852
					(448-672)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
						Feed (ipm)	47.9	53.9	67.9	88.6	89.3	94.1
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	448	RPM	9127	6845	4564	3423	2738	2282
					(358-538)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	30.7	34.5	43.4	56.7	57.2	60.2
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.05	≤ 1	385	RPM	7844	5883	3922	2941	2353	1961
					(308-462)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	27.5	28.8	38.4	47.7	48.7	51.8
		≤ 28 HRc	Finish ≤ 0.02	≤ 2	462	RPM	9412	7059	4706	3530	2824	2353
					(370-554)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019
						Feed (ipm)	26.4	27.7	36.9	45.7	46.8	49.7
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile ≤ 0.05	≤ 1	355	RPM	7233	5424	3616	2712	2170	1808
					(284-426)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
						Feed (ipm)	25.3	26.6	35.4	43.9	44.9	47.7
		≤ 35 HRc	Finish ≤ 0.02	≤ 2	426	RPM	8679	6509	4340	3255	2604	2170
					(341-511)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019
						Feed (ipm)	24.3	25.5	34.0	42.2	43.1	45.8

continued on next page

Multi-Carb



Series 66, 66CR Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		3/16	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.05	≤ 1	705	RPM	14363	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
						Feed (ipm)	80.4	90.5	110.6	145.4	143.5	150.1	124.4
		Finish 	≤ 0.02	≤ 2	846	RPM	17236	12927	8618	6463	5171	4309	3232
					(677-1015)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034
						Feed (ipm)	77.2	86.9	106.2	139.6	137.7	144.1	119.4
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile 	≤ 0.05	≤ 1	540	RPM	11002	8251	5501	4126	3300	2750	2063
					(432-648)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (ipm)	46.2	52.0	65.5	85.4	86.1	90.8	72.6
		Finish 	≤ 0.02	≤ 2	648	RPM	13202	9901	6601	4951	3961	3300	2475
					(518-778)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	44.4	49.9	62.8	82.0	82.7	87.1	69.7
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.05	≤ 1	105	RPM	2139	1604	1070	802	642	535	401
					(84-126)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (ipm)	7.5	7.9	10.5	13.0	13.3	14.1	11.5
		Finish 	≤ 0.02	≤ 2	126	RPM	2567	1925	1284	963	770	642	481
					(101-151)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
						Feed (ipm)	7.2	7.5	10.1	12.5	12.8	13.6	11.0
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.05	≤ 1	85	RPM	1732	1299	866	649	520	433	325
					(68-102)	Fz	0.0003	0.0005	0.0009	0.0011	0.0014	0.0015	0.0016
						Feed (ipm)	3.6	4.5	5.5	6.4	6.5	7.1	5.7
		Finish 	≤ 0.02	≤ 2	102	RPM	2078	1559	1039	779	623	520	390
					(82-122)	Fz	0.0002	0.0004	0.0007	0.0009	0.0011	0.0012	0.0013
						Feed (ipm)	3.5	4.4	5.2	6.2	6.3	6.9	5.5
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.05	≤ 1	390	RPM	7946	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
						Feed (ipm)	27.8	33.4	41.7	56.3	55.8	59.0	47.5
		Finish 	≤ 0.02	≤ 2	468	RPM	9535	7151	4767	3576	2860	2384	1788
					(374-562)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023
						Feed (ipm)	26.7	32.0	40.0	54.1	53.5	56.6	45.6
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.05	≤ 1	140	RPM	2852	2139	1426	1070	856	713	535	
				(112-168)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029	
					Feed (ipm)	10.0	12.0	15.0	20.2	20.0	21.2	17.1	
	Finish 	≤ 0.02	≤ 2	168	RPM	3423	2567	1711	1284	1027	856	642	
				(134-202)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023	
					Feed (ipm)	9.6	11.5	14.4	19.4	19.2	20.3	16.4	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**66M •
66MCR**
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h_6

RE = +0,000/-0,050

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X (TX)
6,0	19,0	63,0	6,0	—	1,63	7	46620
6,0	19,0	63,0	8,0	0,5	1,63	7	46627
6,0	19,0	63,0	6,0	1,0	1,63	7	46628
8,0	20,0	63,0	8,0	—	1,78	7	46621
8,0	20,0	63,0	8,0	0,5	1,78	7	46629
8,0	20,0	63,0	8,0	1,0	1,78	7	46630
8,0	20,0	63,0	8,0	1,5	1,78	7	46631
10,0	22,0	75,0	10,0	—	2,03	7	46622
10,0	22,0	75,0	10,0	0,5	2,03	7	46632
10,0	22,0	75,0	10,0	1,0	2,03	7	46633
10,0	22,0	75,0	10,0	1,5	2,03	7	46634
10,0	22,0	75,0	10,0	2,0	2,03	7	46635
12,0	26,0	83,0	12,0	—	3,45	9	46623
12,0	26,0	83,0	12,0	1,0	3,45	9	46636
12,0	26,0	83,0	12,0	1,5	3,45	9	46637
12,0	26,0	83,0	12,0	2,0	3,45	9	46638
12,0	26,0	83,0	12,0	2,5	3,45	9	46639
12,0	26,0	83,0	12,0	3,0	3,45	9	46640
16,0	32,0	92,0	16,0	—	2,92	9	46624
16,0	32,0	92,0	16,0	1,0	2,92	9	46641
16,0	32,0	92,0	16,0	1,5	2,92	9	46642
16,0	32,0	92,0	16,0	2,0	2,92	9	46643
16,0	32,0	92,0	16,0	2,5	2,92	9	46644
16,0	32,0	92,0	16,0	3,0	2,92	9	46645
16,0	32,0	92,0	16,0	4,0	2,92	9	46646
20,0	38,0	104,0	20,0	—	4,57	11	46625
20,0	38,0	104,0	20,0	1,0	4,57	11	46647
20,0	38,0	104,0	20,0	1,5	4,57	11	46648
20,0	38,0	104,0	20,0	2,0	4,57	11	46649
20,0	38,0	104,0	20,0	2,5	4,57	11	46650
20,0	38,0	104,0	20,0	3,0	4,57	11	46651
20,0	38,0	104,0	20,0	4,0	4,57	11	46652


continued on next page

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Neck Option Available



**66M •
66MCR**
METRIC SERIES

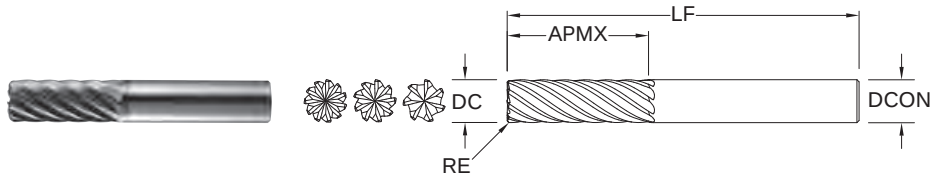

CONTINUED

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON- CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	Ti-NAMITE®-X (TX)
20,0	38,0	104,0	20,0	5,0	4,57	11	46653
25,0	38,0	104,0	25,0	—	7,49	11	46626
25,0	38,0	104,0	25,0	1,0	7,49	11	46654
25,0	38,0	104,0	25,0	1,5	7,49	11	46655
25,0	38,0	104,0	25,0	2,0	7,49	11	46656
25,0	38,0	104,0	25,0	2,5	7,49	11	46657
25,0	38,0	104,0	25,0	3,0	7,49	11	46658
25,0	38,0	104,0	25,0	4,0	7,49	11	46659
25,0	38,0	104,0	25,0	5,0	7,49	11	46660

Neck Option Available

TOLERANCES (mm)

DC = +0,000/–0,050

DCON = h₆

RE = +0,000/–0,050


STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

Series 66M, 66MCR Metric		Hardness			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20	25	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 Profile ≤ 0.05	≤ 1	194	RPM	10260	7695	6156	5130	3847	3078	2462
					(155-232)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
					Feed (mm/min)	2068	2528	2528	3324	3280	3431	2844	
		≤ 275 Bhn or ≤ 28 HRc	 Finish ≤ 0.02	≤ 2	232	RPM	12312	9234	7387	6156	4617	3693	2955
					(186-279)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
					Feed (mm/min)	1985	2427	2427	3191	3149	3294	2730	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile ≤ 0.05	≤ 1	110	RPM	5816	4362	3490	2908	2181	1745	1396
					(88-132)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
					Feed (mm/min)	879	1108	1107	1445	1457	1536	1229	
		≤ 375 Bhn or ≤ 40 HRc	 Finish ≤ 0.02	≤ 2	132	RPM	6980	5235	4188	3490	2617	2094	1675
					(105-158)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
					Feed (mm/min)	844	1063	1063	1387	1399	1474	1179	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile ≤ 0.05	≤ 1	88	RPM	4686	3514	2811	2343	1757	1406	1125
					(71-106)	Fz	0.014	0.026	0.032	0.038	0.051	0.056	0.055
					Feed (mm/min)	472	630	630	810	810	866	680	
		≤ 375 Bhn or ≤ 40 HRc	 Finish ≤ 0.02	≤ 2	106	RPM	5623	4217	3374	2811	2108	1687	1349
					(85-127)	Fz	0.012	0.020	0.026	0.031	0.041	0.045	0.044
					Feed (mm/min)	453	605	605	777	777	831	653	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 Profile ≤ 0.05	≤ 1	171	RPM	9048	6786	5429	4524	3393	2714	2171
					(137-205)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
					Feed (mm/min)	1368	1723	1723	2247	2267	2389	1911	
		≤ 275 Bhn or ≤ 28 HRc	 Finish ≤ 0.02	≤ 2	137	RPM	7238	5429	4343	3619	2714	2171	1737
					(109-164)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
					Feed (mm/min)	875	1103	1103	1438	1451	1529	1223	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	 Profile ≤ 0.05	≤ 1	117	RPM	6220	4665	3732	3110	2333	1866	1493
					(94-141)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
					Feed (mm/min)	731	975	975	1209	1236	1314	1067	
		≤ 275 Bhn or ≤ 28 HRc	 Finish ≤ 0.02	≤ 2	141	RPM	7465	5598	4479	3732	2799	2239	1791
					(113-169)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
					Feed (mm/min)	702	17	936	1161	1187	1261	1025	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	 Profile ≤ 0.05	≤ 1	108	RPM	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
					Feed (mm/min)	674	899	899	1115	1140	1211	984	
		≤ 325 Bhn or ≤ 35 HRc	 Finish ≤ 0.02	≤ 2	130	RPM	6883	5162	4130	3441	2581	2065	1652
					(104-156)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
					Feed (mm/min)	647	863	863	1070	1094	1163	945	

continued on next page

Multi-Carb



Series 66M, 66MCR	Metric	Hardness			Vc (m/min)	DC • mm								
			Ae x DC	Ap x DC		6	8	10	12	16	20	25		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.05	≤ 1	215	RPM	11391	8543	6834	5695	4271	3417	2734
						(172-258)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
						Feed (mm/min)	2296	2807	2807	3690	3641	3809	3158	
				≤ 0.02	≤ 2	258	RPM	13669	10252	8201	6834	5126	4101	3281
						(206-309)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
						Feed (mm/min)	2204	2695	2694	3543	3496	3657	3031	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc		≤ 0.05	≤ 1	165	RPM	8725	6544	5235	4362	3272	2617	2094
						(132-198)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
						Feed (mm/min)	1319	1661	1661	2167	2186	2303	1843	
				≤ 0.02	≤ 2	198	RPM	10470	7852	6282	5235	3926	3141	2513
						(158-237)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
						Feed (mm/min)	1266	1595	1595	2080	2099	2211	1769	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc		≤ 0.05	≤ 1	32	RPM	1696	1272	1018	848	636	509	407
						(26-38)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
						Feed (mm/min)	199	266	213	330	337	358	291	
				≤ 0.02	≤ 2	38	RPM	2036	1527	1221	1018	763	611	489
						(31-46)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
						Feed (mm/min)	192	255	255	317	324	344	279	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc		≤ 0.05	≤ 1	26	RPM	1373	1030	824	687	515	412	330
						(21-31)	Fz	0.012	0.019	0.024	0.026	0.036	0.040	0.040
						Feed (mm/min)	115	138	138	163	166	181	145	
				≤ 0.02	≤ 2	31	RPM	1648	1236	989	824	618	494	396
						(25-37)	Fz	0.010	0.015	0.019	0.021	0.029	0.032	0.032
						Feed (mm/min)	111	133	133	157	159	174	139	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc		≤ 0.05	≤ 1	119	RPM	6301	4726	3781	3151	2363	1890	1512	
					(95-143)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073	
					Feed (mm/min)	847	1059	1059	1429	1415	1497	1206		
			≤ 0.02	≤ 2	143	RPM	7561	5671	4537	3781	2836	2268	1815	
					(114-171)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058	
					Feed (mm/min)	813	1016	1016	1372	1359	1437	1158		
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc		≤ 0.05	≤ 1	43	RPM	2262	1696	1357	1131	848	679	543	
					(34-51)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073	
					Feed (mm/min)	304	380	380	513	508	537	433		
			≤ 0.02	≤ 2	51	RPM	2714	2036	1629	1357	1018	814	651	
					(41-61)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058	
					Feed (mm/min)	292	365	365	492	488	516	416		

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm



reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



METRIC Multi-Carb

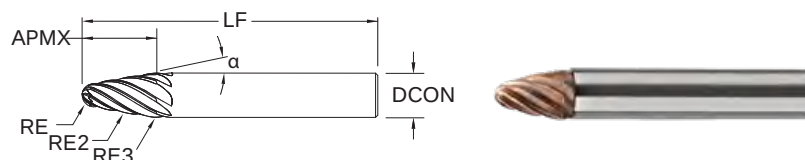

67B METRIC SERIES

TOLERANCES (mm)

DCON = h_6

RE = $+0,010/-0,010$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm								EDP NO.
SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CENTERLINE ANGLE α	TIP RADIUS RE	TAPERED RADIUS RE2	BLENDED RADIUS RE3	NO. OF FLUTES	Ti-NAMITE®-H (TH)
6,0	9,5	58,0	17.5°	1,0	250,0	3,0	4	45700
6,0	8,0	58,0	17.5°	1,5	250,0	3,0	4	45701
8,0	10,5	80,0	20.0°	1,5	250,0	4,0	4	45702
8,0	9,5	80,0	20.0°	2,0	250,0	4,0	4	45703
10,0	12,5	89,0	20.0°	2,0	250,0	5,0	6	45704
10,0	11,5	89,0	20.0°	2,5	250,0	5,0	6	45705
12,0	13,5	100,0	20.0°	3,0	250,0	6,0	8	45706
12,0	14,4	100,0	20.0°	2,5	250,0	6,0	8	45707
12,0	20,0	100,0	14.0°	2,0	60,0	6,0	6	45708
16,0	31,0	109,0	12.5°	2,0	1000,0	5,0	6	45709
16,0	27,5	109,0	12.5°	3,0	1000,0	5,0	8	45710
16,0	24,0	109,0	12.5°	4,0	1000,0	5,0	8	45711
16,0	21,0	109,0	15.0°	4,0	1000,0	5,0	8	45712
16,0	18,5	109,0	20.0°	4,0	1500,0	8,0	8	45713
16,0	28,5	109,0	10.0°	4,0	1000,0	5,0	8	45714
16,0	19,0	109,0	20.0°	3,0	750,0	5,0	8	45715
16,0	15,0	109,0	30.0°	2,0	750,0	3,0	6	45716
16,0	18,5	109,0	20.0°	3,0	60,0	5,0	8	45717

- Designed to significantly improve traditional ball end applications
- Highly efficient at finishing and semi-finishing profiling
- Main application areas include profiling and pocket milling
- Especially suited to machining deep pockets and hard-to-reach areas without using long-reach tools
- Their versatility also allows for machining profiles and blends with one tool
- Recommended for materials $\leq 45 \text{ HRC}$ ($\leq 420 \text{ Bhn}$)

Multi-Carb

			DCON	6		8		10		12		16	
			Ae max	0,20	0,45	0,25	0,55	0,30	0,60	0,35	0,65	0,40	0,70
			Diameter	3,0	6,0	4,0	8,0	5,0	10,0	6,0	12,0	8,0	16,0
													
Metric	Hardness (HRC)	Vc (m/min)	Cut Zone	RE	RE2	RE	RE2	RE	RE2	RE	RE2	RE	RE2
P Alloy Steels	≤28 (155-232)	194	RPM	20583	10292	15438	7719	12350	6175	10292	5146	7719	3859
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	1029	1235	1029	1235	1544	1853	1544	1853	1544	1853
	≤40 (88-132)	110	RPM	11671	5836	8753	4377	7003	3501	5836	2918	4377	2188
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,029	0,070
			Feed (mm/min)	389	467	438	525	700	840	729	875	766	919
P Tool Steels	≤35 (69-118)	93	RPM	9867	4934	7400	3700	5920	2960	4934	2467	3700	1850
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	493	592	493	592	740	888	740	888	740	888
	≤45 (51-77)	64	RPM	6790	3395	5093	2546	4074	2037	3395	1698	2546	1273
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	226	272	255	306	407	489	424	509	382	458
M Stainless Steels	≤28 (94-141)	117	RPM	12414	6207	9310	4655	7448	3724	6207	3103	4655	2328
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,029	0,070
			Feed (mm/min)	621	745	621	745	931	1117	931	1117	815	978
	≤35 (87-130)	108	RPM	11459	5729	8594	4297	6875	3438	5729	2865	4297	2149
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	382	458	430	516	688	825	716	859	645	773
S High Temperature Alloys	≤32 (26-38)	32	RPM	3395	1698	2546	1273	2037	1019	1698	849	1273	637
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	113	136	127	153	204	244	212	255	191	229
	≤43 (21-31)	26	RPM	2759	1379	2069	1034	1655	828	1379	690	1034	517
			Fz	0,004	0,010	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050
			Feed (mm/min)	46	55	69	83	124	149	138	166	129	155
S Titanium Alloys	≤35 (85-133)	109	RPM	11565	5782	8674	4337	6939	3469	5782	2891	4337	2168
			Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,029	0,070
			Feed (mm/min)	578	694	578	694	867	1041	867	1041	759	911
	≤45 (44-61)	53	RPM	5623	2812	4217	2109	3374	1687	2812	1406	2109	1054
			Fz	0,008	0,020	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060
			Feed (mm/min)	187	225	211	253	337	405	351	422	316	380

$rpm = (Vc \times 1000) / (DC \times 3.14)$

$Feed = Fz \times \text{No. of teeth} \times rpm$

Adjust speed and feed according to material hardness

Consider rpm according to cutting area of tool being utilized


Avoid using tip of the tool where possible due to reduced chip space

Be aware of max cut Ae, especially on the lower portion of the tool

Medical applications:

- Titanium can be cut dry while keeping cut size to a minimum and providing good chip evacuation (air blast)
- For cobalt chrome applications, a surface speed of 45M/min is a guide (It can also be cut dry as per cobalt)

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

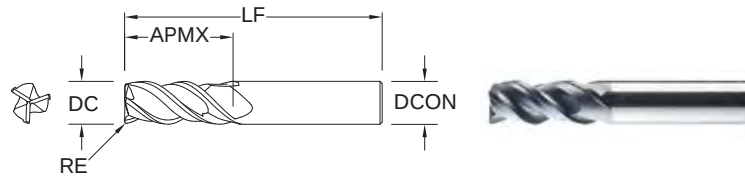

33CR

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0020

>3/8–1 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0020

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

	inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	.015	33345
3/16	9/16	2-1/2	1/4	.015	33346
1/4	3/4	2-1/2	1/4	.020	33347
5/16	13/16	2-1/2	5/16	.020	33348
3/8	1	2-1/2	3/8	.020	33349
7/16	1-1/8	2-3/4	7/16	.020	33350
1/2	1-1/4	3-1/4	1/2	.030	33351
5/8	1-1/2	3-1/2	5/8	.040	33352
3/4	1-3/4	4	3/4	.040	33353
1	2-1/4	5	1	.040	33354


- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

Series 33



Series 33CR Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile	≤ 0.5	≤ 1.5	550	RPM	16808	8404	5603	4202	3362	2801	2101
					(440-660)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
					Feed (ipm)	25.2	30.3	38.7	39.1	39.3	33.6	27.1	
		 Slot	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
					(352-528)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
					Feed (ipm)	20.2	24.2	30.9	31.3	31.5	26.9	21.7	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
					(252-378)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
					Feed (ipm)	11.6	13.0	16.4	16.6	16.7	14.4	11.6	
		 Slot	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
					Feed (ipm)	9.2	10.3	13.0	13.2	13.3	11.5	9.2	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
					(148-222)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
					Feed (ipm)	5.1	5.9	7.9	7.6	7.8	6.8	5.3	
		 Slot	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
					(116-174)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
					Feed (ipm)	4.0	4.7	6.2	6.0	6.1	5.3	4.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
					(392-588)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
					Feed (ipm)	17.1	22.5	28.5	28.1	27.9	24.0	19.7	
		 Slot	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
					Feed (ipm)	13.6	17.9	22.6	22.3	22.2	19.1	15.6	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	9.4	12.5	15.6	15.6	15.6	13.5	10.9	
		 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	7.4	9.9	12.4	12.4	12.4	10.7	8.7	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	 Profile	≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
					(248-372)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	8.5	11.4	14.2	14.2	14.2	12.3	9.9	
		 Slot	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	6.9	9.2	11.5	11.5	11.5	9.9	8.0	

continued on next page

Series 33CR Fractional	Hardness			Vc (sfm)	DC • in								
		Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
					(356-534)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
					Feed (ipm)	14.3	22.4	28.6	28.6	24.5	19.9		
		 Slot	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
					Feed (ipm)	11.4	17.9	22.8	22.8	19.5	15.9		
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
					Feed (ipm)	9.4	12.5	16.6	16.4	16.2	14.0	11.3	
		 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
					Feed (ipm)	7.4	9.9	13.2	13.0	12.9	11.1	9.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	 Profile	≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
					(64-96)	Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024
					Feed (ipm)	1.9	2.6	3.2	3.1	3.1	2.7	2.2	
		 Slot	1	≤ 1	65	RPM	1986	993	662	497	397	331	248
					(52-78)	Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024
					Feed (ipm)	1.5	2.1	2.6	2.5	2.5	2.2	1.8	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
					(50-74)	Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017
					Feed (ipm)	1.1	1.4	1.7	1.7	1.7	1.5	1.2	
		 Slot	1	≤ 1	49	RPM	1497	749	499	374	299	250	187
					(39-59)	Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017
					Feed (ipm)	0.9	1.1	1.3	1.3	1.3	1.2	1.0	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
					(172-258)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	5.9	7.9	9.9	9.9	9.9	8.5	6.9	
		 Slot	1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649
					(136-204)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	4.7	6.2	7.8	7.8	7.8	6.8	5.5	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
					(60-90)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	2.1	2.8	3.4	3.4	3.4	3.0	2.4	
		 Slot	1	≤ 1	60	RPM	1834	917	611	458	367	306	229
					(48-72)	Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028
					Feed (ipm)	1.7	2.2	2.8	2.8	2.8	2.4	1.9	

Bhn (Brinell) HRC (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



33MCR

METRIC SERIES

- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

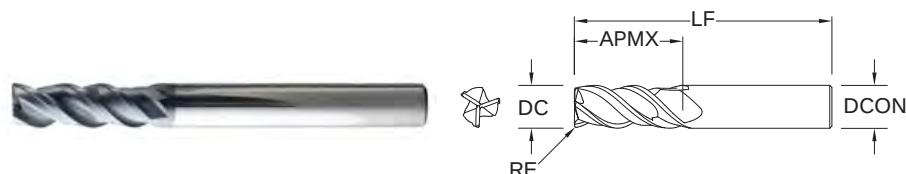

mm					EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE®-A (AlTiN)
3,0	9,0	57,0	6,0	0,3	43445
3,0	9,0	57,0	6,0	0,5	43470
4,0	12,0	57,0	6,0	0,3	43446
4,0	12,0	57,0	6,0	0,5	43471
5,0	15,0	57,0	6,0	0,3	43447
5,0	15,0	57,0	6,0	0,5	43472
6,0	18,0	57,0	6,0	0,5	43448
6,0	18,0	57,0	6,0	1,0	43473
6,0	18,0	57,0	6,0	1,5	43474
6,0	18,0	57,0	6,0	2,0	43475
8,0	20,0	63,0	8,0	0,5	43449
8,0	20,0	63,0	8,0	1,0	43476
8,0	20,0	63,0	8,0	1,5	43477
8,0	20,0	63,0	8,0	2,0	43478
10,0	27,0	72,0	10,0	0,5	43450
10,0	27,0	72,0	10,0	1,0	43479
10,0	27,0	72,0	10,0	1,5	43480
10,0	27,0	72,0	10,0	2,0	43481
10,0	27,0	72,0	10,0	2,5	43482
12,0	30,0	83,0	12,0	0,5	43451
12,0	30,0	83,0	12,0	1,0	43483
12,0	30,0	83,0	12,0	1,5	43484
12,0	30,0	83,0	12,0	2,0	43485
12,0	30,0	83,0	12,0	2,5	43486
12,0	30,0	83,0	12,0	3,0	43487
12,0	30,0	83,0	12,0	4,0	43488
16,0	38,0	92,0	16,0	1,0	43452
16,0	38,0	92,0	16,0	1,5	43489
16,0	38,0	92,0	16,0	2,0	43490
16,0	38,0	92,0	16,0	2,5	43491
16,0	38,0	92,0	16,0	3,0	43492
16,0	38,0	92,0	16,0	4,0	43493
20,0	46,0	104,0	20,0	1,0	43453
20,0	46,0	104,0	20,0	2,0	43494
20,0	46,0	104,0	20,0	2,5	43495
20,0	46,0	104,0	20,0	3,0	43496
20,0	46,0	104,0	20,0	4,0	43497

TOLERANCES (mm)

3-6 DIAMETER

DC = $+0,000/-0,030$ DCON = h_6 RE = $+0,000/-0,050$

>6-10 DIAMETER


DC = $+0,000/-0,040$ DCON = h_6 RE = $+0,000/-0,050$

>10-20 DIAMETER

DC = $+0,000/-0,050$ DCON = h_6 RE = $+0,000/-0,050$

	STEELS
	STAINLESS STEELS
	CAST IRON
	HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com



Series 33MCR Metric		Hardness			Vc (m/min)	DC • mm									
			Ae x DC	Ap x DC		3	6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	168	RPM	17773	8886	6665	5332	4443	3332	2666	
						(134-201)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	
						Feed (mm/min)	640	768	981	981	992	998	853		
			 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	
						(107-161)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	
						Feed (mm/min)	512	614	785	785	793	798	682		
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	
						(77-115)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	
						Feed (mm/min)	293	330	415	415	421	425	366		
			 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	
						(61-91)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	
						Feed (mm/min)	233	262	330	330	334	337	291		
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	 Profile	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	
						(45-68)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	
						Feed (mm/min)	129	151	201	201	194	198	172		
			 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	
						(35-53)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	
						Feed (mm/min)	101	118	157	157	152	155	135		
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375
							(119-179)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
							Feed (mm/min)	433	570	722	722	712	707	608	
				 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890
							(95-143)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
							Feed (mm/min)	345	454	575	575	567	563	484	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 275 Bhn or ≤ 28 HRc	 Profile	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	
						(83-124)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	237	316	396	396	395	396	343		
			 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	
						(66-99)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	188	251	314	314	314	314	272		
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		≤ 325 Bhn or ≤ 35 HRc	 Profile	≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	
						(76-113)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	216	288	361	361	361	361	361	313	
			 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	
						(61-91)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
						Feed (mm/min)	174	233	291	291	291	291	291	252	

continued on next page

Series 33



Series 33MCR						Vc		DC • mm						
Metric	Hardness	Ae x DC	Ap x DC	(m/min)		3	6	8	10	12	16	20		
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRC	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157
						(109-163)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
						Feed (mm/min)	362	569	725	725	725	725	621	
		≤ 260 Bhn or ≤ 26 HRC	Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721
						(87-130)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
						Feed (mm/min)	289	454	578	578	578	578	496	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRC	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648
						(83-124)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072
						Feed (mm/min)	237	316	422	422	415	411	356	
		≤ 300 Bhn or ≤ 32 HRC	Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309
						(66-99)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072
						Feed (mm/min)	188	251	335	335	330	327	283	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRC	Profile 	≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388
						(20-29)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059
						Feed (mm/min)	48	65	81	65	79	78	68	
		≤ 400 Bhn or ≤ 43 HRC	Slot 	1	≤ 1	20	RPM	2100	1050	788	630	525	394	315
						(16-24)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059
						Feed (mm/min)	39	53	66	66	64	64	55	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRC	Profile 	≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301
						(15-23)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043
						Feed (mm/min)	29	36	43	43	43	43	38	
		≤ 350 Bhn or ≤ 38 HRC	Slot 	1	≤ 1	15	RPM	1583	792	594	475	396	297	238
						(12-18)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043
						Feed (mm/min)	23	28	34	34	34	34	30	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRC	Profile 	≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042
						(52-79)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	150	200	250	250	250	250	217	
		≤ 420 Bhn or ≤ 45 HRC	Slot 	1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824
						(41-62)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	119	158	198	198	198	198	171	
	TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRC	Profile 	≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364
						(18-27)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	52	70	87	87	87	87	76	
		≤ 420 Bhn or ≤ 45 HRC	Slot 	1	≤ 1	18	RPM	1939	969	727	582	485	364	291
						(15-22)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
						Feed (mm/min)	42	56	70	70	70	70	60	

Bhn (Brinell) HRC (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

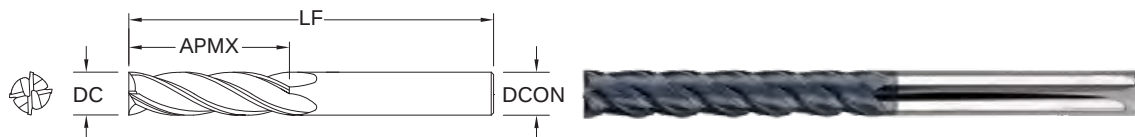

7
FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h₆

STEELS

STAINLESS STEELS


CAST IRON

HIGHTEMP ALLOYS

For patent
information visit
www.ksptpatents.com

	inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)	
1/8	3/4	2-1/4	1/8	70470	
1/8	1	3	1/8	70471	
3/16	3/4	2-1/2	3/16	70472	
3/16	1-1/8	3	3/16	70473	
1/4	1-1/8	3	1/4	70474	
1/4	1-1/2	4	1/4	70475	
5/16	1-1/8	3	5/16	70476	
5/16	1-5/8	4	5/16	70477	
3/8	1-1/8	3	3/8	70478	
3/8	1-3/4	4	3/8	70479	
7/16	2	4-1/2	7/16	70480	
7/16	3	6	7/16	70481	
1/2	2	4-1/2	1/2	70482	
1/2	3	6	1/2	70483	
5/8	2-1/4	5	5/8	70484	
5/8	3	6	5/8	70485	
3/4	2-1/4	5	3/4	70486	
3/4	3	6	3/4	70487	
1	2-1/4	5	1	70488	
1	3	6	1	70489	

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



7B

FRACTIONAL SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)




inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/8	3/4	2-1/4	1/8	70441
1/8	1	3	1/8	70442
3/16	3/4	2-1/2	3/16	70444
3/16	1-1/8	3	3/16	70445
1/4	1-1/8	3	1/4	70447
1/4	1-1/2	4	1/4	70448
5/16	1-1/8	3	5/16	70450
5/16	1-5/8	4	5/16	70451
3/8	1-1/8	3	3/8	70453
3/8	1-3/4	4	3/8	70454
7/16	2	4-1/2	7/16	70456
7/16	3	6	7/16	70457
1/2	2	4-1/2	1/2	70459
1/2	3	6	1/2	70460
5/8	2-1/4	5	5/8	70462
5/8	3	6	5/8	70463
3/4	2-1/4	5	3/4	70465
3/4	3	6	3/4	70466
1	2-1/4	5	1	70468
1	3	6	1	70469


RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

DC = $+0.0000/-0.0020$
 DCON = h_6
 RE = $+0.0000/-0.0010$



For patent information visit www.ksptpatents.com



Series 7, 7B	Fractional	Hardness		Vc (sfm)	DC • in									
					1/8	1/4	3/8	1/2	5/8	3/4	1			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	480	RPM	14669	7334	4890	3667	2934	2445	1834
						(384-576)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
							Feed (ipm)	23.5	29.3	37.2	36.7	37.6	32.3	25.7
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	275	RPM	8404	4202	2801	2101	1681	1401	1051
						(220-330)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	10.1	11.8	15.7	15.1	15.5	13.4	10.9
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	230	RPM	7029	3514	2343	1757	1406	1171	879
						(184-276)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022
							Feed (ipm)	5.6	8.4	11.2	11.2	11.2	9.8	7.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	420	RPM	12835	6418	4278	3209	2567	2139	1604
						(336-504)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
							Feed (ipm)	20.5	25.7	32.5	32.1	32.9	28.2	22.5
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108
						(232-348)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	10.6	12.4	16.5	16.0	16.3	14.2	11.5
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	265	RPM	8098	4049	2699	2025	1620	1350	1012
						(212-318)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	9.7	11.3	15.1	14.6	14.9	13.0	10.5
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2	605	RPM	18489	9244	6163	4622	3698	3081	2311
						(484-726)	Fz	0.0006	0.0015	0.0028	0.0037	0.0046	0.0047	0.0051
							Feed (ipm)	44.4	55.5	69.0	68.4	68.0	57.9	47.1
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2	465	RPM	14210	7105	4737	3553	2842	2368	1776
						(372-558)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
							Feed (ipm)	22.7	31.3	39.8	39.8	38.7	34.1	27.7
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (ipm)	2.9	3.4	4.6	4.4	4.5	3.9	3.2
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
							Feed (ipm)	1.6	2.4	2.6	2.8	2.7	2.4	1.9
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2	300	RPM	9168	4584	3056	2292	1834	1528	1146
						(240-360)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
							Feed (ipm)	14.7	20.2	25.7	25.7	24.9	22.0	17.9
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Finish 	≤ 0.02	≤ 2	105	RPM	3209	1604	1070	802	642	535	401	
					(84-126)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
						Feed (ipm)	5.1	7.1	9.0	9.0	8.7	7.7	6.3	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

METRIC Series 7



7M METRIC SERIES


- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

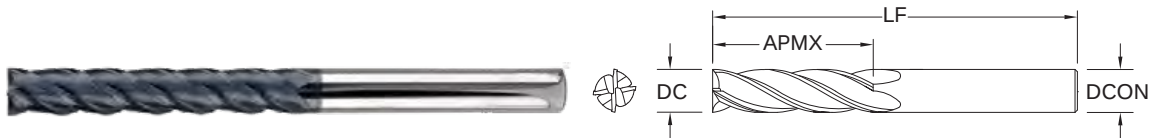

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
3,0	25,0	75,0	3,0	70551
4,0	25,0	75,0	4,0	70552
5,0	25,0	75,0	5,0	70553
6,0	25,0	75,0	6,0	70554
8,0	25,0	75,0	8,0	70555
10,0	38,0	100,0	10,0	70556
12,0	50,0	100,0	12,0	70557
12,0	75,0	150,0	12,0	70558
14,0	75,0	150,0	14,0	70559
16,0	75,0	150,0	16,0	70560
18,0	75,0	150,0	18,0	70561
20,0	75,0	150,0	20,0	70562
25,0	75,0	150,0	25,0	70563

TOLERANCES (mm)

DC = $+0,000/+0,050$
DCON = h_6



For patent information visit www.ksptpatents.com



7MB METRIC SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)




mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
3,0	25,0	75,0	3,0	70527
4,0	25,0	75,0	4,0	70529
5,0	25,0	75,0	5,0	70531
6,0	25,0	75,0	6,0	70533
8,0	25,0	75,0	8,0	70535
10,0	38,0	100,0	10,0	70537
12,0	50,0	100,0	12,0	70539
12,0	75,0	150,0	12,0	70540
14,0	75,0	150,0	14,0	70542
16,0	75,0	150,0	16,0	70544
18,0	75,0	150,0	18,0	70546
20,0	75,0	150,0	20,0	70548
25,0	75,0	150,0	25,0	70550


RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

DC = $+0,000/+0,050$
DCON = h_6
RE = $+0,000/-0,025$



For patent information visit www.ksptpatents.com



Series 7M, 7MB Metric	Hardness		Ae Ae x DC Ae Ap x DC		Vc (m/min)	DC • mm									
			3	6		8	10	12	16	20	25				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	146	RPM	15511	7755	5816	4653	3878	2908	2327	1861
						(117-176)	Fz	0.0166	0.043	0.075	0.093	0.110	0.125	0.147	0.160
							Feed (mm/min)	1030	1334	1745	1731	1706	1454	1368	1191
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	84	RPM	8886	4443	3332	2666	2222	1666	1333	1066
						(67-101)	Fz	0.0122	0.034	0.051	0.069	0.082	0.091	0.109	0.120
							Feed (mm/min)	434	604	680	736	729	606	581	512
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2	70	RPM	7432	3716	2787	2230	1858	1394	1115	892
						(56-84)	Fz	0.0070	0.019	0.040	0.043	0.048	0.057	0.064	0.070
							Feed (mm/min)	208	282	446	384	357	318	285	250
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	128	RPM	13572	6786	5089	4072	3393	2545	2036	1629
						(102-154)	Fz	0.0086	0.024	0.040	0.048	0.058	0.065	0.077	0.087
							Feed (mm/min)	467	651	814	782	787	662	627	567
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2	88	RPM	9371	4686	3514	2811	2343	1757	1406	1125
						(71-106)	Fz	0.0082	0.022	0.037	0.045	0.048	0.060	0.072	0.078
							Feed (mm/min)	307	412	520	506	450	422	405	351
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	81	RPM	8563	4282	3211	2569	2141	1606	1284	1028
						(65-97)	Fz	0.0070	0.019	0.029	0.040	0.048	0.055	0.064	0.070
							Feed (mm/min)	240	325	372	411	411	353	329	288
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2	184	RPM	19550	9775	7331	5865	4887	3666	2932	2346
						(148-221)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
							Feed (mm/min)	1032	1408	1525	1759	1740	1452	1372	1220
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2	142	RPM	15026	7513	5635	4508	3756	2817	2254	1803
						(113-170)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
							Feed (mm/min)	793	1082	1172	1352	1337	1116	1055	938
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0072	0.019	0.029	0.037	0.046	0.053	0.061	0.085
							Feed (mm/min)	74	98	112	90	119	103	95	105
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	20	RPM	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.0075	0.016	0.021	0.030	0.038	0.044	0.051	0.070
							Feed (mm/min)	63	67	66	76	80	69	64	71
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2	91	RPM	9694	4847	3635	2908	2424	1818	1454	1163
						(73-110)	Fz	0.0091	0.024	0.040	0.050	0.060	0.070	0.080	0.088
							Feed (mm/min)	353	465	51	59	582	509	465	409
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Finish 	≤ 0.02	≤ 2	32	RPM	3393	1696	1272	1018	848	636	509	407	
					(26-38)	Fz	0.0082	0.019	0.029	0.037	0.046	0.053	0.061	0.085	
						Feed (mm/min)	111	129	148	151	156	135	124	138	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



56B

FRACTIONAL SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

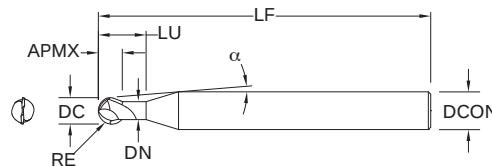

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	Ti-NAMITE [®] -X (TX)
1/32	1/32	3	1/4	8°20'	1/16	.025	93272
1/16	1/16	3	1/4	7°40'	1/8	.055	93273
3/32	3/32	3	1/4	6°50'	3/16	.085	93274
1/8	1/8	3	1/4	6°	1/4	.114	93275
3/16	3/16	3	1/4	3°35'	3/8	.171	93276
1/4	1/4	3-1/2	1/4	—	1/2	.230	93277
5/16	5/16	4	5/16	—	5/8	.292	93278
3/8	3/8	4	3/8	—	3/4	.355	93279
1/2	1/2	4-1/2	1/2	—	1	.480	93280
5/8	5/8	5-1/2	5/8	—	1-1/4	.610	93281
3/4	3/4	6-1/2	3/4	—	1-1/2	.735	93282

Extended Neck Option Available, contact your local KSPT representative for more information.
RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/32–3/32 DIAMETER

DC = +0.0000/–0.0010

DCON = h_6

RE = +0.0000/–0.0005

>3/32–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–3/4 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS


HARDENED STEELS

For patent information visit
www.ksptpatents.com

56MB

METRIC SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

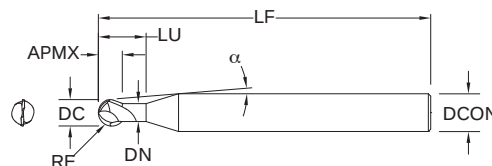

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	Ti-NAMITE [®] -X (TX)
1,0	1,0	76,0	6,0	8°10'	2,0	0,91	91349
1,5	1,5	76,0	6,0	7°45'	3,0	1,37	91350
2,0	2,0	76,0	6,0	7°10'	4,0	1,83	91351
2,5	2,5	76,0	6,0	6°35'	5,0	2,29	91352
3,0	3,0	76,0	6,0	6°	6,0	2,72	91353
4,0	4,0	76,0	6,0	4°30'	8,0	3,63	91354
5,0	5,0	89,0	6,0	2°30'	10,0	4,55	91355
6,0	6,0	89,0	6,0	—	12,0	5,49	91356
8,0	8,0	102,0	8,0	—	16,0	7,49	91357
10,0	10,0	102,0	10,0	—	20,0	9,47	91358
12,0	12,0	114,0	12,0	—	24,0	11,48	91359
16,0	16,0	140,0	16,0	—	32,0	15,62	91360
20,0	20,0	165,0	20,0	—	40,0	19,61	91361

Extended Neck Option Available, contact your local KSPT representative for more information.
RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

1–2,5 DIAMETER

DC = +0,000/–0,025

DCON = h_6

RE = +0,000/–0,0013

>2,5–6 DIAMETER

DC = +0,000/–0,030

DCON = h_6

RE = +0,000/–0,0013

>6–10 DIAMETER

DC = +0,000/–0,040

DCON = h_6

RE = +0,000/–0,0020

>10–20 DIAMETER

DC = +0,000/–0,050


DCON = h_6

RE = +0,000/–0,0025


STEELS

HARDENED STEELS


For patent information visit
www.ksptpatents.com

Series 56B				DC • in										
Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)		1/32	1/16	1/8	3/16	1/4	3/8	1/2	3/4	
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	 Rough	≤ 0.4	≤ 0.1	625	RPM	76400	38200	19100	12733	9550	6367	4775	3183
					(500-750)	Fz	0.0006	0.0015	0.0030	0.0040	0.0050	0.0080	0.0100	0.0120
		 HSM	≤ 0.4	≤ 0.03	950	RPM	116128	58064	29032	19355	14516	9677	7258	4839
					(760-1140)	Fz	0.0007	0.0017	0.0033	0.0044	0.0060	0.0088	0.0110	0.0130
		 HSM	≤ 0.4	≤ 0.03		Feed (ipm)	92	115	115	102	96	102	96	76
						Feed (ipm)	163	197	192	170	174	170	160	126
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	 Rough	≤ 0.4	≤ 0.05	750	RPM	91680	45840	22920	15280	11460	7640	5730	3820
					(600-900)	Fz	0.0005	0.0011	0.0023	0.0030	0.0038	0.0060	0.0075	0.0085
		 HSM	≤ 0.4	≤ 0.02	1150	RPM	140576	70288	35144	23429	17572	11715	8786	5857
					(920-1380)	Fz	0.0006	0.0012	0.0025	0.0033	0.0042	0.0066	0.0082	0.0100
		 HSM	≤ 0.4	≤ 0.02		Feed (ipm)	169	169	176	155	148	155	144	117
						Feed (ipm)	169	169	176	155	148	155	144	117
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	 Rough	≤ 0.4	≤ 0.04	500	RPM	61120	30560	15280	10187	7640	5093	3820	2547
					(400-600)	Fz	0.0004	0.0008	0.0017	0.0023	0.0029	0.0045	0.0057	0.0063
		 HSM	≤ 0.4	≤ 0.01	1000	RPM	122240	61120	30560	20373	15280	10187	7640	5093
					(800-1200)	Fz	0.0005	0.0009	0.0019	0.0025	0.0032	0.0050	0.0063	0.0071
		 HSM	≤ 0.4	≤ 0.01		Feed (ipm)	122	110	116	102	98	102	96	72
						Feed (ipm)	122	110	116	102	98	102	96	72

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Series 56MB Metric				Vc (m/min)	DC • mm											
		Hardness	Ae x DC		Ap x DC	1	1.5	3	5	6	10	12	20			
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRC	Rough 	≤ 0.4	≤ 0.1	191	RPM	60748	40498	20249	12150	10125	6075	5062	3037	
			HSM 	≤ 0.4	≤ 0.03	(153-229)	Fz	0.015	0.038	0.076	0.102	0.127	0.203	0.254	0.305	
						Feed (mm/min)	1822	3078	3078	2479	2572	2466	2572	1853		
		H	≤ 475 Bhn or ≤ 50 HRC	HSM 	≤ 0.4	≤ 0.02	290	RPM	92235	61490	46117	18447	15372	9223	7686	4612
							(232-348)	Fz	0.018	0.043	0.084	0.112	0.117	0.224	0.279	0.330
							Feed (mm/min)	3320	5288	7748	4132	3597	4132	4289	3044	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRC	HSM 	≤ 0.4	≤ 0.01	229	RPM	72833	48556	24278	14567	12139	7283	6069	3642	
						(183-275)	Fz	0.013	0.028	0.058	0.076	0.097	0.152	0.191	0.216	
							Feed (mm/min)	1894	2719	2816	2214	2355	2214	2319	1573	
		HSM 	≤ 0.4	≤ 0.02	351	RPM	111636	74424	37212	22327	18606	11164	9303	5582		
					(281-421)	Fz	0.015	0.030	0.064	0.084	0.107	0.168	0.208	0.254		
						Feed (mm/min)	3349	4465	4763	3751	3982	3751	3870	2836		
		HSM 	≤ 0.4	≤ 0.04	152	RPM	48344	32229	16115	9669	8057	4834	4029	2417		
					(122-182)	Fz	0.010	0.020	0.043	0.058	0.074	0.114	0.145	0.160		
						Feed (mm/min)	967	1289	1386	1122	1192	1102	1168	773		
		HSM 	≤ 655 Bhn or ≤ 60 HRC	HSM 	≤ 0.4	≤ 0.01	305	RPM	97005	64670	32335	19401	16168	9701	8084	4850
							(244-366)	Fz	0.013	0.023	0.048	0.064	0.081	0.127	0.160	0.180
								Feed (mm/min)	2522	2975	3104	2483	2619	2464	2587	1746


Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



57

FRACTIONAL SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

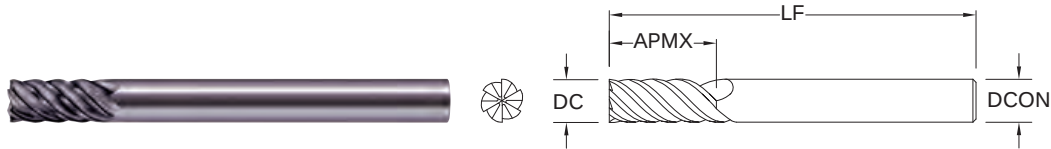

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
1/4	17/32	3-1/2	1/4	36140
5/16	11/16	4	5/16	36141
3/8	13/16	4	3/8	36142
1/2	1-3/32	4-1/2	1/2	36143

Neck Option Available

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

5/16 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

1/2 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

STEELS


HARDENED STEELS

For patent
information visit
www.ksptpatents.com

57M

METRIC SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

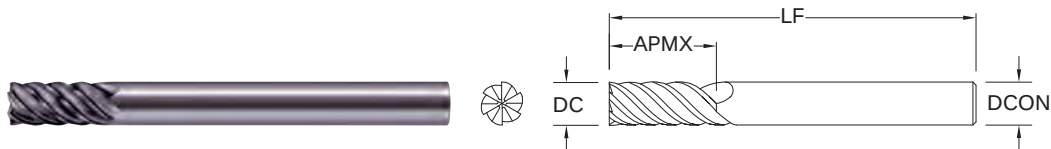

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-X (TX)
6,0	13,0	89,0	6,0	46140
8,0	18,0	102,0	8,0	46141
10,0	22,0	102,0	10,0	46142
12,0	26,0	114,0	12,0	46143
16,0	32,0	140,0	16,0	46145
20,0	38,0	165,0	20,0	46147

Neck Option Available

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030

DCON = h₆

8 DIAMETER

DC = +0,000/-0,040

DCON = h₆

10 DIAMETER

DC = +0,000/-0,040

DCON = h₆

12-20 DIAMETER


DC = +0,000/-0,050

DCON = h₆


STEELS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Series 57 Fractional		Hardness			Vc (sfm)	DC • in					
			Ae x DC	Ap x DC		1/4	5/16	3/8	1/2		
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc		1	≤ 0.3	215	RPM	3285	2628	2190	1643
						(172-258)	Fz	0.0013	0.0019	0.0025	0.0031
							Feed (ipm)	26	30	33	31
				≤ 0.1	≤ 1.5	265	RPM	4049	3239	2699	2025
						(212-318)	Fz	0.0018	0.0026	0.0035	0.0044
							Feed (ipm)	44	51	57	53
				≤ 0.04	≤ 1.5	560	RPM	8557	6845	5705	4278
						(448-672)	Fz	0.0022	0.0033	0.0044	0.0055
							Feed (ipm)	113	136	151	141
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc		1	≤ 0.3	120	RPM	1834	1467	1222	917
						(96-144)	Fz	0.0010	0.0015	0.0020	0.0025
							Feed (ipm)	11	13	15	14
				≤ 0.1	≤ 1.5	150	RPM	2292	1834	1528	1146
						(120-180)	Fz	0.0014	0.0021	0.0028	0.0035
							Feed (ipm)	19	23	26	24
				≤ 0.04	≤ 1.5	490	RPM	7487	5990	4991	3744
						(392-588)	Fz	0.0018	0.0026	0.0035	0.0044
							Feed (ipm)	81	93	105	99
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 740 Bhn or ≤ 65 HRc		1	≤ 0.3	65	RPM	993	795	662	497
						(52-78)	Fz	0.0008	0.0011	0.0015	0.0019
							Feed (ipm)	5	5	6	6
				≤ 0.1	≤ 1.5	80	RPM	1222	978	815	611
						(64-96)	Fz	0.0011	0.0016	0.0021	0.0026
							Feed (ipm)	8	9	10	10
				≤ 0.04	≤ 1.5	250	RPM	3820	3056	2547	1910
						(200-300)	Fz	0.0013	0.0019	0.0025	0.0031
							Feed (ipm)	30	35	38	36

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)
 rpm = $V_c \times 3.82 / DC$
 ipm = $F_z \times 6 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series 57M	Metric	Hardness			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		6	8	10	12	16	20		
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc		1	≤ 0.3	66	RPM	3499	2624	2099	1749	1312	1050
						(53-79)	Fz	0.032	0.048	0.064	0.079	0.094	0.109
						Feed (mm/min)	672	756	806	829	740	686	
				≤ 0.1	≤ 1.5	81	RPM	4294	3220	2576	2147	1610	1288
						(65-97)	Fz	0.046	0.066	0.089	0.112	0.132	0.152
						Feed (mm/min)	1185	1275	1376	1443	1275	1175	
			≤ 0.04	≤ 1.5	171	RPM	9064	6798	5439	4532	3399	2719	
					(137-205)	Fz	0.056	0.084	0.112	0.140	0.170	0.200	
					Feed (mm/min)	3046	3426	3655	3807	3467	3263		
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc		1	≤ 0.3	37	RPM	1961	1471	1177	981	735	588
						(30-44)	Fz	0.025	0.038	0.051	0.064	0.077	0.090
						Feed (mm/min)	294	335	360	377	340	318	
				≤ 0.1	≤ 1.5	46	RPM	2438	1829	1463	1219	914	732
						(37-55)	Fz	0.036	0.053	0.071	0.089	0.107	0.125
						Feed (mm/min)	527	582	623	651	587	549	
			≤ 0.04	≤ 1.5	149	RPM	7898	5924	4739	3949	2962	2369	
					(119-179)	Fz	0.046	0.066	0.089	0.112	0.135	0.158	
					Feed (mm/min)	2180	2346	2531	2654	2399	2246		
		≤ 740 Bhn or ≤ 65 HRc		1	≤ 0.3	20	RPM	1060	795	636	530	398	318
						(16-24)	Fz	0.020	0.028	0.038	0.048	0.058	0.068
						Feed (mm/min)	127	134	145	153	138	130	
				≤ 0.1	≤ 1.5	24	RPM	1272	954	763	636	477	382
						(19-29)	Fz	0.028	0.041	0.053	0.066	0.078	0.090
						Feed (mm/min)	214	235	243	252	223	206	
			≤ 0.04	≤ 1.5	76	RPM	4029	3021	2417	2014	1511	1209	
					(61-91)	Fz	0.033	0.048	0.064	0.079	0.094	0.109	
					Feed (mm/min)	798	870	928	955	852	790		

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = (Vc x 1000) / (DC x 3.14)



mm/min = Fz x 6 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

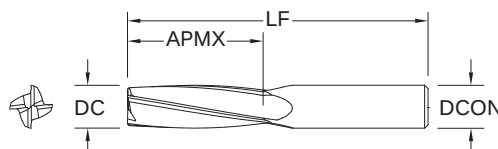
27
FRACTIONAL SERIES
TOLERANCES (inch)


DC = +0.0000/-0.0030

DCON = h_6
NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	72978	72979
3/8	1-1/8	2-1/2	3/8	72980	72981
1/2	1-1/2	3-1/2	1/2	72982	72983
3/4	1-3/8	4	3/4	72984	72985

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites

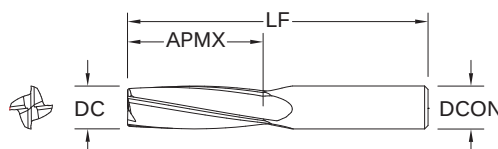
27M
METRIC SERIES
TOLERANCES (mm)

DC = +0,000/-0,080


DCON = h_6
NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	83056	83057
8,0	25,0	63,0	8,0	83058	83059
10,0	28,0	63,0	10,0	83060	83061
12,0	38,0	89,0	12,0	83062	83063
16,0	48,0	115,0	16,0	83064	83065

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites


FRACTIONAL Series 27



Series 27 Fractional			Vc (sfm)		DC • in			
	Ae x DC	Ap x DC			1/4	3/8	1/2	3/4
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	400	RPM	6112	4075	3056	2037
			(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	Profile 	≤ 0.5 ≤ 1.5	500	RPM	7640	5093	3820	2547
			(400-600)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	49	61	61	49
	HSM 	≤ 0.5 ≤ 2	825	RPM	12606	8404	6303	4202
			(660-990)	Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	187	232	232	185
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	320	RPM	4890	3260	2445	1630
			(256-384)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	31	39	39	31
	Profile 	≤ 0.5 ≤ 1.5	400	RPM	6112	4075	3056	2037
			(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	HSM 	≤ 0.5 ≤ 2	660	RPM	10085	6723	5042	3362
			(528-792)	Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	149	186	186	148
N CARBON, GRAPHITE	Slot 	1 ≤ 1	480	RPM	7334	4890	3667	2445
			(384-576)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	59	74	73	59
	Profile 	≤ 0.5 ≤ 1.5	600	RPM	9168	6112	4584	3056
			(480-720)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	73	93	92	73
	HSM 	≤ 0.5 ≤ 2	990	RPM	15127	10085	7564	5042
			(792-1188)	Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	278	347	348	278
PLASTICS	Slot 	1 ≤ 1	800	RPM	12224	8149	6112	4075
			(640-690)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	98	124	122	98
	Profile 	≤ 0.5 ≤ 1.5	1000	RPM	15280	10187	7640	5093
			(800-1200)	Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	122	155	153	122
	HSM 	≤ 0.5 ≤ 2	1650	RPM	25212	16808	12606	8404
			(1320-1980)	Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	464	578	580	464
MACHINABLE CERAMICS MACHINABLE GLASS	Slot 	1 ≤ 1	40	RPM	611	407	306	204
			(32-48)	Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.0	2.4	2.4	2.0
	Profile 	≤ 0.5 ≤ 1.5	50	RPM	764	509	382	255
			(40-60)	Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.4	3.1	3.1	2.4
	HSM 	≤ 0.5 ≤ 2	85	RPM	1299	866	649	433
			(68-102)	Fz	0.0018	0.0034	0.0046	0.0055
				Feed (ipm)	9.4	11.8	11.9	9.5

HSM (High Speed Machining)
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 4 \times rpm$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur
 finish cuts typically required reduced feed and cutting depths



rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)



Series 27M Metric				Vc (m/min)		DC • mm					
		Ae x DC	Ap x DC			6	8	10	12	16	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181	2385	
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120	
					Feed (mm/min)	1018	1240	1145	1272	1145	
		≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	2982	
				(120-180)	Fz	0.040	0.065	0.075	0.100	0.120	
					Feed (mm/min)	1272	1550	1431	1590	1431	
		≤ 0.5	≤ 2	250	RPM	13252	9939	7951	6626	4970	
				(200-300)	Fz	0.095	0.145	0.175	0.235	0.280	
					Feed (mm/min)	5036	5765	5566	6228	5566	
	GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650	1988
					(80-120)	Fz	0.040	0.065	0.075	0.100	0.120
						Feed (mm/min)	848	1034	954	1060	954
		≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	2385	
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120	
					Feed (mm/min)	1018	1240	1145	1272	1145	
		≤ 0.5	≤ 2	200	RPM	10602	7951	6361	5301	3976	
				(160-240)	Fz	0.095	0.145	0.175	0.235	0.280	
					Feed (mm/min)	4029	4612	4453	4983	4453	
CARBON, GRAPHITE			1	≤ 1	145	RPM	7686	5765	4612	3843	2882
					(116-174)	Fz	0.050	0.080	0.095	0.125	0.150
						Feed (mm/min)	1537	1845	1752	1922	1729
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	3677	
				(148-222)	Fz	0.050	0.080	0.095	0.125	0.150	
					Feed (mm/min)	1961	2354	2236	2452	2206	
		≤ 0.5	≤ 2	300	RPM	15903	11927	9542	7951	5963	
				(240-360)	Fz	0.115	0.185	0.220	0.290	0.350	
					Feed (mm/min)	7315	8826	8397	9223	8349	
	PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494	4870
					(196-294)	Fz	0.050	0.080	0.095	0.125	0.150
						Feed (mm/min)	2597	3117	2961	3247	2922
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	6063	
				(244-366)	Fz	0.050	0.080	0.095	0.125	0.150	
					Feed (mm/min)	3234	3880	3686	4042	3638	
		≤ 0.5	≤ 2	505	RPM	26769	20077	16062	13385	10038	
				(404-606)	Fz	0.115	0.185	0.220	0.290	0.350	
					Feed (mm/min)	12314	14857	14134	15526	14054	
MACHINABLE CERAMICS MACHINABLE GLASS			1	≤ 1	10	RPM	530	398	318	265	199
					(8-12)	Fz	0.020	0.035	0.045	0.050	0.060
						Feed (mm/min)	42	56	57	53	48
		≤ 0.5	≤ 1.5	15	RPM	795	596	477	398	298	
				(12-18)	Fz	0.020	0.035	0.045	0.050	0.060	
					Feed (mm/min)	64	83	86	80	72	
		≤ 0.5	≤ 2	25	RPM	1325	994	795	663	497	
				(20-30)	Fz	0.045	0.075	0.085	0.115	0.140	
					Feed (mm/min)	239	298	270	305	278	

HSM (High Speed Machining)
 $\text{rpm} = Vc \times 3.82 / DC$
 $\text{mm/min} = Fz \times 4 \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur
 finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)

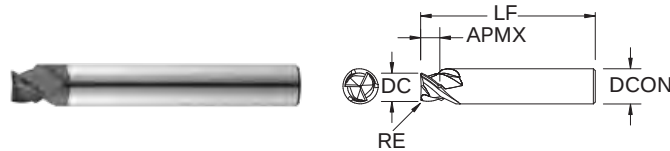

Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates
- Specially engineered flute shape for improved chip control
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- Meets MIL-STD 1913

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	
0.2100	1/4	0.118	1-3/4	.010	

TOLERANCES (inch)

DC = +0.0080/-0.0000

APMX = +0.0060/-0.0000

DCON = h₆

RE = +0.0000/-0.0005


STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com



Non-Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- 45 degree chamfer enables slot and deburr in one operation
- Meets MIL-STD 1913

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2100	1/4	0.118	1-3/4	34760	34761

TOLERANCES (inch)

DC = +0.0080/-0.0000


APMX = +0.0060/-0.0000

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Picatinny Rail Ferrous Recoil Groove Tool



Picatinny Rail Recoil Groove Tool 3 Flute Made to MIL-STD-1913						Vc (sfm)	DC • in	
Hardness				Ae x DC	Ap x DC		0.2100	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	440 (352-528)	RPM	8004
							Fz	0.0009
							Feed (ipm)	22.99
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Slot 	0.210	0.118	250 (200-300)	RPM	4548
							Fz	0.0006
							Feed (ipm)	9.79
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Slot 	0.210	0.118	145 (116-174)	RPM	2638
							Fz	0.0005
							Feed (ipm)	4.47
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	390 (312-468)	RPM	7094
							Fz	0.0007
							Feed (ipm)	17.01
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Slot 	0.210	0.118	270 (216-324)	RPM	4911
							Fz	0.0006
							Feed (ipm)	9.41
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Slot 	0.210	0.118	250 (200-300)	RPM	4548
							Fz	0.0006
							Feed (ipm)	8.74
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Slot 	0.210	0.118	270 (216-324)	RPM	4911
							Fz	0.0006
							Feed (ipm)	9.41
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Slot 	0.210	0.118	65 (52-78)	RPM	1182
							Fz	0.0005
							Feed (ipm)	2.00
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Slot 	0.210	0.118	49 (39-59)	RPM	891
							Fz	0.0004
							Feed (ipm)	1.05
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Slot 	0.210	0.118	170 (136-204)	RPM	3092
							Fz	0.0006
							Feed (ipm)	5.89
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Slot 	0.210	0.118	60 (48-72)	RPM	1091	
						Fz	0.0006	
						Feed (ipm)	2.09	

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC

ipm = Fz x 3 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



Picatinny Rail Non-Ferrous Recoil Groove Tool

Picatinny Rail
Non-Ferrous Recoil
Groove Tool
3 Flute
Made to MIL-STD-1913



	Hardness	Slot	Ae x DC	Ap x DC	Vc (sfm)	DC • in	
						0.2100	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	Slot 	0.210	0.118	1600 (1280-1920)	RPM	29105
						Fz	0.0026
						Feed (ipm)	227.89
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	Slot 	0.210	0.118	600 (480-720)	RPM	10914
						Fz	0.0026
						Feed (ipm)	85.46
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	Slot 	0.210	0.118	345 (276-414)	RPM	6276
						Fz	0.0022
						Feed (ipm)	40.79
	PLASTICS Polycarbonate, PVC, Polypropylene	Slot 	0.210	0.118	1600 (1280-1920)	RPM	29105
						Fz	0.0044
						Feed (ipm)	380.58

Bhn (Brinell) HRC (Rockwell C) HRB (Rockwell B)
when recommended speed exceeds your capability, use maximum available and recalculate ipm
rpm = Vc x 3.82 / DC
ipm = Fz x 3 x rpm
reduce speed and feed for materials harder than listed
reduce feed and Ae when finish milling (.02 x DC maximum)
refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

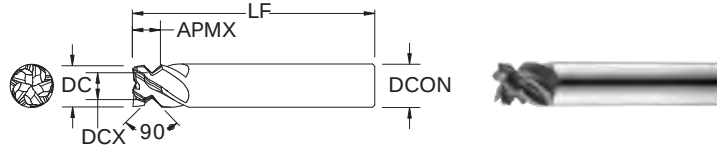

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS



For patent
information visit
www.ksptpatents.com

Ferrous Dovetail Form Tool

FRACTIONAL SERIES

CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	inch			EDP NO.	
		SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	Ti-NAMITE®-A (TA)	Ti-NAMITE®-M (TM)
0.6050	0.384	5/8	0.410	3-1/2	37391	37390

- Five-flute design allows for higher machining parameters
- Open end work design allows for increased chip space
- Square end configuration with enhanced corner strength to improve corner durability
- Meets MIL-STD 1913

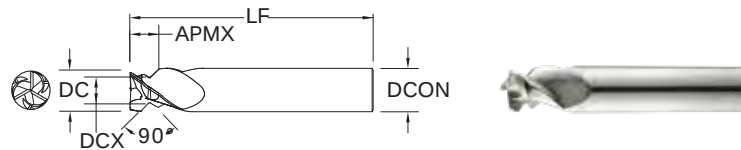

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com


Non-Ferrous Dovetail Form Tool

FRACTIONAL SERIES

CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	inch			EDP NO.	
		SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.6050	0.384	5/8	0.410	3-1/2	34762	34763

- Open Flute design improves chip removal at high feed rates
- Specially engineered flute shape for improved chip control
- Circular land improves surface finish and chatter suppression
- Symmetrical end gashing improves balance in high speed operations
- Meets MIL-STD 1913

Picatinny Rail Ferrous Dovetail Form Tool



Picatinny Rail Dovetail Form Tool 5 Flute Made to MIL-STD-1913				Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in	
								0.6050	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	450 (360-540)	RPM	2841	
							Fz	0.0032	
							Feed (ipm)	46.03	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX	260 (208-312)	RPM	1642	
							Fz	0.0024	
							Feed (ipm)	19.68	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX	145 (116-174)	RPM	916	
							Fz	0.0019	
							Feed (ipm)	8.60	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	400 (320-480)	RPM	2526	
							Fz	0.0024	
							Feed (ipm)	30.28	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX	280 (224-336)	RPM	1768	
							Fz	0.0019	
							Feed (ipm)	16.61	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ .50	APMX	260 (208-312)	RPM	1642	
							Fz	0.0019	
							Feed (ipm)	15.42	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ .50	APMX	280 (224-336)	RPM	1768	
							Fz	0.0029	
							Feed (ipm)	25.78	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ .50	APMX	75 (60-90)	RPM	474	
							Fz	0.0018	
							Feed (ipm)	4.22	
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ .50	APMX	60 (48-72)	RPM	379	
							Fz	0.0013	
							Feed (ipm)	2.39	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ .50	APMX	180 (144-216)	RPM	1137	
							Fz	0.0021	
							Feed (ipm)	11.97	
TITANIUM ALLOYS (DIFFICULT) Ti10V2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 420 Bhn or ≤ 45 HRc	Profile 	≤ .50	APMX	70 (56-84)	RPM	442		
						Fz	0.0021		
						Feed (ipm)	4.65		

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC


ipm = Fz x 5 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Picatinny Rail Non-Ferrous Dovetail Form Tool



Picatinny Rail Dovetail Form Tool 3 Flute Made to MIL-STD-1913						Vc (sfm)	DC • in	
Hardness				Ae x DC	Ap x DC		0.6050	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile 	≤ .50	APMX	2000 (1600-2400)	RPM	12628
							Fz	0.0056
							Feed (ipm)	211.39
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Profile 	≤ .50	APMX	750 (600-900)	RPM	4736
							Fz	0.0056
							Feed (ipm)	79.27
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	Profile 	≤ .50	APMX	430 (344-516)	RPM	2715
							Fz	0.0046
							Feed (ipm)	37.72
	PLASTICS Polycarbonate, PVC, Polypropylene		Profile 	≤ .50	APMX	2000 (1600-2400)	RPM	12628
							Fz	0.0093
							Feed (ipm)	353.03

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 when recommended speed exceeds your capability, use maximum available and recalculate ipm
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

High Performance Aluminum End Mills



Milling

HIGH PERFORMANCE ALUMINUM END MILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
S-Carb APR® & APF®	43APR-3	3 Flute Advanced Productivity Rougher Fractional	133	134
	43APR-3	3 Flute Advanced Productivity Rougher Metric	135	137
	43APR-4	4 Flute Advanced Productivity Rougher Metric	136	137
	43APF	4 Flute Advanced Productivity Finisher Fractional	138	139
	43MAPF	4 Flute Advanced Productivity Finisher Metric	140	141
S-Carb APF-B®	43APF-B	Multi-Flute Advanced Productivity Finisher Metric	142	143
S-Carb® (3 Flute)	43	3 Flute Non-Ferrous Square End Fractional	144	156
	43CR	3 Flute Non-Ferrous Corner Radius Fractional	144	156
	43L	3 Flute Non-Ferrous Square End Long Reach Fractional	148	156
	43LC	3 Flute Non-Ferrous Corner Radius End Long Reach Fractional	148	156
	43EC	3 Flute Non-Ferrous Square End Extra Long Reach Fractional	151	156
	43B	3 Flute Non-Ferrous Ball End Fractional	152	156
	43LB	3 Flute Non-Ferrous Ball End Long Reach Fractional	153	156
	43EB	3 Flute Non-Ferrous Ball End Extra Long Reach Fractional	153	156
	43M	3 Flute Non-Ferrous Square End Metric (Unpolished Flutes)	157	165
	43M	3 Flute Non-Ferrous Square End Metric (Polished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius Metric (Unpolished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius Metric (Polished Flutes)	157	165
	43MCR	3 Flute Non-Ferrous Corner Radius 4xD Metric (Polished Flutes)	157	165
	43ML	3 Flute Non-Ferrous Square End Long Reach Metric	160	165
	43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Unpolished Flutes)	160	165
	43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Polished Flutes)	160	165
	43MB	3 Flute Non-Ferrous Ball End Metric (Polished Flutes)	162	165
S-Carb® Rougher (3 Flute)	43CB	3 Flute Rougher Non-Ferrous Chip Breaker Fractional	154	156
	43LCB	3 Flute Rougher Non-Ferrous Chip Breaker Long Reach Fractional	155	156
	43MCB	3 Flute Rougher Non-Ferrous Chip Breaker Metric	164	165
S-Carb® (2 Flute)	47	2 Flute Non-Ferrous Square End Fractional	166	169
	47L	2 Flute Non-Ferrous Square End Long Reach Fractional	167	169
	47B	2 Flute Non-Ferrous Ball End Fractional	168	169
	47LB	2 Flute Non-Ferrous Ball End Long Reach Fractional	168	169
	47M	2 Flute Non-Ferrous Square End Metric	170	172
	47ML	2 Flute Non-Ferrous Square End Long Reach Metric	170	172
	47MB	2 Flute Non-Ferrous Ball End Metric	171	172
	47MLB	2 Flute Non-Ferrous Ball End Long Reach Metric	171	172
Ski-Carb	44	2 Flute Non-Ferrous Materials Square End Fractional	173	174
	44M	2 Flute Non-Ferrous Materials Square End Metric	173	174
	45	2 Flute Non-Ferrous Materials Long Reach Corner Radius Fractional	176	177

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO PARA ALUMINIO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
S-Carb APR® y APF®	43APR-3	3 filos, productividad avanzada, desbastador, fraccional	133	134
	43APR-3	3 filos, productividad avanzada, desbastador, métrico	135	137
	43APR-4	4 filos, productividad avanzada, desbastador, métrico	136	137
	43APF	4 filos, productividad avanzada, acabador, fraccional	138	139
	43MAPF	4 filos, productividad avanzada, acabador, métrico	140	141
S-Carb APF-B®	43APF-B	Fresa Cónica Circular Multi-Filos tipo Barril, métrica	142	143
S-Carb® (3 filos)	43	3 filos, no férrico, punta cuadrada, fraccional	144	156
	43CR	3 filos, no férrico, radio angulado, fraccional	144	156
	43L	3 filos, no férrico, punta cuadrada, largo alcance, fraccional	148	156
	43LC	3 filos, no férricos, largo alcance, radio angulado, fraccional	148	156
	43EC	3 filos, no férrico, punta cuadrada, alcance extralargo, fraccional	151	156
	43B	3 filos, no férrico, punta esférica, fraccional	152	156
	43LB	3 filos, no férrico, punta esférica, largo alcance, fraccional	153	156
	43EB	3 filos, no férrico, punta esférica, alcance extralargo, fraccional	153	156
	43M	3 filos, no férrico, punta cuadrada, métrico (filos no pulidos)	157	165
	43M	3 filos, no férrico, punta cuadrada, métrico (filos pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado, métrico (filos no pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado, métrico (filos pulidos)	157	165
	43MCR	3 filos, no férrico, radio angulado 4xD, métrico (filos pulidos)	157	165
	43ML	3 filos, no férrico, punta cuadrada, largo alcance, métrico	160	165
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos no pulidos)	160	165
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos pulidos)	160	165
	43MB	3 filos, no férrico, punta esférica, métrico (filos pulidos)	162	165
Desbastador S-Carb® (3 filos)	43CB	3 filos, desbastador, no férrico, rompevirutas, fraccional	154	156
	43LCB	3 filos, desbastador, no férrico, rompevirutas, largo alcance, fraccional	155	156
	43MCB	3 filos, desbastador, no férrico, rompevirutas, métrico	164	165
S-Carb® (2 filos)	47	2 filos, no férrico, punta cuadrada, fraccional	166	169
	47L	2 filos, no férrico, punta cuadrada, largo alcance, fraccional	167	169
	47B	2 filos, no férrico, punta esférica, fraccional	168	169
	47LB	2 filos, no férrico, punta esférica, largo alcance, fraccional	168	169
	47M	2 filos, no férrico, punta cuadrada, métrico	170	172
	47ML	2 filos, no férrico, punta cuadrada, largo alcance, métrico	170	172
	47MB	2 filos, no férrico, punta esférica, métrico	171	172
	47MLB	2 filos, no férrico, punta esférica, largo alcance, métrico	171	172
Ski-Carb	44	2 filos, materiales no férricos, punta cuadrada, fraccional	173	174
	44M	2 filos, materiales no férricos, punta cuadrada, métrico	173	174
	45	2 filos, materiales no férricos, largo alcance, radio angulado, fraccional	176	177



Recomendaciones de velocidades y avances mostradas tras cada serie

FRAISE HAUTE PERFORMANCE POUR ALUMINIUM	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
S-Carb APR®/APF®	43APR-3	3 dents productivité avancée d'ébauche (fractionnel)	133	134
	43APR-3	3 dents productivité avancée d'ébauche (métrique)	135	137
	43APR-4	4 dents productivité avancée d'ébauche (métrique)	136	137
	43APF	4 dents productivité avancée de finition (fractionnel)	138	139
	43MAPF	4 dents productivité avancée de finition (métrique)	140	141
S-Carb APF-B®	43APF-B	Fraise multi dents finition pour productivité avancée cotes (métrique)	142	143
S-Carb® (3 dents)	43	3 dents non-ferreux non rayonné (fractionnel)	144	156
	43CR	3 dents non-ferreux rayonné (fractionnel)	144	156
	43L	3 dents non-ferreux non rayonné longue portée (fractionnel)	148	156
	43LC	3 dents non-ferreux longue portée rayonné (fractionnel)	148	156
	43EC	3 dents non-ferreux non rayonné portée extra-longue (fractionnel)	151	156
	43B	3 dents non-ferreux à bout hémisphérique (fractionnel)	152	156
	43LB	3 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	153	156
	43EB	3 dents non-ferreux à bout hémisphérique portée extra-longue (fractionnel)	153	156
	43M	3 dents non-ferreux non rayonné (métrique) (goujures non polies)	157	165
	43M	3 dents non-ferreux non rayonné (métrique) (goujures polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures non polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures polies)	157	165
	43MCR	3 dents matériaux non-ferreux rayonné 4xD (métrique) (goujures polies)	157	165
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures non polies)	160	165
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures polies)	160	165
	43ML	3 dents non-ferreux non rayonné longue portée (métrique)	160	165
	43MB	3 dents non-ferreux à bout hémisphérique (métrique) (goujures polies)	162	165
	43CB	3 dents d'ébauche non-ferreux brise-copeaux (fractionnel)	154	156
	43LCB	3 dents d'ébauche non-ferreux brise-copeaux longue portée (fractionnel)	155	156
	43MCB	3 dents d'ébauche non-ferreux brise-copeaux (métrique)	164	165
S-Carb® (2 dents)	47	2 dents non-ferreux non rayonné (fractionnel)	166	169
	47L	2 dents non-ferreux non rayonné longue portée (fractionnel)	167	169
	47B	2 dents non-ferreux à bout hémisphérique (fractionnel)	168	169
	47LB	2 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	168	169
	47M	2 dents non-ferreux non rayonné (métrique)	170	172
	47ML	2 dents non-ferreux non rayonné longue portée (métrique)	170	172
	47MB	2 dents non-ferreux à bout hémisphérique (métrique)	171	172
	47MLB	2 dents non-ferreux à bout hémisphérique longue portée (métrique)	171	172
Ski-Carb	44	2 dents matériaux non-ferreux non rayonné (fractionnel)	173	174
	44M	2 dents matériaux non-ferreux non rayonné (métrique)	173	174
	45	2 dents matériaux non-ferreux longue portée rayonné (fractionnel)	176	177

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGSSCHAFTFRÄSER FÜR ALUMINIUM	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
S-Carb APR® & APF®	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden	133	134
	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden (Erweiterung)	135	137
	43APR-4	Hochleistungs-Schruppfräser mit 4 Schneiden	136	137
	43APF	Zölliger Hochleistungs-Schlichtfräser mit 4 Schneiden	138	139
	43MAPF	Hochleistungs-Schlichtfräser mit 4 Schneiden	140	141
S-Carb APF-B®	43APF-B	Metrischer mehrschneidiger Hochleistungsschlichtfräser	142	143
S-Carb® (3 Schneiden)	43	Zölliger NE-Schaftfräser mit 3 Schneiden ohne Eckenradien	144	156
	43CR	Zölliger NE-Fräser mit 3 Schneiden und Eckenradien	144	156
	43L	Zölliger NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	148	156
	43LC	Zölliger Langlochfräser mit 3 Schneiden und Eckenradien	148	156
	43EC	Zölliger NE-Superlangloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	151	156
	43B	Zölliger NE-Radiusschaftfräser mit 3 Schneiden	152	156
	43LB	Zölliger NE-Langloch-Radiusschaftfräser mit 3 Schneiden	153	156
	43EB	Zölliger NE-Superlangloch-Radiusschaftfräser mit 3 Schneiden	153	156
	43M	NE-Schaftfräser mit 3 unpolierten Schneiden ohne Eckenradien	157	165
	43M	NE-Schaftfräser mit 3 polierten Schneiden ohne Eckenradien	157	165
	43MCR	NE-Fräser mit 3 unpolierten Schneiden und Eckenradien	157	165
	43MCR	NE-Fräser mit 3 polierten Schneiden und Eckenradien	157	165
	43MCR	NE-Fräser 4xD mit 3 polierten Schneiden und Eckenradien	157	165
	43ML	NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	160	165
	43MLC	NE-Langlochfräser mit 3 unpolierten Schneiden und Eckenradien	160	165
	43MLC	NE-Langlochfräser mit 3 polierten Schneiden und Eckenradien	160	165
	43MB	NE-Radiusschaftfräser mit 3 polierten Schneiden	162	165
	43CB	Zölliger NE-Schruppfräser mit 3 Schneiden und Spanbrechern	154	156
	43LCB	Zölliger NE-Langloch-Schruppfräser mit 3 Spanteilernuten	155	156
	43MCB	NE-Schruppfräser mit 3 Schneiden und Spanbrechern	164	165
S-Carb® Schruppfräser (3 Schneiden)	47	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	166	169
	47L	Zölliger NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	167	169
	47B	Zölliger NE-Radiusschaftfräser mit 2 Schneiden	168	169
	47LB	Zölliger NE-Langloch-Radiusschaftfräser mit 2 Schneiden	168	169
	47M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	170	172
	47ML	NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	170	172
	47MB	NE-Radiusschaftfräser mit 2 Schneiden	171	172
	47MLB	NE-Langloch-Radiusschaftfräser mit 2 Schneiden	171	172
	44	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	173	174
Ski-Carb	44M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	173	174
	45	Zölliger Langlochfräser mit 2 Schneidenn und Eckenradien für Nichteisenmetalle	176	177

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

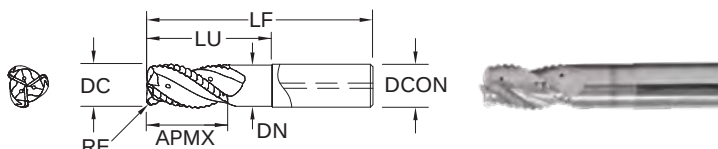

43APR-3

FRACTIONAL SERIES

TOLERANCES (inch)

1/2-1 DIAMETER

DC = -0.0004/-0.004

DCON = h_6

RE = +/-0.002

NON-FERROUS


For patent
information visit
www.ksptpatents.com

	inch						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
1/2	1	3-1/4	1/2	1-1/2	.474	.030	34100
1/2	1	3-1/4	1/2	1-1/2	.474	.060	34101
1/2	1	3-1/4	1/2	1-1/2	.474	.090	34102
1/2	1	3-1/4	1/2	1-1/2	.474	.120	34103
5/8	1-3/8	3-5/8	5/8	2	.594	.030	34104*
5/8	1-3/8	3-5/8	5/8	2	.594	.060	34105*
5/8	1-3/8	3-5/8	5/8	2	.594	.090	34106*
5/8	1-3/8	3-5/8	5/8	2	.594	.120	34107*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.030	34108*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.060	34109*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.090	34110*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.120	34111*
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.030	34112
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.060	34113
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.090	34114
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.120	34115
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.030	34116*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.060	34117*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.090	34118*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.120	34119*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.030	34120*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.060	34121*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.090	34122*
3/4	1-3/8	5-1/8	3/4	3-1/4	.713	.120	34123*
1	1-3/4	4-1/2	1	2-1/2	.949	.030	34124
1	1-3/4	4-1/2	1	2-1/2	.949	.060	34125
1	1-3/4	4-1/2	1	2-1/2	.949	.090	34126
1	1-3/4	4-1/2	1	2-1/2	.949	.120	34127
1	1-3/8	5-1/4	1	3-1/4	.949	.030	34128*
1	1-3/8	5-1/4	1	3-1/4	.949	.060	34129*
1	1-3/8	5-1/4	1	3-1/4	.949	.090	34130*
1	1-3/8	5-1/4	1	3-1/4	.949	.120	34131*
1	1-3/8	6-1/4	1	4-1/4	.949	.030	34132*
1	1-3/8	6-1/4	1	4-1/4	.949	.060	34133*
1	1-3/8	6-1/4	1	4-1/4	.949	.090	34134*
1	1-3/8	6-1/4	1	4-1/4	.949	.120	34135*

*Variable Helix

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- New 3 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

FRACTIONAL S-Carb APR®



Series 43APR-3 Fractional		Ae Ae Ae x DC Ap x DC		DC • inch				
				Vc (sfm)		APR-3		
						0.75	1	
N	ALUMINIUM ALLOYS 6068, 7075	Slot 	1	≤ 1	5250	RPM	26740	20055
					(980-6900)	Fz	0.0055	0.0059
						Feed (ipm)	441	355
		Profile 	≤ 0.5	≤ 1.5	5900	RPM	30051	22538
					(980-6900)	Fz	0.0063	0.0067
						Feed (ipm)	568	453
		HSM 	≤ 0.1	≤ 2	6900	RPM	35144	26358
					(980-6900)	Fz	0.0075	0.0079
						Feed (ipm)	791	625

Series 43APR-3L Fractional		Ae x DC	Ap x DC	Vc (sfm)		DC • inch				
						APR-3 LONG				
						0.5	0.625	0.75	1	
N	ALUMINIUM ALLOYS 6068, 7075		1	≤ 1	3280	RPM	25059	20047	16706	12530
					(980-6900)	Fz	0.0039	0.0043	0.0047	0.0051
						Feed (ipm)	293	259	236	192
			≤ 0.5	≤ 1.5	3950	RPM	<u>30178</u>	24142	20119	15089
					(980-6900)	Fz	0.0047	0.0051	0.0055	0.0059
						Feed (ipm)	426	369	332	267
			≤ 0.1	≤ 2	4600	RPM	35144	28115	23429	17572
					(980-6900)	Fz	0.0055	0.0059	0.0063	0.0067
						Feed (ipm)	580	498	443	353

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz

For best results use the peak power of the specific machine torque chart.

Typically 10hp is required to remove 45 cubic inches of material (MRR).

Eg. >> (Ae x Ap x Feed) >> Therefore Full slotting 1" dia: 1 x 1 x 355 = 355 cubic inches, so it needs a min of 78hp.

Larger cuts and chip load consume more power.


Review the power chart of each machine to determine MAX power for ultimate performance.


Example below shows peak power @ 10,000 rpm.

The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com).

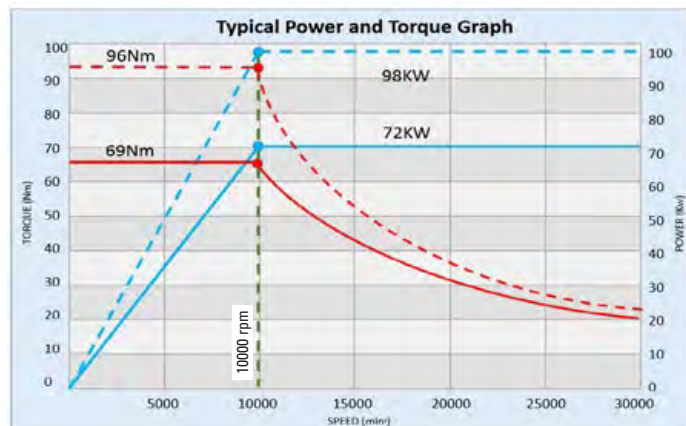

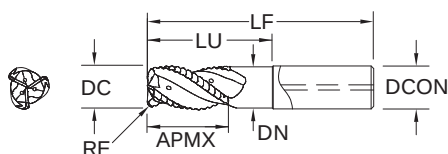

43APR-3

METRIC SERIES

TOLERANCES (mm)

12–25 DIAMETER

DC = $-0,010/-0,100$

DCON = h_6

RE = $+/-0,05$

NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
12,0	26,0	83,0	12,0	39,0	11,40	1,0	44976*
12,0	26,0	83,0	12,0	39,0	11,40	2,0	44977*
12,0	26,0	83,0	12,0	39,0	11,40	3,0	44978*
12,0	26,0	83,0	12,0	39,0	11,40	4,0	44979*
12,0	26,0	95,0	12,0	—	—	—	44975*
16,0	35,0	92,0	16,0	—	—	—	44980*
16,0	35,0	92,0	16,0	51,0	15,20	2,0	44981*
16,0	35,0	92,0	16,0	51,0	15,20	3,0	44982*
16,0	35,0	92,0	16,0	51,0	15,20	4,0	44983*
16,0	35,0	108,0	16,0	67,0	15,20	2,0	44985*
16,0	35,0	108,0	16,0	67,0	15,20	3,0	44986*
16,0	35,0	108,0	16,0	67,0	15,20	4,0	44987*
16,0	35,0	124,0	16,0	—	—	—	44984*
20,0	35,0	86,0	20,0	—	—	—	44990
20,0	35,0	86,0	20,0	45,0	19,00	3,0	44991
20,0	35,0	86,0	20,0	45,0	19,00	4,0	44992
20,0	35,0	106,0	20,0	—	—	—	44993*
20,0	35,0	106,0	20,0	65,0	19,00	2,0	44994*
20,0	35,0	106,0	20,0	65,0	19,00	3,0	44995*
20,0	35,0	106,0	20,0	65,0	19,00	4,0	44996*
20,0	35,0	106,0	20,0	65,0	19,00	5,0	44997*
20,0	35,0	145,0	20,0	—	—	—	45020*
20,0	35,0	125,0	20,0	84,0	19,00	2,0	45021*
20,0	35,0	125,0	20,0	84,0	19,00	3,0	45022*
20,0	35,0	125,0	20,0	84,0	19,00	4,0	45023*
25,0	43,0	108,0	25,0	—	—	—	44998
25,0	43,0	108,0	25,0	60,0	23,75	2,0	44999
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45000
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45001
25,0	35,0	140,0	25,0	—	—	—	45002*
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45003*
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45004*
25,0	35,0	151,0	25,0	105,0	23,75	3,0	45025*
25,0	35,0	176,0	25,0	—	—	—	45024*


*Variable Helix

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- New 3 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43APR-4

METRIC SERIES

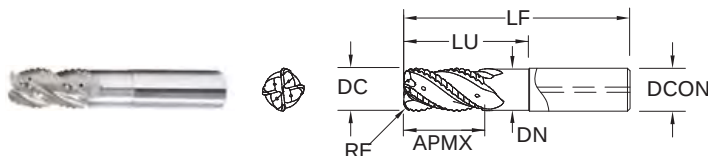

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 L³ per minute material removal rates
- 4 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
20,0	35,0	86,0	20,0	—	19,00	—	45005
20,0	35,0	86,0	20,0	45,0	19,00	3,0	45006
20,0	35,0	86,0	20,0	45,0	19,00	4,0	45007
20,0	35,0	106,0	20,0	—	19,00	—	45008
20,0	35,0	106,0	20,0	65,0	19,00	2,0	45009
20,0	35,0	106,0	20,0	65,0	19,00	3,0	45010
20,0	35,0	106,0	20,0	65,0	19,00	4,0	45011
20,0	35,0	106,0	20,0	65,0	19,00	5,0	45012
25,0	43,0	108,0	25,0	—	23,75	—	45013
25,0	43,0	108,0	25,0	60,0	23,75	2,0	45014
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45015
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45016
25,0	35,0	140,0	25,0	—	23,75	—	45017
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45018
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45019

TOLERANCES (mm)

20–25 DIAMETER


DC = -0,010/-0,100

DCON = h₆

RE = ±0,050

NON-FERROUS

For patent information visit www.ksptpatents.com



Series 43APR-3 43APR-4 Metric		Ae x DC		Ap x DC		Vc (m/min)		DC • mm			
								APR-3		APR-4	
								20	25	20	25
N	ALUMINIUM ALLOYS 6068, 7075		Slot	1	≤ 1	1600	RPM	25461	20369	25461	20369
						(300-2100)	Fz	0.14	0.15	0.12	0.13
							Feed (mm/min)	10694	9166	12222	10592
			Profile	≤ 0.5	≤ 1.5	1800	RPM	28644	22915	28644	22915
						(300-2100)	Fz	0.16	0.17	0.14	0.15
							Feed (mm/min)	13749	11687	16041	13749
			HSM	≤ 0.25	≤ 2	2100	RPM	33418	26735	33418	26735
						(300-2100)	Fz	0.19	0.20	0.16	0.17
							Feed (mm/min)	19048	16041	21388	18180

Series 43APR-3 43APR-4 Metric					DC • mm					
					APR-3 LONG					
					12	16	20	25		
N	ALUMINIUM ALLOYS 6068, 7075		1	≤ 1	1600	RPM	26522	19892	15913	12731
					(300-2100)	Fz	0.10	0.11	0.12	0.13
						Feed (mm/min)	7957	6564	5729	4965
			≤ 0.5	≤ 1.5	1800	RPM	31827	23870	19096	15277
					(300-2100)	Fz	0.12	0.13	0.14	0.15
						Feed (mm/min)	11458	9309	8020	6875
			≤ 0.25	≤ 2	2100	RPM	37131	27849	22279	17823
					(300-2100)	Fz	0.14	0.15	0.16	0.17
						Feed (mm/min)	15595	12532	10694	9090

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz

For best results use the peak power of the specific machine torque chart.

Typically 10kw is required to remove 1 litre of material (MMR).

Eg. >> (Ae x Ap x Feed) / 1000000 >> Therefore Full slotting Ø25: 25 x 25 x 7333 = 4.58 Litres so it needs a min of 46Kw.

Larger cuts and chip load consume more power.

Review the power chart of each machine to determine MAX power for ultimate performance.


Example below shows peak power @ 10,000 rpm.

The APR-4 design is for ultimate metal removal but typically requires more power, and is also better suited to horizontal machines.


The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.


Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com).

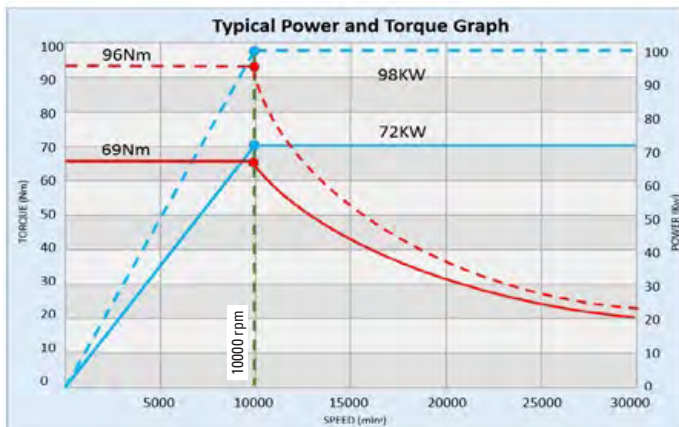

FRACTIONAL S-Carb APF®



43APF FRACTIONAL SERIES

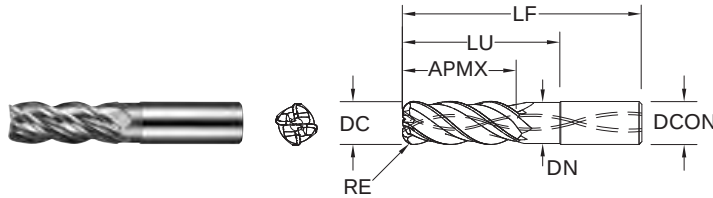

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.030		34016
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.060		34017
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.090		34018
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.120		34019
1/2	2	4	1/2	2-3/8	.478	.030		34020
1/2	2	4	1/2	2-3/8	.478	.060		34021
1/2	2	4	1/2	2-3/8	.478	.090		34022
1/2	2	4	1/2	2-3/8	.478	.120		34023
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.030		34024
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.060		34025
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.090		34026
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.120		34027
3/4	3	5-3/8	3/4	3-1/2	.728	.030		34028
3/4	3	5-3/8	3/4	3-1/2	.728	.060		34029
3/4	3	5-3/8	3/4	3-1/2	.728	.090		34030
3/4	3	5-3/8	3/4	3-1/2	.728	.120		34031

Available on request: • JetStream Technology

TOLERANCES (inch)

1/2-3/4 DIAMETER


DC = $-0.0004/-0.0020$

DCON = h_6


RE = $+0.0012/-0.0012$

NON-FERROUS

For patent information visit
www.ksptpatents.com


Series 43APF Fractional		Hardness			Vc (sfm)	DC • in			
			Ae x DC	Ap x DC		1/2	3/4		
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 2.5	2625	RPM	20055	13370
						(2100-3150)	Fz	0.0030	0.0050
							Feed (in/min)	241	267
		≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 4	2625	RPM	20055	13370
						(2100-3150)	Fz	0.0020	0.0040
							Feed (in/min)	160	214
	ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 2.5	1970	RPM	15051	10034
						(1576-2364)	Fz	0.0030	0.0050
							Feed (in/min)	181	201
		≤ 150 Bhn or ≤ 88 HRb		≤ 0.1	≤ 4	1970	RPM	15051	10034
						(1576-2364)	Fz	0.0020	0.0040
							Feed (in/min)	120	161

Bhn (Brinell) HRb (Rockwell B)
 surface speed is dependent on machine spindle and fixturing
 balancing is recommended at ultra high surface speeds
 tool life may be reduced when machining Lithium Alloys
 $rpm = Vc \times 3.82 / DC$
 $ipm = Fz \times 4 \times rpm$
 maximum recommended depths shown
 reduce speed and feed for materials harder than listed
 finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum
 ramp angle = 6° (feed rate = 50%)
 plunging not recommended
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



43MAPF

METRIC SERIES

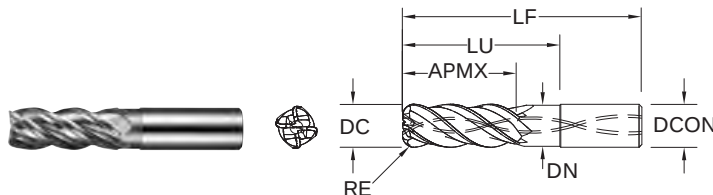

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE®-B (TiB ₂)
6,0	24,0	58,0	6,0	30,0	5,70	—	44627
8,0	32,0	64,0	8,0	40,0	7,60	—	44628
10,0	40,0	80,0	10,0	50,0	9,50	—	44629
12,0	30,0	83,0	12,0	40,0	11,40	—	44630
12,0	30,0	83,0	12,0	40,0	11,40	2,0	44745
12,0	30,0	83,0	12,0	40,0	11,40	3,0	44746
12,0	30,0	83,0	12,0	40,0	11,40	4,0	44747
12,0	30,0	83,0	12,0	50,0	11,40	0,5	44641
12,0	30,0	83,0	12,0	50,0	11,40	5,0	44642
12,0	48,0	100,0	12,0	62,0	11,40	—	44631
12,0	48,0	100,0	12,0	62,0	11,40	2,0	44748
12,0	48,0	100,0	12,0	62,0	11,40	3,0	44749
12,0	48,0	100,0	12,0	62,0	11,40	4,0	44750
16,0	40,0	92,0	16,0	51,0	15,20	—	44634
16,0	40,0	92,0	16,0	51,0	15,20	2,0	44751
16,0	40,0	92,0	16,0	51,0	15,20	3,0	44752
16,0	40,0	92,0	16,0	51,0	15,20	4,0	44753
16,0	42,0	93,0	16,0	51,0	15,20	5,0	44643
16,0	64,0	125,0	16,0	82,0	15,20	—	44635
16,0	64,0	125,0	16,0	82,0	15,20	2,0	44754
16,0	64,0	125,0	16,0	82,0	15,20	3,0	44755
16,0	64,0	125,0	16,0	82,0	15,20	4,0	44756
20,0	50,0	108,0	20,0	63,0	19,00	—	44636
20,0	50,0	108,0	20,0	63,0	19,00	3,0	44757
20,0	50,0	108,0	20,0	63,0	19,00	4,0	44758
20,0	50,0	108,0	20,0	63,0	19,00	5,0	44759
20,0	80,0	150,0	20,0	102,0	19,00	—	44637
20,0	80,0	150,0	20,0	102,0	19,00	3,0	44760
20,0	80,0	150,0	20,0	102,0	19,00	4,0	44761
20,0	80,0	150,0	20,0	102,0	19,00	5,0	44762
25,0	63,0	130,0	25,0	79,0	23,75	—	44638
25,0	63,0	130,0	25,0	79,0	23,75	3,0	44763
25,0	63,0	130,0	25,0	79,0	23,75	4,0	44764
25,0	63,0	130,0	25,0	79,0	23,75	5,0	44765
25,0	100,0	175,0	25,0	120,0	23,75	—	44639
25,0	100,0	175,0	25,0	120,0	23,75	3,0	44766
25,0	100,0	175,0	25,0	120,0	23,75	4,0	44767
25,0	100,0	175,0	25,0	120,0	23,75	5,0	44768

Available on request: • JetStream Technology

TOLERANCES (mm)

6–25 DIAMETER


DC = $-0,010/-0,050$

DCON = h_6

RE = $+0,03/-0,03$

NON-FERROUS

For patent information visit www.ksptpatents.com



Series 43MAPF Metric	Hardness		Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
						6	8	10	12	16	20	25		
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile 	≤ 0.1	≤ 2.5	800	RPM	42440	31830	25464	21220	15915	12732	10186
						(640-960)	Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170
							Feed (mm/min)	8488	7003	6111	5942	6366	7130	6926
		≤ 150 Bhn or ≤ 88 HRb	Profile 	≤ 0.1	≤ 4	800	RPM	42440	31830	25464	21220	15915	12732	10186
						(640-960)	Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120
							Feed (mm/min)	6790	5729	5093	4244	4456	5093	4889
	ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	≤ 150 Bhn or ≤ 88 HRb	Profile 	≤ 0.1	≤ 2.5	600	RPM	31830	23873	19098	15915	11936	9549	7639
						(480-720)	Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170
							Feed (mm/min)	6366	5252	4584	4456	4774	5347	5195
		≤ 150 Bhn or ≤ 88 HRb	Profile 	≤ 0.1	≤ 4	600	RPM	31830	23873	19098	15915	11936	9549	7639
						(480-720)	Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120
							Feed (mm/min)	5093	4297	3820	3183	3342	3820	3667

Bhn (Brinell) HRb (Rockwell B)

surface speed is dependent on machine spindle and fixturing

balancing is recommended at ultra high surface speeds

*tool life may be reduced when machining Lithium Alloys

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fz} \times 4 \times \text{rpm}$

maximum recommended depths shown



reduce speed and feed for materials harder than listed

finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum

ramp angle = 6° (feed rate = 50%)

plunging not recommended

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

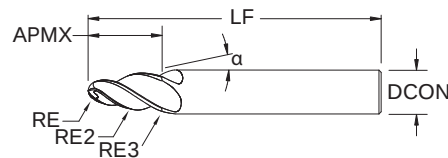S-Carb APF-B®**APF-B**
METRIC SERIES

- Designed to significantly improve traditional ball end applications
- Highly efficient at finishing and semi-finishing profiling
- Main application areas include profiling and pocket milling
- Especially suited to machining deep pockets and hard-to-reach areas without using long-reach tools
- Their versatility also allows for machining profiles and blends with one tool
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				NO. OF FLUTES	EDP NO. Ti-NAMITE®-B (TiB ₂)
			CENTERLINE ANGLE α	TIP RADIUS RE	TAPERED RADIUS RE2	BLENDED RADIUS RE3		
6,0	9,5	58,0	17.5°	1,0	250,0	3,0	3	45718
6,0	8,0	58,0	17.5°	1,5	250,0	3,0	3	45719
8,0	10,5	80,0	20°	1,5	250,0	4,0	3	45720
8,0	9,5	80,0	20°	2,0	250,0	4,0	3	45721
10,0	12,5	89,0	20°	2,0	250,0	5,0	3	45722
10,0	11,5	89,0	20°	2,5	250,0	5,0	3	45723
12,0	13,5	100,0	20°	3,0	250,0	6,0	4	45724
12,0	14,4	100,0	20°	2,5	250,0	6,0	4	45725
12,0	20,0	100,0	14°	2,0	60,0	6,0	4	45726
16,0	31,0	109,0	12.5°	2,0	1000,0	5,0	4	45727
16,0	27,5	109,0	12.5°	3,0	1000,0	5,0	4	45728
16,0	24,0	109,0	12.5°	4,0	1000,0	5,0	4	45729
16,0	21,0	109,0	15°	4,0	1000,0	5,0	4	45730
16,0	18,5	109,0	20°	4,0	1500,0	8,0	4	45731
16,0	28,5	109,0	10°	4,0	1000,0	5,0	4	45732
16,0	19,0	109,0	20°	3,0	750,0	5,0	4	45733
16,0	15,0	109,0	30°	2,0	750,0	3,0	4	45734
16,0	18,5	109,0	20°	3,0	60,0	5,0	4	45735

TOLERANCES (mm)DCON = h_6 RE = $-0,010/-0,010$

NON-FERROUS

For patent
information visit
www.ksptpatents.com

			DCON	6		8		10		12		16	
			Ae max	0,20	0,45	0,25	0,55	0,30	0,60	0,35	0,65	0,40	0,70
			Diameter	3,0	6,0	4,0	8,0	5,0	10,0	6,0	12,0	8,0	16,0
													
Metric	Hardness (HRb)	Vc (m/min)	Cut Zone	RE	RE2	RE	RE2	RE	RE2	RE	RE2	RE	RE2
N Aluminum	≤88	510	RPM	54111	27056	40583	20292	32467	16233	27056	13528	20292	10146
		(388-632)	Fz	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080	0,042	0,100
			Feed (mm/min)	2706	3247	2536	3044	2435	2922	3607	4329	3382	4058
	≥88	330	RPM	35013	17507	26260	13130	21008	10504	17507	8753	13130	6565
		(284-376)	Fz	0,013	0,030	0,017	0,040	0,021	0,050	0,025	0,060	0,033	0,080
			Feed (mm/min)	1313	1576	1313	1576	1313	1576	1751	2101	1751	2101

$rpm = (Vc \times 1000) / (DC \times 3.14)$

Feed= Fz x No. of flutes x rpm


Adjust speed and feed cutting

Adjust rates according to cutting area of tool being used


Avoid using tip of the tool where possible due to reduced chip space

Be aware of max cut Ae, especially on the lower portion of the tool

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**43 •
43CR**
FRACTIONAL SERIES

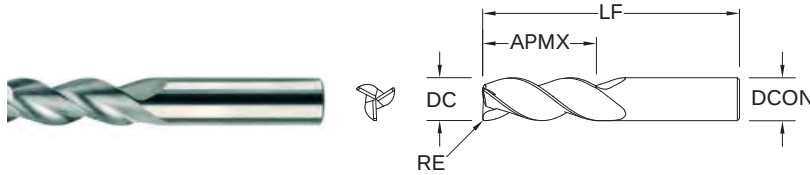

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	—	34701	34728
1/8	3/8	1-1/2	1/8	.010	34771	34793
3/16	5/16	2-1/2	3/16	—	34822	34857
3/16	9/16	2	3/16	—	34702	34729
3/16	9/16	2	3/16	.010	34772	34794
3/16	3/4	2-1/2	3/16	—	34823	34858
1/4	3/8	2	1/4	—	34703	34730
1/4	3/8	2-1/2	1/4	.010	35575	35665
1/4	3/8	2-1/2	1/4	.015	35576	35666
1/4	3/8	2-1/2	1/4	.030	35577	35667
1/4	3/8	2-1/2	1/4	.060	35578	35668
1/4	1/2	2-1/2	1/4	—	34824	34859
1/4	3/4	2-1/2	1/4	—	34704	34731
1/4	3/4	2-1/2	1/4	.010	34773	34795
1/4	3/4	2-1/2	1/4	.015	35579	35669
1/4	3/4	2-1/2	1/4	.030	34774	34796
1/4	3/4	2-1/2	1/4	.060	35580	35670
1/4	1	3	1/4	—	34825	34860
1/4	1	3	1/4	.010	35581	35671
1/4	1	3	1/4	.015	35582	35672
1/4	1	3	1/4	.030	35583	35673
1/4	1	3	1/4	.060	35584	35674
1/4	1-1/4	3-1/2	1/4	—	34705	34732
1/4	1-3/4	4	1/4	—	34826	34861
5/16	7/16	2	5/16	—	34706	34733
5/16	5/8	2-1/2	5/16	—	34707	34734
5/16	5/8	2-1/2	5/16	.030	34775	34797
5/16	1-1/4	4	5/16	—	34708	34735
3/8	1/2	2	3/8	—	34709	34736
3/8	1/2	3	3/8	.010	35585	35675
3/8	1/2	3	3/8	.015	35586	35676
3/8	1/2	3	3/8	.030	35587	35677
3/8	1/2	3	3/8	.060	35588	35678
3/8	1/2	3	3/8	.090	35589	35679
3/8	1	2-1/2	3/8	—	34710	34737
3/8	1	2-1/2	3/8	.010	34776	34798

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

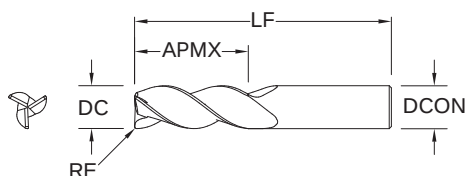

**43 •
43CR**
FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆


RE = +0.0000/–0.0020

NON-FERROUS


For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/8	1	2-1/2	3/8	.030	34777	34799
3/8	1	2-1/2	3/8	.060	32761	32825
3/8	1	3	3/8	.015	35590	35680
3/8	1	3	3/8	.090	35591	35681
3/8	1-1/4	3-1/2	3/8	—	34827	34862
3/8	1-1/2	3-1/2	3/8	—	34711	34738
3/8	1-1/2	4	3/8	.010	35592	35682
3/8	1-1/2	4	3/8	.015	35593	35683
3/8	1-1/2	4	3/8	.030	35594	35684
3/8	1-1/2	4	3/8	.060	35595	35685
3/8	1-1/2	4	3/8	.090	35596	35686
3/8	2	4	3/8	—	34828	34863
1/2	5/8	2-1/2	1/2	—	34712	34739
1/2	5/8	3	1/2	.010	35597	35687
1/2	5/8	3	1/2	.015	35598	35688
1/2	5/8	3	1/2	.030	35599	35689
1/2	5/8	3	1/2	.060	35600	35690
1/2	5/8	3	1/2	.090	35601	35691
1/2	5/8	3	1/2	.120	35602	35692
1/2	1	3	1/2	—	34830	34865
1/2	1	3	1/2	.010	35603	35693
1/2	1	3	1/2	.015	35604	35694
1/2	1	3	1/2	.030	35605	35695
1/2	1	3	1/2	.060	35606	35696
1/2	1	3	1/2	.090	35607	35697
1/2	1	3	1/2	.120	35608	35698
1/2	1-1/4	3	1/2	.015	35609	35699
1/2	1-1/4	3-1/4	1/2	—	34713	34740
1/2	1-1/4	3-1/4	1/2	.010	34778	34800
1/2	1-1/4	3-1/4	1/2	.030	34779	34801
1/2	1-1/4	3-1/4	1/2	.060	34780	34802
1/2	1-1/4	3-1/4	1/2	.090	34781	34803
1/2	1-1/4	3-1/4	1/2	.120	32766	32830
1/2	1-5/8	4	1/2	—	34831	34866
1/2	1-5/8	4	1/2	.010	35610	35700
1/2	1-5/8	4	1/2	.015	35611	35701

continued on next page



**43 •
43CR**
FRACTIONAL SERIES

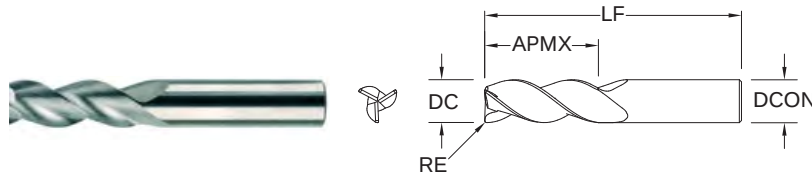

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/2	1-5/8	4	1/2	.030	35612	35702
1/2	1-5/8	4	1/2	.060	35613	35703
1/2	1-5/8	4	1/2	.090	35614	35704
1/2	1-5/8	4	1/2	.120	35615	35705
1/2	2	4	1/2	—	34714	34741
1/2	2	4	1/2	.010	35616	35706
1/2	2	4	1/2	.015	35617	35707
1/2	2	4	1/2	.030	35618	35708
1/2	2	4	1/2	.060	35619	35709
1/2	2	4	1/2	.090	35620	35710
1/2	2	4	1/2	.120	35621	35711
1/2	2-1/2	5	1/2	—	34832	34867
1/2	3-1/8	6	1/2	—	34715	34742
5/8	3/4	3	5/8	—	34716	34743
5/8	3/4	3-1/2	5/8	.030	35622	35712
5/8	3/4	3-1/2	5/8	.060	35623	35713
5/8	3/4	3-1/2	5/8	.090	35624	35714
5/8	3/4	3-1/2	5/8	.120	35625	35715
5/8	1-5/8	3-3/4	5/8	—	34717	34744
5/8	1-5/8	3-3/4	5/8	.030	34782	34804
5/8	1-5/8	3-3/4	5/8	.060	34783	34805
5/8	1-5/8	3-3/4	5/8	.090	34784	34806
5/8	1-5/8	3-3/4	5/8	.120	35626	35716
5/8	2-1/8	4	5/8	—	34833	34868
5/8	2-1/2	5	5/8	—	34718	34745
5/8	3-1/4	6	5/8	—	34834	34869
5/8	3-3/4	6	5/8	—	34719	34746
3/4	1	3	3/4	—	34720	34747
3/4	1	4	3/4	.030	35627	35717
3/4	1	4	3/4	.060	35628	35718
3/4	1	4	3/4	.090	35629	35719
3/4	1	4	3/4	.120	35630	35720
3/4	1	4	3/4	.190	35631	35721
3/4	1	4	3/4	.250	35632	35722
3/4	1-5/8	4	3/4	—	34721	34748
3/4	1-5/8	4	3/4	.030	34785	34807

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

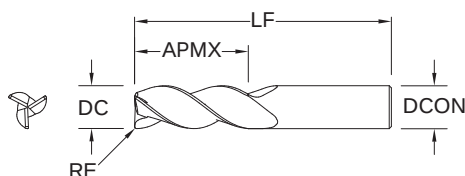

43 •
43CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/4	1-5/8	4	3/4	.060	34786	34808
3/4	1-5/8	4	3/4	.090	34787	34809
3/4	1-5/8	4	3/4	.120	34815	34817
3/4	1-5/8	4	3/4	.190	35633	35723
3/4	1-5/8	4	3/4	.250	35634	35724
3/4	2-1/4	5	3/4	—	34722	34749
3/4	2-1/4	5	3/4	.030	35635	35725
3/4	2-1/4	5	3/4	.060	35636	35726
3/4	2-1/4	5	3/4	.090	35637	35727
3/4	2-1/4	5	3/4	.120	35638	35728
3/4	2-1/4	5	3/4	.190	35639	35729
3/4	2-1/4	5	3/4	.250	35640	35730
3/4	2-1/2	5	3/4	—	34758	34765
3/4	3-1/4	6	3/4	—	34723	34750
1	1-1/4	4	1	—	34724	34751
1	1-1/4	5	1	.030	35641	35731
1	1-1/4	5	1	.060	35642	35732
1	1-1/4	5	1	.090	35643	35733
1	1-1/4	5	1	.120	35644	35734
1	1-1/4	5	1	.190	35645	35735
1	1-1/4	5	1	.250	35646	35736
1	2	4-1/2	1	—	34725	34752
1	2	4-1/2	1	.030	34789	34811
1	2	4-1/2	1	.060	34790	34812
1	2	4-1/2	1	.090	34791	34813
1	2	4-1/2	1	.120	34816	34818
1	2	5	1	.190	35647	35737
1	2	5	1	.250	35648	35738
1	2-5/8	6	1	—	34726	34753
1	3-1/4	6	1	—	34727	34754
1	3-1/4	6	1	.030	35649	35739
1	3-1/4	6	1	.060	35650	35740
1	3-1/4	6	1	.090	35651	35741
1	3-1/4	6	1	.120	35652	35742
1	3-1/4	6	1	.190	35653	35743
1	3-1/4	6	1	.250	35654	35744
1	4-1/8	7	1	—	34835	34870

CONTINUED



43L • 43LC

FRACTIONAL SERIES

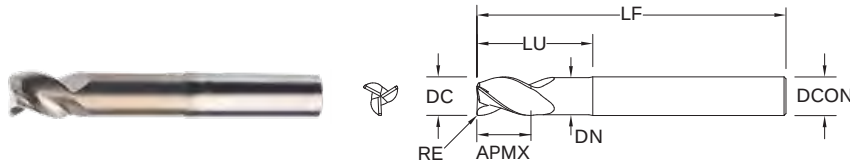

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	5/32	3	1/8	1/2	.105	—	32700	32725
1/8	5/32	3	1/8	1/2	.105	.010	32751	32815
1/8	5/32	3	1/8	3/4	.105	—	32691	34888
3/16	7/32	3	3/16	1/2	.167	—	32701	32726
3/16	7/32	3	3/16	1/2	.167	.010	32752	32816
3/16	7/32	3	3/16	3/4	.167	—	32692	34889
1/4	3/8	2-1/2	1/4	3/4	.230	.015	35787	36235
1/4	3/8	2-1/2	1/4	3/4	.230	.060	35788	36236
1/4	3/8	4	1/4	3/4	.230	—	32702	32727
1/4	3/8	4	1/4	3/4	.230	.010	32753	32817
1/4	3/8	4	1/4	3/4	.230	.030	32754	32818
1/4	3/8	4	1/4	1-1/2	.230	—	32703	32728
1/4	3/8	4	1/4	1-1/2	.230	.010	32755	32819
1/4	3/8	4	1/4	1-1/2	.230	.030	32756	32820
1/4	3/8	4	1/4	2-1/8	.230	—	32704	32729
1/4	3/8	4	1/4	2-1/8	.230	.010	32757	32821
1/4	3/8	4	1/4	2-1/8	.230	.030	32758	32822
5/16	7/16	4	5/16	1-1/8	.292	—	32705	32730
5/16	7/16	4	5/16	1-1/8	.292	.030	32759	32823
5/16	7/16	4	5/16	2-1/8	.292	—	32706	32731
5/16	7/16	4	5/16	2-1/8	.292	.030	32760	32824
3/8	1/2	3	3/8	1-1/8	.355	.015	35791	36239
3/8	1/2	3	3/8	1-1/8	.355	.090	35792	36240
3/8	1/2	4	3/8	1-1/8	.355	—	32707	32732
3/8	1/2	4	3/8	1-1/8	.355	.030	32762	32826
3/8	1/2	4	3/8	1-1/8	.355	.060	32763	32827
3/8	1/2	4	3/8	2-1/8	.355	—	32708	32733
3/8	1/2	4	3/8	2-1/8	.355	.030	32764	32828
3/8	1/2	4	3/8	2-1/8	.355	.060	32765	32829
1/2	5/8	3	1/2	1-3/8	.480	.015	35795	36243
1/2	5/8	4	1/2	1-3/8	.480	—	32709	32734
1/2	5/8	4	1/2	1-3/8	.480	.030	32767	32831
1/2	5/8	4	1/2	1-3/8	.480	.060	32768	32832
1/2	5/8	4	1/2	1-3/8	.480	.090	32769	32833
1/2	5/8	4	1/2	1-3/8	.480	.120	32770	32834
1/2	5/8	4	1/2	2-1/4	.480	.015	35796	36244

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent information visit
www.ksptpatents.com

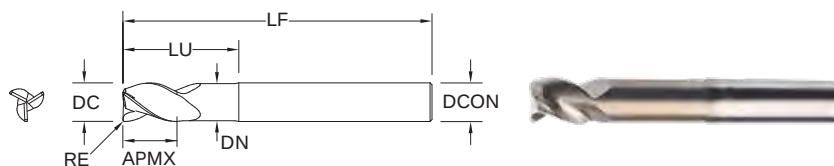

**43L •
43LC**
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/2	5/8	6	1/2	2-1/8	.480	—		32710	32735
1/2	5/8	6	1/2	2-1/8	.480	.030		32771	32835
1/2	5/8	6	1/2	2-1/8	.480	.060		32772	32836
1/2	5/8	6	1/2	2-1/8	.480	.090		32773	32837
1/2	5/8	6	1/2	2-1/8	.480	.120		32774	32838
1/2	5/8	6	1/2	3-3/8	.480	—		32711	32736
1/2	5/8	6	1/2	3-3/8	.480	.030		32775	32839
1/2	5/8	6	1/2	3-3/8	.480	.060		32776	32840
1/2	5/8	6	1/2	3-3/8	.480	.090		32777	32841
1/2	5/8	6	1/2	3-3/8	.480	.120		32778	32842
1/2	5/8	6	1/2	4-1/4	.480	—		32697	34894
5/8	3/4	4	5/8	1-3/4	.605	—		32712	32737
5/8	3/4	4	5/8	1-3/4	.605	.030		32779	32843
5/8	3/4	4	5/8	1-3/4	.605	.060		32780	32844
5/8	3/4	4	5/8	1-3/4	.605	.090		32781	32845
5/8	3/4	4	5/8	1-3/4	.605	.120		32782	32846
5/8	3/4	4	5/8	2-3/8	.605	—		32713	32738
5/8	3/4	4	5/8	2-3/8	.605	.030		32783	32847
5/8	3/4	4	5/8	2-3/8	.605	.060		32784	32848
5/8	3/4	4	5/8	2-3/8	.605	.090		32785	32849
5/8	3/4	4	5/8	2-3/8	.605	.120		32786	32850
5/8	3/4	6	5/8	3-3/8	.605	—		32714	32739
5/8	3/4	6	5/8	3-3/8	.605	.030		32787	32851
5/8	3/4	6	5/8	3-3/8	.605	.060		32788	32852
5/8	3/4	6	5/8	3-3/8	.605	.090		32789	32853
5/8	3/4	6	5/8	3-3/8	.605	.120		32790	32854
5/8	3/4	6	5/8	4-3/8	.605	—		32698	34895
3/4	1	4	3/4	1-3/4	.730	—		32715	32740
3/4	1	4	3/4	1-3/4	.730	.030		32791	32855
3/4	1	4	3/4	1-3/4	.730	.060		32792	32856
3/4	1	4	3/4	1-3/4	.730	.090		32793	32857
3/4	1	4	3/4	1-3/4	.730	.120		32794	32858
3/4	1	4	3/4	2	.730	.190		35803	36251
3/4	1	4	3/4	2	.730	.250		35804	36252
3/4	1	6	3/4	2-3/8	.730	—		32716	32741
3/4	1	6	3/4	2-3/8	.730	.030		32795	32859

continued on next page



43L • 43LC

FRACTIONAL SERIES

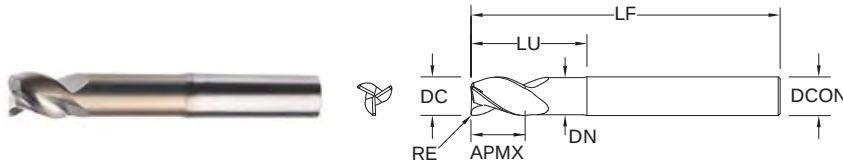

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3/4	1	6	3/4	2-3/8	.730	.060	32796	32860
3/4	1	6	3/4	2-3/8	.730	.090	32797	32861
3/4	1	6	3/4	2-3/8	.730	.120	32798	32862
3/4	1	6	3/4	3-3/8	.730	—	32717	32742
3/4	1	6	3/4	3-3/8	.730	.030	32799	32863
3/4	1	6	3/4	3-3/8	.730	.060	32800	32864
3/4	1	6	3/4	3-3/8	.730	.090	32801	32865
3/4	1	6	3/4	3-3/8	.730	.120	32802	32866
3/4	1	6	3/4	4-3/8	.730	—	32699	34896
1	1-1/4	5	1	2-5/8	.980	.190	35809	36257
1	1-1/4	5	1	2-5/8	.980	.250	35810	36258
1	1-1/4	6	1	2-3/8	.980	—	32718	32743
1	1-1/4	6	1	2-3/8	.980	.030	32803	32867
1	1-1/4	6	1	2-3/8	.980	.060	32804	32868
1	1-1/4	6	1	2-3/8	.980	.090	32805	32869
1	1-1/4	6	1	2-3/8	.980	.120	32806	32870
1	1-1/4	6	1	3-3/8	.980	—	32719	32744
1	1-1/4	6	1	3-3/8	.980	.030	32807	32871
1	1-1/4	6	1	3-3/8	.980	.060	32808	32872
1	1-1/4	6	1	3-3/8	.980	.090	32809	32873
1	1-1/4	6	1	3-3/8	.980	.120	32810	32874
1	1-1/4	6	1	3-3/8	.980	.190	35811	36259
1	1-1/4	6	1	3-3/8	.980	.250	35812	36260
1	1-1/4	7	1	4-3/8	.980	—	32720	32745

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0000/–0.0020

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0000/–0.0020

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

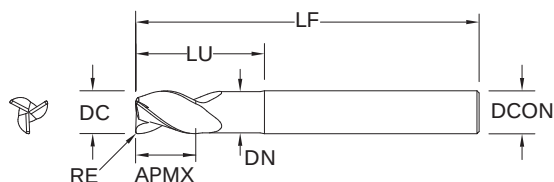

43EC
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6


RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				CORNER RADIUS RE	EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN			UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	.015		35789	36237
1/4	3/8	3	1/4	1-1/8	.230	.060		35790	36238
3/8	1/2	4	3/8	2-1/8	.355	.015		35793	36241
3/8	1/2	4	3/8	2-1/8	.355	.090		35794	36242
1/2	5/8	5	1/2	3-3/8	.480	.015		35797	36245
1/2	5/8	6	1/2	4-1/4	.480	.015		35798	36246
1/2	5/8	6	1/2	4-1/4	.480	.030		35799	36247
1/2	5/8	6	1/2	4-1/4	.480	.060		35800	36248
1/2	5/8	6	1/2	4-1/4	.480	.090		35801	36249
1/2	5/8	6	1/2	4-1/4	.480	.120		35802	36250
3/4	1	6	3/4	3-3/8	.730	.190		35805	36253
3/4	1	6	3/4	3-3/8	.730	.250		35806	36254
1	1-1/4	7	1	4-3/8	.980	.030		35813	36261
1	1-1/4	7	1	4-3/8	.980	.060		35814	36262
1	1-1/4	7	1	4-3/8	.980	.090		35815	36263
1	1-1/4	7	1	4-3/8	.980	.120		35816	36264
1	1-1/4	7	1	4-3/8	.980	.190		35817	36265
1	1-1/4	7	1	4-3/8	.980	.250		35818	36266


- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43B

FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

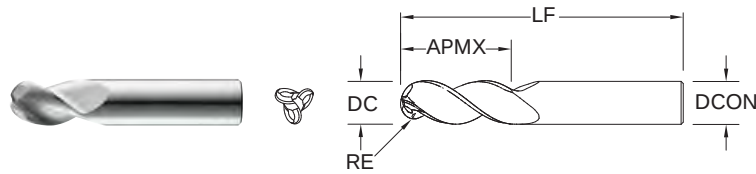

CUTTING DIAMETER DC	inch			EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	2	1/4	34916	34972
1/4	3/4	2-1/2	1/4	34917	34973
1/4	1	3	1/4	34918	34974
3/8	1/2	2	3/8	34919	34975
3/8	1	2-1/2	3/8	34920	34976
3/8	1-1/2	3-1/2	3/8	34921	34977
1/2	5/8	2-1/2	1/2	34922	34978
1/2	1	3	1/2	34923	34979
1/2	1-1/4	3	1/2	34924	34980
1/2	1-5/8	4	1/2	34925	34981
1/2	2	4	1/2	34926	34982
5/8	3/4	3	5/8	34927	34983
5/8	1-5/8	4	5/8	34928	34984
3/4	1	3	3/4	34929	34985
3/4	1-5/8	4	3/4	34930	34986
3/4	2-1/4	5	3/4	34931	34987
1	1-1/4	4	1	34932	34988
1	2	5	1	34933	34989
1	3-1/4	6	1	34934	34990

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER



DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005

NON-FERROUS

For patent
information visit
www.ksptpatents.com

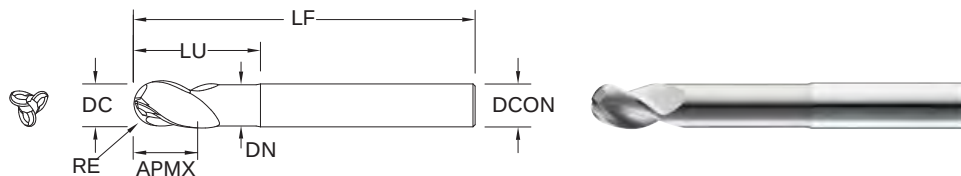

43LB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0005/–0.0005



inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	1/4	3/4	.230	34941	35005
3/8	1/2	3	3/8	1-1/8	.355	34943	35007
1/2	5/8	3	1/2	1-3/8	.480	34945	35009
1/2	5/8	4	1/2	2-1/4	.480	34946	35010
5/8	3/4	4	5/8	1-5/8	.605	34949	35013
3/4	1	4	3/4	2	.730	34951	35015
1	1-1/4	5	1	2-5/8	.980	34954	35018
1	1-1/4	6	1	3-3/8	.980	34955	35019

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

NON-FERROUS

For patent information visit
www.ksptpatents.com

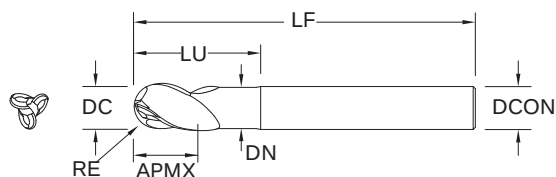

43EB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0005/–0.0005


inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE®-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	34942	35006
3/8	1/2	4	3/8	2-1/8	.355	34944	35008
1/2	5/8	5	1/2	3-3/8	.480	34947	35011
1/2	5/8	6	1/2	4-1/4	.480	34948	35012
5/8	3/4	6	5/8	3-3/8	.605	34950	35014
3/4	1	6	3/4	3-3/8	.730	34952	35016
1	1-1/4	7	1	4-3/8	.980	34956	35020

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


NON-FERROUS

For patent information visit
www.ksptpatents.com



43CB

FRACTIONAL SERIES

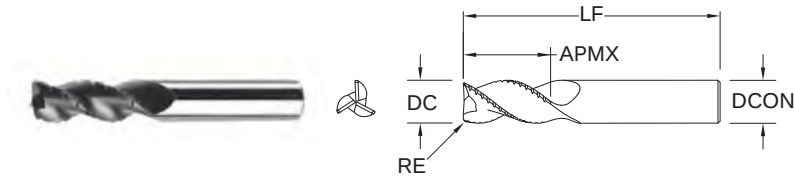

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	1/4	.020	33390	33450
1/4	1/2	2-1/2	1/4	.020	33391	33451
1/4	3/4	2-1/2	1/4	.020	33392	33452
1/4	1	3	1/4	.020	33393	33453
1/4	1-1/4	3-1/2	1/4	.020	33394	33454
1/4	1-3/4	4	1/4	.020	33395	33455
5/16	7/16	2-1/2	5/16	.020	33396	33456
5/16	11/16	2-1/2	5/16	.020	33397	33457
5/16	1	3	5/16	.020	33398	33458
5/16	2-1/8	4	5/16	.020	33400	33460
3/8	1/2	3	3/8	.020	33401	33461
3/8	1	2-1/2	3/8	.020	33400	33405
3/8	1-1/4	3-1/2	3/8	.020	33402	33462
3/8	1-1/2	4	3/8	.020	33403	33463
3/8	2	4	3/8	.020	33404	33464
1/2	5/8	3	1/2	.030	33406	33466
1/2	1	3	1/2	.030	33407	33467
1/2	1-1/4	3-1/4	1/2	.030	33401	33406
1/2	1-5/8	4	1/2	.030	33408	33468
1/2	2	4	1/2	.030	33409	33469
1/2	2-1/2	5	1/2	.030	33410	33470
1/2	3-1/8	6	1/2	.030	33411	33471
5/8	3/4	3-1/2	5/8	.030	33412	33472
5/8	1-5/8	3-3/4	5/8	.030	33402	33407
5/8	2-1/8	4	5/8	.030	33413	33473
5/8	3-1/4	6	5/8	.030	33415	33475
5/8	3-3/4	6	5/8	.030	33416	33476
3/4	1	4	3/4	.030	33417	33477
3/4	1-5/8	4	3/4	.030	33403	33408
3/4	2-1/4	5	3/4	.030	33418	33478
3/4	3-1/4	6	3/4	.030	33419	33479
3/4	4	6	3/4	.030	33420	33480
1	1-1/4	5	1	.030	33421	33481
1	2	4-1/2	1	.030	33404	33409
1	2-5/8	6	1	.030	33422	33482
1	3-1/4	6	1	.030	33423	33483
1	4-1/8	7	1	.030	33424	33484

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER


DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0000/–0.0020

NON-FERROUS

For patent information visit
www.ksptpatents.com

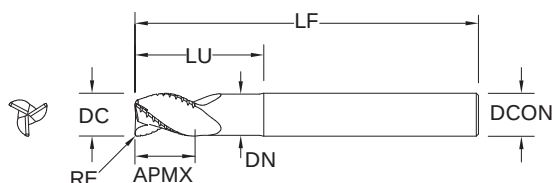

43LCB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0000/–0.0020


NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch							EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	3/4	.230	.020	33500	33540
1/4	3/8	4	1/4	1-1/8	.230	.020	33501	33541
1/4	3/8	4	1/4	2-1/8	.230	.020	33502	33542
5/16	7/16	4	5/16	1-1/8	.292	.020	33503	33543
5/16	7/16	4	5/16	2-1/8	.292	.020	33504	33544
3/8	1/2	4	3/8	1-1/8	.355	.020	33507	33547
3/8	1/2	4	3/8	2-1/8	.355	.020	33508	33548
1/2	5/8	4	1/2	1-3/8	.480	.030	33511	33551
1/2	5/8	4	1/2	2-1/4	.480	.030	33512	33552
1/2	5/8	6	1/2	3-3/8	.480	.030	33513	33553
1/2	5/8	6	1/2	4-1/4	.480	.030	33514	33554
5/8	3/4	4	5/8	1-5/8	.605	.030	33515	33555
5/8	3/4	6	5/8	2-3/8	.605	.030	33516	33556
5/8	3/4	6	5/8	3-3/8	.605	.030	33517	33557
5/8	3/4	6	5/8	4-3/8	.605	.030	33518	33558
3/4	1	4	3/4	2	.730	.030	33519	33559
3/4	1	6	3/4	2-1/2	.730	.030	33520	33560
3/4	1	6	3/4	3-3/8	.730	.030	33521	33561
3/4	1	6	3/4	4-3/8	.730	.030	33522	33562
1	1-1/4	6	1	2-5/8	.980	.030	33523	33563
1	1-1/4	6	1	3-3/8	.980	.030	33524	33564
1	1-1/4	7	1	4-3/8	.980	.030	33525	33565



- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

Series
43CR, 43CB, 43LC,
43, 43L, 43LCB, 43B,
43LB, 43ELB, 43EC
Fractional



43, 43L, 43LCB, 43B, 43LB, 43ELB, 43EC Fractional					Ae Ap Ae		DC • in							
Hardness		Ae x DC	Ap x DC	Vc (sfm)		1/8	1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	Slot	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112	
					(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
						Feed (ipm)	132	183	220	220	191	171	156	
		Profile	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640	
					(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
						Feed (ipm)	165	229	275	275	238	214	195	
	HSM	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606		
				(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195		
					Feed (ipm)	635	832	1059	1059	908	832	737		
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	Slot	1	≤ 1	600	RPM	18336	9168	6112	4584	3667	3056	2292
						(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	50	69	83	83	72	64	58
			Profile	≤ 0.5	≤ 1.5	750	RPM	22920	11460	7640	5730	4584	3820	2865
						(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
							Feed (ipm)	62	86	103	103	89	80	73
	HSM	≤ 0.05	≤ 2	1240	RPM	37894	18947	12631	9474	7579	6316	4737		
				(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195		
					Feed (ipm)	239	313	398	398	341	313	277		
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot	1	≤ 1	865	RPM	26434	13217	8811	6609	5287	4406	3304
						(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	63	79	106	99	87	79	69
			Profile	≤ 0.5	≤ 1.5	1080	RPM	33005	16502	11002	8251	6601	5501	4126
						(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
							Feed (ipm)	79	99	132	124	109	99	87
HSM	≤ 0.05	≤ 2	1780	RPM	54397	27198	18132	13599	10879	9066	6800			
			(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160			
				Feed (ipm)	277	367	462	469	408	381	326			
COPPER ALLOYS Beryllium Copper C110, Malleable Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Slot	1	≤ 1	345	RPM	10543	5272	3514	2636	2109	1757	1318	
					(276-414)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
						Feed (ipm)	25	32	42	40	35	32	28	
		Profile	≤ 0.5	≤ 1.5	430	RPM	13141	6570	4380	3285	2628	2190	1643	
					(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
						Feed (ipm)	32	39	53	49	43	39	34	
HSM	≤ 0.05	≤ 2	710	RPM	21698	10849	7233	5424	4340	3616	2712			
			(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160			
				Feed (ipm)	111	146	184	187	163	152	130			
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		Slot	1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	8149	6112	
					(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
						Feed (ipm)	220	293	367	367	323	293	257	
		Profile	≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187	7640	
					(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
						Feed (ipm)	275	367	458	458	403	367	321	
HSM	≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808	12606			
			(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320			
				Feed (ipm)	1029	1361	1714	1740	1513	1387	1210			

Bhn (Brinell) HRC (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

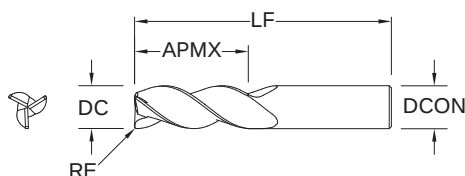

43M •
43MCR
METRIC SERIES

TOLERANCES (mm)

≤6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER

DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050


NON-FERROUS

For patent
information visit
www.ksptpatents.com


mm					EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	52,0	6,0	—	—	44890
4,0	11,0	55,0	6,0	—	—	44891
5,0	13,0	57,0	6,0	—	—	44892
6,0	13,0	57,0	6,0	—	44701	44715
6,0	13,0	57,0	6,0	1,5	—	44732
6,0	13,0	57,0	6,0	0,5	—	44902
6,0	13,0	57,0	6,0	1,0	—	44894
6,0	13,0	72,0	6,0	—	44702	44716
6,0	13,0	72,0	6,0	0,8	—	44842
6,0	13,0	72,0	6,0	1,2	—	44843
6,0	24,0	75,0	6,0	—	—	44893
6,0	24,0	75,0	6,0	0,5	—	44844
6,0	24,0	75,0	6,0	1,0	—	44845
8,0	19,0	63,0	8,0	—	44703	44717
8,0	19,0	63,0	8,0	0,3	—	44846
8,0	19,0	63,0	8,0	0,5	—	44847
8,0	19,0	63,0	8,0	1,0	—	44848
8,0	19,0	63,0	8,0	1,5	—	44849
8,0	32,0	75,0	8,0	—	—	44895
8,0	32,0	75,0	8,0	0,5	—	44850
8,0	32,0	75,0	8,0	1,0	—	44851
8,0	32,0	75,0	8,0	1,5	—	44852
8,0	32,0	75,0	8,0	2,0	—	44853
10,0	22,0	72,0	10,0	—	44705	44719
10,0	22,0	72,0	10,0	0,3	—	44854
10,0	22,0	72,0	10,0	0,5	—	44855
10,0	22,0	72,0	10,0	1,0	—	44856
10,0	22,0	72,0	10,0	1,5	—	44857
10,0	40,0	100,0	10,0	—	—	44896
10,0	40,0	100,0	10,0	0,5	—	44858

continued on next page

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



**43M •
43MCR**
METRIC SERIES

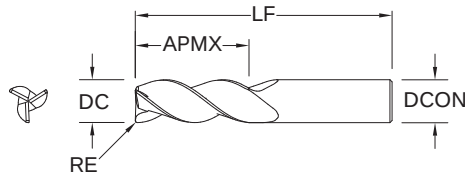

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
10,0	40,0	100,0	10,0	1,0	—	44859
10,0	40,0	100,0	10,0	1,5	—	44860
10,0	40,0	100,0	10,0	2,0	—	44861
12,0	26,0	83,0	12,0	—	44708	44722
12,0	26,0	83,0	12,0	1,5	44814	44733
12,0	26,0	83,0	12,0	2,0	44815	44826
12,0	26,0	83,0	12,0	2,5	44816	44827
12,0	26,0	83,0	12,0	3,0	44817	44734
12,0	48,0	100,0	12,0	—	—	44897
12,0	48,0	100,0	12,0	0,5	—	44862
12,0	48,0	100,0	12,0	1,0	—	44863
12,0	48,0	100,0	12,0	1,5	—	44864
12,0	48,0	100,0	12,0	2,0	—	44865
12,0	48,0	100,0	12,0	2,5	—	44866
12,0	48,0	100,0	12,0	3,0	—	44867
14,0	30,0	89,0	14,0	—	—	44898
14,0	30,0	89,0	14,0	1,0	—	44868
14,0	30,0	89,0	14,0	2,0	—	44869
14,0	30,0	89,0	14,0	3,0	—	44870
16,0	32,0	92,0	16,0	—	44711	44725
16,0	32,0	92,0	16,0	1,5	44818	44735
16,0	32,0	92,0	16,0	2,0	44819	44828
16,0	32,0	92,0	16,0	2,5	44820	44829
16,0	32,0	92,0	16,0	3,0	44821	44736
16,0	32,0	92,0	16,0	4,0	—	44871
16,0	64,0	125,0	16,0	—	—	44900
16,0	64,0	125,0	16,0	0,5	—	44872
16,0	64,0	125,0	16,0	1,0	—	44873
16,0	64,0	125,0	16,0	1,5	—	44874
16,0	64,0	125,0	16,0	2,0	—	44875
16,0	64,0	125,0	16,0	2,5	—	44876
16,0	64,0	125,0	16,0	3,0	—	44877

continued on next page

TOLERANCES (mm)

≤6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER



DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

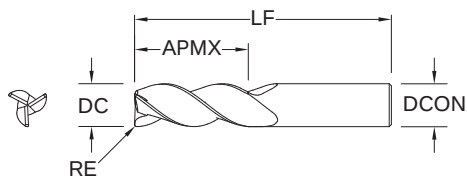

**43M •
43MCR**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
16,0	64,0	125,0	16,0	4,0	—	44878
20,0	38,0	104,0	20,0	—	44714	44728
20,0	38,0	104,0	20,0	2,0	44822	44830
20,0	38,0	104,0	20,0	2,5	44823	44831
20,0	38,0	104,0	20,0	3,0	44824	44737
20,0	38,0	104,0	20,0	4,0	—	44879
20,0	80,0	150,0	20,0	—	—	44901
20,0	80,0	150,0	20,0	0,5	—	44880
20,0	80,0	150,0	20,0	1,0	—	44881
20,0	80,0	150,0	20,0	1,5	—	44882
20,0	80,0	150,0	20,0	2,0	—	44883
20,0	80,0	150,0	20,0	2,5	—	44884
20,0	80,0	150,0	20,0	3,0	—	44885
20,0	80,0	150,0	20,0	4,0	—	44886
25,0	50,0	125,0	25,0	—	—	44731

CONTINUED



43ML • 43MLC

METRIC SERIES

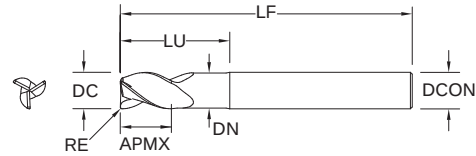

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	63,0	6,0	20,0	5,49	0,5	44769	44789
6,0	10,0	63,0	6,0	20,0	5,49	1,0	44770	44790
6,0	10,0	75,0	6,0	20,0	5,49	—	—	42706
6,0	13,0	72,0	6,0	30,0	5,49	0,5	44771	44791
6,0	13,0	72,0	6,0	30,0	5,49	1,0	44772	44792
8,0	12,0	75,0	8,0	25,0	7,49	—	—	42707
8,0	12,0	75,0	8,0	25,0	7,49	0,3	44773	44793
8,0	12,0	75,0	8,0	25,0	7,49	0,5	44774	44794
8,0	12,0	75,0	8,0	25,0	7,49	0,8	—	44950
8,0	12,0	75,0	8,0	25,0	7,49	1,0	44775	44795
8,0	12,0	75,0	8,0	25,0	7,49	1,2	—	44951
8,0	12,0	75,0	8,0	25,0	7,49	1,5	44776	44796
8,0	12,0	75,0	8,0	25,0	7,49	1,6	—	44952
10,0	14,0	100,0	10,0	35,0	9,48	—	—	42708
10,0	14,0	100,0	10,0	35,0	9,48	0,3	44777	44797
10,0	14,0	100,0	10,0	35,0	9,48	0,5	44778	44798
10,0	14,0	100,0	10,0	35,0	9,48	1,0	44779	44799
10,0	14,0	100,0	10,0	35,0	9,48	1,5	44780	44800
10,0	14,0	100,0	10,0	35,0	9,50	0,8	—	44953
10,0	14,0	100,0	10,0	35,0	9,50	1,2	—	44954
10,0	14,0	100,0	10,0	35,0	9,50	1,6	—	44955
10,0	14,0	100,0	10,0	35,0	9,50	2,4	—	44956
12,0	16,0	100,0	12,0	40,0	11,48	—	—	42709
12,0	16,0	100,0	12,0	40,0	11,48	0,5	44781	44801
12,0	16,0	100,0	12,0	40,0	11,48	0,8	—	44957
12,0	16,0	100,0	12,0	40,0	11,48	1,0	44782	44802
12,0	16,0	100,0	12,0	40,0	11,48	1,2	—	44958
12,0	16,0	100,0	12,0	40,0	11,48	1,5	44783	44803
12,0	16,0	100,0	12,0	40,0	11,48	1,6	—	44959
12,0	16,0	100,0	12,0	40,0	11,48	2,0	44784	44804
12,0	16,0	100,0	12,0	40,0	11,48	2,4	—	44960
12,0	16,0	100,0	12,0	40,0	11,48	2,5	44832	44839
12,0	16,0	100,0	12,0	40,0	11,48	3,0	44833	44738
12,0	16,0	100,0	12,0	40,0	11,48	4,0	44834	44741

continued on next page

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/−0,008
DCON = h₆

>6–10 DIAMETER

DC = +0,000/−0,009
DCON = h₆
RE = +0,000/−0,050

>10–18 DIAMETER



DC = +0,000/−0,011
DCON = h₆
RE = +0,000/−0,050

>18–20 DIAMETER

DC = +0,000/−0,013
DCON = h₆
RE = +0,000/−0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

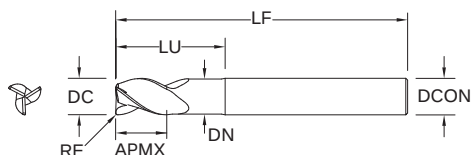

**43ML •
43MLC**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	mm				EDP NO.	
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
14,0	18,0	125,0	14,0	45,0	13,49	—	—	44899
14,0	18,0	125,0	14,0	45,0	13,49	1,0	—	44961
14,0	18,0	125,0	14,0	45,0	13,49	2,0	—	44962
14,0	18,0	125,0	14,0	45,0	13,49	3,0	—	44963
14,0	18,0	125,0	14,0	45,0	13,49	4,0	—	44964
16,0	20,0	125,0	16,0	50,0	15,47	—	—	42710
16,0	20,0	125,0	16,0	50,0	15,47	2,0	44785	44805
16,0	20,0	125,0	16,0	50,0	15,47	2,5	44835	44840
16,0	20,0	125,0	16,0	50,0	15,47	3,0	44836	44739
16,0	20,0	125,0	16,0	50,0	15,47	4,0	44786	44806
16,0	20,0	125,0	16,0	50,0	15,49	0,8	—	44965
16,0	20,0	125,0	16,0	50,0	15,49	1,2	—	44966
16,0	20,0	125,0	16,0	50,0	15,49	1,6	—	44967
16,0	20,0	125,0	16,0	50,0	15,49	2,4	—	44968
16,0	20,0	125,0	16,0	50,0	15,49	3,2	—	44969
20,0	25,0	150,0	20,0	65,0	19,46	—	—	42711
20,0	25,0	150,0	20,0	65,0	19,46	2,0	44787	44807
20,0	25,0	150,0	20,0	65,0	19,46	2,4	—	44973
20,0	25,0	150,0	20,0	65,0	19,46	2,5	44837	44841
20,0	25,0	150,0	20,0	65,0	19,46	3,0	44838	44740
20,0	25,0	150,0	20,0	65,0	19,46	4,0	44788	44808
20,0	25,0	150,0	20,0	65,0	19,48	0,8	—	44970
20,0	25,0	150,0	20,0	65,0	19,48	1,2	—	44971
20,0	25,0	150,0	20,0	65,0	19,48	1,6	—	44972
20,0	25,0	150,0	20,0	65,0	19,48	3,2	—	44974

CONTINUED



43MB

METRIC SERIES

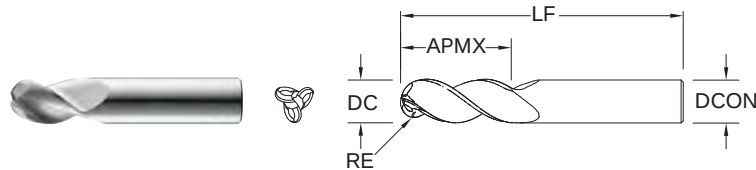

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE®-B (TiB ₂)
3,0	4,5	57,0	6,0	44916
4,0	6,0	57,0	6,0	44919
5,0	7,5	57,0	6,0	44922
6,0	9,0	57,0	6,0	44925
8,0	12,0	63,0	8,0	44928
10,0	15,0	75,0	10,0	44931
12,0	18,0	83,0	12,0	44934
16,0	24,0	100,0	16,0	44937
20,0	30,0	108,0	20,0	44940
25,0	37,5	127,0	25,0	44943

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006

DCON = h₆

RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,0127/-0,0127

>18-25 DIAMETER



DC = +0,000/-0,013

DCON = h₆

RE = +0,0127/-0,0127

NON-FERROUS

For patent
information visit
www.ksptpatents.com

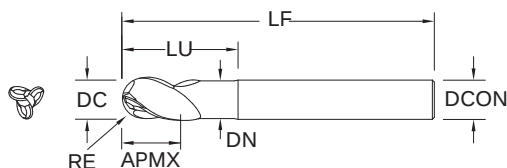

43MB

METRIC SERIES

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006

DCON = h_6

RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008

DCON = h_6

RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h_6

RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h_6

RE = +0,0127/-0,0127

>18-25 DIAMETER

DC = +0,000/-0,013

DCON = h_6

RE = +0,0127/-0,0127


NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	Ti-NAMITE®-B (TiB ₂)
3,0	6,0	57,0	6,0	10,0	2,74	44917
3,0	9,0	57,0	6,0	16,0	2,74	44918
4,0	8,0	57,0	6,0	13,0	3,73	44920
4,0	12,0	57,0	6,0	21,0	3,73	44921
5,0	10,0	63,0	6,0	16,0	4,50	44923
5,0	15,0	63,0	6,0	26,0	4,50	44924
6,0	12,0	63,0	6,0	19,0	5,49	44926
6,0	18,0	75,0	6,0	31,0	5,49	44927
8,0	16,0	75,0	8,0	25,0	7,49	44929
8,0	24,0	83,0	8,0	41,0	7,49	44930
10,0	20,0	83,0	10,0	31,0	9,50	44932
10,0	30,0	100,0	10,0	51,0	9,50	44933
12,0	24,0	100,0	12,0	37,0	11,48	44935
12,0	36,0	130,0	12,0	61,0	11,48	44936
16,0	32,0	130,0	16,0	49,0	15,49	44938
16,0	48,0	150,0	16,0	81,0	15,49	44939
20,0	40,0	130,0	20,0	61,0	19,48	44941
20,0	60,0	150,0	20,0	101,0	19,48	44942
25,0	50,0	152,0	25,0	76,0	24,49	44944
25,0	75,0	170,0	25,0	126,0	24,49	44945


RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



43MCB

METRIC SERIES

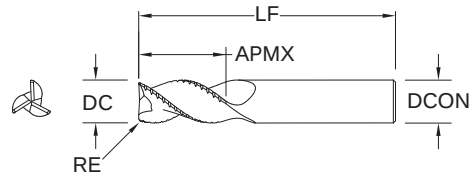

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	19,0	63,0	6,0	0,5	44298	44299
8,0	19,0	63,0	8,0	0,3	44300	44305
10,0	22,0	72,0	10,0	0,3	44301	44306
12,0	26,0	83,0	12,0	1,0	44302	44307
16,0	32,0	92,0	16,0	1,0	44303	44308
20,0	38,0	104,0	20,0	1,0	44304	44309

TOLERANCES (mm)

>6–10 DIAMETER

DC = +0,000/–0,009

DCON = h₆

RE = +0,000/–0,050

>10–18 DIAMETER

DC = +0,000/–0,011

DCON = h₆

RE = +0,000/–0,050

>18–20 DIAMETER

DC = +0,000/–0,013


DCON = h₆

RE = +0,000/–0,050

NON-FERROUS


For patent
information visit
www.ksptpatents.com

Series
43M, 43MB, 43MCR,
43ML, 43MLC,
43MCB
Metric



43ML, 43MLC, 43MCB Metric		Hardness	Ae Ap Ae x DC Ap x DC		Vc (m/min)	DC • mm								
						3	6	10	12	16	20	25		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243	
					(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	3371	4682	5618	5618	4869	4370	3980		
			≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771	
					(488-732)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	4196	5828	6994	6994	6061	5440	4955		
		≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804		
				(804-1206)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488		
				Feed (mm/min)	16131	21124	26888	26885	23046	21126	18726			
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357
						(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	1273	1768	2121	2121	1838	1650	1503	
			≤ 0.5	≤ 1.5	230	RPM	24418	12209	7326	6105	4578	3663	2930	
					(184-276)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213	
					Feed (mm/min)	1582	2197	2637	2637	2285	2051	1868		
		≤ 0.05	≤ 2	380	RPM	40343	20172	12103	10086	7564	6052	4841		
				(304-456)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488		
				Feed (mm/min)	6099	7987	10166	10166	8714	7988	7081			
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass		≤ 140 Bhn or ≤ 3 HRc		1	≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376
						(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1620	2025	2701	2532	2228	2026	1773	
			≤ 0.5	≤ 1.5	330	RPM	35035	17518	10511	8759	6569	5255	4204	
					(264-396)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
					Feed (mm/min)	2018	2522	3363	3153	2775	2523	2207		
		≤ 0.05	≤ 2	545	RPM	57861	28930	17358	14465	10849	8679	6943		
				(436-654)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400		
				Feed (mm/min)	7082	9373	11804	11976	10415	9721	8332			
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338
						(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	642	803	1070	1003	883	803	702	
			≤ 0.5	≤ 1.5	130	RPM	13802	6901	4141	3450	2588	2070	1656	
					(104-156)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175	
					Feed (mm/min)	795	994	1325	1242	1093	994	870		
		≤ 0.05	≤ 2	215	RPM	22826	11413	6848	5706	4280	3424	2739		
				(172-258)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400		
				Feed (mm/min)	2794	3697	4656	4725	4109	3835	3287			
PLASTICS ABS, Polycarbonate, PVC, Polypropylene				1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243
						(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	5618	7490	9364	9363	8240	7491	6555	
			≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771	
					(488-732)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350	
					Feed (mm/min)	6994	9325	11657	11656	10258	9326	8160		
		≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804		
				(804-1206)	Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800		
				Feed (mm/min)	26117	34567	43532	44169	38410	35210	30730			


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 3 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



47

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

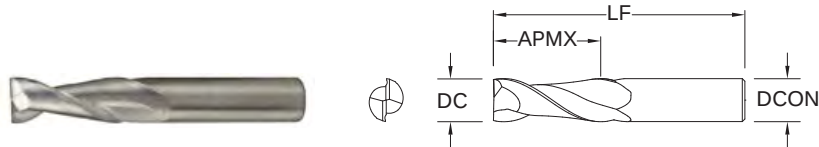

CUTTING DIAMETER DC	inch			EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34620	34660
3/16	9/16	2	3/16	34621	34661
1/4	3/4	2-1/2	1/4	34622	34662
5/16	13/16	2-1/2	5/16	34623	34663
3/8	1	2-1/2	3/8	34624	34664
1/2	1-1/4	3-1/4	1/2	34625	34665
5/8	1-5/8	3-3/4	5/8	34626	34666
3/4	1-5/8	4	3/4	34627	34667
1	2	4-1/2	1	34628	34668

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆



3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

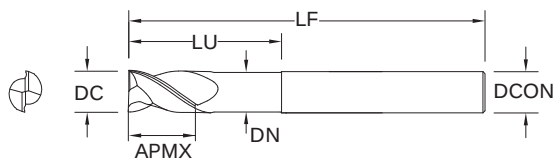

47L
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

3/4–1 DIAMETER

DC = +0.0000/–0.00051


DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch				EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34640	34678
3/8	1/2	4	3/8	2-1/8	.360	34641	34679
1/2	5/8	6	1/2	2-1/8	.485	34642	34680
1/2	5/8	6	1/2	3-3/8	.485	34643	34681
5/8	3/4	6	5/8	2-3/8	.610	34644	34682
5/8	3/4	6	5/8	3-3/8	.610	34645	34683
3/4	1	6	3/4	2-1/2	.735	34646	34684
3/4	1	6	3/4	3-3/8	.735	34647	34685


- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



47B

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

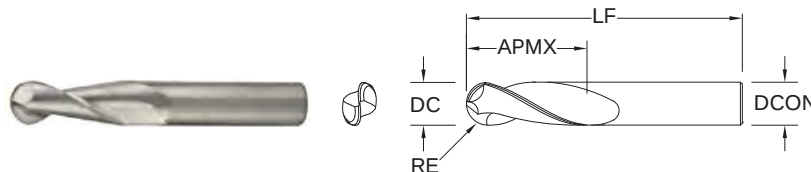

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34630	34669
3/16	9/16	2	3/16	34631	34670
1/4	3/4	2-1/2	1/4	34632	34671
5/16	13/16	2-1/2	5/16	34633	34672
3/8	1	2-1/2	3/8	34634	34673
1/2	1-1/4	3-1/4	1/2	34635	34674
5/8	1-5/8	3-3/4	5/8	34636	34675
3/4	1-5/8	4	3/4	34637	34676
1	2	4-1/2	1	34638	34677

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/–0.00032

DCON = h₆

RE = +0.0005/–0.0005

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005


NON-FERROUS

For patent
information visit
www.ksptpatents.com

47LB

FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

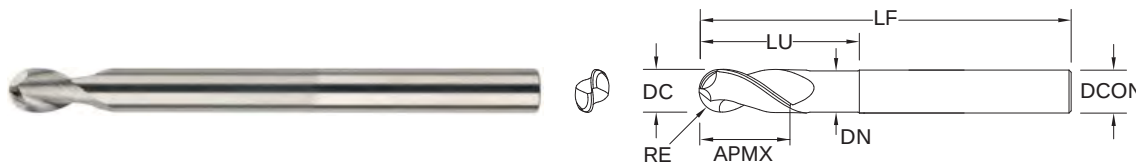

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34650	34686
3/8	1/2	4	3/8	2-1/8	.360	34651	34687
1/2	5/8	6	1/2	2-1/8	.485	34652	34688
1/2	5/8	6	1/2	3-3/8	.485	34653	34689
5/8	3/4	6	5/8	2-3/8	.610	34655	34691
5/8	3/4	6	5/8	3-3/8	.610	34654	34690
3/4	1	6	3/4	2-1/2	.735	34656	34693
3/4	1	6	3/4	3-3/8	.735	34657	34692

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

RE = +0.0005/–0.0005

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

RE = +0.0005/–0.0005

3/4–1 DIAMETER


DC = +0.0000/–0.00051

DCON = h₆

RE = +0.0005/–0.0005


NON-FERROUS

For patent
information visit
www.ksptpatents.com



Series 47, 47B, 47L, 47LB Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in						
					1/8	1/4	3/8	1/2	5/8	3/4	1
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	Slot 1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	6112
				(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070
					Feed (ipm)	88	122	147	147	127	114
		Profile ≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187
				(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070
					Feed (ipm)	110	153	183	183	159	143
		HSM ≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808
				(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165
					Feed (ipm)	424	555	706	706	605	555
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Slot 1	≤ 1	600	RPM	18336	9168	6112	4584	3667	2292
				(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070
					Feed (ipm)	33	46	55	55	48	43
		Profile ≤ 0.5	≤ 1.5	750	RPM	22920	11460	7640	5730	4584	3820
				(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070
					Feed (ipm)	41	57	69	69	60	53
		HSM ≤ 0.05	≤ 2	1240	RPM	37894	18947	12631	9474	7579	6316
				(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165
					Feed (ipm)	159	208	265	265	227	208
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 1	≤ 1	865	RPM	26434	13217	8811	6609	5287	4406
				(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060
					Feed (ipm)	42	53	70	66	58	53
		Profile ≤ 0.5	≤ 1.5	1080	RPM	33005	16502	11002	8251	6601	5501
				(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060
					Feed (ipm)	53	66	88	83	73	66
		HSM ≤ 0.05	≤ 2	1780	RPM	54397	27198	18132	13599	10879	9066
				(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140
					Feed (ipm)	185	245	308	313	272	254
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Slot 1	≤ 1	345	RPM	10543	5272	3514	2636	2109	1757
				(276-414)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060
					Feed (ipm)	17	21	28	26	23	21
		Profile ≤ 0.5	≤ 1.5	430	RPM	13141	6570	4380	3285	2628	2190
				(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060
					Feed (ipm)	21	26	35	33	29	26
		HSM ≤ 0.05	≤ 2	710	RPM	21698	10849	7233	5424	4340	3616
				(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140
					Feed (ipm)	74	98	123	125	108	101
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		Slot 1	≤ 1	1600	RPM	48896	24448	16299	12224	9779	6112
				(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120
					Feed (ipm)	147	196	244	244	215	196
		Profile ≤ 0.5	≤ 1.5	2000	RPM	61120	30560	20373	15280	12224	10187
				(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120
					Feed (ipm)	183	244	306	306	269	244
		HSM ≤ 0.05	≤ 2	3300	RPM	100848	50424	33616	25212	20170	16808
				(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275
					Feed (ipm)	686	908	1143	1160	1008	924


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



47M

METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

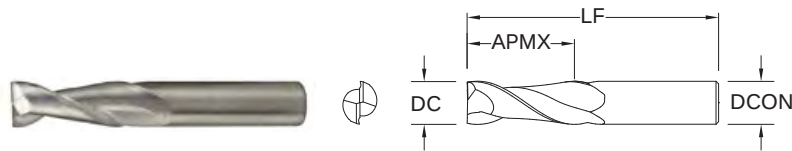

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	38,0	3,0	44550	44587
4,0	11,0	50,0	4,0	44551	44588
5,0	13,0	50,0	5,0	44552	44589
6,0	13,0	57,0	6,0	44553	44590
8,0	19,0	63,0	8,0	44554	44591
10,0	22,0	72,0	10,0	44555	44592
12,0	26,0	83,0	12,0	44556	44593
14,0	26,0	83,0	14,0	44557	44594
16,0	32,0	92,0	16,0	44558	44595
20,0	38,0	104,0	20,0	44559	44596
25,0	38,0	104,0	25,0	44560	44597

TOLERANCES (mm)

3 DIAMETER

DC = $+0,000/-0,006$
DCON = h_6

>3-6 DIAMETER

DC = $+0,000/-0,008$
DCON = h_6

>6-10 DIAMETER

DC = $+0,000/-0,009$
DCON = h_6

>10-18 DIAMETER


DC = $+0,000/-0,012$
DCON = h_6

>18-25 DIAMETER

DC = $+0,000/-0,013$
DCON = h_6

NON-FERROUS


For patent information visit
www.ksptpatents.com



47ML

METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

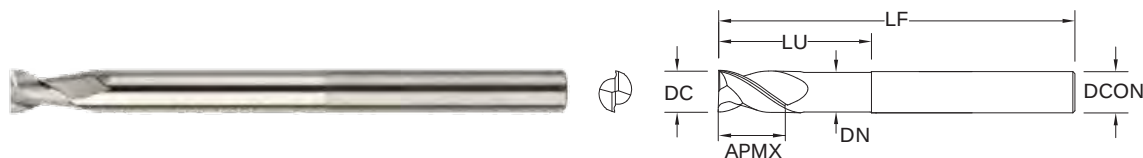

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44561	44609
8,0	12,0	100,0	8,0	54,0	7,62	44562	44610
10,0	12,0	100,0	10,0	54,0	9,62	44563	44611
12,0	16,0	150,0	12,0	80,0	11,62	44564	44612
16,0	20,0	150,0	16,0	80,0	15,62	44565	44613
20,0	25,0	150,0	20,0	80,0	19,62	44566	44614

TOLERANCES (mm)

6 DIAMETER

DC = $+0,000/-0,008$
DCON = h_6

>6-10 DIAMETER

DC = $+0,000/-0,009$
DCON = h_6

>10-18 DIAMETER



DC = $+0,000/-0,011$
DCON = h_6

>18-20 DIAMETER

DC = $+0,000/-0,013$
DCON = h_6

NON-FERROUS

For patent information visit
www.ksptpatents.com

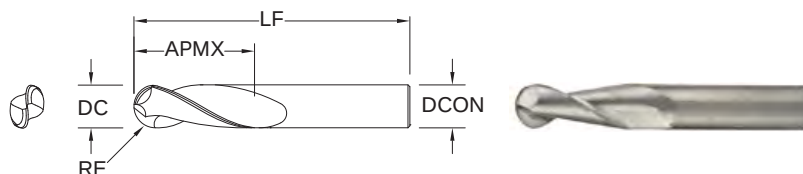

47MB
METRIC SERIES

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006
DCON = h₆
RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008
DCON = h₆
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h₆
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,012
DCON = h₆
RE = +0,0127/-0,0127

>18-25 DIAMETER

DC = +0,000/-0,013
DCON = h₆
RE = +0,0127/-0,0127



mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	38,0	3,0	44570	44598
4,0	11,0	50,0	4,0	44571	44599
5,0	13,0	50,0	5,0	44572	44600
6,0	13,0	57,0	6,0	44573	44601
8,0	19,0	63,0	8,0	44574	44602
10,0	22,0	72,0	10,0	44575	44603
12,0	26,0	83,0	12,0	44576	44604
14,0	26,0	83,0	14,0	44577	44605
16,0	32,0	92,0	16,0	44578	44606
20,0	37,3	104,0	20,0	44579	44607
25,0	38,0	104,0	25,0	44580	44608

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

NON-FERROUS

For patent information visit
www.ksptpatents.com

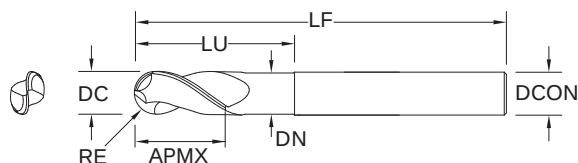

47MLB
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008
DCON = h₆
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h₆
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011
DCON = h₆
RE = +0,0127/-0,0127

>18-20 DIAMETER

DC = +0,000/-0,013
DCON = h₆
RE = +0,0127/-0,0127


mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	Ti-NAMITE®-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44581	44615
8,0	12,0	100,0	8,0	54,0	7,62	44582	44616
10,0	12,0	100,0	10,0	54,0	9,62	44583	44617
12,0	16,0	150,0	12,0	80,0	11,62	44584	44618
16,0	20,0	150,0	16,0	80,0	15,62	44585	44619
20,0	25,0	150,0	20,0	80,0	19,62	44586	44620

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball end design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)


NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 47M, 47MB, 47ML, 47MLB Metric				Vc (m/min)	DC • mm								
Hardness	Ae x DC	Ap x DC	3		6	10	12	16	20	25			
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243
					(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	2247	3121	3746	3745	3246	2913	2653	
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771
					(488-732)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	2797	3885	4663	4662	4041	3627	3303	
	 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804	
				(804-1206)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488	
				Feed (mm/min)	10754	14083	17925	17924	15364	14084	12484		
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	 Slot	1	≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357
					(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	848	1178	1414	1414	1226	1100	1002	
		 Profile	≤ 0.5	≤ 1.5	230	RPM	24418	12209	7326	6105	4578	3663	2930
					(184-276)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	1055	1465	1758	1758	1524	1367	1245	
	 HSM	≤ 0.05	≤ 2	380	RPM	40343	20172	12103	10086	7564	6052	4841	
				(304-456)	Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488	
				Feed (mm/min)	4066	5325	6778	6777	5809	5325	4720		
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	 Slot	1	≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376
					(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	1080	1350	1801	1688	1485	1350	1182	
		 Profile	≤ 0.5	≤ 1.5	330	RPM	35035	17518	10511	8759	6569	5255	4204
					(264-396)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	1345	1682	2242	2102	1850	1682	1472	
	 HSM	≤ 0.05	≤ 2	545	RPM	57861	28930	17358	14465	10849	8679	6943	
				(436-654)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400	
				Feed (mm/min)	4721	6248	7869	7984	6943	6480	5555		
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRC	 Slot	1	≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338
					(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	428	535	713	669	589	535	468	
		 Profile	≤ 0.5	≤ 1.5	130	RPM	13802	6901	4141	3450	2588	2070	1656
					(104-156)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	530	662	883	828	729	662	580	
	 HSM	≤ 0.05	≤ 2	215	RPM	22826	11413	6848	5706	4280	3424	2739	
				(172-258)	Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400	
				Feed (mm/min)	1862	2465	3104	3150	2739	2556	2191		
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 200 Bhn or ≤ 23 HRC	 Slot	1	≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243
					(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
					Feed (mm/min)	3745	4994	6243	6242	5493	4994	4370	
		 Profile	≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	12143	9714	7771
					(488-732)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
					Feed (mm/min)	4662	6217	7771	7771	6839	6217	5440	
	 HSM	≤ 0.05	≤ 2	1005	RPM	106698	53349	32009	26674	20006	16005	12804	
				(804-1206)	Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800	
				Feed (mm/min)	17412	23045	29022	29446	25607	23473	20487		

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fz \times 2 \times rpm$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

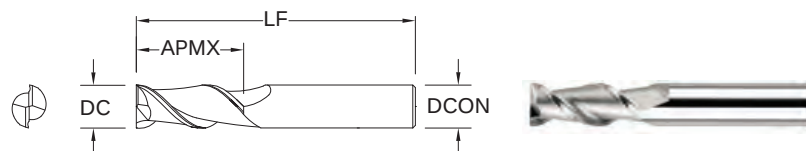

44

FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h₆

3/4–1 DIAMETER

DC = +0.0000/–0.00051

DCON = h₆
NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	Ti-NAMITE®-B (TiB ₂) W/FLAT	UNCOATED	Ti-NAMITE®-B (TiB ₂)
1/4	3/4	2-7/16	3/8	34501	34502	32033	32053
1/4	1-1/4	3-1/16	3/8	34503	34504	32034	32054
1/4	1-3/4	3-9/16	3/8	34505	34506	32035	32055
5/16	1-3/8	3-1/8	3/8	34507	34508	32036	32056
3/8	3/4	2-1/2	3/8	34509	34510	32037	32057
3/8	1-1/2	3-1/4	3/8	34511	34512	32038	32058
3/8	2-1/2	4-1/4	3/8	34513	34514	32039	32059
1/2	1-1/4	3-1/4	1/2	34515	34516	32040	32060
1/2	2	4	1/2	34517	34518	32041	32061
1/2	3	5	1/2	34519	34520	32042	32062
5/8	1-5/8	3-3/4	5/8	34521	34522	32043	32063
5/8	2-1/2	4-5/8	5/8	34523	34524	32044	32064
3/4	1-5/8	3-7/8	3/4	34525	34526	32045	32065
3/4	3	5-1/4	3/4	34527	34528	32046	32066
3/4	4	6-1/4	3/4	34529	34530	32047	32067
1	2	4-1/2	1	34531	34532	32048	32068
1	4	6-1/2	1	34533	34534	32049	32069

Contact your KSPT Sales Representative for more information on Corner Radius options.

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/–0,006

DCON = h₆

>3–6 DIAMETER

DC = +0,000/–0,008

DCON = h₆

>6–10 DIAMETER

DC = +0,000/–0,009

DCON = h₆

>10–18 DIAMETER

DC = +0,000/–0,011


DCON = h₆

>18–20 DIAMETER

DC = +0,000/–0,013

DCON = h₆
NON-FERROUS

For patent
information visit
www.ksptpatents.com

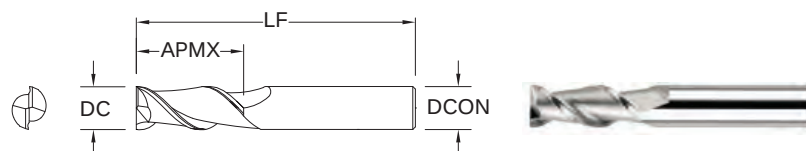


44M

METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	UNCOATED	Ti-NAMITE®-B (TiB ₂) W/FLAT	Ti-NAMITE®-B (TiB ₂)
3,0	8,0	52,0	6,0	44505	49663	44506	49674
4,0	11,0	55,0	6,0	44509	49664	44510	49675
5,0	13,0	57,0	6,0	44513	49665	44514	49676
6,0	13,0	57,0	6,0	44517	49666	44518	49677
8,0	19,0	69,0	10,0	44521	49667	44522	49678
10,0	22,0	72,0	10,0	44525	49668	44526	49679
12,0	26,0	83,0	12,0	44529	49669	44530	49680
14,0	26,0	83,0	14,0	44533	49670	44534	49681
16,0	32,0	92,0	16,0	44537	49671	44538	49682
18,0	32,0	92,0	18,0	44541	49672	44542	49683
20,0	38,0	104,0	20,0	44545	49673	44546	49684


Contact your KSPT Sales Representative for more information on Corner Radius options.

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)



Series 44	Fractional	Hardness			Vc (sfm)	DC • in												
			Ae x DC	Ap x DC		1/8	1/4	3/8	1/2	5/8	3/4	1						
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb		1	≤ 1	1600 (1280-1920)	RPM	<u>48896</u>	24448	16299	12224	9779	8149	6112					
						Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085					
						Feed (ipm)	88	122	147	147	127	114	104					
			≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	<u>61120</u>	<u>30560</u>	20373	15280	12224	10187	7640					
						Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085					
						Feed (ipm)	110	153	183	183	159	143	130					
		≤ 0.05	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606						
					Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195						
					Feed (ipm)	424	555	706	706	605	555	492						
					ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb		1	≤ 1	600 (480-720)	RPM	18336	9168	6112	4584	3667	3056	2292
											Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
											Feed (ipm)	33	46	55	55	48	43	39
	≤ 0.5	≤ 1.5	750 (600-900)	RPM			22920	11460	7640	5730	4584	3820	2865					
				Fz			0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085					
				Feed (ipm)			41	57	69	69	60	53	49					
	≤ 0.05	≤ 2	1240 (992-1488)	RPM		<u>37894</u>	18947	12631	9474	7579	6316	4737						
				Fz		0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195						
				Feed (ipm)		159	208	265	265	227	208	185						
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc		1	≤ 1		865 (692-1038)	RPM	26434	13217	8811	6609	5287	4406	3304				
							Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070				
							Feed (ipm)	42	53	70	66	58	53	46				
			≤ 0.5	≤ 1.5	1080 (864-1296)	RPM	33005	16502	11002	8251	6601	5501	4126					
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070					
						Feed (ipm)	53	66	88	83	73	66	58					
		≤ 0.05	≤ 2	1780 (1424-2136)	RPM	54397	27198	18132	13599	10879	9066	6800						
					Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160						
					Feed (ipm)	185	245	308	313	272	254	218						
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc		1	≤ 1	345 (276-414)	RPM	10543	5272	3514	2636	2109	1757	1318				
							Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070				
							Feed (ipm)	17	21	28	26	23	21	18				
			≤ 0.5	≤ 1.5	430 (344-516)	RPM	13141	6570	4380	3285	2628	2190	1643					
						Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070					
						Feed (ipm)	21	26	35	33	29	26	23					
		≤ 0.05	≤ 2	710 (568-852)	RPM	21698	10849	7233	5424	4340	3616	2712						
					Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160						
					Feed (ipm)	74	98	123	125	108	101	87						
PLASTICS ABS, Polycarbonate, PVC, Polypropylene				1	≤ 1	1600 (1280-1920)	RPM	<u>48896</u>	24448	16299	12224	9779	8149	6112				
							Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140				
							Feed (ipm)	147	196	244	244	215	196	171				
			≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	<u>61120</u>	<u>30560</u>	20373	15280	12224	10187	7640					
						Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140					
						Feed (ipm)	183	244	306	306	269	244	214					
		≤ 0.05	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606						
					Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320						
					Feed (ipm)	686	908	1143	1160	1008	924	807						

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



Series 44M Metric	Hardness			Vc (m/min)	DC • mm								
		Ae x DC	Ap x DC		3	6	10	12	16	20	25		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	 Slot	1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	2247	3121	3746	3745	3246	2913	2653
		 Profile	≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	2797	3885	4663	4662	4041	3627	3303
		 HSM	≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
						Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
						Feed (mm/min)	10754	14083	17925	17924	15364	14084	12484
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	 Slot	1	≤ 1	185 (148-222)	RPM	19641	9820	5892	4910	3683	2946	2357
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	848	1178	1414	1414	1226	1100	1002
		 Profile	≤ 0.5	≤ 1.5	230 (184-276)	RPM	24418	12209	7326	6105	4578	3663	2930
						Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
						Feed (mm/min)	1055	1465	1758	1758	1524	1367	1245
		 HSM	≤ 0.05	≤ 2	380 (304-456)	RPM	40343	20172	12103	10086	7564	6052	4841
						Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
						Feed (mm/min)	4066	5325	6778	6777	5809	5325	4720
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	 Slot	1	≤ 1	265 (212-318)	RPM	28134	14067	8440	7034	5275	4220	3376
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1080	1350	1801	1688	1485	1350	1182
		 Profile	≤ 0.5	≤ 1.5	330 (264-396)	RPM	35035	17518	10511	8759	6569	5255	4204
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	1345	1682	2242	2102	1850	1682	1472
		 HSM	≤ 0.05	≤ 2	545 (436-654)	RPM	57861	28930	17358	14465	10849	8679	6943
						Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
						Feed (mm/min)	4721	6248	7869	7984	6943	6480	5555
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	 Slot	1	≤ 1	105 (84-126)	RPM	11148	5574	3344	2787	2090	1672	1338
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	428	535	713	669	589	535	468
		 Profile	≤ 0.5	≤ 1.5	130 (104-156)	RPM	13802	6901	4141	3450	2588	2070	1656
						Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
						Feed (mm/min)	530	662	883	828	729	662	580
		 HSM	≤ 0.05	≤ 2	215 (172-258)	RPM	22826	11413	6848	5706	4280	3424	2739
						Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
						Feed (mm/min)	1862	2465	3104	3150	2739	2556	2191
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		 Slot	1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
						Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	3745	4994	6243	6242	5493	4994	4370
		 Profile	≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
						Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
						Feed (mm/min)	4662	6217	7771	7771	6839	6217	5440
		 HSM	≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
						Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800
						Feed (mm/min)	17412	23045	29022	29446	25607	23473	20487


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fz} \times 2 \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)



45

FRACTIONAL SERIES

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRC)

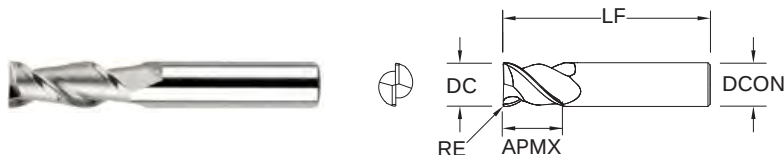

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.			
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED W/FLAT	UNCOATED	TI-NAMITE®-B (TiB ₂) W/FLAT	TI-NAMITE®-B (TiB ₂)
1/4	3/8	2-1/2	3/8	.010	91257	91250	91242	91235
5/16	7/16	2-1/2	3/8	.012	91258	91251	91243	91236
3/8	9/16	2-1/2	3/8	.015	91259	91252	91244	91237
1/2	3/4	3	1/2	.020	91260	91253	91245	91238
5/8	7/8	3-1/2	5/8	.025	91261	91254	91246	91239
3/4	1	4	3/4	.030	91262	91255	91247	91240
1	1-1/4	4	1	.040	91263	91256	91248	91241

Contact your KSPT representative for reach options.

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/–0.00035

DCON = h_6

RE = +0.0000/–0.0020

1/2–5/8 DIAMETER

DC = +0.0000/–0.00043

DCON = h_6

RE = +0.0000/–0.0020

3/4–1 DIAMETER


DC = +0.0000/–0.00051

DCON = h_6

RE = +0.0000/–0.0020

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Series 45 Fractional	Hardness			Vc (sfm)	DC • in							
		Ae x DC	Ap x DC		1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 88 HRb	 Slot	1	≤ 1	1600	RPM	24448	16299	12224	9779	8149	6112
					(1280-1920)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	122	147	147	127	114	104	
		 Profile	≤ 0.5	≤ 1.5	2000	RPM	30560	20373	15280	12224	10187	7640
					(1600-2400)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	153	183	183	159	143	130	
		 HSM	≤ 0.05	≤ 2	3300	RPM	50424	33616	25212	20170	16808	12606
					(2640-3960)	Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
					Feed (ipm)	555	706	706	605	555	492	
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Bhn or ≤ 77 HRb	 Slot	1	≤ 1	600	RPM	9168	6112	4584	3667	3056	2292
					(480-720)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	46	55	55	48	43	39	
		 Profile	≤ 0.5	≤ 1.5	750	RPM	11460	7640	5730	4584	3820	2865
					(600-900)	Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
					Feed (ipm)	57	69	69	60	53	49	
		 HSM	≤ 0.05	≤ 2	1240	RPM	18947	12631	9474	7579	6316	4737
					(992-1488)	Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
					Feed (ipm)	208	265	265	227	208	185	
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	 Slot	1	≤ 1	865	RPM	13217	8811	6609	5287	4406	3304
					(692-1038)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	53	70	66	58	53	46	
		 Profile	≤ 0.5	≤ 1.5	1080	RPM	16502	11002	8251	6601	5501	4126
					(864-1296)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	66	88	83	73	66	58	
		 HSM	≤ 0.05	≤ 2	1780	RPM	27198	18132	13599	10879	9066	6800
					(1424-2136)	Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
					Feed (ipm)	245	308	313	272	254	218	
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	 Slot	1	≤ 1	345	RPM	5272	3514	2636	2109	1757	1318
					(276-414)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	21	28	26	23	21	18	
		 Profile	≤ 0.5	≤ 1.5	430	RPM	6570	4380	3285	2628	2190	1643
					(344-516)	Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
					Feed (ipm)	26	35	33	29	26	23	
		 HSM	≤ 0.05	≤ 2	710	RPM	10849	7233	5424	4340	3616	2712
					(568-852)	Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
					Feed (ipm)	98	123	125	108	101	87	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		 Slot	1	≤ 1	1600	RPM	24448	16299	12224	9779	8149	6112
					(1280-1920)	Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
					Feed (ipm)	196	244	244	215	196	171	
		 Profile	≤ 0.5	≤ 1.5	2000	RPM	30560	20373	15280	12224	10187	7640
					(1600-2400)	Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
					Feed (ipm)	244	306	306	269	244	214	
		 HSM	≤ 0.05	≤ 2	3300	RPM	50424	33616	25212	20170	16808	12606
					(2640-3960)	Fz	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
					Feed (ipm)	908	1143	1160	1008	924	807	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
 rpm = Vc x 3.82 / DC
 ipm = Fz x 2 x rpm
 reduce speed and feed for materials harder than listed
 reduce cut depth and feed by 50% for long flute and long reach tools
 reduce feed and Ae when finish milling (.02 x DC maximum)
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

High Performance Drills



Hole Making

HIGH PERFORMANCE DRILLS	SERIES	DESCRIPTION	APPLICATION		PAGE	S&F PAGE
			● PREFERRED	○ ALTERNATE		
Hi-PerCarb®	142P (3XD)	2 Flute Internal Coolant 4 Margin 3XD	●		188	202
	142P (5XD)	2 Flute Internal Coolant 4 Margin 5XD	●		191	202
	142P (8XD)	2 Flute Internal Coolant 4 Margin 8XD	●		194	202
	142P (12XD)	2 Flute Internal Coolant 4 Margin 12XD	●		198	202
	143M-S (3XD)	2 Flute Internal Coolant 2 Margin 3XD	●	○	206	214
	143M-S (5XD)	2 Flute Internal Coolant 2 Margin 5XD	●	○	210	214
	141K (5xD)	3 Flute Internal Coolant 3 Margin 5xD	●		218	222
	131N (3xD)	3 Flute External Coolant 3 Margin 3xD		●	223	231
	131N (5xD)	3 Flute External Coolant 3 Margin 5xD		●	227	231
	135 (3xD)	2 Flute External Coolant 4 Margin 3xD	●	○	234	240
	135 (5xD)	2 Flute External Coolant 4 Margin 5xD	●	○	244	250
	146U (3xD)	2 Flute Internal Coolant 4 Margin 3xD	●	○	254	268
	146U (5xD)	2 Flute Internal Coolant 4 Margin 5xD	●	○	259	268
	136U (2xD)	2 Flute External Coolant 4 Margin 2xD	●	○	264	268
CFRP 8 Facet	120	2 Flute External Coolant 4 Margin CFRP		●	232	233

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	APLICACIÓN		PÁGINA	S&F PÁGINA
			● PREFERIDO	○ ALTERNATIVO		
Hi-PerCarb®	142P (3XD)	2 filos, refrigeración interna, 4 margen, 3XD	●		188	202
	142P (5XD)	2 filos, refrigeración interna, 4 margen, 5XD	●		191	202
	142P (8XD)	2 filos, refrigeración interna, 4 margen, 8XD	●		194	202
	142P (12XD)	2 filos, refrigeración interna, 4 margen, 12XD	●		198	202
	143M-S (3XD)	2 filos, refrigeración interna, 2 margen, 3XD	●	●	206	214
	143M-S (5XD)	2 filos, refrigeración interna, 2 margen, 5XD	●	●	210	214
	141K (5xD)	3 filos, refrigeración interna, 3 margen, 5xD	●		218	222
	131N (3xD)	3 filos, refrigeración externa, 3 margen, 3xD		●	223	231
	131N (5xD)	3 filos, refrigeración externa, 3 margen, 5xD		●	227	231
	135 (3xD)	2 filos, refrigeración externa, 4 margen, 3xD	●	●	234	240
	135 (5xD)	2 filos, refrigeración externa, 4 margen, 5xD	●	●	244	250
	146U (3xD)	2 filos, refrigeración interna, 4 margen, 3xD	●	●	254	268
	146U (5xD)	2 filos, refrigeración interna, 4 margen, 5xD	●	●	259	268
	136U (2xD)	2 filos, refrigeración externa, 4 margen, 2xD	●	●	264	268
				●		
De 8 caras CFRP	120	2 filos, refrigeración externa, 4 margen, CFRP		●	232	233

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS HAUTE PERFORMANCE	SÉRIES	DESCRIPTION	APPLICATION		PAGE	S&F PAGE
			● PRÉFÉRÉ	○ ALTERNER		
Hi-PerCarb®	142P (3XD)	2 dents trou d'huile 4 listel 3XD	●		188	202
	142P (5XD)	2 dents trou d'huile 4 listel 5XD	●		191	202
	142P (8XD)	2 dents trou d'huile 4 listel 8XD	●		194	202
	142P (12XD)	2 dents trou d'huile 4 listel 12XD	●		198	202
	143M-S (3XD)	2 dents trou d'huile 2 listel 3XD	●	●	206	214
	143M-S (5XD)	2 dents trou d'huile 2 listel 5XD	●	●	210	214
	141K (5xD)	3 dents refroidissement interne à 3 listel 5xD	●		218	222
	131N (3xD)	3 dents refroidissement externe à 3 listel 3xD		●	223	231
	131N (5xD)	3 dents refroidissement externe à 3 listel 5xD		●	227	231
	135 (3xD)	2 dents refroidissement externe à 4 listel 3xD	●	●	234	240
	135 (5xD)	2 dents refroidissement externe à 4 listel 5xD	●	●	244	250
	146U (3xD)	2 dents refroidissement interne à 4 listel 3xD	●	●	254	268
	146U (5xD)	2 dents refroidissement interne à 4 listel 5xD	●	●	259	268
	136U (2xD)	2 dents refroidissement externe à 4 listel 2xD	●	●	264	268
				●		
CFRP à 8 facettes	120	2 dents refroidissement externe à 4 listel CFRP		●	232	233


Recommandations de vitesse et avance indiquées après chaque série

Bohren

HOCHLEISTUNGS- BOHRER	SERIE	BESCHREIBUNG	ANWENDUNG		SEITE	S&F SEITE
			● BEVORZUGT	○ WECHSELN		
Hi-PerCarb®	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 3xD	●		188	202
	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 5xD	●		191	202
	142P (3XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 8xD	●		194	202
	142P (12XD)	Doppelfasenbohrer mit 4 Schneiden und Innenkühlung, 12xD	●		198	202
	143M-S (3XD)	2 Einfasenbohrer mit 2 Schneiden und Innenkühlung, 3xD	●	●	206	214
	143M-S (5XD)	2 Einfasenbohrer mit 2 Schneiden und Innenkühlung, 5xD	●	●	210	214
	141K (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Innenkühlung	●		218	222
	131N (3xD)	Dreifasenbohrer 3xD mit 3 Schneiden und Außenkühlung		●	223	231
	131N (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Außenkühlung		●	227	231
	135 (3xD)	Doppelfasenbohrer 3xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		234	240
	135 (5xD)	Doppelfasenbohrer 5xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		244	250
	146U (3xD)	Doppelfasenbohrer 3xD mit 4 Schneiden und Innenkühlung	● ● ● ● ● ●		254	268
	146U (5xD)	Doppelfasenbohrer 5xD mit 4 Schneiden und Innenkühlung	● ● ● ● ● ●		259	268
	136U (2xD)	Doppelfasenbohrer 2xD mit 4 Schneiden und Außenkühlung	● ● ● ● ● ●		264	268
CFRP 8 Facet	120	Doppelfasenbohrer CFRP mit 4 Schneiden und Außenkühlung		●	232	233

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

Drill Matrix

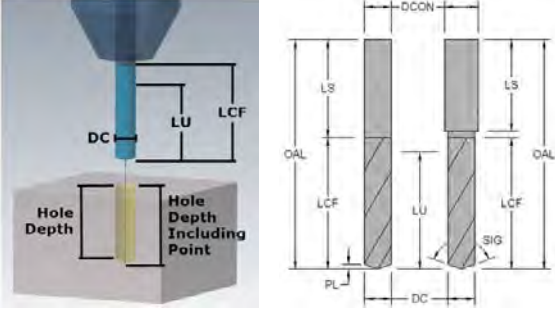Item				Preferred Cut Type for Series ★ Best ☆ Better ○ Good (blank) Not Recommended																		
				Material																		
				Low Carbon ≤ 20 HRC	Medium Carbon, Alloy 20 to 35 HRC	High Carbon, Alloy 35 to 45 HRC	Ferritic & Martensitic ≤ 45 HRC	Austenitic & Duplex ≤ 25 HRC	Precipitation Hardened ≤ 45 HRC	Low Alloy, Grey, Ductile ≤ 25 HRC	Med-High Alloy, Nodular 25 to 35 HRC	High Alloy, Nodular ≥ 35 HRC	Aluminum Alloys	Copper Alloys	Plastics, Composites	Titanium Alloys ≤ 45 HRC	Iron, Nickel, Cobalt Alloys ≤ 45 HRC	Refractory Alloys, Mo, Ta, W ≤ 35 HRC	High Carbon, Med Alloy 45 to 50 HRC	Tool, Mold & Die 45 to 55 HRC	Tool, Mold & Die 55 to 65 HRC	
Name / Series	Tool Type	Coolant Delivery	Page	Steel			Stainless Steel			Cast Iron			Non Ferrous			HRSA			Hard Steel			
Hi-PerCarb® 142P	High Performance Drill	Internal	188	★	★	★	☆	☆	☆	☆	☆	☆	☆	★		☆	☆	☆	★	☆	☆	
Hi-PerCarb® 143M-S	High Performance Drill	Internal	206	☆			★	★	★	☆	☆	☆	○	★		★	★	★				
Hi-PerCarb® 141K	High Performance Drill	Internal	218	☆	☆	☆	○		○	★	★	★	☆	☆		○		○				
Hi-PerCarb® 131N	High Performance Drill	External	223							○			★	★	☆	○						
Series 120	High Performance Drill	External	232												★							
Hi-PerCarb® 135	High Performance Drill	External	234	★	★	★	★	☆	★	☆	☆	☆	○	○		☆	☆	☆	★	☆	☆	
Hi-PerCarb® 146U	High Performance Drill	Internal	254	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Hi-PerCarb® 136U	High Performance Drill	External	264	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Series 120	High Performance Drill	External	232												★							
Series 106	General Application Drill	External	348	○	○	○						☆							★	★	☆	
Series 101	General Application Drill	External	336	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○				
Series 103	General Application Drill	External	352	○	○	○	○	○	○	○	☆	☆	○			○	○	○				
Series 108	General Application Drill	External	341	★	☆	☆	☆	☆	☆	☆	☆	☆		○	○	☆	☆	☆				
Series 301, 301M	Drill & Countersink	External	358	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	○	○	☆	○	○	
Series 601	Countersink	External	364	○	○	○	○	★	○	☆	☆	☆	★	☆	○	○	○	○				
Series 603	Countersink	External	367	☆	☆	☆	☆	★	☆	★	☆	☆	★	★	☆	☆	☆	☆	○			
Series 606	Countersink	External	370	★	★	★	★	★	★	★	★	★	○	★	★	★	★	★	☆	☆	○	
Series 200	Reamer	External	374	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	○	
Series 201M	Reamer	External	378	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	○	

Drill Matrix


	Attributes										
	Material hardness and machinability affect speed, feed, and cut depths. For dimensional and finish quality, a low TIR of the tool-holder assembly in the machine is critical: less than 0.1% drill diameter is preferred. Spot drilling is not necessary in most situations if the drilling surface is machined flat ; spot drill point angle should be greater than drill point angle. Liquid coolant (internal or external) such as oil based or synthetic is highly recommended for all drilling applications. For proper cooling, lubrication and chip evacuation, ensure the coolant is supplied throughout the entire depth of the hole. When liquid coolant cannot be applied for applications such as plastics or composites, clear the swarf with air or vacuum. Depending on material machinability, a peck cycle may be necessary for external coolant drills beyond 2x or 3x depths.										
	Diameter Range inch	Diameter Range mm	Tolerance	Length	Point Angle °	Self Centering	Flute Count	Margins	Helix Angle °	Shank	Coating
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x, 8x, 12x	137	yes	2	4	30	Common	Ti-NAMITE®-X
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x	136	yes	2	2	30	Common	Ti-NAMITE®-A
	0.1250 0.7500	3,00 16,00	DC + / +	5x	124	yes	3	3	30	Common	Ti-NAMITE®-X
	0.1250 0.7500	3,00 16,00	DC + / +	3x, 5x	124	yes	3	3	30	Common	Ti-NAMITE®-B
	0.0980 0.5000	2,70 12,00	DC 0 / -	3x	145, 90	yes	2	4	20	Common	Di-NAMITE®
	0.0156 0.9219	1,25 22,00	DC + / +	3x, 5x	145	yes	2	4	32	Common	Ti-NAMITE®-A
	0.1250 0.8125	3,00 20,50	DC + / +	3x, 5x	180	yes	2	4	15	Common	Ti-NAMITE®-X
	0.0625 0.8125	1,50 20,50	DC + / +	2x	180	yes	2	4	15	Common	Ti-NAMITE®-X
	0.0980 0.5000	2,70 12,00	DC + / -	3x	145, 90	yes	2	4	20	Common	Di-Namite®
	0.0400 0.5000	1,00 12,00	DC 0 / -	3x	140	yes	2	2	0	Straight	Ti-NAMITE®-A or uncoated
	0.0135 0.5000	0,70 12,00	DC 0 / -	5x	118	no	2	2	20	Straight	Ti-NAMITE®-A or uncoated
	0.1065 0.7500	3,00 20,00	DC 0 / -	3x	150	yes	3	3	30	Straight	Ti-NAMITE®-A or uncoated
	-	0,50 16,00	DC 0 / -	3x	118	yes	2	2	20	Straight	Ti-NAMITE®-A or uncoated
	0.0250 0.2188	0,50 5,00	DC + / 0	spot	118, 60	yes	2	2	0	Straight	Ti-NAMITE®-A or uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	1	-	0	Common	uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	3	-	0	Common	uncoated
	0.1250 1.0000	-	DC + / -	spot	60, 82, or 90	yes	6	6	0	Common	uncoated
	0.0469 0.5000	-	DC + / 0	varies	-	-	4 or 6	4 or 6	0	Straight	uncoated
	-	1,00 10,00	DC + / 0	varies	-	-	4 or 6	4 or 6	0	Straight	uncoated

Drilling Operations



Coolant Recommendations

- Coolant works to mobilize chips away from the cut zone, reduce the heat created during the cutting process and minimize friction.
- It is important to optimize the coolant pressure and position in order to gain the full benefits coolant offers the cutting process.
- Proper coolant application promotes greater operating parameters, greater material removal rates, improved surface finishes, predictable tool life, reduced power consumption and reduced cycle times.
- Pressure is important, but more importantly is consistency of the pressure and application onto the tool; intermittent cooling of carbide leads to thermal stressing of the material and the formation of "microcracks."
- Proper cleanliness and filtration of coolants is important in order for the coolant to maintain its beneficial properties, and also to avoid a reduction in coolant pressure or the possibility of clogging the coolant channels in coolant through drills.


RECOMMENDED COOLANT PRESSURE
BY DIAMETER – psi

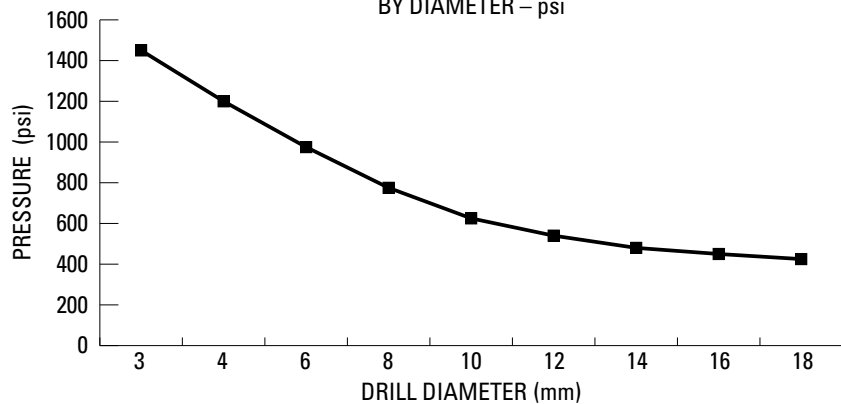

RECOMMENDED COOLANT PRESSURE
BY DIAMETER – bar

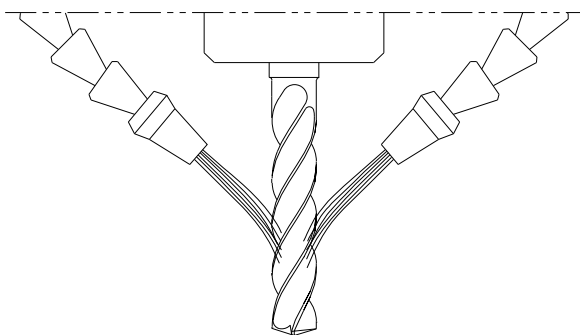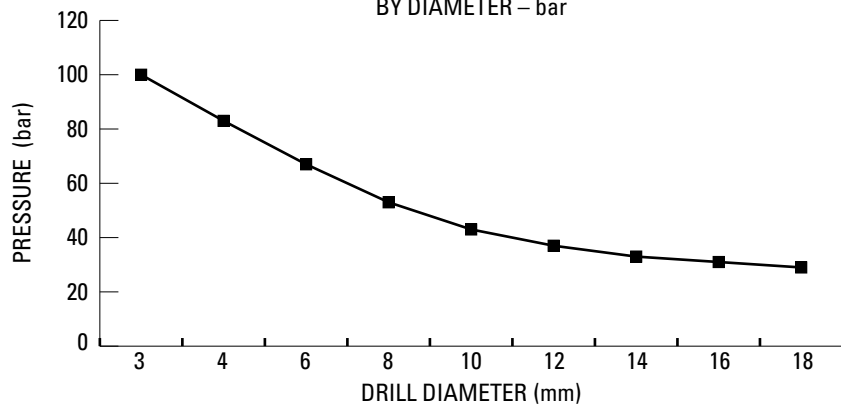

LARGE TIP – LOW VELOCITY
NO COVERAGE AT MAXIMUM DEPTH



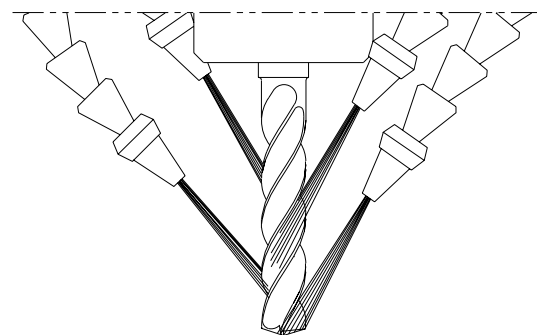


SMALL TIP – HIGH VELOCITY
COMPLETE COVERAGE


- Reducing the nozzle size helps maximize the cooling benefits of the unique double margin design on the Hi-PerCarb drill by increasing velocity. Aim the nozzles in line with the secondary flute located between the two margins as well as the flute for best results.

Recomendaciones en operacion de taladrado

- El líquido de refrigeración actúa movilizandando las virutas fuera de la zona de corte, disminuyendo el calor generado durante el proceso de corte y minimizando la fricción.
- Es importante optimizar la presión de la refrigeración y la posición para poder obtener todos los beneficios del refrigerante durante el proceso de corte.
- Una aplicación apropiada de la refrigeración fomenta mayores parámetros de operación, mayores índices de eliminación de material, acabados de superficie mejorados, una duración de la herramienta más predecible, bajo consumo de energía y un tiempo de ciclo reducido.
- La presión del refrigerante es importante, pero lo es más el flujo continuo aplicado a la herramienta; una refrigeración intermitente en el carburo puede ocasionar un estrés térmico en el material y la formación de "micro-fisuras".
- Una limpieza y filtración adecuadas son importantes para que el refrigerante mantenga sus propiedades y beneficios; por otra parte, se evita la reducción de la presión o la posibilidad de obstruir los canales de refrigeración de la broca.

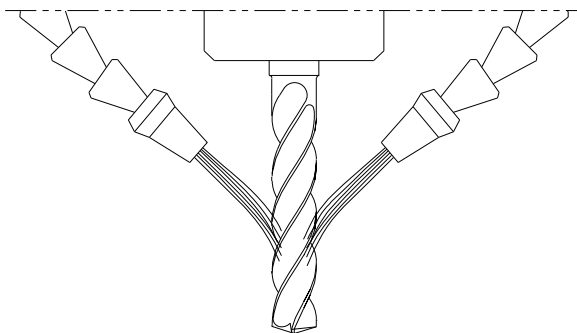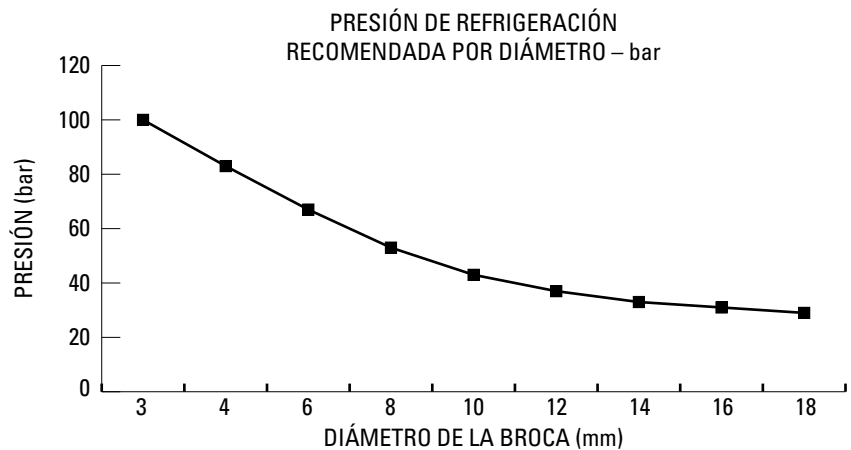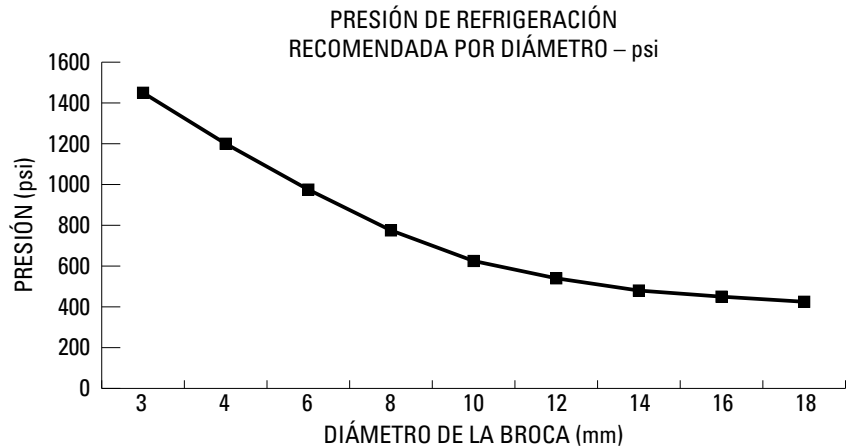

PUNTA GRANDE – BAJA VELOCIDAD
SIN ALCANCE A PROFUNDIDAD MÁXIMA

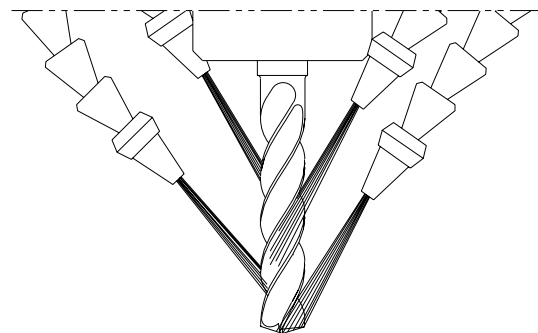




PUNTA PEQUEÑA – ALTA VELOCIDAD
COMPLETO ALCANCE

- Reducir el tamaño de la boquilla ayuda a maximizar los beneficios de refrigeración del exclusivo diseño de doble margen de la broca. Hi-PerCarb aumentando la velocidad. Coloque las boquillas en línea con el segundo filo que se encuentra entre los dos márgenes y también el filo para obtener mejores resultados.


Opérations de perçage

Recommandations en matière de refroidissement

- Le liquide de refroidissement sert à éloigner les copeaux de la zone de coupe, à réduire la chaleur dégagée durant la coupe et à minimiser la friction.
- Il est important d'optimiser la pression et la position du réfrigérant pour en retirer les bénéfices maximums durant la coupe.
- L'application adéquate de réfrigérant se traduit par des paramètres opératoires supérieurs, des taux d'élimination supérieurs des matériaux, de plus belles finitions des surfaces, une durée de vie des outils prévisible, moins de consommation d'énergie et des temps de cycle réduits.
- La pression est importante, mais une pression régulière et l'application sur l'outil sont des facteurs encore plus importants ; le refroidissement intermittent du carbure se traduit par des contraintes thermiques pour le matériau et la formation de microfissures.
- La propreté et le filtrage adéquats des réfrigérants sont importants pour qu'ils conservent leur propriétés, mais aussi pour éviter la réduction de pression du réfrigérant ou le risque d'obturation des conduits à réfrigérant dans les perceuses à réfrigérant intégré.

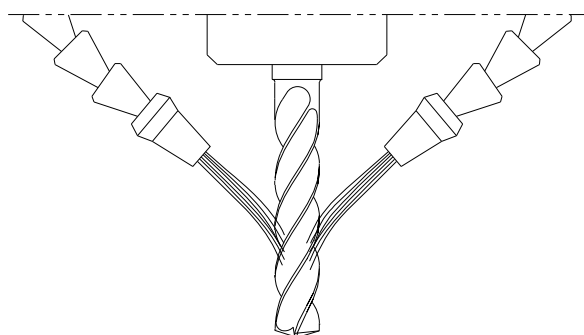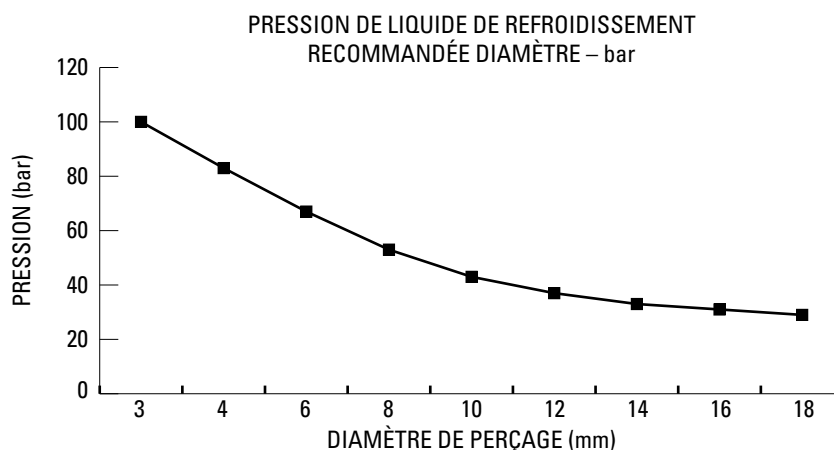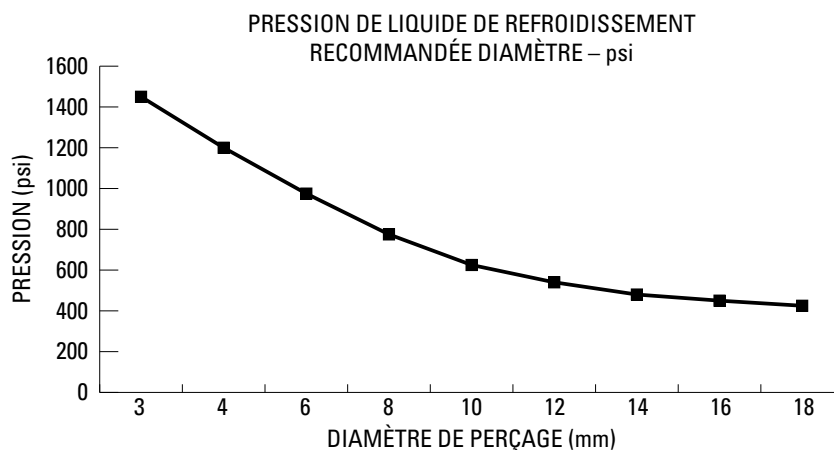

POINTE LARGE – BASSE VITESSE
PAS DE COUVERTURE À LA PROFONDEUR MAXIMUM



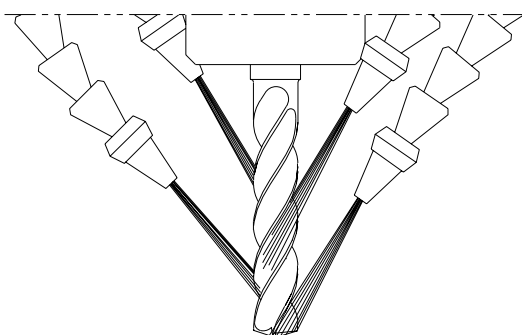


POINTE FINE – GRANDE VITESSE
COUVERTURE COMPLÈTE


- La réduction de la taille de l'embout permet de maximiser les bienfaits du refroidissement du concept à double listel original de la perceuse Hi-PerCarb en augmentant la vitesse. Pour les meilleurs résultats, orientez les embouts dans l'axe de la goujure secondaire située entre les deux listels, de même que la goujure primaire.

Bohrarbeiten **Kühlmittlempfehlungen**

- Kühlmittel dienen dazu, die Späne aus dem Schneidenbereich zu entfernen, die beim Schneiden erzeugte Wärme abzutransportieren und die Reibung zu verringern.
- Es kommt darauf an, den Kühlschmiermitteldruck und die Zufuhr zu optimieren, um alle Vorteile beim Bohren nutzen zu können.
- Der richtige Kühlschmiermitteleinsatz ermöglicht höhere Schnittparameter, höheren Materialabtrag, bessere Oberflächengüte, vorhersehbare Standzeiten und geringere Leistungsaufnahme und Laufzeiten.
- Der Druck ist wichtig, aber wichtiger ist dessen Konstanz und die Zufuhr zum Werkzeug. Unterbrochene Kühlung des Hartmetalls führt zur thermischen Belastung und Bildung von "Mikrorissen".
- Kühlmittel sind sauber zu halten und zu filtern, damit die Qualität des Kühlmittels erhalten bleibt und der Kühlmitteldruck durch Verstopfung der Kühlmittelkanäle im Bohrer nicht absinkt.

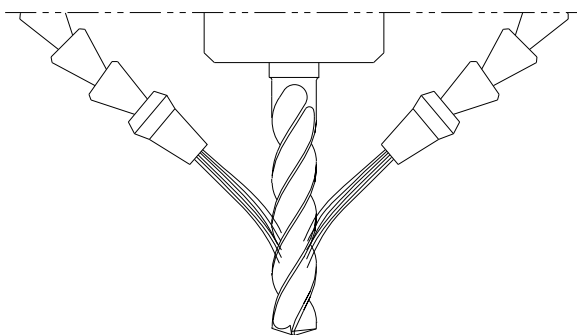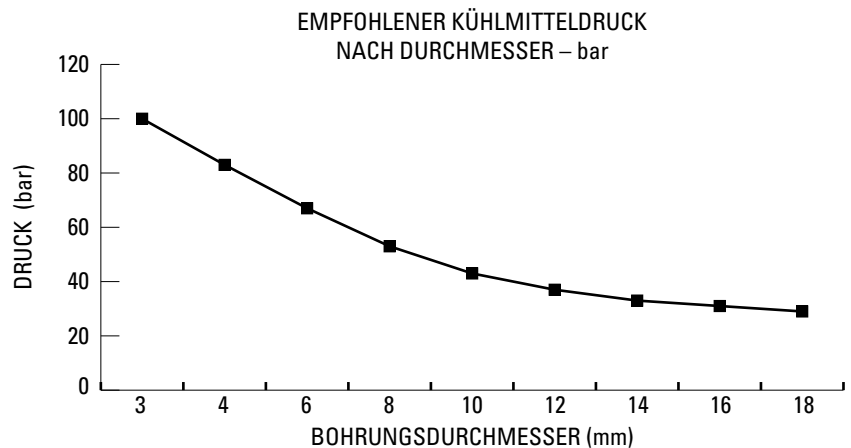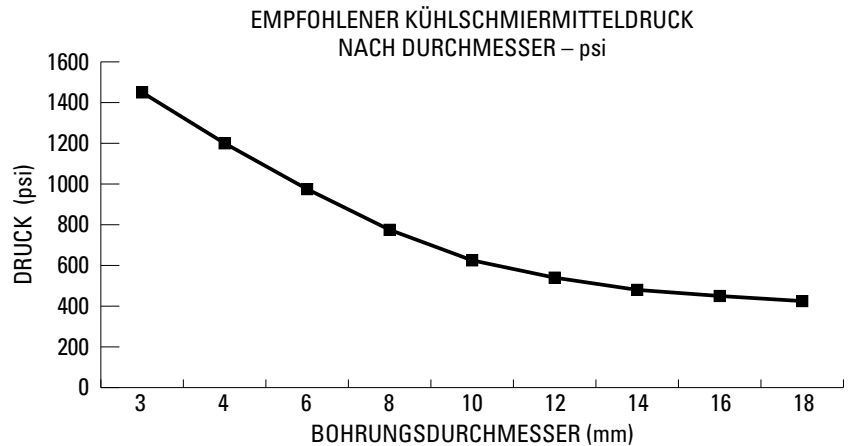

BREITE QUERSCHNEIDE – GERINGE DREHZAHL
KEINE VOLLSTÄNDIGE BENETZUNG BEI MAX. BOHRUNGSTIEFE

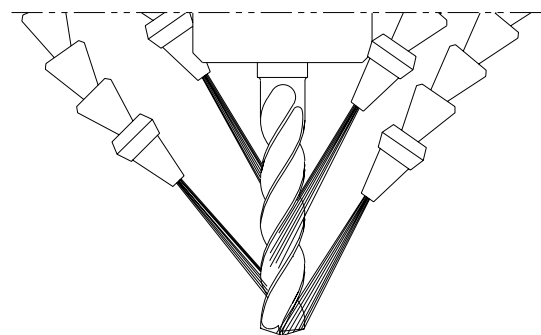

SCHMALE QUERSCHNEIDE – HOHE DREHZAHL
VOLLSTÄNDIGE BENETZUNG

- Durch Verringern der Düsengröße können die vorteilhaften Eigenschaften der Doppelfase genutzt werden, um die Drehzahl des Hi-PerCarb-Bohrers zu steigern. Richten Sie die Düsen auf die Nebennut zwischen beiden Fasen sowie auf die Schneiden aus, um beste Ergebnisse zu erzielen.




3xD



142P 3xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	66400
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	66401
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	56400
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	66402
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	66403
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	66404
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	56401
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	66405
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	56402
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	66406
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	66407
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	66408
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	66409
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	56403
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	66410
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	56404
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	66411
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	66412
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	66413
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	56405
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	66414
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	66415
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	66416
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	66417
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	56406
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	66418
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	66419
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	66420
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	66421
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	56407
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	66422
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	66423
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	66424
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	66425
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	56408
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	66426
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	66427
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	66428
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	66429
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	56409
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	66430
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	66431
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	66432
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	66433

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

142P 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					TI-NAMITE®-X (TX)
0.2500	6,350 mm	1/4 E	8,0	79,0	34,0	24,0	36,0	56410
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	66434
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	66435
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	56411
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	66436
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	66437
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	56412
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	66438
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	66439
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	66440
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	66441
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	56413
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	66442
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	66443
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	66444
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	66445
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	56414
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	66446
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	66447
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	66448
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	66449
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	56415
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	66450
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	66451
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	66452
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	66453
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	56416
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	66454
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	56417
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	66455
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	66456
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	66457
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	56418
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	66458
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	66459
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	66460
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	66461
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	56419
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	66462
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	66463
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	56420
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	66464
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	66465
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	56421
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	66466
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	66467
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	66468
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	66469
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	56422
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	66470
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	66471
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	66472
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	66473
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	56423

continued on next page

CONTINUED




3xD



142P 3xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life

- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation

- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle

- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications

- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm						EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	TI-NAMITE®-X (TX)
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	66474
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	66475
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	66476
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	66477
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	56424
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	66478
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	66479
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	66480
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	66481
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	56425
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	66482
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	66483
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	66484
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	66485
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	66486
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	66487
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	66488
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	66489
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	56426
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	66490
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	56427
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	66491
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	56428
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	66492
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	66493
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	56429
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	66494
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	66495
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	66496
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	56430
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	66497
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	56431
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	66498
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	66499
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	66500
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	66501
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	56432
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	66502
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	56433
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	56434
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	56435

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS


CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com



142P 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGHTEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	66503
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	66504
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	56436
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	66505
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	66506
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	66507
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	56437
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	66508
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	56438
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	66509
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	66510
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	66511
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	66512
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	56439
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	66513
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	56440
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	66514
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	66515
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	66516
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	56441
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	66517
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	66518
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	66519
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	66520
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	56442
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	66521
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	66522
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	66523
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	66524
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	56443
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	66525
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	66526
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	66527
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	66528
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	56444
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	66529
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	66530
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	66531
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	66532
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	56445
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	66533
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	66534
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	66535

continued on next page

- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4 margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤50HRc (475 Bhn)




5xD



142P 5xD

FRACTIONAL & METRIC SERIES

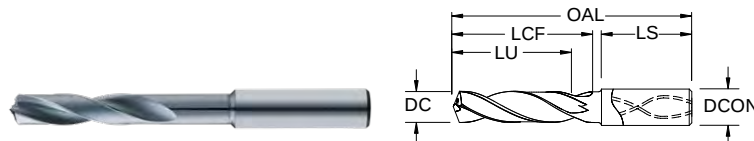

- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

		inch & mm						EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	66536
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	56446
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	66537
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	66538
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	56447
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	66539
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	66540
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	56448
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	66541
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	66542
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	66543
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	66544
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	56449
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	66545
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	66546
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	66547
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	66548
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	56450
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	66549
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	66550
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	66551
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	66552
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	56451
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	66553
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	66554
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	66555
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	66556
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	56452
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	66557
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	56453
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	66558
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	66559
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	66560
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	56454
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	66561
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	66562
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	66563
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	66564
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	56455
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	66565
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	66566
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	56456
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	66567

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 5xD


FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE®-X (TX)
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	66568
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	56457
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	66569
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	66570
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	66571
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	66572
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	56458
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	66573
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	66574
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	66575
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	66576
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	56459
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	66577
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	66578
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	66579
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	66580
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	56460
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	66581
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	66582
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	66583
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	66584
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	56461
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	66585
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	66586
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	66587
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	66588
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	66589
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	66590
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	66591
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	66592
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	56462
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	66593
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	56463
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	66594
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	56464
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	66595
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	66596
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	56465
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	66597
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	66598
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	66599
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	56466
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	66600
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	56467
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	66601
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	66602
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	66603
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	66604
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	56468
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	66605
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	56469
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	56470
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	56471

CONTINUED



8xD



142P 8xD

FRACTIONAL & METRIC SERIES

- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	72,0	34,0	29,0	36,0	66606
0.1220	3,100 mm		6,0	72,0	34,0	29,0	36,0	66607
0.1250	3,175 mm	1/8	6,0	72,0	34,0	29,0	36,0	56472
0.1260	3,200 mm		6,0	72,0	34,0	29,0	36,0	66608
0.1299	3,300 mm		6,0	72,0	34,0	29,0	36,0	66609
0.1339	3,400 mm		6,0	72,0	34,0	29,0	36,0	66610
0.1360	3,454 mm	#29	6,0	72,0	34,0	29,0	36,0	56473
0.1378	3,500 mm		6,0	72,0	34,0	29,0	36,0	66611
0.1406	3,571 mm	9/64	6,0	72,0	34,0	29,0	36,0	56474
0.1417	3,600 mm		6,0	72,0	34,0	29,0	36,0	66612
0.1457	3,700 mm		6,0	72,0	34,0	29,0	36,0	66613
0.1496	3,800 mm		6,0	81,0	43,0	37,0	36,0	66614
0.1535	3,900 mm		6,0	81,0	43,0	37,0	36,0	66615
0.1562	3,967 mm	5/32	6,0	81,0	43,0	37,0	36,0	56475
0.1575	4,000 mm		6,0	81,0	43,0	37,0	36,0	66616
0.1590	4,039 mm	#21	6,0	81,0	43,0	37,0	36,0	56476
0.1614	4,100 mm		6,0	81,0	43,0	37,0	36,0	66617
0.1654	4,200 mm		6,0	81,0	43,0	37,0	36,0	66618
0.1693	4,300 mm		6,0	81,0	43,0	37,0	36,0	66619
0.1719	4,366 mm	11/64	6,0	81,0	43,0	36,0	36,0	56477
0.1732	4,400 mm		6,0	81,0	43,0	36,0	36,0	66620
0.1772	4,500 mm		6,0	81,0	43,0	36,0	36,0	66621
0.1811	4,600 mm		6,0	81,0	43,0	36,0	36,0	66622
0.1850	4,699 mm	#13	6,0	81,0	43,0	36,0	36,0	66623
0.1875	4,763 mm	3/16	6,0	95,0	57,0	50,0	36,0	56478
0.1890	4,801 mm	#12	6,0	95,0	57,0	50,0	36,0	66624
0.1929	4,900 mm		6,0	95,0	57,0	50,0	36,0	66625
0.1969	5,000 mm		6,0	95,0	57,0	49,0	36,0	66626
0.2008	5,100 mm		6,0	95,0	57,0	49,0	36,0	66627
0.2031	5,159 mm	13/64	6,0	95,0	57,0	49,0	36,0	56479
0.2047	5,200 mm		6,0	95,0	57,0	49,0	36,0	66628
0.2087	5,300 mm		6,0	95,0	57,0	49,0	36,0	66629
0.2126	5,400 mm		6,0	95,0	57,0	49,0	36,0	66630
0.2165	5,500 mm		6,0	95,0	57,0	49,0	36,0	66631
0.2188	5,558 mm	7/32	6,0	95,0	57,0	49,0	36,0	56480
0.2205	5,600 mm		6,0	95,0	57,0	49,0	36,0	66632

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 8xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	95,0	57,0	48,0	36,0	66633
0.2283	5,800 mm		6,0	95,0	57,0	48,0	36,0	66634
0.2323	5,900 mm		6,0	95,0	57,0	48,0	36,0	66635
0.2344	5,954 mm	15/64	6,0	95,0	57,0	48,0	36,0	56481
0.2362	6,000 mm		6,0	95,0	57,0	48,0	36,0	66636
0.2402	6,100 mm		8,0	114,0	76,0	67,0	36,0	66637
0.2441	6,200 mm		8,0	114,0	76,0	67,0	36,0	66638
0.2480	6,300 mm		8,0	114,0	76,0	67,0	36,0	66639
0.2500	6,350 mm	1/4 E	8,0	114,0	76,0	66,0	36,0	56482
0.2520	6,400 mm		8,0	114,0	76,0	66,0	36,0	66640
0.2559	6,500 mm		8,0	114,0	76,0	66,0	36,0	66641
0.2570	6,528 mm	F	8,0	114,0	76,0	66,0	36,0	56483
0.2598	6,600 mm		8,0	114,0	76,0	66,0	36,0	66642
0.2638	6,700 mm		8,0	114,0	76,0	66,0	36,0	66643
0.2656	6,746 mm	17/64	8,0	114,0	76,0	66,0	36,0	56484
0.2677	6,800 mm		8,0	114,0	76,0	66,0	36,0	66644
0.2717	6,900 mm		8,0	114,0	76,0	66,0	36,0	66645
0.2756	7,000 mm		8,0	114,0	76,0	65,0	36,0	66646
0.2795	7,100 mm		8,0	114,0	76,0	65,0	36,0	66647
0.2812	7,142 mm	9/32	8,0	114,0	76,0	65,0	36,0	56485
0.2835	7,200 mm		8,0	114,0	76,0	65,0	36,0	66648
0.2874	7,300 mm		8,0	114,0	76,0	65,0	36,0	66649
0.2913	7,400 mm		8,0	114,0	76,0	65,0	36,0	66650
0.2953	7,500 mm		8,0	114,0	76,0	65,0	36,0	66651
0.2969	7,541 mm	19/64	8,0	114,0	76,0	65,0	36,0	56486
0.2992	7,600 mm		8,0	114,0	76,0	65,0	36,0	66652
0.3031	7,700 mm		8,0	114,0	76,0	64,0	36,0	66653
0.3071	7,800 mm		8,0	114,0	76,0	64,0	36,0	66654
0.3110	7,900 mm		8,0	114,0	76,0	64,0	36,0	66655
0.3125	7,938 mm	5/16	8,0	114,0	76,0	64,0	36,0	56487
0.3150	8,000 mm		8,0	114,0	76,0	64,0	36,0	66656
0.3189	8,100 mm		10,0	142,0	95,0	83,0	40,0	66657
0.3228	8,200 mm		10,0	142,0	95,0	83,0	40,0	66658
0.3268	8,300 mm		10,0	142,0	95,0	83,0	40,0	66659
0.3281	8,334 mm	21/64	10,0	142,0	95,0	83,0	40,0	56488
0.3307	8,400 mm		10,0	142,0	95,0	82,0	40,0	66660
0.3320	8,433 mm	Q	10,0	142,0	95,0	82,0	40,0	56489
0.3346	8,500 mm		10,0	142,0	95,0	82,0	40,0	66661
0.3386	8,600 mm		10,0	142,0	95,0	82,0	40,0	66662
0.3425	8,700 mm		10,0	142,0	95,0	82,0	40,0	66663
0.3438	8,733 mm	11/32	10,0	142,0	95,0	82,0	40,0	56490
0.3465	8,800 mm		10,0	142,0	95,0	82,0	40,0	66664
0.3504	8,900 mm		10,0	142,0	95,0	82,0	40,0	66665
0.3543	9,000 mm		10,0	142,0	95,0	82,0	40,0	66666

continued on next page

CONTINUED



8xD



142P 8xD

FRACTIONAL & METRIC SERIES

- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRC (475 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.3583	9,100 mm		10,0	142,0	95,0	81,0	40,0	66667	
0.3594	9,129 mm	23/64	10,0	142,0	95,0	81,0	40,0	56491	
0.3622	9,200 mm		10,0	142,0	95,0	81,0	40,0	66668	
0.3661	9,300 mm		10,0	142,0	95,0	81,0	40,0	66669	
0.3680	9,347 mm	U	10,0	142,0	95,0	81,0	40,0	56492	
0.3701	9,400 mm		10,0	142,0	95,0	81,0	40,0	66670	
0.3740	9,500 mm		10,0	142,0	95,0	81,0	40,0	66671	
0.3750	9,525 mm	3/8	10,0	142,0	95,0	81,0	40,0	56493	
0.3780	9,600 mm		10,0	142,0	95,0	81,0	40,0	66672	
0.3819	9,700 mm		10,0	142,0	95,0	80,0	40,0	66673	
0.3858	9,800 mm		10,0	142,0	95,0	80,0	40,0	66674	
0.3898	9,900 mm		10,0	142,0	95,0	80,0	40,0	66675	
0.3906	9,921 mm	25/64	10,0	142,0	95,0	80,0	40,0	56494	
0.3937	10,000 mm		10,0	142,0	95,0	80,0	40,0	66676	
0.3976	10,100 mm		12,0	162,0	114,0	99,0	45,0	66677	
0.4016	10,200 mm		12,0	162,0	114,0	99,0	45,0	66678	
0.4055	10,300 mm		12,0	162,0	114,0	99,0	45,0	66679	
0.4062	10,317 mm	13/32	12,0	162,0	114,0	99,0	45,0	56495	
0.4095	10,400 mm		12,0	162,0	114,0	98,0	45,0	66680	
0.4134	10,500 mm		12,0	162,0	114,0	98,0	45,0	66681	
0.4173	10,600 mm		12,0	162,0	114,0	98,0	45,0	66682	
0.4213	10,700 mm		12,0	162,0	114,0	98,0	45,0	66683	
0.4219	10,716 mm	27/64	12,0	162,0	114,0	98,0	45,0	56496	
0.4252	10,800 mm		12,0	162,0	114,0	98,0	45,0	66684	
0.4291	10,900 mm		12,0	162,0	114,0	98,0	45,0	66685	
0.4331	11,000 mm		12,0	162,0	114,0	97,0	45,0	66686	
0.4370	11,100 mm		12,0	162,0	114,0	97,0	45,0	66687	
0.4375	11,113 mm	7/16	12,0	162,0	114,0	97,0	45,0	56497	
0.4409	11,200 mm		12,0	162,0	114,0	97,0	45,0	66688	
0.4449	11,300 mm		12,0	162,0	114,0	97,0	45,0	66689	
0.4488	11,400 mm		12,0	162,0	114,0	97,0	45,0	66690	
0.4528	11,500 mm		12,0	162,0	114,0	97,0	45,0	66691	
0.4567	11,600 mm		12,0	162,0	114,0	97,0	45,0	66692	
0.4606	11,700 mm		12,0	162,0	114,0	96,0	45,0	66693	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 8xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4646	11,800 mm		12,0	162,0	114,0	96,0	45,0	66694
0.4685	11,900 mm		12,0	162,0	114,0	96,0	45,0	66695
0.4688	11,908 mm	15/32	12,0	162,0	114,0	96,0	45,0	56498
0.4724	12,000 mm		12,0	162,0	114,0	96,0	45,0	66696
0.4844	12,304 mm	31/64	14,0	178,0	133,0	114,0	45,0	56499
0.4921	12,500 mm		14,0	178,0	133,0	114,0	45,0	66697
0.5000	12,700 mm	1/2	14,0	178,0	133,0	114,0	45,0	56500
0.5039	12,800 mm		14,0	178,0	133,0	114,0	45,0	66698
0.5118	13,000 mm		14,0	178,0	133,0	114,0	45,0	66699
0.5156	13,096 mm	33/64	14,0	178,0	133,0	113,0	45,0	56501
0.5315	13,500 mm		14,0	178,0	133,0	113,0	45,0	66700
0.5433	13,800 mm		14,0	178,0	133,0	113,0	45,0	66701
0.5512	14,000 mm		14,0	178,0	133,0	113,0	45,0	66702
0.5625	14,288 mm	9/16	16,0	203,0	152,0	130,0	48,0	56502
0.5709	14,500 mm		16,0	203,0	152,0	130,0	48,0	66703
0.5781	14,684 mm	37/64	16,0	203,0	152,0	130,0	48,0	56503
0.5827	14,800 mm		16,0	203,0	152,0	130,0	48,0	66704
0.5906	15,000 mm		16,0	203,0	152,0	129,0	48,0	66705
0.6102	15,500 mm		16,0	203,0	152,0	129,0	48,0	66706
0.6221	15,800 mm		16,0	203,0	152,0	128,0	48,0	66707
0.6250	15,875 mm	5/8	16,0	203,0	152,0	128,0	48,0	56504
0.6299	16,000 mm		16,0	203,0	152,0	128,0	48,0	66708
0.6562	16,667 mm	21/32	18,0	222,0	171,0	145,0	48,0	56505
0.6875	17,463 mm	11/16	18,0	222,0	171,0	145,0	48,0	56506
0.7500	19,050 mm	3/4	20,0	243,0	190,0	161,0	50,0	56507

CONTINUED




12xD



142P 12xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRC (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	87,0	49,0	44,0	36,0	66709
0.1220	3,100 mm		6,0	87,0	49,0	44,0	36,0	66710
0.1250	3,175 mm	1/8	6,0	87,0	49,0	44,0	36,0	56508
0.1260	3,200 mm		6,0	87,0	49,0	44,0	36,0	66711
0.1299	3,300 mm		6,0	87,0	49,0	44,0	36,0	66712
0.1339	3,400 mm		6,0	87,0	49,0	44,0	36,0	66713
0.1360	3,454 mm	#29	6,0	87,0	49,0	44,0	36,0	56509
0.1378	3,500 mm		6,0	87,0	49,0	44,0	36,0	66714
0.1406	3,571 mm	9/64	6,0	87,0	49,0	43,0	36,0	56510
0.1417	3,600 mm		6,0	87,0	49,0	43,0	36,0	66715
0.1457	3,700 mm		6,0	87,0	49,0	43,0	36,0	66716
0.1496	3,800 mm		6,0	100,0	62,0	56,0	36,0	66717
0.1535	3,900 mm		6,0	100,0	62,0	56,0	36,0	66718
0.1562	3,967 mm	5/32	6,0	100,0	62,0	56,0	36,0	56511
0.1575	4,000 mm		6,0	100,0	62,0	56,0	36,0	66719
0.1590	4,039 mm	#21	6,0	100,0	62,0	56,0	36,0	56512
0.1614	4,100 mm		6,0	100,0	62,0	56,0	36,0	66720
0.1654	4,200 mm		6,0	100,0	62,0	55,0	36,0	66721
0.1693	4,300 mm		6,0	100,0	62,0	55,0	36,0	66722
0.1719	4,366 mm	11/64	6,0	100,0	62,0	55,0	36,0	56513
0.1732	4,400 mm		6,0	100,0	62,0	55,0	36,0	66723
0.1772	4,500 mm		6,0	100,0	62,0	55,0	36,0	66724
0.1811	4,600 mm		6,0	100,0	62,0	55,0	36,0	66725
0.1850	4,699 mm	#13	6,0	100,0	62,0	55,0	36,0	66726
0.1875	4,763 mm	3/16	6,0	119,0	81,0	74,0	36,0	56514
0.1890	4,801 mm	#12	6,0	119,0	81,0	74,0	36,0	66727
0.1929	4,900 mm		6,0	119,0	81,0	74,0	36,0	66728
0.1969	5,000 mm		6,0	119,0	81,0	73,0	36,0	66729
0.2008	5,100 mm		6,0	119,0	81,0	73,0	36,0	66730
0.2031	5,159 mm	13/64	6,0	119,0	81,0	73,0	36,0	56515
0.2047	5,200 mm		6,0	119,0	81,0	73,0	36,0	66731
0.2087	5,300 mm		6,0	119,0	81,0	73,0	36,0	66732
0.2126	5,400 mm		6,0	119,0	81,0	73,0	36,0	66733
0.2165	5,500 mm		6,0	119,0	81,0	73,0	36,0	66734

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com


142P 12xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2188	5,558 mm	7/32	6,0	119,0	81,0	73,0	36,0	56516
0.2205	5,600 mm		6,0	119,0	81,0	73,0	36,0	66735
0.2244	5,700 mm		6,0	119,0	81,0	72,0	36,0	66736
0.2283	5,800 mm		6,0	119,0	81,0	72,0	36,0	66737
0.2323	5,900 mm		6,0	119,0	81,0	72,0	36,0	66738
0.2344	5,954 mm	15/64	6,0	119,0	81,0	72,0	36,0	56517
0.2362	6,000 mm		6,0	119,0	81,0	72,0	36,0	66739
0.2402	6,100 mm		8,0	146,0	108,0	99,0	36,0	66740
0.2441	6,200 mm		8,0	146,0	108,0	99,0	36,0	66741
0.2480	6,300 mm		8,0	146,0	108,0	99,0	36,0	66742
0.2500	6,350 mm	1/4 E	8,0	146,0	108,0	98,0	36,0	56518
0.2520	6,400 mm		8,0	146,0	108,0	98,0	36,0	66743
0.2559	6,500 mm		8,0	146,0	108,0	98,0	36,0	66744
0.2570	6,528 mm	F	8,0	146,0	108,0	98,0	36,0	56519
0.2598	6,600 mm		8,0	146,0	108,0	98,0	36,0	66745
0.2638	6,700 mm		8,0	146,0	108,0	98,0	36,0	66746
0.2656	6,746 mm	17/64	8,0	146,0	108,0	98,0	36,0	56520
0.2677	6,800 mm		8,0	146,0	108,0	98,0	36,0	66747
0.2717	6,900 mm		8,0	146,0	108,0	98,0	36,0	66748
0.2756	7,000 mm		8,0	146,0	108,0	97,0	36,0	66749
0.2795	7,100 mm		8,0	146,0	108,0	97,0	36,0	66750
0.2812	7,142 mm	9/32	8,0	146,0	108,0	97,0	36,0	56521
0.2835	7,200 mm		8,0	146,0	108,0	97,0	36,0	66751
0.2874	7,300 mm		8,0	146,0	108,0	97,0	36,0	66752
0.2913	7,400 mm		8,0	146,0	108,0	97,0	36,0	66753
0.2953	7,500 mm		8,0	146,0	108,0	97,0	36,0	66754
0.2969	7,541 mm	19/64	8,0	146,0	108,0	97,0	36,0	56522
0.2992	7,600 mm		8,0	146,0	108,0	97,0	36,0	66755
0.3031	7,700 mm		8,0	146,0	108,0	96,0	36,0	66756
0.3071	7,800 mm		8,0	146,0	108,0	96,0	36,0	66757
0.3110	7,900 mm		8,0	146,0	108,0	96,0	36,0	66758
0.3125	7,938 mm	5/16	8,0	146,0	108,0	96,0	36,0	56523
0.3150	8,000 mm		8,0	146,0	108,0	96,0	36,0	66759
0.3189	8,100 mm		10,0	182,0	135,0	123,0	40,0	66760
0.3228	8,200 mm		10,0	182,0	135,0	123,0	40,0	66761
0.3268	8,300 mm		10,0	182,0	135,0	123,0	40,0	66762
0.3281	8,334 mm	21/64	10,0	182,0	135,0	123,0	40,0	56524
0.3307	8,400 mm		10,0	182,0	135,0	122,0	40,0	66763
0.3320	8,433 mm	Q	10,0	182,0	135,0	122,0	40,0	56525
0.3346	8,500 mm		10,0	182,0	135,0	122,0	40,0	66764
0.3386	8,600 mm		10,0	182,0	135,0	122,0	40,0	66765
0.3425	8,700 mm		10,0	182,0	135,0	122,0	40,0	66766


continued on next page

CONTINUED



142P 12xD

FRACTIONAL & METRIC SERIES



- High-performance point design stabilizes on entry for exceptional hole size and cylindricity while also allowing for low thrust force and extended tool life
- Internal coolant hole improves coolant flow to extend tool life and aid in chip evacuation
- 4-margin design improves hole straightness and roundness while providing improved stability for difficult applications like cross holes and when exiting on angle
- Proprietary Ti-NAMITE®-X coating and industry leading carbide substrate provides exceptional wear resistance and toughness for demanding applications
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3438	8,733 mm	11/32	10,0	182,0	135,0	122,0	40,0	56526
0.3465	8,800 mm		10,0	182,0	135,0	122,0	40,0	66767
0.3504	8,900 mm		10,0	182,0	135,0	122,0	40,0	66768
0.3543	9,000 mm		10,0	182,0	135,0	122,0	40,0	66769
0.3583	9,100 mm		10,0	182,0	135,0	121,0	40,0	66770
0.3594	9,129 mm	23/64	10,0	182,0	135,0	121,0	40,0	56527
0.3622	9,200 mm		10,0	182,0	135,0	121,0	40,0	66771
0.3661	9,300 mm		10,0	182,0	135,0	121,0	40,0	66772
0.3680	9,347 mm	U	10,0	182,0	135,0	121,0	40,0	56528
0.3701	9,400 mm		10,0	182,0	135,0	121,0	40,0	66773
0.3740	9,500 mm		10,0	182,0	135,0	121,0	40,0	66774
0.3750	9,525 mm	3/8	10,0	182,0	135,0	121,0	40,0	56529
0.3780	9,600 mm		10,0	182,0	135,0	121,0	40,0	66775
0.3819	9,700 mm		10,0	182,0	135,0	120,0	40,0	66776
0.3858	9,800 mm		10,0	182,0	135,0	120,0	40,0	66777
0.3898	9,900 mm		10,0	182,0	135,0	120,0	40,0	66778
0.3906	9,921 mm	25/64	10,0	182,0	135,0	120,0	40,0	56530
0.3937	10,000 mm		10,0	182,0	135,0	120,0	40,0	66779
0.3976	10,100 mm		12,0	210,0	162,0	147,0	45,0	66780
0.4016	10,200 mm		12,0	210,0	162,0	147,0	45,0	66781
0.4055	10,300 mm		12,0	210,0	162,0	147,0	45,0	66782
0.4062	10,317 mm	13/32	12,0	210,0	162,0	147,0	45,0	56531
0.4095	10,400 mm		12,0	210,0	162,0	146,0	45,0	66783
0.4134	10,500 mm		12,0	210,0	162,0	146,0	45,0	66784
0.4173	10,600 mm		12,0	210,0	162,0	146,0	45,0	66785
0.4213	10,700 mm		12,0	210,0	162,0	146,0	45,0	66786
0.4219	10,716 mm	27/64	12,0	210,0	162,0	146,0	45,0	56532
0.4252	10,800 mm		12,0	210,0	162,0	146,0	45,0	66787
0.4291	10,900 mm		12,0	210,0	162,0	146,0	45,0	66788
0.4331	11,000 mm		12,0	210,0	162,0	145,0	45,0	66789
0.4370	11,100 mm		12,0	210,0	162,0	145,0	45,0	66790
0.4375	11,113 mm	7/16	12,0	210,0	162,0	145,0	45,0	56533
0.4409	11,200 mm		12,0	210,0	162,0	145,0	45,0	66791
0.4449	11,300 mm		12,0	210,0	162,0	145,0	45,0	66792

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.0114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

142P 12xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4488	11,400 mm		12,0	210,0	162,0	145,0	45,0	66793
0.4528	11,500 mm		12,0	210,0	162,0	145,0	45,0	66794
0.4567	11,600 mm		12,0	210,0	162,0	145,0	45,0	66795
0.4606	11,700 mm		12,0	210,0	162,0	144,0	45,0	66796
0.4646	11,800 mm		12,0	210,0	162,0	144,0	45,0	66797
0.4685	11,900 mm		12,0	210,0	162,0	144,0	45,0	66798
0.4688	11,908 mm	15/32	12,0	210,0	162,0	144,0	45,0	56534
0.4724	12,000 mm		12,0	210,0	162,0	144,0	45,0	66799
0.4844	12,304 mm	31/64	14,0	234,0	189,0	171,0	45,0	56535
0.4921	12,500 mm		14,0	234,0	189,0	170,0	45,0	66800
0.5000	12,700 mm	1/2	14,0	234,0	189,0	170,0	45,0	56536
0.5039	12,800 mm		14,0	234,0	189,0	170,0	45,0	66801
0.5118	13,000 mm		14,0	234,0	189,0	170,0	45,0	66802
0.5156	13,096 mm	33/64	14,0	234,0	189,0	169,0	45,0	56537
0.5315	13,500 mm		14,0	234,0	189,0	169,0	45,0	66803
0.5433	13,800 mm		14,0	234,0	189,0	168,0	45,0	66804
0.5512	14,000 mm		14,0	234,0	189,0	168,0	45,0	66805
0.5625	14,288 mm	9/16	16,0	267,0	216,0	195,0	48,0	56538
0.5709	14,500 mm		16,0	267,0	216,0	194,0	48,0	66806
0.5781	14,684 mm	37/64	16,0	267,0	216,0	194,0	48,0	56539
0.5827	14,800 mm		16,0	267,0	216,0	194,0	48,0	66807
0.5906	15,000 mm		16,0	267,0	216,0	193,0	48,0	66808
0.6102	15,500 mm		16,0	267,0	216,0	193,0	48,0	66809
0.6221	15,800 mm		16,0	267,0	216,0	192,0	48,0	66810
0.6250	15,875 mm	5/8	16,0	267,0	216,0	192,0	48,0	56540
0.6299	16,000 mm		16,0	267,0	216,0	192,0	48,0	66811
0.6562	16,667 mm	21/32	18,0	292,0	241,0	216,0	48,0	56541
0.6875	17,463 mm	11/16	18,0	292,0	241,0	215,0	48,0	56542
0.7500	19,050 mm	3/4	20,0	319,0	266,0	238,0	50,0	56543

CONTINUED

Series 142P Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536 ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100 TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 175 Bhn or ≤ 7 HRc	425	RPM	12988	8659	6494	4329	3247	2598	2165	
		(340-510)	Fr	0.0043	0.0065	0.0086	0.0129	0.0172	0.0216	0.0259	
			Feed (ipm)	56.0	56.0	56.0	56.0	56.0	56.0	56.0	
	≤ 275 Bhn or ≤ 28 HRc	380	RPM	11613	7742	5806	3871	2903	2323	1935	
		(304-456)	Fr	0.0039	0.0058	0.0078	0.0116	0.0155	0.0194	0.0233	
			Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
	≤ 425 Bhn or ≤ 45 HRc	220	RPM	6723	4482	3362	2241	1681	1345	1121	
		(176-264)	Fr	0.0033	0.0049	0.0065	0.0098	0.0131	0.0164	0.0196	
			Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0	
	≤ 275 Bhn or ≤ 28 HRc	330	RPM	10085	6723	5042	3362	2521	2017	1681	
			Fr	0.0033	0.0049	0.0065	0.0098	0.0131	0.0164	0.0196	
			Feed (ipm)	33.0	33.0	33.0	33.0	33.0	33.0	33.0	
		≤ 375 Bhn or ≤ 40 HRc	200	RPM	6112	4075	3056	2037	1528	1222	1019
				Fr	0.0028	0.0042	0.0056	0.0083	0.0111	0.0139	0.0167
				Feed (ipm)	17.0	17.0	17.0	17.0	17.0	17.0	17.0
	≤ 425 Bhn or ≤ 45 HRc	140	RPM	4278	2852	2139	1426	1070	856	713	
			Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119	
			Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5	8.5	
	≤ 200 Bhn or ≤ 13 HRc	145	RPM	4431	2954	2216	1477	1108	886	739	
			Fr	0.0028	0.0042	0.0056	0.0085	0.0113	0.0141	0.0169	
			Feed (ipm)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	2903	1935	1452	968	726	581	484
				Fr	0.0013	0.0020	0.0027	0.0040	0.0054	0.0067	0.0081
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 185 Bhn or ≤ 9 HRc	305	RPM	9321	6214	4660	3107	2330	1864	1553	
			Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154	
			Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0	
	≤ 275 Bhn or ≤ 28 HRc	195	RPM	5959	3973	2980	1986	1490	1192	993	
			Fr	0.0020	0.0030	0.0040	0.0060	0.0081	0.0101	0.0121	
			Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0	12.0	
	≤ 275 Bhn or ≤ 28 HRc	150	RPM	4584	3056	2292	1528	1146	917	764	
			Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119	
			Feed (ipm)	9.1	9.1	9.1	9.1	9.1	9.1	9.1	
	≤ 375 Bhn or ≤ 40 HRc	110	RPM	3362	2241	1681	1121	840	672	560	
			Fr	0.0018	0.0027	0.0036	0.0054	0.0071	0.0089	0.0107	
			Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0	
K CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	360	RPM	11002	7334	5501	3667	2750	2200	1834	
			Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273	
			Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0	
	≤ 260 Bhn or ≤ 26 HRc	335	RPM	10238	6825	5119	3413	2559	2048	1706	
			Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273	
			Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5	

continued on next page

	Series 142P Fractional	Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	770	RPM	23531	15687	11766	7844	5883	4706	3922
			(616-924)	Fr	0.0049	0.0073	0.0098	0.0147	0.0195	0.0244	0.0293
				Feed (ipm)	115.0	115.0	115.0	115.0	115.0	115.0	115.0
		≤ 150 Bhn or ≤ 8 HRb	660	RPM	20170	13446	10085	6723	5042	4034	3362
			(528-792)	Fr	0.0050	0.0074	0.0099	0.0149	0.0198	0.0248	0.0297
				Feed (ipm)	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
			(440-660)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (ipm)	33.5	33.5	33.5	33.5	33.5	33.5	33.5
		≤ 200 Bhn or ≤ 23 HRc	440	RPM	13446	8964	6723	4482	3362	2689	2241
			(352-528)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0008	0.0012	0.0016	0.0024	0.0032	0.0040	0.0048
				Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		≤ 400 Bhn or ≤ 43 HRc	50	RPM	1528	1019	764	509	382	306	255
			(40-60)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0033	0.0039
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		≤ 440 Bhn or ≤ 47 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0008	0.0013	0.0017	0.0025	0.0034	0.0042	0.0051
				Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 rpm = Vc x 3.82 / DC
 ipm = Fr x RPM
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 142P Metric	Hardness	Vc (m/min)	DC • mm								
			3	6	8	10	12	14	16		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (104-155)	130	RPM	13733	6867	5150	4120	3433	2943	2575
				Fr	0.104	0.207	0.276	0.345	0.414	0.483	0.552
				Feed (mm/min)	1422	1422	1422	1422	1422	1422	1422
		≤ 275 Bhn or ≤ 28 HRc (93-139)	116	RPM	12279	6140	4605	3684	3070	2631	2302
				Fr	0.093	0.186	0.248	0.310	0.372	0.434	0.496
				Feed (mm/min)	1143	1143	1143	1143	1143	1143	1143
		≤ 425 Bhn or ≤ 45 HRc (54-80)	67	RPM	7109	3555	2666	2133	1777	1523	1333
				Fr	0.079	0.157	0.210	0.262	0.314	0.367	0.419
				Feed (mm/min)	559	559	559	559	559	559	559
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc (80-121)	101	RPM	10664	5332	3999	3199	2666	2285	1999
				Fr	0.079	0.157	0.210	0.262	0.314	0.367	0.419
				Feed (mm/min)	838	838	838	838	838	838	838
		≤ 375 Bhn or ≤ 40 HRc (49-73)	61	RPM	6463	3231	2424	1939	1616	1385	1212
				Fr	0.067	0.134	0.178	0.223	0.267	0.312	0.356
				Feed (mm/min)	432	432	432	432	432	432	432
		≤ 425 Bhn or ≤ 45 HRc (34-51)	43	RPM	4524	2262	1696	1357	1131	969	848
				Fr	0.048	0.095	0.127	0.159	0.191	0.223	0.255
				Feed (mm/min)	216	216	216	216	216	216	216
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc (35-53)	44	RPM	4686	2343	1757	1406	1171	1004	879
				Fr	0.068	0.136	0.181	0.226	0.271	0.316	0.361
				Feed (mm/min)	318	318	318	318	318	318	318
		≤ 375 Bhn or ≤ 40 HRc (23-35)	29	RPM	3070	1535	1151	921	767	658	576
				Fr	0.032	0.065	0.086	0.108	0.129	0.151	0.172
				Feed (mm/min)	99	99	99	99	99	99	99
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc (74-112)	93	9856	9856	4928	3696	2957	2464	2112	1848
				0.062	0.062	0.124	0.165	0.206	0.247	0.289	0.330
				610	610	610	610	610	610	610	610
		≤ 275 Bhn or ≤ 28 HRc (48-71)	59	6301	6301	3151	2363	1890	1575	1350	1181
				0.048	0.048	0.097	0.129	0.161	0.193	0.226	0.258
				305	305	305	305	305	305	305	305
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (37-55)	46	4847	4847	2424	1818	1454	1212	1039	909
				0.048	0.048	0.095	0.127	0.159	0.191	0.223	0.254
				231	231	231	231	231	231	231	231
		≤ 375 Bhn or ≤ 40 HRc (27-40)	34	3555	3555	1777	1333	1066	889	762	666
				0.043	0.043	0.086	0.114	0.143	0.171	0.200	0.229
				152	152	152	152	152	152	152	152
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc (88-132)	110	RPM	11633	5816	4362	3490	2908	2493	2181
				Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582
				Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270
		≤ 260 Bhn or ≤ 26 HRc (82-123)	102	RPM	10825	5413	4059	3248	2706	2320	2030
				Fr	0.109	0.218	0.291	0.364	0.436	0.509	0.582
				Feed (mm/min)	1181	1181	1181	1181	1181	1181	1181

continued on next page

Series 142P Metric	Hardness	Vc (m/min)	DC • mm									
			3	6	8	10	12	14	16			
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	235	RPM	24882	12441	9331	7465	6220	5332	4665		
		≤ 80 Bhn or ≤ 47 HRb	(188-282)	Fr	0.117	0.235	0.313	0.391	0.470	0.548	0.626	
				Feed (mm/min)	2921	2921	2921	2921	2921	2921	2921	
		201	RPM	21327	10664	7998	6398	5332	4570	3999		
		≤ 150 Bhn or ≤ 88 HRb	(161-241)	Fr	0.119	0.238	0.318	0.397	0.476	0.556	0.635	
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540	
	Copper Alloys Alum Bronze, C110, Muntz Brass	168	RPM	17773	8886	6665	5332	4443	3808	3332		
		≤ 140 Bhn or ≤ 3 HRc	(134-201)	Fr	0.048	0.096	0.128	0.160	0.192	0.223	0.255	
				Feed (mm/min)	851	851	851	851	851	851	851	
		134	RPM	14218	7109	5332	4265	3555	3047	2666		
		≤ 200 Bhn or ≤ 23 HRc	(107-161)	Fr	0.048	0.096	0.129	0.161	0.193	0.225	0.257	
				Feed (mm/min)	686	686	686	686	686	686	686	
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	29	RPM	3070	1535	1151	921	767	658	576		
		≤ 300 Bhn or ≤ 32 HRc	(23-35)	Fr	0.019	0.038	0.051	0.063	0.076	0.089	0.101	
				Feed (mm/min)	58	58	58	58	58	58	58	
		15	RPM	1616	808	606	485	404	346	303		
		≤ 400 Bhn or ≤ 43 HRc	(12-18)	Fr	0.016	0.031	0.042	0.052	0.063	0.073	0.084	
				Feed (mm/min)	25	25	25	25	25	25	25	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	66	RPM	6947	3474	2605	2084	1737	1489	1303		
		≤ 275 Bhn or ≤ 28 HRc	(52-79)	Fr	0.042	0.084	0.112	0.140	0.168	0.196	0.224	
				Feed (mm/min)	292	292	292	292	292	292	292	
		49	RPM	5170	2585	1939	1551	1293	1108	969		
		≤ 350 Bhn or ≤ 38 HRc	(39-59)	Fr	0.038	0.077	0.102	0.128	0.153	0.179	0.204	
				Feed (mm/min)	198	198	198	198	198	198	198	
		26	RPM	2747	1373	1030	824	687	589	515		
		≤ 440 Bhn or ≤ 47 HRc	(21-31)	Fr	0.029	0.057	0.076	0.096	0.115	0.134	0.153	
				Feed (mm/min)	79	79	79	79	79	79	79	
	H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	2747	1373	1030	824	687	589	515	
			≤ 475 Bhn or ≤ 50 HRc	(21-31)	Fr	0.020	0.041	0.054	0.068	0.081	0.095	0.109
					Feed (mm/min)	56	56	56	56	56	56	56

(Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x RPM

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




3xD



143M-S 3xD

FRACTIONAL & METRIC SERIES

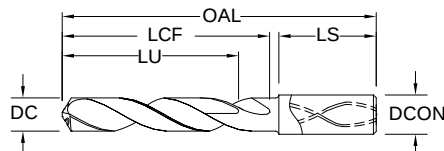

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	69120
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	69121
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	56800
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	69122
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	69123
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	69124
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	56801
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	69125
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	56802
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	69126
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	69127
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	69128
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	69129
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	56803
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	69130
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	56804
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	69131
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	69132
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	69133
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	56805
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	69134
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	69135
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	69136
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	69137
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	56806
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	69138
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	69139
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	69140
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	69141
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	56807
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	69142
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	69143
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	69144
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	69145
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	56808
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	69146

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

143M-S 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	69147
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	69148
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	69149
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	56809
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	69150
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	69151
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	69152
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	69153
0.2500	6,350 mm	1/4 E	8,0	79,0	34,0	24,0	36,0	56810
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	69154
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	69155
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	56811
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	69156
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	69157
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	56812
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	69158
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	69159
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	69160
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	69161
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	56813
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	69162
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	69163
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	69164
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	69165
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	56814
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	69166
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	69167
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	69168
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	69169
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	56815
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	69170
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	69171
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	69172
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	69173
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	56816
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	69174
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	56817
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	69175
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	69176
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	69177
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	56818
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	69178
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	69179
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	69180

continued on next page

CONTINUED




3xD



143M-S 3xD

FRACTIONAL & METRIC SERIES

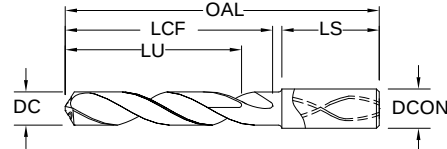

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.3583	9,100 mm	23/64	10,0	89,0	47,0	33,0	40,0	69181
0.3594	9,129 mm		10,0	89,0	47,0	33,0	40,0	56819
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	69182
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	69183
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	56820
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	69184
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	69185
0.3750	9,525 mm		10,0	89,0	47,0	33,0	40,0	56821
0.3780	9,600 mm	3/8	10,0	89,0	47,0	33,0	40,0	69186
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	69187
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	69188
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	69189
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	56822
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	69190
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	69191
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	69192
0.4055	10,300 mm	13/32	12,0	102,0	55,0	40,0	45,0	69193
0.4062	10,317 mm		12,0	102,0	55,0	40,0	45,0	56823
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	69194
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	69195
0.4173	10,600 mm	27/64	12,0	102,0	55,0	39,0	45,0	69196
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	69197
0.4219	10,716 mm		12,0	102,0	55,0	39,0	45,0	56824
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	69198
0.4291	10,900 mm	7/16	12,0	102,0	55,0	39,0	45,0	69199
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	69200
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	69201
0.4375	11,113 mm		12,0	102,0	55,0	38,0	45,0	56825
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	69202
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	69203
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	69204
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	69205
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	69206
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	69207
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	69208
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	69209

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

143M-S 3xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	56826
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	69210
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	56827
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	69211
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	56828
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	69212
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	69213
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	56829
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	69214
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	69215
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	69216
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	56830
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	69217
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	56831
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	69218
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	69219
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	69220
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	69221
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	56832
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	69222
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	56833
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	56834
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	56835

CONTINUED



143M-S 5xD

FRACTIONAL & METRIC SERIES

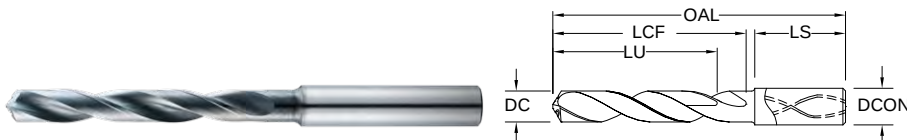

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	69223
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	69224
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	56836
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	69225
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	69226
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	69227
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	56837
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	69228
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	56838
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	69229
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	69230
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	69231
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	69232
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	56839
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	69233
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	56840
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	69234
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	69235
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	69236
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	56841
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	69237
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	69238
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	69239
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	69240
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	56842
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	69241
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	69242
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	69243
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	69244
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	56843
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	69245
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	69246
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	69247
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	69248
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	56844
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	69249

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

continued on next page


143M-S 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITIN)
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	69250
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	69251
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	69252
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	56845
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	69253
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	69254
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	69255
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	69256
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	56846
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	69257
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	69258
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	56847
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	69259
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	69260
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	56848
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	69261
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	69262
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	69263
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	69264
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	56849
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	69265
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	69266
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	69267
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	69268
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	56850
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	69269
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	69270
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	69271
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	69272
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	56851
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	69273
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	69274
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	69275
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	69276
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	56852
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	69277
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	56853
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	69278
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	69279
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	69280
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	56854
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	69281
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	69282
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	69283


continued on next page

CONTINUED



143M-S 5xD

FRACTIONAL & METRIC SERIES

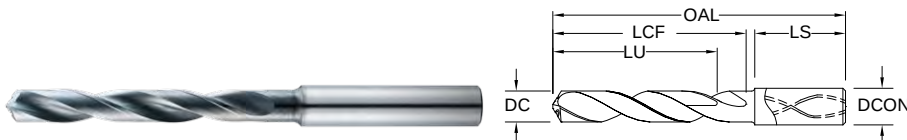

- Coolant through design improves coolant flow to extend tool life and aid in chip evacuation
- Eccentric 2-margin design reduces frictional heat and minimizes material adhesion to the margins without weakening the drill
- Computer controlled edge honing protects against chip damage
- High-performance point design stabilizes on contact for exceptional hole size and cylindricity allowing for low thrust force and extended tool life
- SGS Ti-NAMITE®-A coating provides exceptional wear and erosion resistance when drilling heat resisting alloys like Inconel, Stainless Steel, and Titanium Alloys
- Recommended for materials ≤ 50HRc (475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	69284
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	56855
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	69285
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	69286
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	56856
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	69287
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	69288
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	56857
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	69289
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	69290
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	69291
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	69292
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	56858
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	69293
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	69294
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	69295
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	69296
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	56859
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	69297
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	69298
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	69299
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	69300
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	56860
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	69301
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	69302
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	69303
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	69304
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	56861
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	69305
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	69306
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	69307
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	69308
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	69309
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	69310
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	69311
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	69312

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

143M-S 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-A (AITiN)
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	56862
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	69313
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	56863
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	69314
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	56864
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	69315
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	69316
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	56865
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	69317
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	69318
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	69319
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	56866
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	69320
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	56867
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	69321
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	69322
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	69323
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	69324
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	56868
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	69325
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	56869
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	56870
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	56871

CONTINUED

Series 143M-S Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	5/8	3/4	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	425	RPM	12988	8659	6494	4329	3247	2598	2165
			(340-510)	Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
				Feed (ipm)	51.0	51.0	51.0	51.0	51.0	51.0	51.0
		≤ 275 Bhn or ≤ 28 HRc	380	RPM	11613	7742	5806	3871	2903	2323	1935
				Fr	0.0035	0.0053	0.0071	0.0106	0.0141	0.0177	0.0212
			(304-456)	Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 425 Bhn or ≤ 45 HRc		220	RPM	6723	4482	3362	2241	1681	1345
			Fr		0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
			(176-264)	Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc		330	RPM	10085	6723	5042	3362	2521	2017
			Fr		0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
			(264-396)	Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 375 Bhn or ≤ 40 HRc		200	RPM	6112	4075	3056	2037	1528	1222
			Fr		0.0025	0.0038	0.0051	0.0076	0.0101	0.0127	0.0152
			(160-240)	Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5
		≤ 425 Bhn or ≤ 45 HRc		140	RPM	4278	2852	2139	1426	1070	856
			Fr		0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108
			(112-168)	Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc		145	RPM	4431	2954	2216	1477	1108	886
			Fr		0.0026	0.0039	0.0052	0.0078	0.0104	0.0130	0.0156
			(116-174)	Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 375 Bhn or ≤ 40 HRc		95	RPM	2903	1935	1452	968	726	581
			Fr		0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
			(76-114)	Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc		325	RPM	9932	6621	4966	3311	2483	1986
			Fr		0.0030	0.0045	0.0060	0.0091	0.0121	0.0151	0.0181
			(260-390)	Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 275 Bhn or ≤ 28 HRc		210	RPM	6418	4278	3209	2139	1604	1284
			Fr		0.0023	0.0035	0.0047	0.0070	0.0093	0.0117	0.0140
			(168-252)	Feed (ipm)	15.0	15.0	15.0	15.0	15.0	15.0	15.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc		160	RPM	4890	3260	2445	1630	1222	978
			Fr		0.0023	0.0035	0.0047	0.0070	0.0093	0.0117	0.0140
			(128-192)	Feed (ipm)	11.4	11.4	11.4	11.4	11.4	11.4	11.4
		≤ 375 Bhn or ≤ 40 HRc		115	RPM	3514	2343	1757	1171	879	703
			Fr		0.0021	0.0031	0.0042	0.0062	0.0083	0.0104	0.0125
			(92-138)	Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3

continued on next page

	Series 143M-S Fractional	Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc	335	RPM	10238	6825	5119	3413	2559	2048	1706
			(268-402)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5
S	HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	130	RPM	3973	2649	1986	1324	993	795	662
			(104-156)	Fr	0.0014	0.0022	0.0029	0.0043	0.0057	0.0072	0.0086
				Feed (ipm)	5.7	5.7	5.7	5.7	5.7	5.7	5.7
		≤ 400 Bhn or ≤ 43 HRc	70	RPM	2139	1426	1070	713	535	428	357
			(56-84)	Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0061	0.0073
				Feed (ipm)	2.6	2.6	2.6	2.6	2.6	2.6	2.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		≤ 440 Bhn or ≤ 47 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x RPM

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 143M-S Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	130 (104-155) ≤ 175 Bhn or ≤ 7 HRc	RPM	13733	6867	5150	4120	3433	2943	2575
			Fr	0.094	0.189	0.252	0.314	0.377	0.440	0.503
			Feed (mm/min)	1295	1295	1295	1295	1295	1295	1295
		116 (93-139) ≤ 275 Bhn or ≤ 28 HRc	RPM	12279	6140	4605	3684	3070	2631	2302
			Fr	0.085	0.170	0.226	0.283	0.339	0.396	0.452
			Feed (mm/min)	1041	1041	1041	1041	1041	1041	1041
		67 (54-80) ≤ 425 Bhn or ≤ 45 HRc	RPM	7109	3555	2666	2133	1777	1523	1333
			Fr	0.071	0.143	0.191	0.238	0.286	0.333	0.381
			Feed (mm/min)	508	508	508	508	508	508	508
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	101 (80-121) ≤ 275 Bhn or ≤ 28 HRc	RPM	10664	5332	3999	3199	2666	2285	1999
			Fr	0.071	0.143	0.191	0.238	0.286	0.333	0.381
			Feed (mm/min)	762	762	762	762	762	762	762
		61 (49-73) ≤ 375 Bhn or ≤ 40 HRc	RPM	6463	3231	2424	1939	1616	1385	1212
			Fr	0.061	0.122	0.162	0.203	0.244	0.284	0.325
			Feed (mm/min)	394	394	394	394	394	394	394
		43 (34-51) ≤ 425 Bhn or ≤ 45 HRc	RPM	4524	2262	1696	1357	1131	969	848
			Fr	0.043	0.086	0.115	0.144	0.173	0.202	0.231
			Feed (mm/min)	196	196	196	196	196	196	196
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	44 (35-53) ≤ 200 Bhn or ≤ 13 HRc	RPM	4686	2343	1757	1406	1171	1004	879
			Fr	0.062	0.125	0.166	0.208	0.249	0.291	0.332
			Feed (mm/min)	292	292	292	292	292	292	292
		29 (23-35) ≤ 375 Bhn or ≤ 40 HRc	RPM	3070	1535	1151	921	767	658	576
			Fr	0.029	0.058	0.077	0.097	0.116	0.135	0.154
			Feed (mm/min)	89	89	89	89	89	89	89
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	99 (79-119) ≤ 185 Bhn or ≤ 9 HRc	RPM	10502	5251	3938	3151	2626	2250	1969
			Fr	0.073	0.145	0.193	0.242	0.290	0.339	0.387
			Feed (mm/min)	762	762	762	762	762	762	762
		64 (51-77) ≤ 275 Bhn or ≤ 28 HRc	RPM	6786	3393	2545	2036	1696	1454	1272
			Fr	0.056	0.112	0.150	0.187	0.225	0.262	0.299
			Feed (mm/min)	381	381	381	381	381	381	381
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	49 (39-59) ≤ 275 Bhn or ≤ 28 HRc	RPM	5170	2585	1939	1551	1293	1108	969
			Fr	0.056	0.112	0.149	0.187	0.224	0.261	0.299
			Feed (mm/min)	290	290	290	290	290	290	290
		35 (28-42) ≤ 375 Bhn or ≤ 40 HRc	RPM	3716	1858	1394	1115	929	796	697
			Fr	0.050	0.100	0.133	0.166	0.200	0.233	0.266
			Feed (mm/min)	185	185	185	185	185	185	185

continued on next page

Series 143M-S Metric		Hardness	Vc (m/min)	DC • mm								
				3	6	8	10	12	14	16		
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	110	RPM	11633	5816	4362	3490	2908	2493	2181	
			(88-132)	Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582	
				Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270	
		≤ 260 Bhn or ≤ 26 HRc	102	RPM	10825	5413	4059	3248	2706	2320	2030	
			(82-123)	Fr	0.109	0.218	0.291	0.364	0.436	0.509	0.582	
				Feed (mm/min)	1181	1181	1181	1181	1181	1181	1181	
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	40	RPM	4201	2100	1575	1260	1050	900	788	
			(32-48)	Fr	0.034	0.069	0.092	0.115	0.138	0.161	0.184	
				Feed (mm/min)	145	145	145	145	145	145	145	
		≤ 400 Bhn or ≤ 43 HRc	21	RPM	2262	1131	848	679	565	485	424	
			(17-26)	Fr	0.029	0.058	0.078	0.097	0.117	0.136	0.156	
				Feed (mm/min)	66	66	66	66	66	66	66	
		TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	66	RPM	6947	3474	2605	2084	1737	1489	1303
				(52-79)	Fr	0.042	0.084	0.112	0.140	0.168	0.196	0.224
					Feed (mm/min)	292	292	292	292	292	292	292
	≤ 350 Bhn or ≤ 38 HRc		49	RPM	5170	2585	1939	1551	1293	1108	969	
			(39-59)	Fr	0.038	0.077	0.102	0.128	0.153	0.179	0.204	
				Feed (mm/min)	198	198	198	198	198	198	198	
	≤ 440 Bhn or ≤ 47 HRc	26	RPM	2747	1373	1030	824	687	589	515		
		(21-31)	Fr	0.029	0.057	0.076	0.096	0.115	0.134	0.153		
			Feed (mm/min)	79	79	79	79	79	79	79		

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{RPM}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




5xD



141K 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 43 HRc (≤ 400 Bhn)

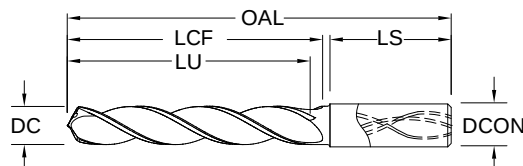

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)	
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0	65160	
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	65161	
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0	55160	
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	65162	
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	65163	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	65164	
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0	55161	
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	65165	
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0	55162	
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	65166	
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0	65167	
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0	65168	
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0	65169	
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0	55163	
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0	65170	
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0	55164	
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0	65171	
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0	65172	
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0	65173	
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0	55165	
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	65174	
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	65175	
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	65176	
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	65177	
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0	55166	
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	65178	
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	65179	
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	65180	
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	65181	
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0	55167	
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	65182	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	65183	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	65184	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	65185	
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0	55168	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	65186	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

CAST IRON

For patent
information visit
www.ksptpatents.com

continued on next page

141K 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	65187
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	65188
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	65189
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	55169
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	65190
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	65191
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	65192
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	65193
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	55170
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	65194
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	65195
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	55171
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	65196
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	65197
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	55172
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	65198
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	65199
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	65200
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	65201
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	55173
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	65202
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	65203
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	65204
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	65205
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	55174
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	65206
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	65207
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	65208
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	65209
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	55175
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	65210
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	65211
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	65212
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	65213
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	55176
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	65214
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	55177
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	65215
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	65216
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	65217
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	55178
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	65218
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	65219
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	65220
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	65221
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	55179

continued on next page

CONTINUED




5xD



141K 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 43 HRc (≤ 400 Bhn)

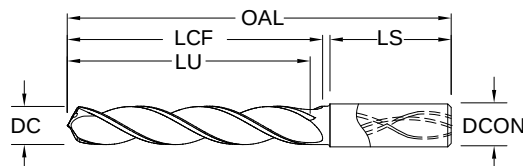

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)	
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	65222	
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	65223	
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	55180	
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	65224	
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	65225	
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	55181	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	65226	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	65227	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	65228	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	65229	
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	55182	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	65230	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	65231	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	65232	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	65233	
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	55183	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	65234	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	65235	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	65236	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	65237	
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	55184	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	65238	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	65239	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	65240	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	65241	
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	55185	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	65242	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	65243	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	65244	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	65245	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	65246	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	65247	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	65248	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	65249	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	55186	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	65250	

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00028/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

CAST IRON

For patent
information visit
www.ksptpatents.com

continued on next page

141K 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-M (TM)
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	55187
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	65251
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	55188
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	65252
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	65253
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	55189
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	65254
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	65255
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	65256
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	55190
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	65257
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	55191
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	65258
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	65259
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	65260
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	65261
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	55192
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	65262
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	55193
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	55194
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	55195

CONTINUED

FRACTIONAL Hi-PerCarb®



Series 141K 5D Fractional	Hardness	Vc (sfm)		DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 1 HRc	450	RPM	13752	9168	6876	4584	3438	2750	2292
			(360-540)	Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297
			Feed (ipm)	68	68	68	68	68	68	68	
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc	375	RPM	11460	7640	5730	3820	2865	2292	1910
			(300-450)	Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
			Feed (ipm)	45	45	45	45	45	45	45	
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc	325	RPM	9932	6621	4966	3311	2483	1986	1655
			(260-390)	Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
			Feed (ipm)	39	39	39	39	39	39	39	
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc	450	RPM	13752	9168	6876	4584	3438	2750	2292
			(360-540)	Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297
			Feed (ipm)	68	68	68	68	68	68	68	
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc	250	RPM	7640	5093	3820	2547	1910	1528	1273
			(200-300)	Fr	0.0031	0.0047	0.0063	0.0094	0.0126	0.0157	0.0188
			Feed (ipm)	24	24	24	24	24	24	24	

Bhn (Brinell) HRc (Rockwell C)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

METRIC Hi-PerCarb®

Series 141K 5D Metric	Hardness	Vc (m/min)		DC • mm							
				3	6	8	10	12	14	16	
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 1 HRc	137	RPM	14541	7271	5453	4362	3635	3116	2726
			(110-165)	Fr	0.119	0.237	0.316	0.395	0.475	0.554	0.633
			Feed (mm/min)	1725	1725	1725	1725	1725	1725	1725	
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc	114	RPM	12118	6059	4544	3635	3029	2597	2272
			(91-137)	Fr	0.094	0.189	0.252	0.315	0.378	0.441	0.504
			Feed (mm/min)	1145	1145	1145	1145	1145	1145	1145	
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc	99	RPM	10502	5251	3938	3151	2626	2250	1969
			(79-119)	Fr	0.094	0.189	0.251	0.314	0.377	0.440	0.503
			Feed (mm/min)	990	990	990	990	990	990	990	
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc	137	RPM	14541	7271	5453	4362	3635	3116	2726
			(110-165)	Fr	0.119	0.237	0.316	0.395	0.475	0.554	0.633
			Feed (mm/min)	1725	1725	1725	1725	1725	1725	1725	
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc	76	RPM	8078	4039	3029	2424	2020	1731	1515
			(61-91)	Fr	0.076	0.151	0.201	0.252	0.302	0.352	0.403
			Feed (mm/min)	610	610	610	610	610	610	610	

(Brinell) HRc (Rockwell C)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

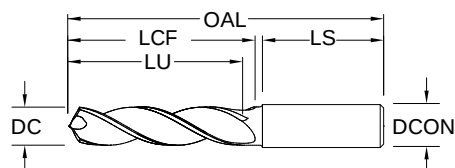

131N 3xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm					EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE®-B (TiB ₂)
0.1181	3,000 mm		6,0	62,0	20,0	15,0	36,0	64600 67600
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	64601 67601
0.1250	3,175 mm	1/8	6,0	62,0	20,0	15,0	36,0	54600 54700
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	64602 67602
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	64603 67603
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	64604 67604
0.1360	3,454 mm	#29	6,0	62,0	20,0	15,0	36,0	54601 54701
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	64605 67605
0.1406	3,571 mm	9/64	6,0	62,0	20,0	15,0	36,0	54602 54702
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	64606 67606
0.1457	3,700 mm		6,0	62,0	20,0	15,0	36,0	64607 67607
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	64608 67608
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	64609 67609
0.1562	3,967 mm	5/32	6,0	66,0	24,0	18,0	36,0	54603 54703
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	64610 67610
0.1590	4,039 mm	#21	6,0	66,0	24,0	18,0	36,0	54604 54704
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	64611 67611
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	64612 67612
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	64613 67613
0.1719	4,366 mm	11/64	6,0	66,0	24,0	17,0	36,0	54605 54705
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	64614 67614
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	64615 67615
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	64616 67616
0.1850	4,699 mm	#13	6,0	66,0	24,0	17,0	36,0	64617 67617
0.1875	4,763 mm	3/16	6,0	66,0	28,0	21,0	36,0	54606 54706
0.1890	4,801 mm	#12	6,0	66,0	28,0	21,0	36,0	64618 67618
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	64619 67619
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	64620 67620
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	64621 67621
0.2031	5,159 mm	13/64	6,0	66,0	28,0	20,0	36,0	54607 54707
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	64622 67622
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	64623 67623
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	64624 67624
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	64625 67625
0.2188	5,558 mm	7/32	6,0	66,0	28,0	20,0	36,0	54608 54708
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	64626 67626

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)

continued on next page




3xD



131N 3xD

FRACTIONAL & METRIC SERIES

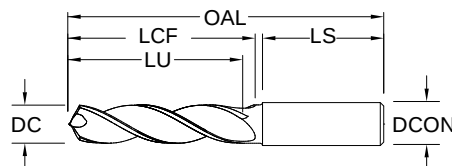

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	64627	67627
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	64628	67628
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	64629	67629
0.2344	5,954 mm	15/64	6,0	66,0	28,0	19,0	36,0	54609	54709
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	64630	67630
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	64631	67631
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	64632	67632
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	64633	67633
0.2500	6,350 mm	1/4 E	8,0	79,0	34,0	24,0	36,0	54610	54710
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	64634	67634
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	64635	67635
0.2570	6,528 mm	F	8,0	79,0	34,0	24,0	36,0	54611	54711
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	64636	67636
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	64637	67637
0.2656	6,746 mm	17/64	8,0	79,0	34,0	24,0	36,0	54612	54712
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	64638	67638
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	64639	67639
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	64640	67640
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	64641	67641
0.2812	7,142 mm	9/32	8,0	79,0	41,0	30,0	36,0	54613	54713
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	64642	67642
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	64643	67643
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	64644	67644
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	64645	67645
0.2969	7,541 mm	19/64	8,0	79,0	41,0	30,0	36,0	54614	54714
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	64646	67646
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	64647	67647
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	64648	67648
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	64649	67649
0.3125	7,938 mm	5/16	8,0	79,0	41,0	29,0	36,0	54615	54715
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	64650	67650
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	64651	67651
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	64652	67652
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	64653	67653
0.3281	8,334 mm	21/64	10,0	89,0	47,0	34,0	40,0	54616	54716
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	64654	67654

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

continued on next page


131N 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.3320	8,433 mm	Q	10,0	89,0	47,0	34,0	40,0	54617	54717
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	64655	67655
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	64656	67656
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	64657	67657
0.3438	8,733 mm	11/32	10,0	89,0	47,0	34,0	40,0	54618	54718
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	64658	67658
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	64659	67659
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	64660	67660
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	64661	67661
0.3594	9,129 mm	23/64	10,0	89,0	47,0	33,0	40,0	54619	54719
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	64662	67662
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	64663	67663
0.3680	9,347 mm	U	10,0	89,0	47,0	33,0	40,0	54620	54720
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	64664	67664
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	64665	67665
0.3750	9,525 mm	3/8	10,0	89,0	47,0	33,0	40,0	54621	54721
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	64666	67666
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	64667	67667
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	64668	67668
0.3898	9,900 mm		10,0	89,0	47,0	32,0	40,0	64669	67669
0.3906	9,921 mm	25/64	10,0	89,0	47,0	32,0	40,0	54622	54722
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	64670	67670
0.3976	10,100 mm		12,0	102,0	55,0	40,0	45,0	64671	67671
0.4016	10,200 mm		12,0	102,0	55,0	40,0	45,0	64672	67672
0.4055	10,300 mm		12,0	102,0	55,0	40,0	45,0	64673	67673
0.4062	10,317 mm	13/32	12,0	102,0	55,0	40,0	45,0	54623	54723
0.4095	10,400 mm		12,0	102,0	55,0	39,0	45,0	64674	67674
0.4134	10,500 mm		12,0	102,0	55,0	39,0	45,0	64675	67675
0.4173	10,600 mm		12,0	102,0	55,0	39,0	45,0	64676	67676
0.4213	10,700 mm		12,0	102,0	55,0	39,0	45,0	64677	67677
0.4219	10,716 mm	27/64	12,0	102,0	55,0	39,0	45,0	54624	54724
0.4252	10,800 mm		12,0	102,0	55,0	39,0	45,0	64678	67678
0.4291	10,900 mm		12,0	102,0	55,0	39,0	45,0	64679	67679
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	64680	67680
0.4370	11,100 mm		12,0	102,0	55,0	38,0	45,0	64681	67681
0.4375	11,113 mm	7/16	12,0	102,0	55,0	38,0	45,0	54625	54725
0.4409	11,200 mm		12,0	102,0	55,0	38,0	45,0	64682	67682
0.4449	11,300 mm		12,0	102,0	55,0	38,0	45,0	64683	67683
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	64684	67684
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	64685	67685
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	64686	67686
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	64687	67687
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	64688	67688
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	64689	67689


continued on next page

CONTINUED



131N 3xD

FRACTIONAL & METRIC SERIES

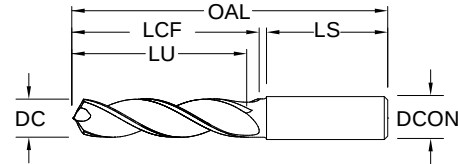

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

DECIMAL DC	METRIC DC	inch & mm						EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.4688	11,908 mm	15/32	12,0	102,0	55,0	37,0	45,0	54626	54726
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	64690	67690
0.4844	12,304 mm	31/64	14,0	107,0	60,0	41,0	45,0	54627	54727
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	64691	67691
0.5000	12,700 mm	1/2	14,0	107,0	60,0	41,0	45,0	54628	54728
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	64692	67692
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	64693	67693
0.5156	13,096 mm	33/64	14,0	107,0	60,0	40,0	45,0	54629	54729
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	64694	67694
0.5433	13,800 mm		14,0	107,0	60,0	39,0	45,0	64695	67695
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	64696	67696
0.5625	14,288 mm	9/16	16,0	115,0	65,0	43,0	48,0	54630	54730
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	64697	67697
0.5781	14,684 mm	37/64	16,0	115,0	65,0	43,0	48,0	54631	54731
0.5827	14,800 mm		16,0	115,0	65,0	43,0	48,0	64698	67698
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	64699	67699
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	64700	67700
0.6221	15,800 mm		16,0	115,0	65,0	41,0	48,0	64701	67701
0.6250	15,875 mm	5/8	16,0	115,0	65,0	41,0	48,0	54632	54732
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	64702	67702
0.6562	16,667 mm	21/32	18,0	123,0	73,0	47,0	48,0	54633	54733
0.6875	17,463 mm	11/16	18,0	123,0	73,0	47,0	48,0	54634	54734
0.7500	19,050 mm	3/4	20,0	131,0	79,0	50,0	50,0	54635	54735

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$
DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$
DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$
DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$
DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$
DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$
DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$
DCON = h_6

>6-10 DIAMETER



DC = $\pm 0.006/\pm 0.021$
DCON = h_6

>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$
DCON = h_6

NON-FERROUS

For patent information visit
www.ksptpatents.com

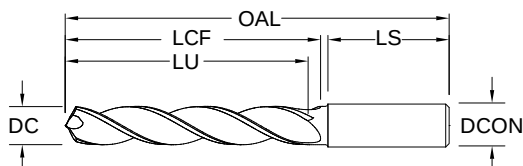

131N 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00028/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

		inch & mm							EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS		UNCOATED	TI-NAMITE®-B (TiB ₂)
0.1181	3,000 mm		6,0	66,0	28,0	23,0	36,0		65000	64800
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0		65001	64801
0.1250	3,175 mm	1/8	6,0	66,0	28,0	23,0	36,0		55000	54800
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0		65002	64802
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0		65003	64803
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0		65004	64804
0.1360	3,454 mm	#29	6,0	66,0	28,0	23,0	36,0		55001	54801
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0		65005	64805
0.1406	3,571 mm	9/64	6,0	66,0	28,0	23,0	36,0		55002	54802
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0		65006	64806
0.1457	3,700 mm		6,0	66,0	28,0	23,0	36,0		65007	64807
0.1496	3,800 mm		6,0	74,0	36,0	29,0	36,0		65008	64808
0.1535	3,900 mm		6,0	74,0	36,0	29,0	36,0		65009	64809
0.1562	3,967 mm	5/32	6,0	74,0	36,0	29,0	36,0		55003	54803
0.1575	4,000 mm		6,0	74,0	36,0	29,0	36,0		65010	64810
0.1590	4,039 mm	#21	6,0	74,0	36,0	29,0	36,0		55004	54804
0.1614	4,100 mm		6,0	74,0	36,0	29,0	36,0		65011	64811
0.1654	4,200 mm		6,0	74,0	36,0	29,0	36,0		65012	64812
0.1693	4,300 mm		6,0	74,0	36,0	29,0	36,0		65013	64813
0.1719	4,366 mm	11/64	6,0	74,0	36,0	29,0	36,0		55005	54805
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0		65014	64814
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0		65015	64815
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0		65016	64816
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0		65017	64817
0.1875	4,763 mm	3/16	6,0	82,0	44,0	37,0	36,0		55006	54806
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0		65018	64818
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0		65019	64819
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0		65020	64820
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0		65021	64821
0.2031	5,159 mm	13/64	6,0	82,0	44,0	36,0	36,0		55007	54807
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0		65022	64822
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0		65023	64823
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0		65024	64824
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0		65025	64825
0.2188	5,558 mm	7/32	6,0	82,0	44,0	36,0	36,0		55008	54808
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0		65026	64826

continued on next page

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRC)




5xD



131N 5xD

FRACTIONAL & METRIC SERIES

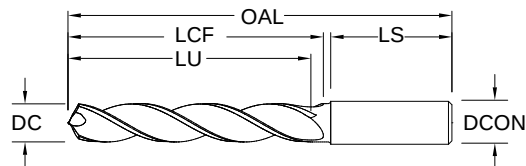

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

		inch & mm						EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	65027	64827
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	65028	64828
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	65029	64829
0.2344	5,954 mm	15/64	6,0	82,0	44,0	35,0	36,0	55009	54809
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	65030	64830
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	65031	64831
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	65032	64832
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	65033	64833
0.2500	6,350 mm	1/4 E	8,0	91,0	53,0	43,0	36,0	55010	54810
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	65034	64834
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	65035	64835
0.2570	6,528 mm	F	8,0	91,0	53,0	43,0	36,0	55011	54811
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	65036	64836
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	65037	64837
0.2656	6,746 mm	17/64	8,0	91,0	53,0	43,0	36,0	55012	54812
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	65038	64838
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	65039	64839
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	65040	64840
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	65041	64841
0.2812	7,142 mm	9/32	8,0	91,0	53,0	42,0	36,0	55013	54813
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	65042	64842
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	65043	64843
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	65044	64844
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	65045	64845
0.2969	7,541 mm	19/64	8,0	91,0	53,0	42,0	36,0	55014	54814
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	65046	64846
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	65047	64847
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	65048	64848
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	65049	64849
0.3125	7,938 mm	5/16	8,0	91,0	53,0	41,0	36,0	55015	54815
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	65050	64850
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	65051	64851
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	65052	64852
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	65053	64853
0.3281	8,334 mm	21/64	10,0	103,0	61,0	48,0	40,0	55016	54816
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	65054	64854

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$ DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$ DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$ DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$ DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$ DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0,002/\pm 0,012$ DCON = h_6

>3-6 DIAMETER

DC = $\pm 0,004/\pm 0,016$ DCON = h_6

>6-10 DIAMETER

DC = $\pm 0,006/\pm 0,021$ DCON = h_6

>10-18 DIAMETER

DC = $\pm 0,007/\pm 0,025$ DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com


continued on next page

131N 5xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.		CONTINUED
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED	Ti-NAMITE®-B (TiB ₂)	
0.3320	8,433 mm	Q	10,0	103,0	61,0	48,0	40,0	55017	54817	
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	65055	64855	
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	65056	64856	
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	65057	64857	
0.3438	8,733 mm	11/32	10,0	103,0	61,0	48,0	40,0	55018	54818	
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	65058	64858	
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	65059	64859	
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	65060	64860	
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	65061	64861	
0.3594	9,129 mm	23/64	10,0	103,0	61,0	47,0	40,0	55019	54819	
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	65062	64862	
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	65063	64863	
0.3680	9,347 mm	U	10,0	103,0	61,0	47,0	40,0	55020	54820	
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	65064	64864	
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	65065	64865	
0.3750	9,525 mm	3/8	10,0	103,0	61,0	47,0	40,0	55021	54821	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	65066	64866	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	65067	64867	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	65068	64868	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	65069	64869	
0.3906	9,921 mm	25/64	10,0	103,0	61,0	46,0	40,0	55022	54822	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	65070	64870	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	65071	64871	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	65072	64872	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	65073	64873	
0.4062	10,317 mm	13/32	12,0	118,0	71,0	56,0	45,0	55023	54823	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	65074	64874	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	65075	64875	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	65076	64876	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	65077	64877	
0.4219	10,716 mm	27/64	12,0	118,0	71,0	55,0	45,0	55024	54824	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	65078	64878	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	65079	64879	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	65080	64880	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	65081	64881	
0.4375	11,113 mm	7/16	12,0	118,0	71,0	54,0	45,0	55025	54825	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	65082	64882	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	65083	64883	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	65084	64884	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	65085	64885	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	65086	64886	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	65087	64887	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	65088	64888	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	65089	64889	
0.4688	11,908 mm	15/32	12,0	118,0	71,0	53,0	45,0	55026	54826	
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	65090	64890	


continued on next page



131N 5xD

FRACTIONAL & METRIC SERIES

- 3-margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

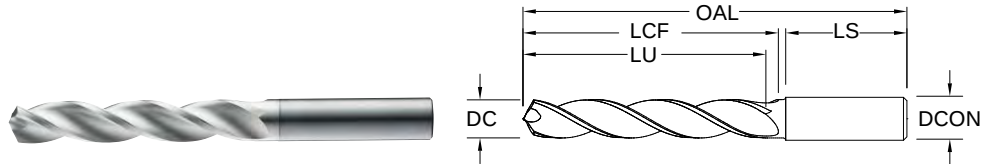

inch & mm										EDP NO.	
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE®-B (TiB ₂)			
0.4844	12,304 mm	31/64	14,0	124,0	77,0	58,0	45,0	55027	54827		
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	65091	64891		
0.5000	12,700 mm	1/2	14,0	124,0	77,0	58,0	45,0	55028	54828		
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	65092	64892		
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	65093	64893		
0.5156	13,096 mm	33/64	14,0	124,0	77,0	57,0	45,0	55029	54829		
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	65094	64894		
0.5433	13,800 mm		14,0	124,0	77,0	56,0	45,0	65095	64895		
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	65096	64896		
0.5625	14,288 mm	9/16	16,0	133,0	83,0	61,0	48,0	55030	54830		
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	65097	64897		
0.5781	14,684 mm	37/64	16,0	133,0	83,0	61,0	48,0	55031	54831		
0.5827	14,800 mm		16,0	133,0	83,0	61,0	48,0	65098	64898		
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	65099	64899		
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	65100	64900		
0.6221	15,800 mm		16,0	133,0	83,0	59,0	48,0	65101	64901		
0.6250	15,875 mm	5/8	16,0	133,0	83,0	59,0	48,0	55032	54832		
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	65102	64902		
0.6562	16,667 mm	21/32	18,0	143,0	93,0	68,0	48,0	55033	54833		
0.6875	17,463 mm	11/16	18,0	143,0	93,0	67,0	48,0	55034	54834		
0.7500	19,050 mm	3/4	20,0	153,0	101,0	72,0	50,0	55035	54835		

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Series 131N 3D & 5D Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS < 12% SI 6061, 2024, 7075	≤ 150 Bhn or ≤ 88 HRb	800	RPM	24448	16299	12224	8149	6112	4890	4075
		(640-960)	Fr	0.0055	0.0083	0.0110	0.0166	0.0221	0.0276	0.0331	
			Feed (ipm)	135	135	135	135	135	135	135	
	ALUMINUM ALLOYS > 12% SI A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	600	RPM	18336	12224	9168	6112	4584	3667	3056
		(480-720)	Fr	0.0055	0.0082	0.0109	0.0164	0.0218	0.0273	0.0327	
			Feed (ipm)	100	100	100	100	100	100	100	
	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
		(440-660)	Fr	0.0020	0.0030	0.0040	0.0061	0.0081	0.0101	0.0121	
			Feed (ipm)	34	34	34	34	34	34	34	
	PLASTICS Acrylic, PVC, Polypropylene		450	RPM	13752	9168	6876	4584	3438	2750	2292
			(360-540)	Fr	0.0025	0.0037	0.0049	0.0074	0.0099	0.0124	0.0148
				Feed (ipm)	34	34	34	34	34	34	34

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 131N 3D & 5D Metric				DC • mm							
Hardness	Vc (m/min)			3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS < 12% SI 6061, 2024, 7075	≤ 150 Bhn or ≤ 88 HRb	244	RPM	25851	12926	9694	7755	6463	5540	4847
			(195-293)	Fr	0.133	0.265	0.354	0.442	0.531	0.619	0.708
			Feed (mm/min)	3430	3430	3430	3430	3430	3430	3430	3430
		ALUMINUM ALLOYS > 12% SI A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	183	RPM	19388	9694	7271	5816	4847	4155
	(146-219)			Fr	0.131	0.262	0.349	0.437	0.524	0.611	0.699
			Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540	2540
	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass		≤ 175 Bhn or ≤ 16 HRc	168	RPM	17773	8886	6665	5332	4443	3808
		(134-201)		Fr	0.049	0.097	0.130	0.162	0.194	0.227	0.259
			Feed (mm/min)	864	864	864	864	864	864	864	864
		PLASTICS Acrylic, PVC, Polypropylene		137	RPM	14541	7271	5453	4362	3635	3116
	(110-165)			Fr	0.059	0.119	0.158	0.198	0.238	0.277	0.317
			Feed (mm/min)	864	864	864	864	864	864	864	864

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120




3xD



120

FRACTIONAL & METRIC SERIES

- Double margin design stabilizes the drill for greater hole accuracy and improved surface finish
- Notched point reduces thrust force over conventional designs
- 8 facet point reduces fiber breakout and delamination on exit
- 90 degree secondary chamfer angle improves hole entrance and exit quality

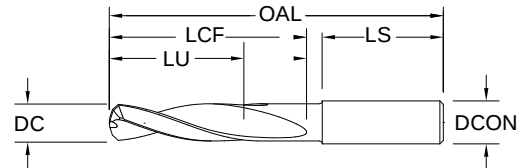

DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.0980	2,489 mm	#40	1/8	2	9/16	7/16	1-1/4	50000
0.1063	2,700 mm		6,0	63,0	20,0	16,0	32,0	50001
0.1181	3,000 mm		6,0	63,0	20,0	16,0	36,0	50002
0.1250	3,175 mm	1/8	1/4	2-1/2	3/4	9/16	1-7/16	50003
0.1260	3,200 mm		6,0	63,0	20,0	15,0	36,0	50004
0.1285	3,264 mm	#30	1/4	2-1/2	3/4	9/16	1-7/16	50005
0.1405	3,569 mm	#28	1/4	2-1/2	3/4	9/16	1-7/16	50006
0.1570	3,988 mm	#22	1/4	2-5/8	7/8	5/8	1-7/16	50007
0.1590	4,039 mm	#21	1/4	2-5/8	7/8	5/8	1-7/16	50008
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	50009
0.1660	4,216 mm	#19	1/4	2-5/8	7/8	5/8	1-7/16	50010
0.1719	4,366 mm	11/64	1/4	2-5/8	7/8	5/8	1-7/16	50011
0.1875	4,763 mm	3/16	1/4	2-5/8	1	23/32	1-7/16	50012
0.1910	4,851 mm	#11	1/4	2-5/8	1	23/32	1-7/16	50013
0.1990	5,055 mm	#8	1/4	2-5/8	1	23/32	1-7/16	50014
0.2010	5,105 mm	#7	1/4	2-5/8	1	23/32	1-7/16	50015
0.2210	5,613 mm	#2	1/4	2-5/8	1	21/32	1-7/16	50016
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	50017
0.2500	6,350 mm	1/4 E	1/4	3-1/8	1-5/16	15/16	1-7/16	50018
0.2510	6,380 mm		5/16	3-1/8	1-5/16	15/16	1-7/16	50019
0.2570	6,528 mm	F	5/16	3-1/8	1-5/16	15/16	1-7/16	50020
0.2720	6,909 mm	I	5/16	3-1/8	1-5/16	29/32	1-7/16	50021
0.2770	7,036 mm	J	5/16	3-1/8	1-5/16	29/32	1-7/16	50022
0.2810	7,137 mm	K	5/16	3-1/8	1-9/16	1-9/64	1-7/16	50023
0.3125	7,938 mm	5/16	5/16	3-1/8	1-9/16	1-3/32	1-7/16	50024
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	50025
0.3750	9,525 mm	3/8	3/8	3-1/2	1-27/32	1-9/32	1-9/16	50026
0.3770	9,576 mm	V	1/2	3-1/2	1-27/32	1-9/32	1-9/16	50027
0.3937	10,000 mm		10,0	89,0	47,0	32,0	40,0	50028
0.4375	11,113 mm	7/16	1/2	4-1/16	2-3/16	1-17/32	1-9/16	50029
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	50030
0.5000	12,700 mm	1/2	1/2	4-1/4	2-5/16	1-9/16	1-3/4	50031

TOLERANCES (inch)

DC = +.0000/+.0005

DCON = h₆

TOLERANCES (mm)

DC = +0,000/+0,013

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Series 120

Series 120 Fractional			DC • in							
Vc (sfm)			1/8	3/16	1/4	5/16	3/8	7/16	1/2	
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	320	RPM	9779	6519	4890	3912	3260	2794	2445
		(256-384)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	5.9	5.9	5.9	5.9	5.9	5.9	5.9
	GFRP (Fiberglass)	240	RPM	7334	4890	3667	2934	2445	2096	1834
		(192-288)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	CARBON, GRAPHITE	400	RPM	12224	8149	6112	4890	4075	3493	3056
		(320-480)	Fr	0.0008	0.0012	0.0016	0.0020	0.0024	0.0028	0.0032
			Feed (ipm)	9.8	9.8	9.8	9.8	9.8	9.8	9.8

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120 Metric			DC • mm							
Vc (m/min)			2.5	3	4	6	8	10	12	
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	100	RPM	12722	10602	7951	5301	3976	3181	2650
		(80-120)	Fr	0.012	0.014	0.019	0.028	0.038	0.047	0.057
			Feed (mm/min)	150	150	150	150	150	150	150
	GFRP (Fiberglass)	75	RPM	9542	7951	5963	3976	2982	2385	1988
		(65-90)	Fr	0.012	0.014	0.019	0.029	0.039	0.048	0.058
			Feed (mm/min)	115	115	115	115	115	115	115
	CARBON, GRAPHITE	120	RPM	15266	12722	9542	6361	4771	3817	3181
		(96-144)	Fr	0.015	0.018	0.025	0.037	0.049	0.062	0.074
			Feed (mm/min)	235	235	235	235	235	235	235

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm


adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



135 3xD

FRACTIONAL & METRIC SERIES

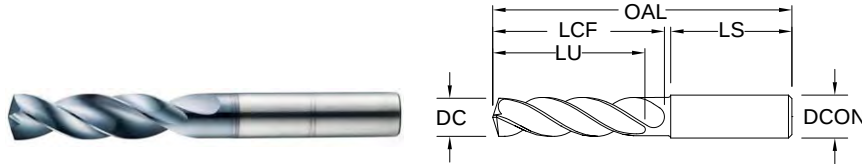

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
0.0156	0,396 mm	1/64	1/8	1-1/2	1/8	7/64	1	51752*
0.0312	0,792 mm	1/32	1/8	1-1/2	1/4	13/64	1	51269*
0.0469	1,191 mm	3/64	1/8	1-1/2	3/8	5/16	1	51270*
0.0492	1,250 mm		3,0	38,0	9,5	8,0	25,0	64500*
0.0571	1,450 mm		3,0	38,0	9,5	7,0	25,0	64501*
0.0595	1,511 mm	#53	1/8	1-1/2	3/8	9/32	1	64502*
0.0625	1,588 mm	1/16	1/8	2	7/16	11/32	1-1/4	51271*
0.0630	1,600 mm		3,0	50,0	11,0	9,0	32,0	64503*
0.0689	1,750 mm		3,0	50,0	11,0	8,0	32,0	64504*
0.0700	1,778 mm	#50	1/8	2	7/16	21/64	1-1/4	64505*
0.0781	1,984 mm	5/64	1/8	2	1/2	25/64	1-1/4	51272*
0.0785	1,994 mm	#47	1/8	2	1/2	25/64	1-1/4	64506*
0.0807	2,050 mm		3,0	50,0	12,0	9,0	32,0	64507*
0.0810	2,057 mm	#46	1/8	2	1/2	3/8	1-1/4	64508*
0.0890	2,261 mm	#43	1/8	2	1/2	3/8	1-1/4	64509*
0.0935	2,375 mm	#42	1/8	2	1/2	23/64	1-1/4	64510*
0.0938	2,383 mm	3/32	1/8	2	1/2	23/64	1-1/4	51273
0.0980	2,489 mm	#40	1/8	2	9/16	27/64	1-1/4	51274
0.0984	2,500 mm		3,0	50,0	14,0	10,0	32,0	64511
0.0995	2,527 mm	#39	1/8	2	9/16	27/64	1-1/4	51753
0.1015	2,578 mm	#38	1/8	2	9/16	27/64	1-1/4	51754
0.1040	2,642 mm	#37	1/8	2	9/16	13/32	1-1/4	51755
0.1065	2,705 mm	#36	1/8	2	9/16	13/32	1-1/4	51756
0.1094	2,779 mm	7/64	1/8	2	5/8	15/32	1-1/4	51275
0.1100	2,794 mm	#35	1/8	2	5/8	15/32	1-1/4	51276
0.1110	2,819 mm	#34	1/8	2	5/8	15/32	1-1/4	51277
0.1130	2,870 mm	#33	1/8	2	5/8	29/64	1-1/4	51757
0.1142	2,900 mm		3,0	50,0	16,0	12,0	32,0	64512
0.1160	2,946 mm	#32	1/8	2	5/8	29/64	1-1/4	51758
0.1181	3,000 mm		6,0	62,0	20,0	16,0	36,0	63155
0.1200	3,048 mm	#31	1/8	2	5/8	29/64	1-1/4	51759
0.1220	3,100 mm		6,0	62,0	20,0	15,0	36,0	63741
0.1250	3,175 mm	1/8	1/4	2-1/2	3/4	9/16	1-7/16	51330
0.1260	3,200 mm		6,0	62,0	20,0	15,0	36,0	63156
0.1285	3,264 mm	#30	1/4	2-1/2	3/4	9/16	1-7/16	51278
0.1299	3,300 mm		6,0	62,0	20,0	15,0	36,0	63157

*Single Margin

continued on next page

TOLERANCES (inch)

$\leq .1181$ DIAMETER

DC = $\pm 0.0008/\pm 0.0047$

DCON = h_6

$>.1181-.2362$ DIAMETER

DC = $\pm 0.0016/\pm 0.0063$

DCON = h_6

$>.2362-.3937$ DIAMETER

DC = $\pm 0.0024/\pm 0.0083$

DCON = h_6

$>.3937-.7087$ DIAMETER

DC = $\pm 0.0028/\pm 0.0098$

DCON = h_6

$>.7087-1.1811$ DIAMETER

DC = $\pm 0.0031/\pm 0.0114$

DCON = h_6

TOLERANCES (mm)

≤ 3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

$>3-6$ DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

$>6-10$ DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

$>10-18$ DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

$>18-30$ DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.1339	3,400 mm		6,0	62,0	20,0	15,0	36,0	63158
0.1360	3,454 mm	#29	1/4	2-1/2	3/4	9/16	1-7/16	51331
0.1378	3,500 mm		6,0	62,0	20,0	15,0	36,0	63159
0.1405	3,569 mm	#28	1/4	2-1/2	3/4	35/64	1-7/16	51760
0.1406	3,571 mm	9/64	1/4	2-1/2	3/4	9/16	1-7/16	51332
0.1417	3,600 mm		6,0	62,0	20,0	15,0	36,0	63160
0.1440	3,658 mm	#27	1/4	2-1/2	3/4	35/64	1-7/16	51761
0.1457	3,700 mm		6,0	62,0	20,0	14,0	36,0	63161
0.1470	3,734 mm	#26	1/4	2-1/2	3/4	17/32	1-7/16	51762
0.1495	3,797 mm	#25	1/4	2-5/8	7/8	21/32	1-7/16	51333
0.1496	3,800 mm		6,0	66,0	24,0	18,0	36,0	63742
0.1520	3,861 mm	#24	1/4	2-5/8	7/8	21/32	1-7/16	51763
0.1535	3,900 mm		6,0	66,0	24,0	18,0	36,0	63743
0.1540	3,912 mm	#23	1/4	2-5/8	7/8	21/32	1-7/16	51764
0.1562	3,967 mm	5/32	1/4	2-5/8	7/8	41/64	1-7/16	51334
0.1570	3,988 mm	#22	1/4	2-5/8	7/8	41/64	1-7/16	51765
0.1575	4,000 mm		6,0	66,0	24,0	18,0	36,0	63162
0.1590	4,039 mm	#21	1/4	2-5/8	7/8	41/64	1-7/16	51335
0.1610	4,089 mm	#20	1/4	2-5/8	7/8	5/8	1-7/16	51279
0.1614	4,100 mm		6,0	66,0	24,0	18,0	36,0	63744
0.1654	4,200 mm		6,0	66,0	24,0	18,0	36,0	63163
0.1660	4,216 mm	#19	1/4	2-5/8	7/8	5/8	1-7/16	51766
0.1693	4,300 mm		6,0	66,0	24,0	18,0	36,0	63164
0.1695	4,305 mm	#18	1/4	2-5/8	7/8	5/8	1-7/16	51767
0.1719	4,366 mm	11/64	1/4	2-5/8	7/8	39/64	1-7/16	51336
0.1730	4,394 mm	#17	1/4	2-5/8	7/8	5/8	1-7/16	51768
0.1732	4,400 mm		6,0	66,0	24,0	17,0	36,0	63745
0.1770	4,496 mm	#16	1/4	2-5/8	7/8	39/64	1-7/16	51769
0.1772	4,500 mm		6,0	66,0	24,0	17,0	36,0	63165
0.1800	4,572 mm	#15	1/4	2-5/8	7/8	39/64	1-7/16	51770
0.1811	4,600 mm		6,0	66,0	24,0	17,0	36,0	63166
0.1820	4,623 mm	#14	1/4	2-5/8	7/8	39/64	1-7/16	51771
0.1850	4,700 mm	#13	1/4	2-5/8	7/8	39/64	1-7/16	51772
0.1850	4,700 mm	#13	6,0	66,0	24,0	17,0	36,0	63746
0.1875	4,763 mm	3/16	1/4	2-5/8	1	23/32	1-7/16	51337
0.1890	4,800 mm	#12	1/4	2-5/8	1	23/32	1-7/16	51773
0.1890	4,800 mm	#12	6,0	66,0	28,0	21,0	36,0	63167
0.1910	4,851 mm	#11	1/4	2-5/8	1	23/32	1-7/16	51774
0.1929	4,900 mm		6,0	66,0	28,0	21,0	36,0	63747
0.1935	4,915 mm	#10	1/4	2-5/8	1	23/32	1-7/16	51775
0.1960	4,978 mm	#9	1/4	2-5/8	1	23/32	1-7/16	51776
0.1969	5,000 mm		6,0	66,0	28,0	20,0	36,0	63168
0.1990	5,055 mm	#8	1/4	2-5/8	1	45/64	1-7/16	51777
0.2008	5,100 mm		6,0	66,0	28,0	20,0	36,0	63748
0.2010	5,105 mm	#7	1/4	2-5/8	1	45/64	1-7/16	51338
0.2031	5,159 mm	13/64	1/4	2-5/8	1	45/64	1-7/16	51339

continued on next page

CONTINUED




3xD



135 3xD

FRACTIONAL & METRIC SERIES

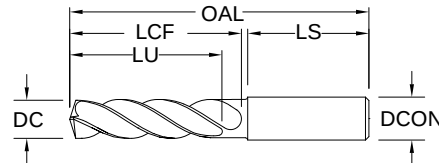

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AItin)
0.2040	5,182 mm	#6	1/4	2-5/8	1	45/64	1-7/16	51778
0.2047	5,200 mm		6,0	66,0	28,0	20,0	36,0	63749
0.2055	5,220 mm	#5	1/4	2-5/8	1	45/64	1-7/16	51779
0.2067	5,250 mm		6,0	66,0	28,0	20,0	36,0	63169
0.2087	5,300 mm		6,0	66,0	28,0	20,0	36,0	63170
0.2090	5,309 mm	#4	1/4	2-5/8	1	11/16	1-7/16	51780
0.2126	5,400 mm		6,0	66,0	28,0	20,0	36,0	63750
0.2130	5,410 mm	#3	1/4	2-5/8	1	11/16	1-7/16	51340
0.2165	5,500 mm		6,0	66,0	28,0	20,0	36,0	63171
0.2188	5,558 mm	7/32	1/4	2-5/8	1	43/64	1-7/16	51341
0.2205	5,600 mm		6,0	66,0	28,0	20,0	36,0	63751
0.2210	5,613 mm	#2	1/4	2-5/8	1	11/16	1-7/16	51781
0.2244	5,700 mm		6,0	66,0	28,0	19,0	36,0	63752
0.2280	5,791 mm	#1	1/4	2-5/8	1	21/32	1-7/16	51782
0.2283	5,800 mm		6,0	66,0	28,0	19,0	36,0	63172
0.2323	5,900 mm		6,0	66,0	28,0	19,0	36,0	63753
0.2340	5,944 mm	A	1/4	2-5/8	1	21/32	1-7/16	51601
0.2344	5,954 mm	15/64	1/4	2-5/8	1	21/32	1-7/16	51342
0.2362	6,000 mm		6,0	66,0	28,0	19,0	36,0	63173
0.2380	6,045 mm	B	1/4	3-1/8	1-5/16	31/32	1-7/16	51602
0.2402	6,100 mm		8,0	79,0	34,0	25,0	36,0	63754
0.2420	6,147 mm	C	1/4	3-1/8	1-5/16	61/64	1-7/16	51603
0.2441	6,200 mm		8,0	79,0	34,0	25,0	36,0	63755
0.2460	6,248 mm	D	1/4	3-1/8	1-5/16	61/64	1-7/16	51604
0.2461	6,250 mm		8,0	79,0	34,0	25,0	36,0	63174
0.2480	6,300 mm		8,0	79,0	34,0	25,0	36,0	63756
0.2500	6,350 mm	1/4 E	1/4	3-1/8	1-5/16	15/16	1-7/16	51343
0.2520	6,400 mm		8,0	79,0	34,0	24,0	36,0	63175
0.2559	6,500 mm		8,0	79,0	34,0	24,0	36,0	63213
0.2570	6,528 mm	F	5/16	3-1/8	1-5/16	59/64	1-7/16	51344
0.2598	6,600 mm		8,0	79,0	34,0	24,0	36,0	63757
0.2610	6,629 mm	G	5/16	3-1/8	1-5/16	59/64	1-7/16	51606
0.2638	6,700 mm		8,0	79,0	34,0	24,0	36,0	63758
0.2656	6,746 mm	17/64	5/16	3-1/8	1-5/16	59/64	1-7/16	51345
0.2660	6,756 mm	H	5/16	3-1/8	1-5/16	59/64	1-7/16	51607
0.2677	6,800 mm		8,0	79,0	34,0	24,0	36,0	63176
0.2717	6,900 mm		8,0	79,0	34,0	24,0	36,0	63759
0.2720	6,909 mm	I	5/16	3-1/8	1-5/16	29/32	1-7/16	51346

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $\pm .00008/\pm .00047$ DCON = h_6 $> .1181-.2362$ DIAMETERDC = $\pm .00016/\pm .00063$ DCON = h_6 $> .2362-.3937$ DIAMETERDC = $\pm .00024/\pm .00083$ DCON = h_6 $> .3937-.7087$ DIAMETERDC = $\pm .00028/\pm .00098$ DCON = h_6 $> .7087-1.1811$ DIAMETERDC = $\pm .00031/\pm .00114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $\pm 0,002/\pm 0,012$ DCON = h_6 $> 3-6$ DIAMETERDC = $\pm 0,004/\pm 0,016$ DCON = h_6 $> 6-10$ DIAMETERDC = $\pm 0,006/\pm 0,021$ DCON = h_6 $> 10-18$ DIAMETERDC = $\pm 0,007/\pm 0,025$ DCON = h_6 $> 18-30$ DIAMETERDC = $\pm 0,008/\pm 0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.kspatents.com

continued on next page

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2756	7,000 mm		8,0	79,0	34,0	24,0	36,0	63177
0.2770	7,036 mm	J	5/16	3-1/8	1-5/16	29/32	1-7/16	51608
0.2795	7,100 mm		8,0	79,0	41,0	30,0	36,0	63760
0.2810	7,137 mm	K	5/16	3-1/8	1-9/16	1-9/64	1-7/16	51609
0.2812	7,142 mm	9/32	5/16	3-1/8	1-9/16	1-9/64	1-7/16	51347
0.2835	7,200 mm		8,0	79,0	41,0	30,0	36,0	63761
0.2854	7,250 mm		8,0	79,0	41,0	30,0	36,0	63178
0.2874	7,300 mm		8,0	79,0	41,0	30,0	36,0	63762
0.2900	7,366 mm	L	5/16	3-1/8	1-9/16	1-1/8	1-7/16	51610
0.2913	7,400 mm		8,0	79,0	41,0	30,0	36,0	63763
0.2950	7,493 mm	M	5/16	3-1/8	1-9/16	1-1/8	1-7/16	51611
0.2953	7,500 mm		8,0	79,0	41,0	30,0	36,0	63179
0.2969	7,541 mm	19/64	5/16	3-1/8	1-9/16	1-7/64	1-7/16	51348
0.2992	7,600 mm		8,0	79,0	41,0	30,0	36,0	63764
0.3020	7,671 mm	N	5/16	3-1/8	1-9/16	1-7/64	1-7/16	51612
0.3031	7,700 mm		8,0	79,0	41,0	29,0	36,0	63765
0.3071	7,800 mm		8,0	79,0	41,0	29,0	36,0	63180
0.3110	7,900 mm		8,0	79,0	41,0	29,0	36,0	63766
0.3125	7,938 mm	5/16	5/16	3-1/8	1-9/16	1-3/32	1-7/16	51349
0.3150	8,000 mm		8,0	79,0	41,0	29,0	36,0	63181
0.3160	8,026 mm	O	3/8	3-1/2	1-27/32	1-3/8	1-9/16	51613
0.3189	8,100 mm		10,0	89,0	47,0	35,0	40,0	63767
0.3228	8,200 mm		10,0	89,0	47,0	35,0	40,0	63768
0.3230	8,204 mm	P	3/8	3-1/2	1-27/32	1-23/64	1-9/16	51614
0.3268	8,300 mm		10,0	89,0	47,0	35,0	40,0	63769
0.3281	8,334 mm	21/64	3/8	3-1/2	1-27/32	1-23/64	1-9/16	51350
0.3307	8,400 mm		10,0	89,0	47,0	34,0	40,0	63182
0.3320	8,433 mm	Q	3/8	3-1/2	1-27/32	1-11/32	1-9/16	51351
0.3346	8,500 mm		10,0	89,0	47,0	34,0	40,0	63183
0.3386	8,600 mm		10,0	89,0	47,0	34,0	40,0	63770
0.3390	8,611 mm	R	3/8	3-1/2	1-27/32	1-11/32	1-9/16	51615
0.3425	8,700 mm		10,0	89,0	47,0	34,0	40,0	63771
0.3438	8,733 mm	11/32	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51352
0.3465	8,800 mm		10,0	89,0	47,0	34,0	40,0	63184
0.3480	8,839 mm	S	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51616
0.3504	8,900 mm		10,0	89,0	47,0	34,0	40,0	63772
0.3543	9,000 mm		10,0	89,0	47,0	34,0	40,0	63185
0.3580	9,093 mm	T	3/8	3-1/2	1-27/32	1-5/16	1-9/16	51617
0.3583	9,100 mm		10,0	89,0	47,0	33,0	40,0	63773
0.3594	9,129 mm	23/64	3/8	3-1/2	1-27/32	1-21/64	1-9/16	51353
0.3622	9,200 mm		10,0	89,0	47,0	33,0	40,0	63774
0.3642	9,250 mm		10,0	89,0	47,0	33,0	40,0	63186
0.3661	9,300 mm		10,0	89,0	47,0	33,0	40,0	63775
0.3680	9,347 mm	U	3/8	3-1/2	1-27/32	1-19/64	1-9/16	51354
0.3701	9,400 mm		10,0	89,0	47,0	33,0	40,0	63776
0.3740	9,500 mm		10,0	89,0	47,0	33,0	40,0	63187

continued on next page

CONTINUED




3xD



135 3xD

FRACTIONAL & METRIC SERIES

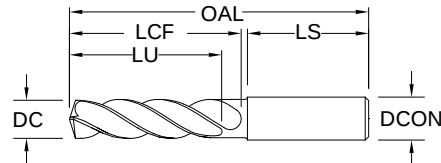

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 50 HRc (≤ 475 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)	
0.3750	9,525 mm	3/8	3/8	3-1/2	1-27/32	1-9/32	1-9/16	51355	
0.3770	9,576 mm	V	1/2	3-1/2	1-27/32	1-9/32	1-9/16	51618	
0.3780	9,600 mm		10,0	89,0	47,0	33,0	40,0	63777	
0.3819	9,700 mm		10,0	89,0	47,0	32,0	40,0	63778	
0.3858	9,800 mm		10,0	89,0	47,0	32,0	40,0	63779	
0.3860	9,804 mm	W	1/2	3-1/2	1-27/32	1-17/64	1-9/16	51619	
0.3898	9,900 mm		10,0	89,0	47,0	40,0	40,0	63780	
0.3906	9,921 mm	25/64	1/2	3-1/2	1-27/32	1-37/64	1-9/16	51356	
0.3937	10,000 mm		10,0	89,0	47,0	40,0	40,0	63188	
0.3970	10,083 mm	X	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51620	
0.3976	10,100 mm		12,0	102,0	55,0	45,0	45,0	63781	
0.4016	10,200 mm		12,0	102,0	55,0	45,0	45,0	63189	
0.4040	10,261 mm	Y	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51621	
0.4055	10,300 mm		12,0	102,0	55,0	45,0	45,0	63782	
0.4062	10,317 mm	13/32	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51357	
0.4095	10,400 mm		12,0	102,0	55,0	45,0	45,0	63783	
0.4130	10,490 mm	Z	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51622	
0.4134	10,500 mm		12,0	102,0	55,0	40,0	45,0	63190	
0.4173	10,600 mm		12,0	102,0	55,0	40,0	45,0	63784	
0.4213	10,700 mm		12,0	102,0	55,0	40,0	45,0	63785	
0.4219	10,716 mm	27/64	1/2	4-1/16	2-3/16	1-19/32	1-49/64	51358	
0.4252	10,800 mm		12,0	102,0	55,0	40,0	45,0	63191	
0.4291	10,900 mm		12,0	102,0	55,0	40,0	45,0	63786	
0.4331	11,000 mm		12,0	102,0	55,0	39,0	45,0	63192	
0.4370	11,100 mm		12,0	102,0	55,0	39,0	45,0	63787	
0.4375	11,113 mm	7/16	1/2	4-1/16	2-3/16	1-37/64	1-49/64	51359	
0.4409	11,200 mm		12,0	102,0	55,0	39,0	45,0	63788	
0.4429	11,250 mm		12,0	102,0	55,0	39,0	45,0	63193	
0.4449	11,300 mm		12,0	102,0	55,0	39,0	45,0	63789	
0.4488	11,400 mm		12,0	102,0	55,0	38,0	45,0	63790	
0.4528	11,500 mm		12,0	102,0	55,0	38,0	45,0	63194	
0.4531	11,509 mm	29/64	1/2	4-1/16	2-3/16	1-33/64	1-49/64	51360	
0.4567	11,600 mm		12,0	102,0	55,0	38,0	45,0	63791	
0.4606	11,700 mm		12,0	102,0	55,0	37,0	45,0	63792	
0.4646	11,800 mm		12,0	102,0	55,0	37,0	45,0	63793	
0.4685	11,900 mm		12,0	102,0	55,0	37,0	45,0	63794	

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $\pm .00008/\pm .00047$ DCON = h_6 $> .1181-.2362$ DIAMETERDC = $\pm .00016/\pm .00063$ DCON = h_6 $> .2362-.3937$ DIAMETERDC = $\pm .00024/\pm .00083$ DCON = h_6 $> .3937-.7087$ DIAMETERDC = $\pm .00028/\pm .00098$ DCON = h_6 $> .7087-1.1811$ DIAMETERDC = $\pm .00031/\pm .00114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $\pm 0,002/\pm 0,012$ DCON = h_6 $> 3-6$ DIAMETERDC = $\pm 0,004/\pm 0,016$ DCON = h_6 $> 6-10$ DIAMETERDC = $\pm 0,006/\pm 0,021$ DCON = h_6 $> 10-18$ DIAMETERDC = $\pm 0,007/\pm 0,025$ DCON = h_6 $> 18-30$ DIAMETERDC = $\pm 0,008/\pm 0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

135 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4688	11,908 mm	15/32	1/2	4-1/16	2-3/16	1-31/64	1-49/64	51361
0.4724	12,000 mm		12,0	102,0	55,0	37,0	45,0	63195
0.4844	12,304 mm	31/64	1/2	4-1/4	2-5/16	1-19/32	1-49/64	51362
0.4921	12,500 mm		14,0	107,0	60,0	41,0	45,0	63196
0.5000	12,700 mm	1/2	1/2	4-1/4	2-5/16	1-9/16	1-49/64	51363
0.5039	12,800 mm		14,0	107,0	60,0	41,0	45,0	63197
0.5118	13,000 mm		14,0	107,0	60,0	41,0	45,0	63198
0.5156	13,096 mm	33/64	5/8	4-1/4	2-5/16	1-35/64	1-49/64	51364
0.5312	13,492 mm	17/32	5/8	4-1/4	2-5/16	1-33/64	1-49/64	51365
0.5315	13,500 mm		14,0	107,0	60,0	40,0	45,0	63199
0.5469	13,891 mm	35/64	5/8	4-1/4	2-5/16	1-1/2	1-49/64	51783
0.5512	14,000 mm		14,0	107,0	60,0	39,0	45,0	63200
0.5625	14,288 mm	9/16	5/8	4-9/16	2-1/2	1-21/32	1-57/64	51366
0.5709	14,500 mm		16,0	115,0	65,0	43,0	48,0	63201
0.5781	14,684 mm	37/64	5/8	4-9/16	2-1/2	1-41/64	1-57/64	51367
0.5906	15,000 mm		16,0	115,0	65,0	42,0	48,0	63202
0.5938	15,083 mm	19/32	5/8	4-9/16	2-1/2	1-39/64	1-57/64	51784
0.6094	15,479 mm	39/64	5/8	4-9/16	2-1/2	1-19/32	1-57/64	51785
0.6102	15,500 mm		16,0	115,0	65,0	42,0	48,0	63203
0.6250	15,875 mm	5/8	5/8	4-9/16	2-1/2	1-9/16	1-57/64	51368
0.6299	16,000 mm		16,0	115,0	65,0	41,0	48,0	63204
0.6406	16,271 mm	41/64	3/4	4-7/8	2-3/4	1-51/64	1-57/64	51786
0.6496	16,500 mm		18,0	123,0	73,0	48,0	48,0	63205
0.6562	16,667 mm	21/32	3/4	4-7/8	2-3/4	1-25/32	1-57/64	51369
0.6693	17,000 mm		18,0	123,0	73,0	47,0	48,0	63206
0.6719	17,066 mm	43/64	3/4	4-7/8	2-3/4	1-3/4	1-57/64	51787
0.6875	17,463 mm	11/16	3/4	4-7/8	2-3/4	1-47/64	1-57/64	51370
0.6890	17,500 mm		18,0	123,0	73,0	47,0	48,0	63207
0.7031	17,859 mm	45/64	3/4	4-7/8	2-3/4	1-45/64	1-57/64	51788
0.7087	18,000 mm		18,0	123,0	73,0	46,0	48,0	63208
0.7188	18,258 mm	23/32	3/4	4-7/8	2-3/4	1-43/64	1-57/64	51789
0.7283	18,500 mm		20,0	131,0	79,0	51,0	50,0	63209
0.7344	18,654 mm	47/64	3/4	4-7/8	2-3/4	1-21/32	1-57/64	51790
0.7480	19,000 mm		20,0	131,0	79,0	51,0	50,0	63210
0.7500	19,050 mm	3/4	3/4	5-1/4	3-1/16	1-15/16	1-31/32	51371
0.7656	19,446 mm	49/64	7/8	5-1/4	3-1/16	1-59/64	1-31/32	51372
0.7677	19,500 mm		20,0	131,0	79,0	50,0	50,0	63211
0.7812	19,842 mm	25/32	7/8	6	3-11/16	2-33/64	2-1/8	51791
0.7874	20,000 mm		20,0	131,0	79,0	49,0	50,0	63212
0.7969	20,241 mm	51/64	7/8	6	3-11/16	2-1/2	2-1/8	51792
0.8071	20,500 mm		22,0	150,0	93,0	62,0	53,0	64513
0.8125	20,638 mm	13/16	7/8	6	3-11/16	2-15/32	2-1/8	51373
0.8268	21,000 mm		22,0	150,0	93,0	61,0	53,0	64514
0.8661	22,000 mm		22,0	150,0	93,0	60,0	53,0	64515
0.8750	22,225 mm	7/8	7/8	6	3-11/16	2-3/8	2-1/8	51374
0.9219	23,416 mm	59/64	1	6	3-11/16	2-5/16	2-1/8	51375

CONTINUED

	Series 135 3D Fractional	Hardness	Vc (sfm)	DC • in								
				1/32	1/8	1/4	3/8	1/2	5/8	7/8		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	385	RPM	47062	11766	5883	3922	2941	2353	1681	
			(308-462)	Fr	0.0010	0.0038	0.0076	0.0115	0.0153	0.0191	0.0268	
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
		≤ 275 Bhn or ≤ 28 HRc	350	RPM	42784	10696	5348	3565	2674	2139	1528	
			(280-420)	Fr	0.0009	0.0036	0.0071	0.0107	0.0142	0.0178	0.0249	
				Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0	
		≤ 425 Bhn or ≤ 45 HRc	200	RPM	24448	6112	3056	2037	1528	1222	873	
			(160-240)	Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
				Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
		ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	300	RPM	36672	9168	4584	3056	2292	1834	1310
				(240-360)	Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206
					Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
	≤ 375 Bhn or ≤ 40 HRc		185	RPM	22614	5654	2827	1885	1413	1131	808	
			(148-222)	Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0180	
				Feed (ipm)	14.5	14.5	14.5	14.5	14.5	14.5	14.5	
	≤ 425 Bhn or ≤ 45 HRc		130	RPM	15891	3973	1986	1324	993	795	568	
			(104-156)	Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123	
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 200 Bhn or ≤ 13 HRc	130	RPM	15891	3973	1986	1324	993	795	568
				(104-156)	Fr	0.0007	0.0026	0.0053	0.0079	0.0106	0.0132	0.0185
					Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		≤ 375 Bhn or ≤ 40 HRc	90	RPM	11002	2750	1375	917	688	550	393	
			(72-108)	Fr	0.0003	0.0012	0.0023	0.0035	0.0047	0.0058	0.0081	
				Feed (ipm)	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	275	RPM	33616	8404	4202	2801	2101	1681	1201	
			(220-330)	Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179	
				Feed (ipm)	21.5	21.5	21.5	21.5	21.5	21.5	21.5	
		≤ 275 Bhn or ≤ 28 HRc	170	RPM	20781	5195	2598	1732	1299	1039	742	
			(136-204)	Fr	0.0005	0.0020	0.0040	0.0061	0.0081	0.0101	0.0141	
				Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	90	RPM	11002	2750	1375	917	688	550	393	
			(72-108)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140	
				Feed (ipm)	5.5	5.5	5.5	5.5	5.5	5.5	5.5	
		≤ 375 Bhn or ≤ 40 HRc	65	RPM	7946	1986	993	662	497	397	284	
			(52-78)	Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123	
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	320	RPM	39117	9779	4890	3260	2445	1956	1397	
			(256-384)	Fr	0.0012	0.0046	0.0092	0.0138	0.0184	0.0230	0.0322	
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
		≤ 260 Bhn or ≤ 26 HRc	285	RPM	34838	8710	4355	2903	2177	1742	1244	
			(228-342)	Fr	0.0011	0.0046	0.0092	0.0138	0.0184	0.0230	0.0321	
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0	

continued on next page

Series 135 3D Fractional				DC • in									
Hardness		Vc (sfm)		1/32	1/8	1/4	3/8	1/2	5/8	7/8			
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	700	RPM	85568	21392	10696	7131	5348	4278	3056		
			(560-840)	Fr	0.0012	0.0049	0.0098	0.0147	0.0196	0.0245	0.0344		
				Feed (ipm)	105.0	105.0	105.0	105.0	105.0	105.0	105.0		
		≤ 150 Bhn or ≤ 88 HRb	600	RPM	73344	18336	9168	6112	4584	3667	2619		
			(480-720)	Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0347		
				Feed (ipm)	91.0	91.0	91.0	91.0	91.0	91.0	91.0		
		COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	500	RPM	61120	15280	7640	5093	3820	3056	2183	
				(400-600)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137	
					Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	
	≤ 200 Bhn or ≤ 23 HRc		400	RPM	48896	12224	6112	4075	3056	2445	1746		
			(320-480)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140		
				Feed (ipm)	24.5	24.5	24.5	24.5	24.5	24.5	24.5		
	S		HIGH TEMP ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	55	RPM	6723	1681	840	560	420	336	240
					(44-66)	Fr	0.0002	0.0008	0.0015	0.0023	0.0031	0.0039	0.0054
						Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 400 Bhn or ≤ 43 HRc		30	RPM	3667	917	458	306	229	183	131	
				(24-36)	Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046	
					Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V		≤ 275 Bhn or ≤ 28 HRc		135	RPM	16502	4126	2063	1375	1031	825	589	
				(108-162)	Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0124	
					Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3	
		≤ 350 Bhn or ≤ 38 HRc	100	RPM	12224	3056	1528	1019	764	611	437		
			(80-120)	Fr	0.0004	0.0016	0.0033	0.0049	0.0065	0.0082	0.0115		
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0		
		≤ 440 Bhn or ≤ 47 HRc	55	RPM	6723	1681	840	560	420	336	240		
			(44-66)	Fr	0.0003	0.0012	0.0024	0.0036	0.0048	0.0059	0.0083		
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0		
H		TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	75	RPM	9168	2292	1146	764	573	458	327	
				(60-90)	Fr	0.0002	0.0008	0.0016	0.0024	0.0031	0.0039	0.0055	
					Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 135 3D Metric	Hardness	Vc (m/min)	DC • mm									
			1.5	3	6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	117	RPM	24882	12441	6220	4665	3732	3110	2333	1866
			(94-141)	Fr	0.047	0.094	0.189	0.252	0.315	0.378	0.504	0.630
				Feed (mm/min)	1175	1175	1175	1175	1175	1175	1175	1175
		≤ 275 Bhn or ≤ 28 HRc	107	RPM	22620	11310	5655	4241	3393	2827	2121	1696
			(85-128)	Fr	0.043	0.086	0.172	0.229	0.286	0.343	0.457	0.572
				Feed (mm/min)	970	970	970	970	970	970	970	970
		≤ 475 Bhn or ≤ 45 HRc	61	RPM	12926	6463	3231	2424	1939	1616	1212	969
			(49-73)	Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	460	460	460	460	460	460	460	460
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	690	690	690	690	690	690	690	690
		≤ 375 Bhn or ≤ 40 HRc	56	RPM	11956	5978	2989	2242	1793	1495	1121	897
			(45-68)	Fr	0.031	0.061	0.122	0.163	0.204	0.244	0.326	0.407
				Feed (mm/min)	365	365	365	365	365	365	365	365
		≤ 425 Bhn or ≤ 45 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.021	0.042	0.083	0.111	0.139	0.167	0.222	0.278
				Feed (mm/min)	175	175	175	175	175	175	175	175
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.032	0.063	0.126	0.168	0.210	0.252	0.336	0.421
				Feed (mm/min)	265	265	265	265	265	265	265	265
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.014	0.028	0.055	0.073	0.092	0.110	0.147	0.183
				Feed (mm/min)	80	80	80	80	80	80	80	80
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	84	RPM	17773	8886	4443	3332	2666	2222	1666	1333
			(67-101)	Fr	0.031	0.061	0.123	0.164	0.204	0.245	0.327	0.409
				Feed (mm/min)	545	545	545	545	545	545	545	545
		≤ 275 Bhn or ≤ 28 HRc	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
			(41-62)	Fr	0.024	0.047	0.095	0.126	0.158	0.189	0.252	0.316
				Feed (mm/min)	260	260	260	260	260	260	260	260
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	135	135	135	135	135	135	135	135
		≤ 375 Bhn or ≤ 40 HRc	20	RPM	4201	2100	1050	788	630	525	394	315
			(16-24)	Fr	0.020	0.040	0.081	0.108	0.135	0.162	0.216	0.270
				Feed (mm/min)	85	85	85	85	85	85	85	85
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	98	RPM	20681	10340	5170	3878	3102	2585	1939	1551
			(78-117)	Fr	0.055	0.110	0.220	0.293	0.366	0.439	0.585	0.732
				Feed (mm/min)	1135	1135	1135	1135	1135	1135	1135	1135
		≤ 260 Bhn or ≤ 26 HRc	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
			(69-104)	Fr	0.055	0.110	0.219	0.292	0.366	0.439	0.585	0.731
				Feed (mm/min)	1010	1010	1010	1010	1010	1010	1010	1010

continued on next page

Series 135 3D Metric	Hardness	Vc (m/min)	DC • mm								
			1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	213	RPM	45239	22620	11310	8482	6786	5655	4241	3393
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.059	0.119	0.238	0.317	0.396	0.476	0.634	0.793
			Feed (mm/min)	2690	2690	2690	2690	2690	2690	2690	2690
		183	RPM	38777	19388	9694	7271	5816	4847	3635	2908
		≤ 150 Bhn or ≤ 8 HRb	Fr	0.060	0.120	0.240	0.320	0.400	0.480	0.640	0.799
			Feed (mm/min)	2325	2325	2325	2325	2325	2325	2325	2325
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	152	RPM	32314	16157	8078	6059	4847	4039	3029	2424
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.024	0.048	0.096	0.128	0.160	0.192	0.256	0.320
			Feed (mm/min)	776	776	776	776	776	776	776	776
		122	RPM	25851	12926	6463	4847	3878	3231	2424	1939
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.024	0.049	0.097	0.130	0.162	0.195	0.260	0.325
			Feed (mm/min)	630	630	630	630	630	630	630	630
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	17	RPM	3555	1777	889	666	533	444	333	267
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.010	0.020	0.039	0.053	0.066	0.079	0.105	0.131
			Feed (mm/min)	35	35	35	35	35	35	35	35
		9	RPM	1939	969	485	364	291	242	182	145
		≤ 400 Bhn or ≤ 43 HRc	Fr	0.008	0.015	0.031	0.041	0.052	0.062	0.083	0.103
			Feed (mm/min)	15	15	15	15	15	15	15	15
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	41	RPM	8725	4362	2181	1636	1309	1091	818	654
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.021	0.042	0.085	0.113	0.141	0.170	0.226	0.283
			Feed (mm/min)	185	185	185	185	185	185	185	185
		30	RPM	6463	3231	1616	1212	969	808	606	485
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.019	0.039	0.077	0.103	0.129	0.155	0.206	0.258
			Feed (mm/min)	125	125	125	125	125	125	125	125
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	23	RPM	4847	2424	1212	909	727	606	454	364	
	≤ 475 Bhn or ≤ 50 HRc	Fr	0.009	0.019	0.037	0.050	0.062	0.074	0.099	0.124	
		Feed (mm/min)	45	45	45	45	45	45	45	45	


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

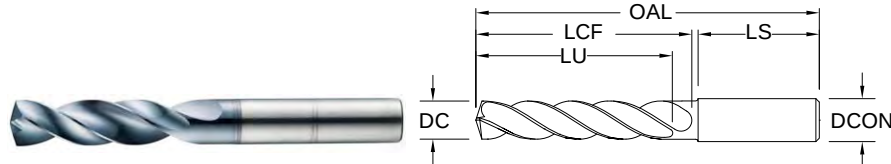

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AItin)
0.0156	0,396 mm	1/64	1/8	1 1/2	5/32	1/8	1	52300*
0.0312	0,792 mm	1/32	1/8	1 1/2	5/16	17/64	1	52301*
0.0469	1,191 mm	3/64	1/8	1 1/2	25/64	21/64	1	52302*
0.0492	1,250 mm		3,0	38,0	10,0	8,0	25,0	64520*
0.0571	1,450 mm		3,0	38,0	10,0	8,0	25,0	64521*
0.0595	1,511 mm	#53	1/8	1-1/2	25/64	5/16	1	64522*
0.0625	1,588 mm	1/16	1/8	2	15/32	3/8	1-1/4	52303*
0.0630	1,600 mm		3,0	50,0	12,0	10,0	32,0	64523*
0.0689	1,750 mm		3,0	50,0	12,0	9,0	32,0	64524*
0.0700	1,778 mm	#50	1/8	2	15/32	23/64	1-1/4	64525*
0.0781	1,984 mm	5/64	1/8	2	35/64	7/16	1-1/4	52304*
0.0785	1,994 mm	#47	1/8	2	35/64	7/16	1-1/4	64526*
0.0807	2,050 mm		3,0	50,0	14,0	11,0	32,0	64527*
0.0810	2,057 mm	#46	1/8	2	35/64	27/64	1-1/4	64528*
0.0890	2,261 mm	#43	1/8	2	19/32	15/32	1-1/4	64529*
0.0935	2,375 mm	#42	1/8	2	5/8	31/64	1-1/4	64530*
0.0938	2,383 mm	3/32	1/8	2	5/8	31/64	1-1/4	52305
0.0980	2,489 mm	#40	1/8	2	43/64	17/32	1-1/4	52306
0.0984	2,500 mm		3,0	50,0	17,0	13,0	32,0	64531
0.0995	2,527 mm	#39	1/8	2	43/64	17/32	1-1/4	52307
0.1015	2,578 mm	#38	1/8	2	43/64	17/32	1-1/4	52308
0.1040	2,642 mm	#37	1/8	2	45/64	35/64	1-1/4	52309
0.1065	2,705 mm	#36	1/8	2	45/64	35/64	1-1/4	52310
0.1094	2,779 mm	7/64	1/8	2	3/4	19/32	1-1/4	52311
0.1100	2,794 mm	#35	1/8	2	3/4	19/32	1-1/4	52312
0.1110	2,819 mm	#34	1/8	2	3/4	19/32	1-1/4	52313
0.1130	2,870 mm	#33	1/8	2	3/4	19/32	1-1/4	52314
0.1142	2,900 mm		3,0	50,0	19,0	15,0	32,0	64532
0.1160	2,946 mm	#32	1/8	2	3/4	37/64	1-1/4	52315
0.1181	3,000 mm		6,0	66,0	28,0	24,0	36,0	64100
0.1200	3,048 mm	#31	1/8	2	3/4	37/64	1-1/4	52316
0.1220	3,100 mm		6,0	66,0	28,0	23,0	36,0	64101
0.1250	3,175 mm	1/8	1/4	3	1	13/16	1-7/16	51580
0.1260	3,200 mm		6,0	66,0	28,0	23,0	36,0	64102
0.1285	3,264 mm	#30	1/4	3	1	13/16	1-7/16	51581
0.1299	3,300 mm		6,0	66,0	28,0	23,0	36,0	64103

*Single Margin

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.1339	3,400 mm		6,0	66,0	28,0	23,0	36,0	64104
0.1360	3,454 mm	#29	1/4	3	1	51/64	1-7/16	51582
0.1378	3,500 mm		6,0	66,0	28,0	23,0	36,0	64105
0.1405	3,569 mm	#28	1/4	3	1	51/64	1-7/16	52317
0.1406	3,571 mm	9/64	1/4	3	1	51/64	1-7/16	51583
0.1417	3,600 mm		6,0	66,0	28,0	23,0	36,0	64106
0.1440	3,658 mm	#27	1/4	3	1	51/64	1-7/16	52318
0.1457	3,700 mm		6,0	66,0	28,0	22,0	36,0	64107
0.1470	3,734 mm	#26	1/4	3	1	25/32	1-7/16	52319
0.1495	3,797 mm	#25	1/4	3-1/4	1-1/4	1-1/32	1-7/16	51584
0.1496	3,800 mm		6,0	74,0	36,0	30,0	36,0	64108
0.1520	3,861 mm	#24	1/4	3-1/4	1-1/4	1-1/32	1-7/16	52321
0.1535	3,900 mm		6,0	74,0	36,0	30,0	36,0	64109
0.1540	3,912 mm	#23	1/4	3-1/4	1-1/4	1-1/32	1-7/16	52322
0.1562	3,967 mm	5/32	1/4	3-1/4	1-1/4	1-1/64	1-7/16	51585
0.1570	3,988 mm	#22	1/4	3-1/4	1-1/4	1-1/64	1-7/16	52323
0.1575	4,000 mm		6,0	74,0	36,0	30,0	36,0	64110
0.1590	4,039 mm	#21	1/4	3-1/4	1-1/4	1-1/64	1-7/16	51586
0.1610	4,089 mm	#20	1/4	3-1/4	1-1/4	1	1-7/16	51587
0.1614	4,100 mm		6,0	74,0	36,0	30,0	36,0	64111
0.1654	4,200 mm		6,0	74,0	36,0	30,0	36,0	64112
0.1660	4,216 mm	#19	1/4	3-1/4	1-1/4	1	1-7/16	52324
0.1693	4,300 mm		6,0	74,0	36,0	30,0	36,0	64113
0.1695	4,305 mm	#18	1/4	3-1/4	1-1/4	1	1-7/16	52325
0.1719	4,366 mm	11/64	1/4	3-1/4	1-1/4	1	1-7/16	51588
0.1730	4,394 mm	#17	1/4	3-1/4	1-1/4	1	1-7/16	52326
0.1732	4,400 mm		6,0	74,0	36,0	29,0	36,0	64114
0.1772	4,500 mm		6,0	74,0	36,0	29,0	36,0	64115
0.1800	4,572 mm	#15	1/4	3-1/4	1-1/4	63/64	1-7/16	52327
0.1811	4,600 mm		6,0	74,0	36,0	29,0	36,0	64116
0.1820	4,623 mm	#14	1/4	3-1/4	1-1/4	63/64	1-7/16	52328
0.1850	4,699 mm	#13	1/4	3-1/4	1-1/4	63/64	1-7/16	52329
0.1850	4,699 mm	#13	6,0	74,0	36,0	29,0	36,0	64117
0.1875	4,763 mm	3/16	1/4	3-1/4	1-3/4	1-15/32	1-7/16	51589
0.1890	4,801 mm	#12	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52330
0.1890	4,801 mm	#12	6,0	82,0	44,0	37,0	36,0	64118
0.1929	4,900 mm		6,0	82,0	44,0	37,0	36,0	64119
0.1935	4,915 mm	#10	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52331
0.1960	4,978 mm	#9	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52332
0.1969	5,000 mm		6,0	82,0	44,0	36,0	36,0	64120
0.1990	5,055 mm	#8	1/4	3-1/4	1-3/4	1-15/32	1-7/16	52333
0.2008	5,100 mm		6,0	82,0	44,0	36,0	36,0	64121
0.2010	5,105 mm	#7	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51506
0.2031	5,159 mm	13/64	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51507
0.2040	5,182 mm	#6	1/4	3 1/4	1 3/4	1-29/64	1 7/16	52334
0.2047	5,200 mm		6,0	82,0	44,0	36,0	36,0	64122

continued on next page


CONTINUED



135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

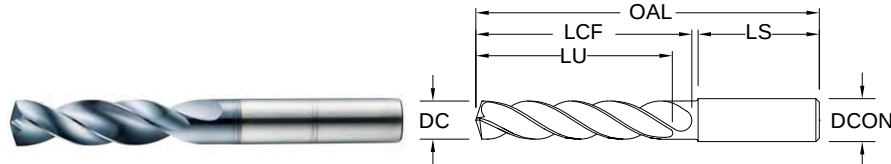

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)	
0.2055	5,220 mm	#5	1/4	3-1/4	1-3/4	1-29/64	1-7/16	51590	
0.2067	5,250 mm		6,0	82,0	44,0	36,0	36,0	64123	
0.2087	5,300 mm		6,0	82,0	44,0	36,0	36,0	64124	
0.2090	5,309 mm	#4	1/4	3-1/4	1-3/4	1-7/16	1-7/16	51508	
0.2126	5,400 mm		6,0	82,0	44,0	36,0	36,0	64125	
0.2130	5,410 mm	#3	1/4	3-1/4	1-3/4	1-7/16	1-7/16	51509	
0.2165	5,500 mm		6,0	82,0	44,0	36,0	36,0	64126	
0.2188	5,558 mm	7/32	1/4	3-1/4	1-3/4	1-27/64	1-7/16	51510	
0.2205	5,600 mm		6,0	82,0	44,0	36,0	36,0	64127	
0.2210	5,613 mm	#2	1/4	3-1/4	1-3/4	1-27/64	1-7/16	52335	
0.2244	5,700 mm		6,0	82,0	44,0	35,0	36,0	64128	
0.2280	5,791 mm	#1	1/4	3-1/4	1-3/4	1-13/32	1-7/16	52336	
0.2283	5,800 mm		6,0	82,0	44,0	35,0	36,0	64129	
0.2323	5,900 mm		6,0	82,0	44,0	35,0	36,0	64130	
0.2340	5,944 mm	A	1/4	3-1/4	1-3/4	1-13/32	1-7/16	52337	
0.2344	5,954 mm	15/64	1/4	3-1/4	1-3/4	1-13/32	1-7/16	51591	
0.2362	6,000 mm		6,0	82,0	44,0	35,0	36,0	64131	
0.2380	6,045 mm	B	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52338	
0.2402	6,100 mm		8,0	91,0	53,0	44,0	36,0	64132	
0.2420	6,147 mm	C	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52339	
0.2441	6,200 mm		8,0	91,0	53,0	44,0	36,0	64133	
0.2460	6,248 mm	D	1/4	3 5/8	2-5/64	1-13/32	1-7/16	52340	
0.2461	6,250 mm		8,0	91,0	53,0	44,0	36,0	64134	
0.2480	6,300 mm		8,0	91,0	53,0	44,0	36,0	64135	
0.2500	6,350 mm	1/4 E	1/4	3-5/8	2-5/64	1-45/64	1-7/16	51511	
0.2520	6,400 mm		8,0	91,0	53,0	43,0	36,0	64136	
0.2559	6,500 mm		8,0	91,0	53,0	43,0	36,0	64137	
0.2570	6,528 mm	F	5/16	3-5/8	2-5/64	1-45/64	1-7/16	51512	
0.2598	6,600 mm		8,0	91,0	53,0	43,0	36,0	64138	
0.2610	6,629 mm	G	5/16	3 5/8	2 5/64	1-11/16	1 7/16	52341	
0.2638	6,700 mm		8,0	91,0	53,0	43,0	36,0	64139	
0.2656	6,746 mm	17/64	5/16	3-5/8	2-5/64	1-11/16	1-7/16	51513	
0.2660	6,756 mm	H	5/16	3-5/8	2-5/64	1-11/16	1-7/16	52342	
0.2677	6,800 mm		8,0	91,0	53,0	43,0	36,0	64140	
0.2717	6,900 mm		8,0	91,0	53,0	43,0	36,0	64141	
0.2720	6,909 mm	I	5/16	3-5/8	2-5/64	1-43/64	1-7/16	51514	

continued on next page

TOLERANCES (inch)

$\leq .1181$ DIAMETER

DC = $\pm .00008/\pm .00047$

DCON = h_6

$> .1181-.2362$ DIAMETER

DC = $\pm .00016/\pm .00063$

DCON = h_6

$> .2362-.3937$ DIAMETER

DC = $\pm .00024/\pm .00083$

DCON = h_6

$> .3937-.7087$ DIAMETER

DC = $\pm .00028/\pm .00098$

DCON = h_6

$> .7087-1.1811$ DIAMETER

DC = $\pm .00031/\pm .00114$

DCON = h_6

TOLERANCES (mm)

≤ 3 DIAMETER

DC = $\pm 0,002/\pm 0,012$

DCON = h_6

$> 3-6$ DIAMETER

DC = $\pm 0,004/\pm 0,016$

DCON = h_6

$> 6-10$ DIAMETER

DC = $\pm 0,006/\pm 0,021$

DCON = h_6

$> 10-18$ DIAMETER

DC = $\pm 0,007/\pm 0,025$

DCON = h_6

$> 18-30$ DIAMETER

DC = $\pm 0,008/\pm 0,029$

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent information visit
www.ksptpatents.com

135 5xD

FRACTIONAL & METRIC SERIES


DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE-A (AITiN)
0.2756	7,000 mm		8,0	91,0	53,0	42,0	36,0	64142
0.2770	7,036 mm	J	5/16	3 5/8	2-5/64	1-43/64	1-7/16	52343
0.2795	7,100 mm		8,0	91,0	53,0	42,0	36,0	64143
0.2810	7,137 mm	K	5/16	3 5/8	2-5/64	1-21/32	1-7/16	52344
0.2812	7,142 mm	9/32	5/16	3-5/8	2-5/64	1-21/32	1-7/16	51515
0.2835	7,200 mm		8,0	91,0	53,0	42,0	36,0	64144
0.2854	7,250 mm		8,0	91,0	53,0	42,0	36,0	64145
0.2874	7,300 mm		8,0	91,0	53,0	42,0	36,0	64146
0.2900	7,366 mm	L	5/16	3-5/8	2-5/64	1-41/64	1-7/16	52345
0.2913	7,400 mm		8,0	91,0	53,0	42,0	36,0	64147
0.2950	7,493 mm	M	5/16	3-5/8	2-5/64	1-41/64	1-7/16	52346
0.2953	7,500 mm		8,0	91,0	53,0	42,0	36,0	64148
0.2969	7,541 mm	19/64	5/16	3-5/8	2-5/64	1-41/64	1-7/16	51516
0.2992	7,600 mm		8,0	91,0	53,0	42,0	36,0	64149
0.3020	7,671 mm	N	5/16	3-5/8	2-5/64	1-5/8	1-7/16	52347
0.3031	7,700 mm		8,0	91,0	53,0	41,0	36,0	64150
0.3071	7,800 mm		8,0	91,0	53,0	41,0	36,0	64151
0.3110	7,900 mm		8,0	91,0	53,0	41,0	36,0	64152
0.3125	7,938 mm	5/16	5/16	3-5/8	2-5/64	1-39/64	1-7/16	51517
0.3150	8,000 mm		8,0	91,0	53,0	41,0	36,0	64153
0.3160	8,026 mm	O	3/8	4	2-13/32	1-15/16	1-9/16	52348
0.3189	8,100 mm		10,0	103,0	61,0	49,0	40,0	64154
0.3228	8,200 mm		10,0	103,0	61,0	49,0	40,0	64155
0.3230	8,204 mm	P	3/8	4	2-13/32	1-59/64	1-9/16	51518
0.3268	8,300 mm		10,0	103,0	61,0	49,0	40,0	64156
0.3281	8,334 mm	21/64	3/8	4	2-13/32	1-59/64	1-9/16	51519
0.3307	8,400 mm		10,0	103,0	61,0	48,0	40,0	64157
0.3320	8,433 mm	Q	3/8	4	2-13/32	1-59/64	1-9/16	51520
0.3346	8,500 mm		10,0	103,0	61,0	48,0	40,0	64158
0.3386	8,600 mm		10,0	103,0	61,0	48,0	40,0	64159
0.3390	8,611 mm	R	3/8	4	2-13/32	1-29/32	1-9/16	52349
0.3425	8,700 mm		10,0	103,0	61,0	48,0	40,0	64160
0.3438	8,733 mm	11/32	3/8	4	2-13/32	1-57/64	1-9/16	51521
0.3465	8,800 mm		10,0	103,0	61,0	48,0	40,0	64161
0.3480	8,839 mm	S	3/8	4	2-13/32	1-57/64	1-9/16	51522
0.3504	8,900 mm		10,0	103,0	61,0	48,0	40,0	64162
0.3543	9,000 mm		10,0	103,0	61,0	48,0	40,0	64163
0.3580	9,093 mm	T	3/8	4	2 13/32	1-7/8	1 9/16	52350
0.3583	9,100 mm		10,0	103,0	61,0	47,0	40,0	64164
0.3594	9,129 mm	23/64	3/8	4	2-13/32	1-7/8	1-9/16	51523
0.3622	9,200 mm		10,0	103,0	61,0	47,0	40,0	64165
0.3642	9,250 mm		10,0	103,0	61,0	47,0	40,0	64166
0.3661	9,300 mm		10,0	103,0	61,0	47,0	40,0	64167
0.3680	9,347 mm	U	3/8	4	2-13/32	1-55/64	1-9/16	51524
0.3701	9,400 mm		10,0	103,0	61,0	47,0	40,0	64168
0.3740	9,500 mm		10,0	103,0	61,0	47,0	40,0	64169

continued on next page

CONTINUED



5xD

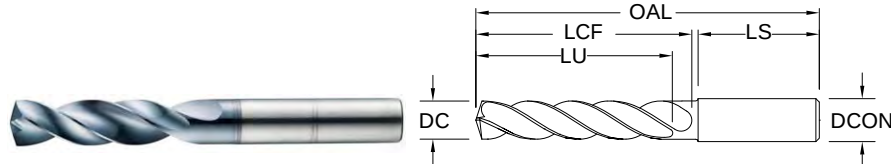

135 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)	
0.3750	9,525 mm	3/8	3/8	4	2-13/32	1-27/32	1-9/16	51525	
0.3770	9,576 mm	V	1/2	4	2-13/32	1-27/32	1-9/16	52351	
0.3780	9,600 mm		10,0	103,0	61,0	47,0	40,0	64170	
0.3819	9,700 mm		10,0	103,0	61,0	46,0	40,0	64171	
0.3858	9,800 mm		10,0	103,0	61,0	46,0	40,0	64172	
0.3860	9,804 mm	W	1/2	4	2-13/32	1-53/64	1-9/16	51526	
0.3898	9,900 mm		10,0	103,0	61,0	46,0	40,0	64173	
0.3906	9,921 mm	25/64	1/2	4	2-13/32	1-53/64	1-9/16	51527	
0.3937	10,000 mm		10,0	103,0	61,0	46,0	40,0	64174	
0.3970	10,084 mm	X	1/2	4-11/16	2-3/4	2-5/32	1-49/64	52352	
0.3976	10,100 mm		12,0	118,0	71,0	56,0	45,0	64175	
0.4016	10,200 mm		12,0	118,0	71,0	56,0	45,0	64176	
0.4040	10,262 mm	Y	1/2	4-11/16	2-3/4	2-5/32	1-49/64	52353	
0.4055	10,300 mm		12,0	118,0	71,0	56,0	45,0	64177	
0.4062	10,317 mm	13/32	1/2	4-11/16	2-3/4	2-9/64	1-49/64	51528	
0.4095	10,400 mm		12,0	118,0	71,0	55,0	45,0	64178	
0.4130	10,490 mm	Z	1/2	4-11/16	2-3/4	2-9/64	1-49/64	52354	
0.4134	10,500 mm		12,0	118,0	71,0	55,0	45,0	64179	
0.4173	10,600 mm		12,0	118,0	71,0	55,0	45,0	64180	
0.4213	10,700 mm		12,0	118,0	71,0	55,0	45,0	64181	
0.4219	10,716 mm	27/64	1/2	4-11/16	2-3/4	2-1/8	1-49/64	51529	
0.4252	10,800 mm		12,0	118,0	71,0	55,0	45,0	64182	
0.4291	10,900 mm		12,0	118,0	71,0	55,0	45,0	64183	
0.4331	11,000 mm		12,0	118,0	71,0	54,0	45,0	64184	
0.4370	11,100 mm		12,0	118,0	71,0	54,0	45,0	64185	
0.4375	11,113 mm	7/16	1/2	4-11/16	2-3/4	2-3/32	1-49/64	51530	
0.4409	11,200 mm		12,0	118,0	71,0	54,0	45,0	64186	
0.4429	11,250 mm		12,0	118,0	71,0	54,0	45,0	64187	
0.4449	11,300 mm		12,0	118,0	71,0	54,0	45,0	64188	
0.4488	11,400 mm		12,0	118,0	71,0	54,0	45,0	64189	
0.4528	11,500 mm		12,0	118,0	71,0	54,0	45,0	64190	
0.4531	11,509 mm	29/64	1/2	4-11/16	2-3/4	2-5/64	1-49/64	51531	
0.4567	11,600 mm		12,0	118,0	71,0	54,0	45,0	64191	
0.4606	11,700 mm		12,0	118,0	71,0	53,0	45,0	64192	
0.4646	11,800 mm		12,0	118,0	71,0	53,0	45,0	64193	
0.4685	11,900 mm		12,0	118,0	71,0	53,0	45,0	64194	

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0.002/+0.012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0.004/+0.016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0.006/+0.021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0.007/+0.025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0.008/+0.029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

135 5xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE-A (AITiN)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4688	11,908 mm	15/32	1/2	4-11/16	2-3/4	2-3/64	1-49/64	51532
0.4724	12,000 mm		12,0	118,0	71,0	53,0	45,0	64195
0.4844	12,304 mm	31/64	1/2	4-7/8	3-1/32	1-5/16	1-49/64	51533
0.4921	12,500 mm		14,0	124,0	77,0	58,0	45,0	64196
0.5000	12,700 mm	1/2	1/2	4-7/8	3-1/32	2-9/32	1-49/64	51534
0.5039	12,800 mm		14,0	124,0	77,0	58,0	45,0	64197
0.5118	13,000 mm		14,0	124,0	77,0	58,0	45,0	64198
0.5156	13,096 mm	33/64	5/8	4-7/8	3-1/32	2-17/64	1-49/64	51535
0.5312	13,492 mm	17/32	5/8	4-7/8	3-1/32	2-15/64	1-49/64	51536
0.5315	13,500 mm		14,0	124,0	77,0	57,0	45,0	64199
0.5469	13,800 mm	35/64	5/8	4-7/8	3-1/32	2-7/32	1-49/64	51537
0.5512	14,000 mm		14,0	124,0	77,0	56,0	45,0	64200
0.5625	14,288 mm	9/16	5/8	5-1/4	3-1/4	2-13/32	1-57/64	51538
0.5709	14,500 mm		16,0	133,0	83,0	61,0	48,0	64201
0.5781	14,684 mm	37/64	5/8	5-1/4	3-1/4	2-25/64	1-57/64	51539
0.5906	15,000 mm		16,0	133,0	83,0	60,0	48,0	64202
0.5938	15,083 mm	19/32	5/8	5-1/4	3-1/4	2-23/64	1-57/64	51592
0.6094	15,479 mm	39/64	5/8	5-1/4	3-1/4	2-11/32	1-57/64	51593
0.6102	15,500 mm		16,0	133,0	83,0	60,0	48,0	64203
0.6250	15,875 mm	5/8	5/8	5-1/4	3-1/4	2-5/16	1-57/64	51540
0.6299	16,000 mm		16,0	133,0	83,0	59,0	48,0	64204
0.6406	16,271 mm	41/64	3/4	5-5/8	3-5/8	2-43/64	1-57/64	51594
0.6496	16,500 mm		18,0	143,0	93,0	68,0	48,0	64205
0.6562	16,667 mm	21/32	3/4	5-5/8	3-5/8	2-41/64	1-57/64	51541
0.6693	17,000 mm		18,0	143,0	93,0	67,0	48,0	64206
0.6719	17,066 mm	43/64	3/4	5-5/8	3-5/8	2-5/8	1-57/64	51595
0.6875	17,463 mm	11/16	3/4	5-5/8	3-5/8	2-19/32	1-57/64	51542
0.6890	17,500 mm		18,0	143,0	93,0	67,0	48,0	64207
0.7031	17,859 mm	45/64	3/4	5-5/8	3-5/8	2-37/64	1-57/64	51543
0.7087	18,000 mm		18,0	143,0	93,0	66,0	48,0	64208
0.7188	18,258 mm	23/32	3/4	6	4	2-59/64	1-31/32	51596
0.7283	18,500 mm		20,0	153,0	101,0	73,0	50,0	64209
0.7344	18,654 mm	47/64	3/4	6	4	2-29/32	1-31/32	51544
0.7480	19,000 mm		20,0	153,0	101,0	73,0	50,0	64210
0.7500	19,050 mm	3/4	3/4	6	4	2-7/8	1-31/32	51545
0.7656	19,446 mm	49/64	7/8	6	4	2-55/64	1-31/32	52355
0.7677	19,500 mm		20,0	153,0	101,0	72,0	50,0	64211
0.7812	19,842 mm	25/32	7/8	6	4	2-55/64	1-31/32	52356
0.7874	20,000 mm		20,0	153,0	101,0	71,0	50,0	64212
0.7969	20,241 mm	51/64	7/8	6	4	2-13/16	1-31/32	52357
0.8071	20,500 mm		22,0	153,0	101,0	70,0	50,0	64533
0.8125	20,638 mm	13/16	7/8	6-1/2	4-1/2	3-3/32	1-31/32	52358
0.8268	21,000 mm		22,0	153,0	101,0	69,0	50,0	64534
0.8661	22,000 mm		22,0	178,0	127,0	94,0	50,0	64535
0.8750	22,225 mm	7/8	7/8	6-1/2	4-1/2	3-3/16	1-31/32	52359
0.9219	23,416 mm	59/64	1	7	5	3-5/8	2-1/8	52360

CONTINUED

Series 135 5D Fractional	Hardness	Vc (sfm)	DC • in								
			1/32	1/8	1/4	3/8	1/2	5/8	7/8		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	345	RPM	42173	10543	5272	3514	2636	2109	1506
			(276-414)	Fr	0.0010	0.0040	0.0080	0.0120	0.0159	0.0199	0.0279
				Feed (ipm)	42.0	42.0	42.0	42.0	42.0	42.0	42.0
		≤ 275 Bhn or ≤ 28 HRc	310	RPM	37894	9474	4737	3158	2368	1895	1353
			(248-372)	Fr	0.0009	0.0036	0.0072	0.0108	0.0144	0.0179	0.0251
				Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0
		≤ 425 Bhn or ≤ 45 HRc	180	RPM	22003	5501	2750	1834	1375	1100	786
			(144-216)	Fr	0.0007	0.0030	0.0060	0.0090	0.0120	0.0150	0.0210
				Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	270	RPM	33005	8251	4126	2750	2063	1650	1179
			(216-324)	Fr	0.0008	0.0030	0.0061	0.0091	0.0121	0.0151	0.0212
				Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0
		≤ 375 Bhn or ≤ 40 HRc	165	RPM	20170	5042	2521	1681	1261	1008	720
			(132-198)	Fr	0.0006	0.0026	0.0052	0.0077	0.0103	0.0129	0.0180
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 425 Bhn or ≤ 45 HRc	115	RPM	14058	3514	1757	1171	879	703	502
			(92-138)	Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0123
				Feed (ipm)	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	120	RPM	14669	3667	1834	1222	917	733	524
			(96-144)	Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0179
				Feed (ipm)	9.4	9.4	9.4	9.4	9.4	9.4	9.4
		≤ 375 Bhn or ≤ 40 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0003	0.0012	0.0024	0.0036	0.0047	0.0059	0.0083
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	250	RPM	30560	7640	3820	2547	1910	1528	1091
			(200-300)	Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179
				Feed (ipm)	19.5	19.5	19.5	19.5	19.5	19.5	19.5
		≤ 275 Bhn or ≤ 28 HRc	150	RPM	18336	4584	2292	1528	1146	917	655
			(120-180)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	9.0	9.0	9.0	9.0	9.0	9.0	9.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	4.8	4.8	4.8	4.8	4.8	4.8	4.8
		≤ 375 Bhn or ≤ 40 HRc	55	RPM	6723	1681	840	560	420	336	240
			(44-66)	Fr	0.0004	0.0018	0.0036	0.0054	0.0071	0.0089	0.0125
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	300	RPM	36672	9168	4584	3056	2292	1834	1310
			(240-360)	Fr	0.0011	0.0045	0.0089	0.0134	0.0179	0.0224	0.0313
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 260 Bhn or ≤ 26 HRc	265	RPM	32394	8098	4049	2699	2025	1620	1157
			(212-318)	Fr	0.0011	0.0046	0.0091	0.0137	0.0183	0.0228	0.0320
				Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0

continued on next page

	Series 135 5D Fractional	Hardness	Vc (sfm)	DC • in							
				1/32	1/8	1/4	3/8	1/2	5/8	7/8	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	635	RPM	77622	19406	9703	6469	4851	3881	2772
			(508-762)	Fr	0.0012	0.0049	0.0099	0.0148	0.0198	0.0247	0.0346
				Feed (ipm)	96.0	96.0	96.0	96.0	96.0	96.0	96.0
		≤ 150 Bhn or ≤ 88 HRc	540	RPM	66010	16502	8251	5501	4126	3300	2357
			(432-648)	Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0348
				Feed (ipm)	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	450	RPM	55008	13752	6876	4584	3438	2750	1965
			(360-540)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	27.5	27.5	27.5	27.5	27.5	27.5	27.5
		≤ 200 Bhn or ≤ 23 HRc	360	RPM	44006	11002	5501	3667	2750	2200	1572
			(288-432)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0
S	HIGH TEMP ALLOYS (Nickel , Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	40	RPM	4890	1222	611	407	306	244	175
			(32-48)	Fr	0.0002	0.0008	0.0016	0.0025	0.0033	0.0041	0.0057
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 400 Bhn or ≤ 43 HRc	20	RPM	2445	611	306	204	153	122	87
			(16-24)	Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	105	RPM	12835	3209	1604	1070	802	642	458
			(84-126)	Fr	0.0005	0.0018	0.0036	0.0054	0.0072	0.0090	0.0127
				Feed (ipm)	5.8	5.8	5.8	5.8	5.8	5.8	5.8
		≤ 350 Bhn or ≤ 38 HRc	80	RPM	9779	2445	1222	815	611	489	349
			(64-96)	Fr	0.0004	0.0016	0.0032	0.0048	0.0064	0.0080	0.0112
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 440 Bhn or ≤ 47 HRc	42	RPM	5134	1284	642	428	321	257	183
			(34-50)	Fr	0.0003	0.0012	0.0025	0.0037	0.0050	0.0062	0.0087
				Feed (ipm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	70	RPM	8557	2139	1070	713	535	428	306
			(56-84)	Fr	0.0002	0.0008	0.0016	0.0024	0.0032	0.0040	0.0056
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 135M 5D Metric				DC • mm								
Hardness		Vc (m/min)		1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	105	RPM	22297	11148	5574	4181	3344	2787	2090	1672
			(84-126)	Fr	0.048	0.095	0.190	0.254	0.317	0.380	0.507	0.634
				Feed (mm/min)	1060	1060	1060	1060	1060	1060	1060	1060
		≤ 275 Bhn or ≤ 28 HRc	94	RPM	20035	10017	5009	3756	3005	2504	1878	1503
			(76-113)	Fr	0.043	0.085	0.171	0.228	0.285	0.341	0.455	0.569
				Feed (mm/min)	855	855	855	855	855	855	855	855
		≤ 425 Bhn or ≤ 45 HRc	55	RPM	11633	5816	2908	2181	1745	1454	1091	872
			(44-66)	Fr	0.036	0.071	0.143	0.190	0.238	0.285	0.381	0.476
				Feed (mm/min)	415	415	415	415	415	415	415	415
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	82	RPM	17449	8725	4362	3272	2617	2181	1636	1309
			(66-99)	Fr	0.036	0.072	0.143	0.191	0.239	0.287	0.382	0.478
				Feed (mm/min)	625	625	625	625	625	625	625	625
		≤ 375 Bhn or ≤ 40 HRc	50	RPM	10664	5332	2666	1999	1600	1333	1000	800
			(40-60)	Fr	0.031	0.062	0.124	0.165	0.206	0.248	0.330	0.413
				Feed (mm/min)	330	330	330	330	330	330	330	330
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	7432	3716	1858	1394	1115	929	697	557
			(28-42)	Fr	0.022	0.043	0.086	0.115	0.144	0.172	0.230	0.287
				Feed (mm/min)	160	160	160	160	160	160	160	160
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	37	RPM	7755	3878	1939	1454	1163	969	727	582
			(29-44)	Fr	0.031	0.062	0.124	0.165	0.206	0.248	0.330	0.413
				Feed (mm/min)	240	240	240	240	240	240	240	240
		≤ 375 Bhn or ≤ 40 HRc	24	RPM	5170	2585	1293	969	776	646	485	388
			(20-29)	Fr	0.015	0.029	0.058	0.077	0.097	0.116	0.155	0.193
				Feed (mm/min)	75	75	75	75	75	75	75	75
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	76	RPM	16157	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.031	0.061	0.123	0.163	0.204	0.245	0.327	0.408
				Feed (mm/min)	495	495	495	495	495	495	495	495
		≤ 275 Bhn or ≤ 28 HRc	46	RPM	9694	4847	2424	1818	1454	1212	909	727
			(37-55)	Fr	0.024	0.047	0.095	0.127	0.158	0.190	0.253	0.316
				Feed (mm/min)	230	230	230	230	230	230	230	230
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	24	RPM	5170	2585	1293	969	776	646	485	388
			(20-29)	Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	120	120	120	120	120	120	120	120
		≤ 375 Bhn or ≤ 40 HRc	17	RPM	3555	1777	889	666	533	444	333	267
			(13-20)	Fr	0.021	0.042	0.084	0.113	0.141	0.169	0.225	0.281
				Feed (mm/min)	75	75	75	75	75	75	75	75
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fr	0.054	0.108	0.217	0.289	0.361	0.433	0.578	0.722
				Feed (mm/min)	1050	1050	1050	1050	1050	1050	1050	1050
		≤ 260 Bhn or ≤ 26 HRc	81	RPM	17126	8563	4282	3211	2569	2141	1606	1284
			(65-97)	Fr	0.055	0.109	0.218	0.291	0.364	0.437	0.582	0.728
				Feed (mm/min)	935	935	935	935	935	935	935	935

continued on next page

	Series 135M 5D Metric	Hardness	Vc (m/min)	DC • mm							
				1.5	3	6	8	10	12	16	20
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	194	RPM	41039	20519	10260	7695	6156	5130	3078
			(155-232)	Fr	0.059	0.118	0.237	0.316	0.395	0.474	0.632
				Feed (mm/min)	2430	2430	2430	2430	2430	2430	2430
		≤ 150 Bhn or ≤ 88 HRc	165	RPM	34899	17449	8725	6544	5235	4362	2617
			(132-198)	Fr	0.059	0.118	0.237	0.316	0.394	0.473	0.631
				Feed (mm/min)	2065	2065	2065	2065	2065	2065	2065
	Copper Alloys Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	137	RPM	29082	14541	7271	5453	4362	3635	2181
			(110-165)	Fr	0.027	0.053	0.107	0.142	0.178	0.213	0.284
				Feed (mm/min)	775	775	775	775	775	775	775
		≤ 200 Bhn or ≤ 23 HRc	110	RPM	23266	11633	5816	4362	3490	2908	2181
			(88-132)	Fr	0.027	0.054	0.108	0.144	0.181	0.217	0.289
				Feed (mm/min)	630	630	630	630	630	630	630
S	HIGH TEMP ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	12	RPM	2585	1293	646	485	388	323	242
			(10-15)	Fr	0.010	0.019	0.039	0.052	0.064	0.077	0.103
				Feed (mm/min)	25	25	25	25	25	25	25
		≤ 400 Bhn or ≤ 43 HRc	6	RPM	1293	646	323	242	194	162	121
			(5-7)	Fr	0.007	0.014	0.028	0.037	0.046	0.056	0.074
				Feed (mm/min)	9	9	9	9	9	9	9
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	32	RPM	6786	3393	1696	1272	1018	848	636
			(26-38)	Fr	0.021	0.043	0.085	0.114	0.142	0.171	0.228
				Feed (mm/min)	145	145	145	145	145	145	145
		≤ 350 Bhn or ≤ 38 HRc	24	RPM	5170	2585	1293	969	776	646	485
			(20-29)	Fr	0.019	0.039	0.077	0.103	0.129	0.155	0.206
				Feed (mm/min)	100	100	100	100	100	100	100
		≤ 440 Bhn or ≤ 47 HRc	13	RPM	2714	1357	679	509	407	339	254
			(10-15)	Fr	0.015	0.029	0.059	0.079	0.098	0.118	0.157
				Feed (mm/min)	40	40	40	40	40	40	40
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	21	RPM	4524	2262	1131	848	679	565	424
			(17-26)	Fr	0.010	0.019	0.038	0.051	0.064	0.076	0.102
				Feed (mm/min)	43	43	43	43	43	43	43

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




3xD



146U 3xD

FRACTIONAL & METRIC SERIES

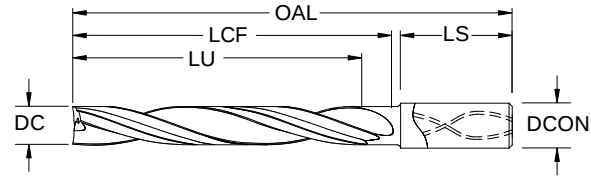

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	55,0	13,0	9,0	34,0	67705
0.1220	3,100 mm		6,0	55,0	14,0	9,0	34,0	67706
0.1250	3,175 mm	1/8	6,0	55,0	14,0	10,0	34,0	58800
0.1260	3,200 mm		6,0	55,0	14,0	10,0	34,0	67707
0.1299	3,300 mm		6,0	55,0	15,0	10,0	34,0	67708
0.1339	3,400 mm		6,0	55,0	15,0	10,0	34,0	67709
0.1360	3,454 mm	#29	6,0	55,0	16,0	10,0	34,0	58801
0.1378	3,500 mm		6,0	55,0	16,0	11,0	34,0	67710
0.1405	3,569 mm	#28	6,0	55,0	16,0	11,0	34,0	58802
0.1406	3,571 mm	9/64	6,0	55,0	16,0	11,0	34,0	58803
0.1417	3,600 mm		6,0	55,0	16,0	11,0	34,0	67711
0.1457	3,700 mm		6,0	60,0	17,0	11,0	34,0	67712
0.1470	3,734 mm	#26	6,0	60,0	17,0	11,0	34,0	58804
0.1495	3,797 mm	#25	6,0	60,0	17,0	11,0	34,0	58805
0.1496	3,800 mm		6,0	60,0	17,0	11,0	34,0	67713
0.1520	3,861 mm	#24	6,0	60,0	17,0	12,0	34,0	58806
0.1535	3,900 mm		6,0	60,0	18,0	12,0	34,0	67714
0.1562	3,967 mm	5/32	6,0	60,0	18,0	12,0	34,0	58807
0.1570	3,988 mm	#22	6,0	60,0	18,0	12,0	34,0	58808
0.1575	4,000 mm		6,0	60,0	18,0	12,0	34,0	67715
0.1590	4,039 mm	#21	6,0	60,0	18,0	12,0	34,0	58809
0.1610	4,089 mm	#20	6,0	60,0	18,0	12,0	34,0	58810
0.1614	4,100 mm		6,0	60,0	18,0	12,0	34,0	67716
0.1654	4,200 mm		6,0	60,0	19,0	13,0	34,0	67717
0.1693	4,300 mm		6,0	60,0	19,0	13,0	34,0	67718
0.1719	4,366 mm	11/64	6,0	60,0	20,0	13,0	34,0	58811
0.1732	4,400 mm		6,0	60,0	20,0	13,0	34,0	67719
0.1770	4,496 mm	#16	6,0	60,0	20,0	13,0	34,0	58812
0.1772	4,500 mm		6,0	60,0	20,0	14,0	34,0	67720
0.1811	4,600 mm		6,0	60,0	21,0	14,0	34,0	67721
0.1850	4,699 mm	#13	6,0	60,0	21,0	14,0	34,0	58813
0.1875	4,763 mm	3/16	6,0	60,0	21,0	14,0	34,0	58814
0.1890	4,801 mm	#12	6,0	65,0	22,0	14,0	33,0	58815
0.1929	4,900 mm		6,0	65,0	22,0	15,0	33,0	67724
0.1935	4,915 mm	#10	6,0	65,0	22,0	15,0	33,0	58816
0.1969	5,000 mm		6,0	65,0	23,0	15,0	33,0	67725

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0,002/+0,012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0,004/+0,016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0,006/+0,021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0,007/+0,025$ DCON = h_6 $>18-30$ DIAMETERDC = $+0,008/+0,029$ DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

146U 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.2008	5,100 mm		6,0	65,0	23,0	15,0	33,0	67726
0.2010	5,105 mm	#7	6,0	65,0	23,0	15,0	33,0	58817
0.2031	5,159 mm	13/64	6,0	65,0	23,0	15,0	33,0	58818
0.2047	5,200 mm		6,0	65,0	23,0	16,0	33,0	67727
0.2087	5,300 mm		6,0	65,0	24,0	16,0	33,0	67728
0.2090	5,309 mm	#4	6,0	65,0	24,0	16,0	33,0	58819
0.2126	5,400 mm		6,0	65,0	24,0	16,0	33,0	67729
0.2130	5,410 mm	#3	6,0	65,0	24,0	16,0	33,0	58820
0.2165	5,500 mm		6,0	65,0	25,0	16,0	33,0	67730
0.2188	5,558 mm	7/32	6,0	65,0	25,0	17,0	33,0	58821
0.2205	5,600 mm		6,0	65,0	25,0	17,0	33,0	67731
0.2244	5,700 mm		6,0	65,0	26,0	17,0	33,0	67732
0.2283	5,800 mm		6,0	65,0	26,0	17,0	33,0	67733
0.2323	5,900 mm		6,0	65,0	27,0	18,0	33,0	67734
0.2344	5,954 mm	15/64	6,0	65,0	27,0	18,0	33,0	58822
0.2362	6,000 mm		6,0	65,0	27,0	18,0	33,0	67735
0.2402	6,100 mm		8,0	70,0	28,0	19,0	34,0	67736
0.2441	6,200 mm		8,0	70,0	28,0	19,0	34,0	67737
0.2461	6,250 mm		8,0	70,0	28,0	19,0	34,0	67738
0.2480	6,300 mm		8,0	70,0	28,0	19,0	34,0	67739
0.2500	6,350 mm	1/4 E	8,0	70,0	29,0	19,0	34,0	58823
0.2520	6,400 mm		8,0	70,0	29,0	19,0	34,0	67740
0.2559	6,500 mm		8,0	70,0	29,0	19,0	34,0	67741
0.2570	6,528 mm	F	8,0	70,0	29,0	20,0	34,0	58824
0.2598	6,600 mm		8,0	70,0	30,0	20,0	34,0	67742
0.2638	6,700 mm		8,0	70,0	30,0	20,0	34,0	67743
0.2656	6,746 mm	17/64	8,0	70,0	30,0	20,0	34,0	58825
0.2677	6,800 mm		8,0	70,0	31,0	20,0	34,0	67744
0.2717	6,900 mm		8,0	70,0	31,0	21,0	34,0	67745
0.2720	6,909 mm	I	8,0	70,0	31,0	21,0	34,0	58826
0.2756	7,000 mm		8,0	75,0	32,0	21,0	34,0	67746
0.2795	7,100 mm		8,0	75,0	32,0	21,0	34,0	67747
0.2812	7,142 mm	9/32	8,0	75,0	32,0	21,0	34,0	58827
0.2835	7,200 mm		8,0	75,0	32,0	22,0	34,0	67748
0.2854	7,250 mm		8,0	75,0	33,0	22,0	34,0	67749
0.2874	7,300 mm		8,0	75,0	33,0	22,0	34,0	67750
0.2913	7,400 mm		8,0	75,0	33,0	22,0	34,0	67751
0.2953	7,500 mm		8,0	75,0	34,0	23,0	34,0	67752
0.2969	7,541 mm	19/64	8,0	75,0	34,0	23,0	34,0	58828
0.2992	7,600 mm		8,0	75,0	34,0	23,0	34,0	67753
0.3031	7,700 mm		8,0	75,0	35,0	23,0	34,0	67754
0.3071	7,800 mm		8,0	75,0	35,0	23,0	34,0	67755
0.3110	7,900 mm		8,0	75,0	36,0	24,0	34,0	67756
0.3125	7,938 mm	5/16	8,0	75,0	36,0	24,0	34,0	58829
0.3150	8,000 mm		8,0	75,0	36,0	24,0	34,0	67757
0.3189	8,100 mm		10,0	80,0	36,0	24,0	34,0	67758

continued on next page

CONTINUED




3xD



146U 3xD

FRACTIONAL & METRIC SERIES

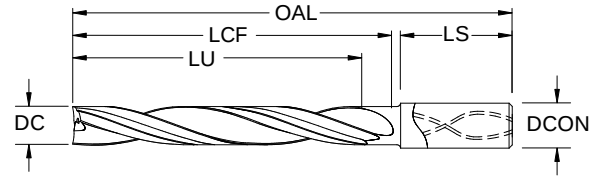

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3228	8,200 mm		10,0	80,0	37,0	25,0	34,0	67759
0.3268	8,300 mm		10,0	80,0	37,0	25,0	34,0	67760
0.3281	8,334 mm	21/64	10,0	80,0	38,0	25,0	34,0	58830
0.3307	8,400 mm		10,0	80,0	38,0	25,0	34,0	67761
0.3320	8,433 mm	Q	10,0	80,0	38,0	25,0	34,0	58831
0.3346	8,500 mm		10,0	80,0	38,0	25,0	34,0	67762
0.3386	8,600 mm		10,0	80,0	39,0	26,0	34,0	67763
0.3425	8,700 mm		10,0	80,0	39,0	26,0	34,0	67764
0.3438	8,733 mm	11/32	10,0	80,0	39,0	26,0	34,0	58832
0.3465	8,800 mm		10,0	80,0	40,0	26,0	34,0	67765
0.3504	8,900 mm		10,0	80,0	40,0	27,0	34,0	67766
0.3543	9,000 mm		10,0	80,0	40,0	27,0	34,0	67767
0.3583	9,100 mm		10,0	80,0	41,0	27,0	34,0	67768
0.3594	9,129 mm	23/64	10,0	80,0	41,0	27,0	34,0	58833
0.3622	9,200 mm		10,0	80,0	41,0	28,0	35,0	67769
0.3661	9,300 mm		10,0	85,0	42,0	28,0	35,0	67770
0.3680	9,347 mm	U	10,0	85,0	42,0	28,0	35,0	58834
0.3701	9,400 mm		10,0	85,0	42,0	28,0	35,0	67771
0.3740	9,500 mm		10,0	85,0	43,0	28,0	35,0	67772
0.3750	9,525 mm	3/8	10,0	85,0	43,0	29,0	35,0	58835
0.3780	9,600 mm		10,0	85,0	43,0	29,0	35,0	67773
0.3819	9,700 mm		10,0	85,0	44,0	29,0	35,0	67774
0.3858	9,800 mm		10,0	85,0	44,0	29,0	35,0	67775
0.3898	9,900 mm		10,0	85,0	45,0	30,0	35,0	67776
0.3906	9,921 mm	25/64	10,0	85,0	45,0	30,0	35,0	58836
0.3937	10,000 mm		10,0	85,0	45,0	30,0	35,0	67777
0.3970	10,084 mm	X	12,0	90,0	46,0	31,0	36,0	58837
0.3976	10,100 mm		12,0	90,0	46,0	31,0	36,0	67778
0.4016	10,200 mm		12,0	90,0	46,0	31,0	36,0	67779
0.4040	10,262 mm	Y	12,0	90,0	46,0	31,0	36,0	58838
0.4055	10,300 mm		12,0	90,0	46,0	31,0	36,0	67780
0.4062	10,317 mm	13/32	12,0	90,0	46,0	31,0	36,0	58839
0.4094	10,400 mm		12,0	90,0	47,0	31,0	36,0	67781
0.4134	10,500 mm		12,0	90,0	47,0	32,0	36,0	67782
0.4173	10,600 mm		12,0	90,0	48,0	32,0	36,0	67783
0.4213	10,700 mm		12,0	90,0	48,0	32,0	36,0	67784

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com


146U 3xD

FRACTIONAL & METRIC SERIES

DECIMAL DC	METRIC DC	inch & mm						EDP NO. Ti-NAMITE®-X (TX)
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	
0.4219	10,716 mm	27/64	12,0	90,0	48,0	32,0	36,0	58840
0.4252	10,800 mm		12,0	90,0	49,0	32,0	36,0	67785
0.4291	10,900 mm		12,0	90,0	49,0	33,0	36,0	67786
0.4331	11,000 mm		12,0	95,0	50,0	33,0	36,0	67787
0.4370	11,100 mm		12,0	95,0	50,0	33,0	36,0	67788
0.4375	11,113 mm	7/16	12,0	95,0	50,0	33,0	36,0	58841
0.4409	11,200 mm		12,0	95,0	50,0	34,0	36,0	67789
0.4449	11,300 mm		12,0	95,0	51,0	34,0	36,0	67790
0.4488	11,400 mm		12,0	95,0	51,0	34,0	36,0	67791
0.4528	11,500 mm		12,0	95,0	52,0	35,0	36,0	67792
0.4531	11,509 mm	29/64	12,0	95,0	52,0	35,0	36,0	58842
0.4567	11,600 mm		12,0	95,0	52,0	35,0	36,0	67793
0.4606	11,700 mm		12,0	95,0	53,0	35,0	36,0	67794
0.4646	11,800 mm		12,0	95,0	53,0	35,0	36,0	67795
0.4685	11,900 mm		12,0	95,0	54,0	36,0	36,0	67796
0.4688	11,908 mm	15/32	12,0	95,0	54,0	36,0	36,0	58843
0.4724	12,000 mm		12,0	95,0	54,0	36,0	36,0	67797
0.4844	12,304 mm	31/64	14,0	105,0	55,0	37,0	37,0	58844
0.4921	12,500 mm		14,0	105,0	56,0	37,0	37,0	67798
0.5000	12,700 mm	1/2	14,0	105,0	57,0	38,0	37,0	58845
0.5039	12,800 mm		14,0	105,0	58,0	38,0	37,0	67799
0.5118	13,000 mm		14,0	105,0	58,0	39,0	37,0	67800
0.5156	13,096 mm	33/64	14,0	105,0	59,0	39,0	37,0	58846
0.5312	13,492 mm	17/32	14,0	105,0	61,0	40,0	37,0	58847
0.5315	13,500 mm		14,0	105,0	61,0	41,0	37,0	67801
0.5469	13,891 mm	35/64	14,0	105,0	63,0	42,0	37,0	58848
0.5512	14,000 mm		14,0	105,0	63,0	42,0	37,0	67802
0.5625	14,288 mm	9/16	16,0	115,0	64,0	43,0	38,0	58849
0.5709	14,500 mm		16,0	115,0	65,0	44,0	38,0	67803
0.5781	14,684 mm	37/64	16,0	115,0	66,0	44,0	38,0	58850
0.5906	15,000 mm		16,0	115,0	68,0	45,0	38,0	67804
0.5938	15,083 mm	19/32	16,0	115,0	68,0	45,0	38,0	58851
0.6094	15,479 mm	39/64	16,0	115,0	70,0	46,0	38,0	58852
0.6102	15,500 mm		16,0	115,0	70,0	46,0	38,0	67805
0.6250	15,875 mm	5/8	16,0	115,0	71,0	48,0	38,0	58853
0.6299	16,000 mm		16,0	115,0	72,0	48,0	38,0	67806
0.6406	16,271 mm	41/64	18,0	130,0	73,0	49,0	44,0	58854
0.6496	16,500 mm		18,0	130,0	74,0	49,0	44,0	67807
0.6562	16,667 mm	21/32	18,0	130,0	75,0	50,0	44,0	58855
0.6693	17,000 mm		18,0	130,0	77,0	51,0	44,0	67808
0.6719	17,066 mm	43/64	18,0	130,0	77,0	51,0	44,0	58856
0.6875	17,463 mm	11/16	18,0	130,0	79,0	52,0	44,0	58857
0.6890	17,500 mm		18,0	130,0	79,0	53,0	44,0	67809
0.7031	17,859 mm	45/64	18,0	130,0	80,0	54,0	44,0	58858


continued on next page

CONTINUED



146U 3xD

FRACTIONAL & METRIC SERIES

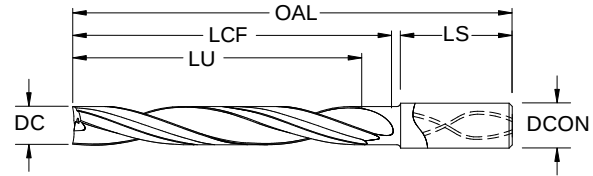

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.7087	18,000 mm		18,0	130,0	81,0	54,0	44,0	67810
0.7188	18,258 mm	23/32	20,0	140,0	82,0	55,0	45,0	58859
0.7283	18,500 mm		20,0	140,0	83,0	55,0	45,0	67811
0.7344	18,654 mm	47/64	20,0	140,0	84,0	56,0	45,0	58860
0.7480	19,000 mm		20,0	140,0	85,0	57,0	45,0	67812
0.7500	19,050 mm	3/4	20,0	140,0	86,0	57,0	45,0	58861
0.7656	19,446 mm	49/64	20,0	140,0	88,0	58,0	45,0	58862
0.7677	19,500 mm		20,0	140,0	88,0	58,0	45,0	67813
0.7812	19,842 mm	25/32	20,0	140,0	89,0	60,0	45,0	58863
0.7874	20,000 mm		20,0	140,0	90,0	60,0	45,0	67814
0.7969	20,241 mm	51/64	22,0	150,0	91,0	61,0	52,0	58864
0.8071	20,500 mm		22,0	150,0	92,0	62,0	52,0	67815
0.8125	20,638 mm	13/16	22,0	150,0	93,0	62,0	52,0	58865

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6


>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent information visit
www.ksptpatents.com

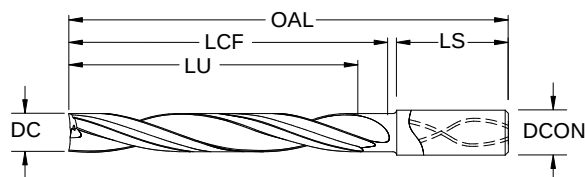

146U 5xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

NON-FERROUS

For patent
information visit
www.ksptpatents.com


		inch & mm						EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1181	3,000 mm		6,0	75,0	19,0	15,0	51,0	67816
0.1220	3,100 mm		6,0	80,0	20,0	15,0	49,0	67817
0.1250	3,175 mm	1/8	6,0	80,0	21,0	16,0	49,0	58866
0.1260	3,200 mm		6,0	80,0	21,0	16,0	49,0	67818
0.1299	3,300 mm		6,0	80,0	21,0	16,0	49,0	67819
0.1339	3,400 mm		6,0	80,0	22,0	17,0	49,0	67820
0.1360	3,454 mm	#29	6,0	80,0	22,0	17,0	49,0	58867
0.1378	3,500 mm		6,0	80,0	23,0	18,0	49,0	67821
0.1405	3,569 mm	#28	6,0	80,0	23,0	18,0	49,0	58868
0.1406	3,571 mm	9/64	6,0	80,0	23,0	18,0	49,0	58869
0.1417	3,600 mm		6,0	80,0	23,0	18,0	49,0	67822
0.1457	3,700 mm		6,0	80,0	24,0	19,0	49,0	67823
0.1470	3,734 mm	#26	6,0	80,0	24,0	19,0	49,0	58870
0.1495	3,797 mm	#25	6,0	80,0	25,0	19,0	49,0	58871
0.1496	3,800 mm		6,0	80,0	25,0	19,0	49,0	67824
0.1520	3,861 mm	#24	6,0	80,0	25,0	19,0	49,0	58872
0.1535	3,900 mm		6,0	80,0	25,0	19,0	49,0	67825
0.1562	3,967 mm	5/32	6,0	80,0	26,0	20,0	49,0	58873
0.1570	3,988 mm	#22	6,0	80,0	26,0	20,0	49,0	58874
0.1575	4,000 mm		6,0	80,0	26,0	20,0	49,0	67826
0.1590	4,039 mm	#21	6,0	80,0	26,0	20,0	49,0	58875
0.1610	4,089 mm	#20	6,0	90,0	27,0	20,0	53,0	58876
0.1614	4,100 mm		6,0	90,0	27,0	20,0	53,0	67827
0.1654	4,200 mm		6,0	90,0	27,0	21,0	53,0	67828
0.1693	4,300 mm		6,0	90,0	28,0	22,0	53,0	67829
0.1719	4,366 mm	11/64	6,0	90,0	28,0	22,0	53,0	58877
0.1732	4,400 mm		6,0	90,0	29,0	22,0	53,0	67830
0.1770	4,496 mm	#16	6,0	90,0	29,0	22,0	53,0	58878
0.1772	4,500 mm		6,0	90,0	29,0	23,0	53,0	67831
0.1811	4,600 mm		6,0	90,0	30,0	23,0	53,0	67832
0.1850	4,699 mm	#13	6,0	90,0	31,0	23,0	53,0	58879
0.1875	4,763 mm	3/16	6,0	90,0	31,0	24,0	53,0	58880
0.1890	4,801 mm	#12	6,0	90,0	31,0	24,0	53,0	58881
0.1929	4,900 mm		6,0	90,0	32,0	24,0	53,0	67835
0.1935	4,915 mm	#10	6,0	90,0	32,0	25,0	53,0	58882
0.1969	5,000 mm		6,0	95,0	33,0	25,0	51,0	67836
0.2008	5,100 mm		6,0	95,0	33,0	26,0	51,0	67837
0.2010	5,105 mm	#7	6,0	95,0	33,0	26,0	51,0	58883
0.2031	5,159 mm	13/64	6,0	95,0	34,0	26,0	51,0	58884
0.2047	5,200 mm		6,0	95,0	34,0	26,0	51,0	67838
0.2087	5,300 mm		6,0	95,0	34,0	27,0	51,0	67839
0.2090	5,309 mm	#4	6,0	95,0	35,0	27,0	51,0	58885

continued on next page

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point reduces the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)



5xD

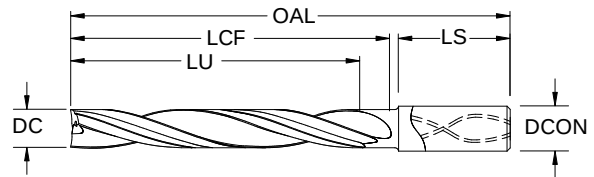

146U 5xD

FRACTIONAL & METRIC SERIES

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point reduces the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.2126	5,400 mm		6,0	95,0	35,0	27,0	51,0	67840	
0.2130	5,410 mm	#3	6,0	95,0	35,0	27,0	51,0	58886	
0.2165	5,500 mm		6,0	95,0	36,0	27,0	51,0	67841	
0.2188	5,558 mm	7/32	6,0	95,0	36,0	28,0	51,0	58887	
0.2205	5,600 mm		6,0	95,0	36,0	28,0	51,0	67842	
0.2244	5,700 mm		6,0	95,0	37,0	28,0	51,0	67843	
0.2283	5,800 mm		6,0	95,0	38,0	29,0	51,0	67844	
0.2323	5,900 mm		6,0	95,0	38,0	30,0	51,0	67845	
0.2344	5,954 mm	15/64	6,0	95,0	39,0	30,0	51,0	58888	
0.2362	6,000 mm		6,0	95,0	39,0	30,0	51,0	67846	
0.2402	6,100 mm		8,0	100,0	40,0	31,0	49,0	67847	
0.2441	6,200 mm		8,0	100,0	40,0	31,0	49,0	67848	
0.2461	6,250 mm		8,0	100,0	41,0	31,0	49,0	67849	
0.2480	6,300 mm		8,0	100,0	41,0	31,0	49,0	67850	
0.2500	6,350 mm	1/4 E	8,0	100,0	41,0	32,0	49,0	58889	
0.2520	6,400 mm		8,0	100,0	42,0	32,0	49,0	67851	
0.2559	6,500 mm		8,0	100,0	42,0	32,0	49,0	67852	
0.2570	6,528 mm	F	8,0	100,0	42,0	33,0	49,0	58890	
0.2598	6,600 mm		8,0	100,0	43,0	33,0	49,0	67853	
0.2638	6,700 mm		8,0	100,0	44,0	34,0	49,0	67854	
0.2656	6,746 mm	17/64	8,0	100,0	44,0	34,0	49,0	58891	
0.2677	6,800 mm		8,0	100,0	44,0	34,0	49,0	67855	
0.2717	6,900 mm		8,0	100,0	45,0	35,0	49,0	67856	
0.2720	6,909 mm	I	8,0	100,0	45,0	35,0	49,0	58892	
0.2756	7,000 mm		8,0	100,0	46,0	35,0	49,0	67857	
0.2795	7,100 mm		8,0	100,0	46,0	35,0	49,0	67858	
0.2812	7,142 mm	9/32	8,0	100,0	46,0	36,0	49,0	58893	
0.2835	7,200 mm		8,0	110,0	47,0	36,0	53,0	67859	
0.2854	7,250 mm		8,0	110,0	47,0	36,0	53,0	67860	
0.2874	7,300 mm		8,0	110,0	47,0	36,0	53,0	67861	
0.2913	7,400 mm		8,0	110,0	48,0	37,0	53,0	67862	
0.2953	7,500 mm		8,0	110,0	49,0	38,0	53,0	67863	
0.2969	7,541 mm	19/64	8,0	110,0	49,0	38,0	53,0	58894	
0.2992	7,600 mm		8,0	110,0	49,0	38,0	53,0	67864	
0.3031	7,700 mm		8,0	110,0	50,0	38,0	53,0	67865	
0.3071	7,800 mm		8,0	110,0	51,0	39,0	53,0	67866	
0.3110	7,900 mm		8,0	110,0	51,0	39,0	53,0	67867	
0.3125	7,938 mm	5/16	8,0	110,0	52,0	40,0	53,0	58895	
0.3150	8,000 mm		8,0	110,0	52,0	40,0	53,0	67868	
0.3189	8,100 mm		10,0	115,0	53,0	41,0	51,0	67869	
0.3228	8,200 mm		10,0	115,0	53,0	41,0	51,0	67870	
0.3268	8,300 mm		10,0	115,0	54,0	42,0	51,0	67871	

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $\pm .00008/\pm .00047$ DCON = h_6 $> .1181-.2362$ DIAMETERDC = $\pm .00016/\pm .00063$ DCON = h_6 $> .2362-.3937$ DIAMETERDC = $\pm .00024/\pm .00083$ DCON = h_6 $> .3937-.7087$ DIAMETERDC = $\pm .00028/\pm .00098$ DCON = h_6 $> .7087-1.1811$ DIAMETERDC = $\pm .00031/\pm .00114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $\pm 0,002/\pm 0,012$ DCON = h_6 $> 3-6$ DIAMETERDC = $\pm 0,004/\pm 0,016$ DCON = h_6 $> 6-10$ DIAMETERDC = $\pm 0,006/\pm 0,021$ DCON = h_6 $> 10-18$ DIAMETERDC = $\pm 0,007/\pm 0,025$ DCON = h_6 $> 18-30$ DIAMETERDC = $\pm 0,008/\pm 0,029$ DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

146U 5xD

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC	METRIC DC	inch & mm		OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON					Ti-NAMITE®-X (TX)
0.3281	8,334 mm	21/64	10,0	115,0	54,0	42,0	51,0	58896
0.3307	8,400 mm		10,0	115,0	55,0	42,0	51,0	67872
0.3320	8,433 mm	Q	10,0	115,0	55,0	42,0	51,0	58897
0.3346	8,500 mm		10,0	115,0	55,0	42,0	51,0	67873
0.3386	8,600 mm		10,0	115,0	56,0	43,0	51,0	67874
0.3425	8,700 mm		10,0	115,0	57,0	43,0	51,0	67875
0.3438	8,733 mm	11/32	10,0	115,0	57,0	44,0	51,0	58898
0.3465	8,800 mm		10,0	115,0	57,0	44,0	51,0	67876
0.3504	8,900 mm		10,0	115,0	58,0	45,0	51,0	67877
0.3543	9,000 mm		10,0	115,0	58,0	45,0	51,0	67878
0.3583	9,100 mm		10,0	115,0	59,0	46,0	51,0	67879
0.3594	9,129 mm	23/64	10,0	115,0	59,0	46,0	51,0	58899
0.3622	9,200 mm		10,0	125,0	60,0	46,0	55,0	67880
0.3661	9,300 mm		10,0	125,0	60,0	46,0	55,0	67881
0.3680	9,347 mm	U	10,0	125,0	61,0	47,0	55,0	58900
0.3701	9,400 mm		10,0	125,0	61,0	47,0	55,0	67882
0.3740	9,500 mm		10,0	125,0	62,0	47,0	55,0	67883
0.3750	9,525 mm	3/8	10,0	125,0	62,0	48,0	55,0	58901
0.3780	9,600 mm		10,0	125,0	62,0	48,0	55,0	67884
0.3819	9,700 mm		10,0	125,0	63,0	49,0	55,0	67885
0.3858	9,800 mm		10,0	125,0	64,0	49,0	55,0	67886
0.3898	9,900 mm		10,0	125,0	64,0	50,0	55,0	67887
0.3906	9,921 mm	25/64	10,0	125,0	64,0	50,0	55,0	58902
0.3937	10,000 mm		10,0	125,0	65,0	50,0	55,0	67888
0.3970	10,084 mm	X	12,0	135,0	66,0	50,0	57,0	58903
0.3976	10,100 mm		12,0	135,0	66,0	50,0	57,0	67889
0.4016	10,200 mm		12,0	135,0	66,0	51,0	57,0	67890
0.4040	10,262 mm	Y	12,0	135,0	67,0	51,0	57,0	58904
0.4055	10,300 mm		12,0	135,0	67,0	51,0	57,0	67891
0.4062	10,317 mm	13/32	12,0	135,0	67,0	52,0	57,0	58905
0.4094	10,400 mm		12,0	135,0	68,0	52,0	57,0	67892
0.4134	10,500 mm		12,0	135,0	68,0	53,0	57,0	67893
0.4173	10,600 mm		12,0	135,0	69,0	53,0	57,0	67894
0.4213	10,700 mm		12,0	135,0	70,0	54,0	57,0	67895
0.4219	10,716 mm	27/64	12,0	135,0	70,0	54,0	57,0	58906
0.4252	10,800 mm		12,0	135,0	70,0	54,0	57,0	67896
0.4291	10,900 mm		12,0	135,0	71,0	54,0	57,0	67897
0.4331	11,000 mm		12,0	135,0	72,0	55,0	57,0	67898
0.4370	11,100 mm		12,0	135,0	72,0	55,0	57,0	67899
0.4375	11,113 mm	7/16	12,0	135,0	72,0	56,0	57,0	58907
0.4409	11,200 mm		12,0	135,0	73,0	56,0	57,0	67900
0.4449	11,300 mm		12,0	135,0	73,0	57,0	57,0	67901
0.4488	11,400 mm		12,0	145,0	74,0	57,0	62,0	67902
0.4528	11,500 mm		12,0	145,0	75,0	58,0	62,0	67903
0.4531	11,509 mm	29/64	12,0	145,0	75,0	58,0	62,0	58908
0.4567	11,600 mm		12,0	145,0	75,0	58,0	62,0	67904
0.4606	11,700 mm		12,0	145,0	76,0	58,0	62,0	67905
0.4646	11,800 mm		12,0	145,0	77,0	59,0	62,0	67906
0.4685	11,900 mm		12,0	145,0	77,0	59,0	62,0	67907
0.4688	11,908 mm	15/32	12,0	145,0	77,0	60,0	62,0	58909

continued on next page




5xD



146U 5xD

FRACTIONAL & METRIC SERIES

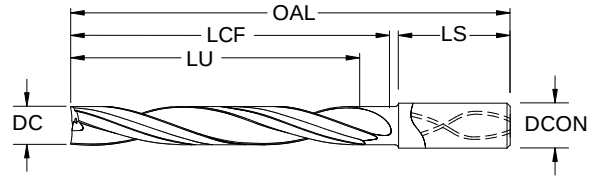

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point reduces the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.4724	12,000 mm		12,0	145,0	78,0	60,0	62,0	67908
0.4844	12,304 mm	31/64	14,0	155,0	80,0	62,0	59,0	58910
0.4921	12,500 mm		14,0	155,0	81,0	62,0	59,0	67909
0.5000	12,700 mm	1/2	14,0	155,0	83,0	64,0	59,0	58911
0.5039	12,800 mm		14,0	155,0	83,0	64,0	59,0	67910
0.5118	13,000 mm		14,0	155,0	84,0	65,0	59,0	67911
0.5156	13,096 mm	33/64	14,0	155,0	85,0	65,0	59,0	58912
0.5312	13,492 mm	17/32	14,0	155,0	88,0	67,0	59,0	58913
0.5315	13,500 mm		14,0	155,0	88,0	68,0	59,0	67912
0.5469	13,891 mm	35/64	14,0	155,0	90,0	69,0	59,0	58914
0.5512	14,000 mm		14,0	155,0	91,0	70,0	59,0	67913
0.5625	14,288 mm	9/16	16,0	175,0	93,0	71,0	66,0	58915
0.5709	14,500 mm		16,0	175,0	94,0	73,0	66,0	67914
0.5781	14,684 mm	37/64	16,0	175,0	95,0	73,0	66,0	58916
0.5906	15,000 mm		16,0	175,0	98,0	75,0	66,0	67915
0.5938	15,083 mm	19/32	16,0	175,0	98,0	75,0	66,0	58917
0.6094	15,479 mm	39/64	16,0	175,0	101,0	77,0	66,0	58918
0.6102	15,500 mm		16,0	175,0	101,0	77,0	66,0	67916
0.6250	15,875 mm	5/8	16,0	175,0	103,0	79,0	66,0	58919
0.6299	16,000 mm		16,0	175,0	104,0	80,0	66,0	67917
0.6406	16,271 mm	41/64	18,0	195,0	106,0	81,0	73,0	58920
0.6496	16,500 mm		18,0	195,0	107,0	82,0	73,0	67918
0.6562	16,667 mm	21/32	18,0	195,0	108,0	83,0	73,0	58921
0.6693	17,000 mm		18,0	195,0	111,0	85,0	73,0	67919
0.6719	17,066 mm	43/64	18,0	195,0	111,0	85,0	73,0	58922
0.6875	17,463 mm	11/16	18,0	195,0	114,0	87,0	73,0	58923
0.6890	17,500 mm		18,0	195,0	114,0	88,0	73,0	67920
0.7031	17,859 mm	45/64	18,0	195,0	116,0	89,0	73,0	58924
0.7087	18,000 mm		18,0	195,0	117,0	90,0	73,0	67921
0.7188	18,258 mm	23/32	20,0	215,0	119,0	91,0	80,0	58925
0.7283	18,500 mm		20,0	215,0	120,0	92,0	80,0	67922
0.7344	18,654 mm	47/64	20,0	215,0	121,0	93,0	80,0	58926
0.7480	19,000 mm		20,0	215,0	123,0	95,0	80,0	67923
0.7500	19,050 mm	3/4	20,0	215,0	124,0	95,0	80,0	58927
0.7656	19,446 mm	49/64	20,0	215,0	126,0	97,0	80,0	58928
0.7677	19,500 mm		20,0	215,0	127,0	97,0	80,0	67924
0.7812	19,842 mm	25/32	20,0	215,0	129,0	99,0	80,0	58929
0.7874	20,000 mm		20,0	215,0	130,0	100,0	80,0	67925
0.7969	20,241 mm	51/64	22,0	220,0	132,0	101,0	81,0	58930
0.8071	20,500 mm		22,0	220,0	133,0	103,0	81,0	67926
0.8125	20,638 mm	13/16	22,0	220,0	134,0	103,0	81,0	58931

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h_6

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h_6

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h_6

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h_6

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h_6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h_6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h_6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h_6

>18-30 DIAMETER

DC = +0,008/+0,029

DCON = h_6

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

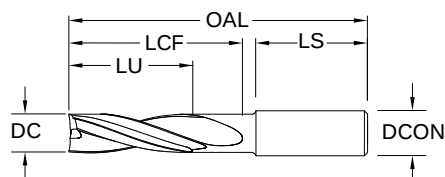

136U 2xD

FRACTIONAL & METRIC SERIES

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+0.00047

DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+0.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+0.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+0.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+0.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0.002/+0.012

DCON = h₆

>3-6 DIAMETER

DC = +0.004/+0.016

DCON = h₆

>6-10 DIAMETER

DC = +0.006/+0.021

DCON = h₆

>10-18 DIAMETER

DC = +0.007/+0.025

DCON = h₆

>18-30 DIAMETER

DC = +0.008/+0.029

DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch & mm									EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)	
0.0591	1,500 mm		6,0	45,0	5,0	3,0	33,0	67060	
0.0625	1,588 mm	1/16	6,0	45,0	6,0	3,0	33,0	58480	
0.0630	1,600 mm		6,0	45,0	6,0	3,0	33,0	67061	
0.0669	1,700 mm		6,0	45,0	6,0	3,0	33,0	67062	
0.0709	1,800 mm		6,0	45,0	6,0	4,0	33,0	67063	
0.0748	1,900 mm		6,0	45,0	7,0	4,0	33,0	67064	
0.0781	1,984 mm	5/64	6,0	45,0	7,0	4,0	33,0	58481	
0.0787	2,000 mm		6,0	45,0	7,0	4,0	33,0	67065	
0.0827	2,100 mm		6,0	45,0	7,0	4,0	33,0	67066	
0.0866	2,200 mm		6,0	50,0	8,0	4,0	31,0	67067	
0.0906	2,300 mm		6,0	50,0	8,0	5,0	31,0	67068	
0.0938	2,383 mm	3/32	6,0	50,0	8,0	5,0	31,0	58482	
0.0945	2,400 mm		6,0	50,0	8,0	5,0	31,0	67069	
0.0984	2,500 mm		6,0	50,0	9,0	5,0	31,0	67070	
0.1015	2,578 mm	#38	6,0	50,0	9,0	5,0	31,0	58483	
0.1024	2,600 mm		6,0	50,0	9,0	5,0	31,0	67071	
0.1040	2,642 mm	#37	6,0	50,0	9,0	5,0	31,0	58484	
0.1063	2,700 mm		6,0	50,0	9,0	5,0	31,0	67072	
0.1065	2,705 mm	#36	6,0	50,0	9,0	5,0	31,0	58485	
0.1094	2,779 mm	7/64	6,0	50,0	10,0	6,0	31,0	58486	
0.1102	2,800 mm		6,0	50,0	10,0	6,0	31,0	67073	
0.1130	2,870 mm	#33	6,0	50,0	10,0	6,0	31,0	58487	
0.1142	2,900 mm		6,0	50,0	10,0	6,0	31,0	67074	
0.1181	3,000 mm		6,0	50,0	10,0	6,0	31,0	67075	
0.1220	3,100 mm		6,0	50,0	11,0	6,0	31,0	67076	
0.1250	3,175 mm	1/8	6,0	50,0	11,0	6,0	31,0	58488	
0.1260	3,200 mm		6,0	50,0	11,0	6,0	31,0	67077	
0.1299	3,300 mm		6,0	50,0	12,0	7,0	31,0	67078	
0.1339	3,400 mm		6,0	50,0	12,0	7,0	31,0	67079	
0.1360	3,454 mm	#29	6,0	50,0	12,0	7,0	31,0	58489	
0.1378	3,500 mm		6,0	50,0	12,0	7,0	31,0	67080	
0.1405	3,569 mm	#28	6,0	50,0	12,0	7,0	31,0	58490	
0.1406	3,571 mm	9/64	6,0	50,0	12,0	7,0	31,0	58491	
0.1417	3,600 mm		6,0	50,0	13,0	7,0	31,0	67081	
0.1457	3,700 mm		6,0	50,0	13,0	7,0	31,0	67082	
0.1470	3,734 mm	#26	6,0	50,0	13,0	7,0	31,0	58492	
0.1495	3,797 mm	#25	6,0	50,0	13,0	8,0	31,0	58493	
0.1496	3,800 mm		6,0	50,0	13,0	8,0	31,0	67083	


- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

continued on next page



136U 2xD

FRACTIONAL & METRIC SERIES

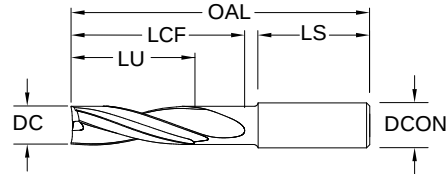

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.1520	3,861 mm	#24	6,0	50,0	14,0	8,0	31,0	58494
0.1535	3,900 mm		6,0	50,0	14,0	8,0	31,0	67084
0.1562	3,967 mm	5/32	6,0	50,0	14,0	8,0	31,0	58495
0.1570	3,988 mm	#22	6,0	50,0	14,0	8,0	31,0	58496
0.1575	4,000 mm		6,0	50,0	14,0	8,0	31,0	67085
0.1590	4,039 mm	#21	6,0	50,0	14,0	8,0	31,0	58497
0.1610	4,089 mm	#20	6,0	50,0	14,0	8,0	31,0	58498
0.1614	4,100 mm		6,0	50,0	14,0	8,0	31,0	67086
0.1654	4,200 mm		6,0	60,0	15,0	8,0	34,0	67087
0.1693	4,300 mm		6,0	60,0	15,0	9,0	34,0	67088
0.1719	4,366 mm	11/64	6,0	60,0	15,0	9,0	34,0	58499
0.1732	4,400 mm		6,0	60,0	15,0	9,0	34,0	67089
0.1770	4,496 mm	#16	6,0	60,0	16,0	9,0	34,0	58500
0.1772	4,500 mm		6,0	60,0	16,0	9,0	34,0	67090
0.1811	4,600 mm		6,0	60,0	16,0	9,0	34,0	67091
0.1850	4,699 mm	#13	6,0	60,0	16,0	9,0	34,0	58501
0.1875	4,763 mm	3/16	6,0	60,0	17,0	10,0	34,0	58502
0.1890	4,801 mm	#12	6,0	60,0	17,0	10,0	34,0	58503
0.1929	4,900 mm		6,0	60,0	17,0	10,0	34,0	67094
0.1935	4,915 mm	#10	6,0	60,0	17,0	10,0	34,0	58504
0.1969	5,000 mm		6,0	60,0	18,0	10,0	34,0	67095
0.2008	5,100 mm		6,0	60,0	18,0	10,0	34,0	67096
0.2010	5,105 mm	#7	6,0	60,0	18,0	10,0	34,0	58505
0.2031	5,159 mm	13/64	6,0	60,0	18,0	10,0	34,0	58506
0.2047	5,200 mm		6,0	60,0	18,0	10,0	34,0	67097
0.2087	5,300 mm		6,0	60,0	19,0	11,0	34,0	67098
0.2090	5,309 mm	#4	6,0	60,0	19,0	11,0	34,0	58507
0.2126	5,400 mm		6,0	60,0	19,0	11,0	34,0	67099
0.2130	5,410 mm	#3	6,0	60,0	19,0	11,0	34,0	58508
0.2165	5,500 mm		6,0	60,0	19,0	11,0	34,0	67100
0.2188	5,558 mm	7/32	6,0	60,0	19,0	11,0	34,0	58509
0.2205	5,600 mm		6,0	60,0	20,0	11,0	34,0	67101
0.2244	5,700 mm		6,0	60,0	20,0	11,0	34,0	67102
0.2283	5,800 mm		6,0	60,0	20,0	12,0	34,0	67103
0.2323	5,900 mm		6,0	60,0	21,0	12,0	34,0	67104
0.2344	5,954 mm	15/64	6,0	60,0	21,0	12,0	34,0	58510
0.2362	6,000 mm		6,0	60,0	21,0	12,0	34,0	67105
0.2402	6,100 mm		8,0	70,0	22,0	13,0	37,0	67106

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETER

DC = $+0.0008/+0.0047$
DCON = h_6

 $> .1181-.2362$ DIAMETER

DC = $+0.0016/+0.0063$
DCON = h_6

 $> .2362-.3937$ DIAMETER

DC = $+0.0024/+0.0083$
DCON = h_6

 $> .3937-.7087$ DIAMETER

DC = $+0.0028/+0.0098$
DCON = h_6

 $> .7087-1.1811$ DIAMETER

DC = $+0.0031/+0.0114$
DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETER

DC = $+0.002/+0.012$
DCON = h_6

 $> 3-6$ DIAMETER

DC = $+0.004/+0.016$
DCON = h_6

 $> 6-10$ DIAMETER

DC = $+0.006/+0.021$
DCON = h_6

 $> 10-18$ DIAMETER

DC = $+0.007/+0.025$
DCON = h_6

 $> 18-30$ DIAMETER

DC = $+0.008/+0.029$
DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

136U 2xD

FRACTIONAL & METRIC SERIES

CONTINUED


DECIMAL DC	METRIC DC	inch & mm						EDP NO.
		FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	TI-NAMITE®-X (TX)
0.2441	6,200 mm		8,0	70,0	22,0	12,0	37,0	67107
0.2461	6,250 mm		8,0	70,0	22,0	13,0	37,0	67108
0.2480	6,300 mm		8,0	70,0	22,0	13,0	37,0	67109
0.2500	6,350 mm	1/4 E	8,0	70,0	22,0	13,0	37,0	58511
0.2520	6,400 mm		8,0	70,0	22,0	13,0	37,0	67110
0.2559	6,500 mm		8,0	70,0	23,0	13,0	37,0	67111
0.2570	6,528 mm	F	8,0	70,0	23,0	13,0	37,0	58512
0.2598	6,600 mm		8,0	70,0	23,0	13,0	37,0	67112
0.2638	6,700 mm		8,0	70,0	23,0	13,0	37,0	67113
0.2656	6,746 mm	17/64	8,0	70,0	24,0	13,0	37,0	58513
0.2677	6,800 mm		8,0	70,0	24,0	14,0	37,0	67114
0.2717	6,900 mm		8,0	70,0	24,0	14,0	37,0	67115
0.2720	6,909 mm	I	8,0	70,0	24,0	14,0	37,0	58514
0.2756	7,000 mm		8,0	70,0	25,0	14,0	37,0	67116
0.2795	7,100 mm		8,0	70,0	25,0	14,0	37,0	67117
0.2812	7,142 mm	9/32	8,0	70,0	25,0	14,0	37,0	58515
0.2835	7,200 mm		8,0	70,0	25,0	14,0	37,0	67118
0.2854	7,250 mm		8,0	70,0	25,0	14,0	37,0	67119
0.2874	7,300 mm		8,0	70,0	26,0	15,0	37,0	67120
0.2913	7,400 mm		8,0	70,0	26,0	15,0	37,0	67121
0.2953	7,500 mm		8,0	70,0	26,0	15,0	37,0	67122
0.2969	7,541 mm	19/64	8,0	70,0	26,0	15,0	37,0	58516
0.2992	7,600 mm		8,0	70,0	27,0	15,0	37,0	67123
0.3031	7,700 mm		8,0	70,0	27,0	15,0	37,0	67124
0.3071	7,800 mm		8,0	70,0	27,0	16,0	37,0	67125
0.3110	7,900 mm		8,0	70,0	28,0	16,0	37,0	67126
0.3125	7,938 mm	5/16	8,0	70,0	28,0	16,0	37,0	58517
0.3150	8,000 mm		8,0	70,0	28,0	16,0	37,0	67127
0.3189	8,100 mm		10,0	80,0	29,0	17,0	40,0	67128
0.3228	8,200 mm		10,0	80,0	29,0	16,0	40,0	67129
0.3268	8,300 mm		10,0	80,0	29,0	17,0	40,0	67130
0.3281	8,334 mm	21/64	10,0	80,0	29,0	17,0	40,0	58518
0.3307	8,400 mm		10,0	80,0	29,0	17,0	40,0	67131
0.3320	8,433 mm	Q	10,0	80,0	30,0	17,0	40,0	58519
0.3346	8,500 mm		10,0	80,0	30,0	17,0	40,0	67132
0.3386	8,600 mm		10,0	80,0	30,0	17,0	40,0	67133
0.3425	8,700 mm		10,0	80,0	30,0	17,0	40,0	67134
0.3438	8,733 mm	11/32	10,0	80,0	31,0	17,0	40,0	58520
0.3465	8,800 mm		10,0	80,0	31,0	18,0	40,0	67135
0.3504	8,900 mm		10,0	80,0	31,0	18,0	40,0	67136
0.3543	9,000 mm		10,0	80,0	31,0	18,0	40,0	67137
0.3583	9,100 mm		10,0	80,0	32,0	18,0	40,0	67138
0.3594	9,129 mm	23/64	10,0	80,0	32,0	18,0	40,0	58521
0.3622	9,200 mm		10,0	80,0	32,0	18,0	40,0	67139
0.3661	9,300 mm		10,0	80,0	33,0	19,0	40,0	67140
0.3680	9,347 mm	U	10,0	80,0	33,0	19,0	40,0	58522

continued on next page



136U 2xD

FRACTIONAL & METRIC SERIES

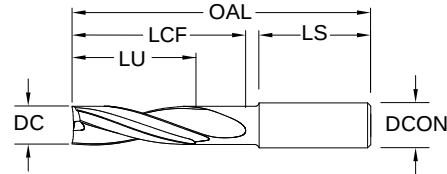

- 4-margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.3701	9,400 mm		10,0	80,0	33,0	19,0	40,0	67141
0.3740	9,500 mm		10,0	80,0	33,0	19,0	40,0	67142
0.3750	9,525 mm	3/8	10,0	80,0	33,0	19,0	40,0	58523
0.3780	9,600 mm		10,0	80,0	34,0	19,0	40,0	67143
0.3819	9,700 mm		10,0	80,0	34,0	19,0	40,0	67144
0.3858	9,800 mm		10,0	80,0	34,0	20,0	40,0	67145
0.3898	9,900 mm		10,0	80,0	35,0	20,0	40,0	67146
0.3906	9,921 mm	25/64	10,0	80,0	35,0	20,0	40,0	58524
0.3937	10,000 mm		10,0	80,0	35,0	20,0	40,0	67147
0.3970	10,084 mm	X	12,0	90,0	36,0	21,0	43,0	58525
0.3976	10,100 mm		12,0	90,0	36,0	21,0	43,0	67148
0.4016	10,200 mm		12,0	90,0	36,0	20,0	43,0	67149
0.4040	10,262 mm	Y	12,0	90,0	36,0	21,0	43,0	58526
0.4055	10,300 mm		12,0	90,0	36,0	21,0	43,0	67150
0.4062	10,317 mm	13/32	12,0	90,0	36,0	21,0	43,0	58527
0.4094	10,400 mm		12,0	90,0	36,0	21,0	43,0	67151
0.4134	10,500 mm		12,0	90,0	37,0	21,0	43,0	67152
0.4173	10,600 mm		12,0	90,0	37,0	21,0	43,0	67153
0.4213	10,700 mm		12,0	90,0	37,0	21,0	43,0	67154
0.4219	10,716 mm	27/64	12,0	90,0	38,0	21,0	43,0	58528
0.4252	10,800 mm		12,0	90,0	38,0	22,0	43,0	67155
0.4291	10,900 mm		12,0	90,0	38,0	22,0	43,0	67156
0.4331	11,000 mm		12,0	90,0	39,0	22,0	43,0	67157
0.4370	11,100 mm		12,0	90,0	39,0	22,0	43,0	67158
0.4375	11,113 mm	7/16	12,0	90,0	39,0	22,0	43,0	58529
0.4409	11,200 mm		12,0	90,0	39,0	22,0	43,0	67159
0.4449	11,300 mm		12,0	90,0	40,0	23,0	43,0	67160
0.4488	11,400 mm		12,0	90,0	40,0	23,0	43,0	67161
0.4528	11,500 mm		12,0	90,0	40,0	23,0	43,0	67162
0.4531	11,509 mm	29/64	12,0	90,0	40,0	23,0	43,0	58530
0.4567	11,600 mm		12,0	90,0	41,0	23,0	43,0	67163
0.4606	11,700 mm		12,0	90,0	41,0	23,0	43,0	67164
0.4646	11,800 mm		12,0	90,0	41,0	24,0	43,0	67165
0.4685	11,900 mm		12,0	90,0	42,0	24,0	43,0	67166
0.4688	11,908 mm	15/32	12,0	90,0	42,0	24,0	43,0	58531
0.4724	12,000 mm		12,0	90,0	42,0	24,0	43,0	67167
0.4844	12,304 mm	31/64	14,0	100,0	43,0	25,0	46,0	58532
0.4921	12,500 mm		14,0	100,0	44,0	25,0	46,0	67168

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = $\pm 0.0008/\pm 0.0047$
DCON = h_6

>.1181-.2362 DIAMETER

DC = $\pm 0.0016/\pm 0.0063$
DCON = h_6

>.2362-.3937 DIAMETER

DC = $\pm 0.0024/\pm 0.0083$
DCON = h_6

>.3937-.7087 DIAMETER

DC = $\pm 0.0028/\pm 0.0098$
DCON = h_6

>.7087-1.1811 DIAMETER

DC = $\pm 0.0031/\pm 0.0114$
DCON = h_6

TOLERANCES (mm)

≤3 DIAMETER

DC = $\pm 0.002/\pm 0.012$
DCON = h_6

>3-6 DIAMETER

DC = $\pm 0.004/\pm 0.016$
DCON = h_6

>6-10 DIAMETER

DC = $\pm 0.006/\pm 0.021$
DCON = h_6

>10-18 DIAMETER

DC = $\pm 0.007/\pm 0.025$
DCON = h_6

>18-30 DIAMETER

DC = $\pm 0.008/\pm 0.029$
DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

136U 2xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.
DECIMAL DC	METRIC DC	FRACTIONAL/ LETTER/WIRE DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	SHANK LENGTH LS	Ti-NAMITE®-X (TX)
0.5000	12,700 mm	1/2	14,0	100,0	44,0	25,0	46,0	58533
0.5039	12,800 mm		14,0	100,0	45,0	26,0	46,0	67169
0.5118	13,000 mm		14,0	100,0	45,0	26,0	46,0	67170
0.5156	13,096 mm	33/64	14,0	100,0	46,0	26,0	46,0	58534
0.5312	13,492 mm	17/32	14,0	100,0	47,0	27,0	46,0	58535
0.5315	13,500 mm		14,0	100,0	47,0	27,0	46,0	67171
0.5469	13,891 mm	35/64	14,0	100,0	49,0	28,0	46,0	58536
0.5512	14,000 mm		14,0	100,0	49,0	28,0	46,0	67172
0.5625	14,288 mm	9/16	16,0	110,0	50,0	29,0	49,0	58537
0.5709	14,500 mm		16,0	110,0	51,0	29,0	49,0	67173
0.5781	14,684 mm	37/64	16,0	110,0	51,0	29,0	49,0	58538
0.5906	15,000 mm		16,0	110,0	53,0	30,0	49,0	67174
0.5938	15,083 mm	19/32	16,0	110,0	53,0	30,0	49,0	58539
0.6094	15,479 mm	39/64	16,0	110,0	54,0	31,0	49,0	58540
0.6102	15,500 mm		16,0	110,0	54,0	31,0	49,0	67175
0.6250	15,875 mm	5/8	16,0	110,0	56,0	32,0	49,0	58541
0.6299	16,000 mm		16,0	110,0	56,0	32,0	49,0	67176
0.6406	16,271 mm	41/64	18,0	125,0	57,0	33,0	57,0	58542
0.6496	16,500 mm		18,0	125,0	58,0	33,0	57,0	67177
0.6562	16,667 mm	21/32	18,0	125,0	58,0	33,0	57,0	58543
0.6693	17,000 mm		18,0	125,0	60,0	34,0	57,0	67178
0.6719	17,066 mm	43/64	18,0	125,0	60,0	34,0	57,0	58544
0.6875	17,463 mm	11/16	18,0	125,0	61,0	35,0	57,0	58545
0.6890	17,500 mm		18,0	125,0	61,0	35,0	57,0	67179
0.7031	17,859 mm	45/64	18,0	125,0	63,0	36,0	57,0	58546
0.7087	18,000 mm		18,0	125,0	63,0	36,0	57,0	67180
0.7188	18,258 mm	23/32	20,0	135,0	64,0	37,0	60,0	58547
0.7283	18,500 mm		20,0	135,0	65,0	37,0	60,0	67181
0.7344	18,654 mm	47/64	20,0	135,0	65,0	37,0	60,0	58548
0.7480	19,000 mm		20,0	135,0	66,0	38,0	60,0	67182
0.7500	19,050 mm	3/4	20,0	135,0	67,0	38,0	60,0	58549
0.7656	19,446 mm	49/64	20,0	135,0	68,0	39,0	60,0	58550
0.7677	19,500 mm		20,0	135,0	68,0	39,0	60,0	67183
0.7812	19,842 mm	25/32	20,0	135,0	69,0	40,0	60,0	58551
0.7874	20,000 mm		20,0	135,0	70,0	40,0	60,0	67184
0.7969	20,241 mm	51/64	22,0	145,0	71,0	40,0	68,0	58552
0.8071	20,500 mm		22,0	145,0	72,0	41,0	68,0	67185
0.8125	20,638 mm	13/16	22,0	145,0	72,0	41,0	68,0	58553

CONTINUED

Series 146U, 136U Fractional				DC • in								
Hardness		Vc (sfm)		1/16	1/8	1/4	3/8	1/2	5/8	3/4	13/16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	285	RPM	17419	8710	4355	2903	2177	1742	1452	1340
			(228-342)	Fr	0.0016	0.0031	0.0062	0.0093	0.0124	0.0155	0.0186	0.0202
				Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
		≤ 275 Bhn or ≤ 28 HRc	255	RPM	15586	7793	3896	2598	1948	1559	1299	1199
			(204-306)	Fr	0.0013	0.0027	0.0054	0.0081	0.0108	0.0135	0.0162	0.0175
				Feed (ipm)	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0
		≤ 425 Bhn or ≤ 45 HRc	145	RPM	8862	4431	2216	1477	1108	886	739	682
			(116-174)	Fr	0.0011	0.0023	0.0045	0.0068	0.0090	0.0113	0.0135	0.0147
				Feed (ipm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	220	RPM	13446	6723	3362	2241	1681	1345	1121	1034
			(176-264)	Fr	0.0015	0.0030	0.0059	0.0089	0.0119	0.0149	0.0178	0.0193
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
		≤ 375 Bhn or ≤ 40 HRc	135	RPM	8251	4126	2063	1375	1031	825	688	635
			(108-162)	Fr	0.0013	0.0027	0.0053	0.0080	0.0107	0.0133	0.0160	0.0173
				Feed (ipm)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	125	RPM	7640	3820	1910	1273	955	764	637	588	
		(100-150)	Fr	0.0012	0.0025	0.0050	0.0075	0.0099	0.0124	0.0149	0.0162	
			Feed (ipm)	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	
	≤ 375 Bhn or ≤ 40 HRc	90	RPM	5501	2750	1375	917	688	550	458	423	
		(72-108)	Fr	0.0005	0.0011	0.0022	0.0033	0.0044	0.0055	0.0065	0.0071	
			Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	265	RPM	16197	8098	4049	2699	2025	1620	1350	1246
			(212-318)	Fr	0.0008	0.0016	0.0032	0.0048	0.0064	0.0080	0.0096	0.0104
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 275 Bhn or ≤ 28 HRc	170	RPM	10390	5195	2598	1732	1299	1039	866	799
			(136-204)	Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0075	0.0081
				Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	130	RPM	7946	3973	1986	1324	993	795	662	611
			(104-156)	Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0076	0.0082
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	5806	2903	1452	968	726	581	484	447
			(76-114)	Fr	0.0006	0.0011	0.0023	0.0034	0.0045	0.0057	0.0068	0.0074
				Feed (ipm)	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
K	GRAY CAST IRONS	≤ 220 Bhn or ≤ 19 HRc	250	RPM	15280	7640	3820	2547	1910	1528	1273	1175
			(200-300)	Fr	0.0016	0.0031	0.0063	0.0094	0.0126	0.0157	0.0188	0.0204
				Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
	DUCTILE CAST IRONS	≤ 260 Bhn or ≤ 26 HRc	220	RPM	13446	6723	3362	2241	1681	1345	1121	1034
			(176-264)	Fr	0.0015	0.0030	0.0059	0.0089	0.0119	0.0149	0.0178	0.0193
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0

continued on next page

Series 146U, 136U Fractional				DC • in								
		Hardness	Vc (sfm)	1/16	1/8	1/4	3/8	1/2	5/8	3/4	13/16	
N	ALUMINUM ALLOYS (WROUGHT) 2024, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	475	RPM	29032	14516	7258	4839	3629	2903	2419	2233
				Fr	0.0016	0.0031	0.0062	0.0093	0.0124	0.0155	0.0186	0.0202
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0
	ALUMINUM ALLOYS (CAST) A356, A380, 390	≤ 140 Bhn or ≤ 3 HRc	380	RPM	23226	11613	5806	3871	2903	2323	1935	1787
				Fr	0.0014	0.0028	0.0055	0.0083	0.0110	0.0138	0.0165	0.0179
				Feed (ipm)	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	175	RPM	10696	5348	2674	1783	1337	1070	891	823
				Fr	0.0007	0.0014	0.0028	0.0042	0.0055	0.0069	0.0083	0.0090
				Feed (ipm)	7.4	7.4	7.4	7.4	7.4	7.4	7.4	7.4
		≤ 350 Bhn or ≤ 38 HRc	130	RPM	7946	3973	1986	1324	993	795	662	611
				Fr	0.0006	0.0013	0.0025	0.0038	0.0050	0.0063	0.0076	0.0082
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		≤ 440 Bhn or ≤ 47 HRc	70	RPM	4278	2139	1070	713	535	428	357	329
				Fr	0.0005	0.0009	0.0019	0.0028	0.0037	0.0047	0.0056	0.0061
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	95	RPM	5806	2903	1452	968	726	581	484	447
				Fr	0.0008	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0101
				Feed (ipm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	80	RPM	4890	2445	1222	815	611	489	407	376
				Fr	0.0007	0.0014	0.0029	0.0043	0.0057	0.0072	0.0086	0.0093
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5

reduce rates when material is harder than listed, when drilling conditions are not optimum, or coolant is not available
 rates shown are for drilling into a flat surface and should be lowered using the reduction multiplier when the workpiece is angled or curved
 reduce rates 10 to 20 percent when using drills without internal coolant
 always use the shortest overhang possible
 longer drills may require a spot drill operation to avoid walking on entry
 internal coolant required in ISO S and M material groups or when drilling depth exceeds 3xD
 Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

angle °	reduction multiplier	
	speed x	feed x
up to 30	1.0	0.6
over 30	0.7	0.4

Series 146U, 136U Metric		Hardness	Vc (m/mm)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
			(69-104)	Fr	0.037	0.074	0.149	0.199	0.248	0.298	0.397	0.496
				Feed (mm/min)	686	686	686	686	686	686	686	686
		≤ 275 Bhn or ≤ 28 HRc	78	RPM	16480	8240	4120	3090	2472	2060	1545	1236
			(62-93)	Fr	0.032	0.065	0.129	0.173	0.216	0.259	0.345	0.432
				Feed (mm/min)	533	533	533	533	533	533	533	533
		≤ 425 Bhn or ≤ 45 HRc	44	RPM	9371	4686	2343	1757	1406	1171	879	703
			(35-53)	Fr	0.027	0.054	0.108	0.145	0.181	0.217	0.289	0.361
				Feed (mm/min)	254	254	254	254	254	254	254	254
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	67	RPM	14218	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.036	0.071	0.143	0.191	0.238	0.286	0.381	0.476
				Feed (mm/min)	508	508	508	508	508	508	508	508
		≤ 375 Bhn or ≤ 40 HRc	41	RPM	8725	4362	2181	1636	1309	1091	818	654
			(33-49)	Fr	0.032	0.064	0.128	0.171	0.213	0.256	0.342	0.427
				Feed (mm/min)	279	279	279	279	279	279	279	279
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	38	RPM	8078	4039	2020	1515	1212	1010	757	606
			(30-46)	Fr	0.030	0.060	0.119	0.159	0.199	0.239	0.319	0.398
				Feed (mm/min)	241	241	241	241	241	241	241	241
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	5816	2908	1454	1091	872	727	545	436
			(22-33)	Fr	0.013	0.026	0.052	0.070	0.087	0.105	0.140	0.175
				Feed (mm/min)	76	76	76	76	76	76	76	76
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	81	RPM	17126	8563	4282	3211	2569	2141	1606	1284
			(65-97)	Fr	0.019	0.039	0.077	0.103	0.129	0.154	0.206	0.257
				Feed (mm/min)	330	330	330	330	330	330	330	330
		≤ 275 Bhn or ≤ 28 HRc	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
			(41-62)	Fr	0.015	0.030	0.060	0.080	0.100	0.120	0.160	0.200
				Feed (mm/min)	165	165	165	165	165	165	165	165
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	40	RPM	8402	4201	2100	1575	1260	1050	788	630
			(32-48)	Fr	0.015	0.030	0.060	0.081	0.101	0.121	0.161	0.202
				Feed (mm/min)	127	127	127	127	127	127	127	127
		≤ 375 Bhn or ≤ 40 HRc	29	RPM	6140	3070	1535	1151	921	767	576	460
			(23-35)	Fr	0.014	0.027	0.055	0.073	0.091	0.109	0.146	0.182
				Feed (mm/min)	84	84	84	84	84	84	84	84
K	GRAY CAST IRONS	≤ 220 Bhn or ≤ 19 HRc	76	RPM	16157	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.038	0.075	0.151	0.201	0.252	0.302	0.402	0.503
				Feed (mm/min)	610	610	610	610	610	610	610	610
	DUCTILE CAST IRONS	≤ 260 Bhn or ≤ 26 HRc	67	RPM	14218	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.036	0.071	0.143	0.191	0.238	0.286	0.381	0.476
				Feed (mm/min)	508	508	508	508	508	508	508	508

continued on next page

Series 146U, 136U Metric			Vc (m/mm)	DC • mm								
Hardness				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS (WROUGHT) 2024, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	145 (116-174)	RPM	30698	15349	7675	5756	4605	3837	2878	2302
			Fr	0.037	0.074	0.149	0.199	0.248	0.298	0.397	0.496	
			Feed (mm/min)	1143	1143	1143	1143	1143	1143	1143	1143	
	ALUMINUM ALLOYS (CAST) A356, A380, 390	≤ 140 Bhn or ≤ 3 HRc	116 (93-139)	RPM	24559	12279	6140	4605	3684	3070	2302	1842
			Fr	0.033	0.066	0.132	0.177	0.221	0.265	0.353	0.441	
			Feed (mm/min)	813	813	813	813	813	813	813	813	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	53 (43-64)	RPM	11310	5655	2827	2121	1696	1414	1060	848
			Fr	0.017	0.033	0.066	0.089	0.111	0.133	0.177	0.222	
			Feed (mm/min)	188	188	188	188	188	188	188	188	
		≤ 350 Bhn or ≤ 38 HRc	40 (32-48)	RPM	8402	4201	2100	1575	1260	1050	788	630
			Fr	0.015	0.030	0.060	0.081	0.101	0.121	0.161	0.202	
			Feed (mm/min)	127	127	127	127	127	127	127	127	
		≤ 440 Bhn or ≤ 47 HRc	21 (17-26)	RPM	4524	2262	1131	848	679	565	424	339
			Fr	0.011	0.022	0.045	0.060	0.075	0.090	0.120	0.150	
			Feed (mm/min)	51	51	51	51	51	51	51	51	
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	29 (23-35)	RPM	6140	3070	1535	1151	921	767	576	460
			Fr	0.019	0.037	0.074	0.099	0.124	0.149	0.199	0.248	
			Feed (mm/min)	114	114	114	114	114	114	114	114	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	24 (20-29)	RPM	5170	2585	1293	969	776	646	485	388
			Fr	0.017	0.034	0.069	0.092	0.115	0.138	0.183	0.229	
			Feed (mm/min)	89	89	89	89	89	89	89	89	

reduce rates when material is harder than listed, when drilling conditions are not optimum, or coolant is not available
 rates shown are for drilling into a flat surface and should be lowered using the reduction multiplier when the workpiece is angled or curved
 reduce rates 10 to 20 percent when using drills without internal coolant
 always use the shortest overhang possible
 longer drills may require a spot drill operation to avoid walking on entry
 internal coolant required in ISO S and M material groups or when drilling depth exceeds 3xD
 Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

angle °	reduction multiplier	
	speed x	feed x
up to 30	1.0	0.6
over 30	0.7	0.4

General Application End Mills





Milling

SERIES	GENERAL APPLICATION END MILLS DESCRIPTION	PAGE	S&F PAGE
3	2 Flute Square End Standard Length Fractional	280	320, 321
3L	2 Flute Square End Long Reach Fractional	280	320, 321
3EL	2 Flute Square End Extended Length Fractional	280	320, 321
3CR	2 Flute Corner Radius Standard Length Fractional	280	320, 321
3M	2 Flute Square End Standard Length Metric	285	326
3XLM	2 Flute Square End Extra Long Reach Metric	285	326
3B	2 Flute Ball End Standard Length Fractional	283	320
3LB	2 Flute Ball End Long Reach Fractional	283	320
3ELB	2 Flute Ball End Extended Length Fractional	283	320
3MB	2 Flute Ball End Standard Length Metric	286	326
3XLMB	2 Flute Ball End Extra Long Reach Metric	286	326
15	2 Flute Double End Square Stub Fractional	287	321
15M	2 Flute Double End Square Stub Metric	289	326
15B	2 Flute Double End Ball Stub Fractional	288	322
15MB	2 Flute Double End Ball Stub Metric	290	326
17	2 Flute Square End Stub Fractional	291	321
17M	2 Flute Square End Stub Metric	291	326
52	2 Flute High Shear Square End Standard Length Fractional	292	323
52M	2 Flute High Shear Square End Standard Length Metric	292	328
59	2 Flute Square End Long Reach Fractional	293	321
59M	2 Flute Square End Long Reach Metric	295	326
59B	2 Flute Ball End Long Reach Fractional	294	321
59MB	2 Flute Ball End Long Reach Metric	296	327
5	3 Flute Square End Standard Length Fractional	297	321
5M	3 Flute Square End Standard Length Metric	299	326
5XLM	3 Flute Square End Extra Long Reach Metric	299	326
5B	3 Flute Ball End Standard Length Fractional	298	321
5MB	3 Flute Ball End Standard Length Metric	300	326
5XLMB	3 Flute Ball End Extra Long Reach Metric	300	326
23	3 Flute Tapered Square End Standard Length Fractional	301	321
24	3 Flute Tapered Corner Radius Standard Length Fractional	302	321
1	4 Flute Square End Standard Length Fractional	303	320, 321
1L	4 Flute Square End Long Reach Fractional	303	320, 321
1EL	4 Flute Square End Extended Length Fractional	303	320, 321
1CR	4 Flute Corner Radius Standard Length Fractional	303	320, 321
1M	4 Flute Square End Standard Length Metric	309	326
1XLM	4 Flute Square End Extra Long Reach Metric	309	326
1MCR	4 Flute Corner Radius Standard Length Metric	309	326

Speed & Feed Recommendations listed at the end of this section

SERIES	GENERAL APPLICATION END MILLS DESCRIPTION	PAGE	S&F PAGE
1B	4 Flute Ball End Standard Length Fractional	307	320
1LB	4 Flute Ball End Long Reach Fractional	307	320
1ELB	4 Flute Ball End Extended Length Fractional	307	320
1MB	4 Flute Ball End Standard Length Metric	312	326
1XLMB	4 Flute Ball End Extra Long Reach Metric	312	326
14	4 Flute Double End Square Stub Fractional	313	321
14M	4 Flute Double End Square Stub Metric	313	326
14B	4 Flute Double End Ball Stub Fractional	314	321
14MB	4 Flute Double End Ball Stub Metric	314	326
16	4 Flute Square End Stub Fractional	303	321
16M	4 Flute Square End Stub Metric	309	326
54	4 Flute High Shear Square End Standard Length Fractional	315	323
54M	4 Flute High Shear Square End Standard Length Metric	315	328
61	Multi-Flute Coarse Pitch Rougher Fractional	316	324
61M	Multi-Flute Coarse Pitch Rougher Metric	316	330
62	Multi-Flute Fine Pitch Rougher Fractional	317	325
62M	Multi-Flute Fine Pitch Rougher Metric	317	331
End Mill Sets	2, 3, & 4 Flute Square End Series 1, 3, 5, 14, 15	318	320, 321
	2, 3, & 4 Flute Ball End Series 1B, 3B, 5B, 14B, 15B	319	320, 321

Speed & Feed Recommendations listed at the end of this section

Fresado

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA	S&F PÁGINA
3	2 filos, punta cuadrada, longitud estándar, fraccional	280	320, 321
3L	2 filos, punta cuadrada, largo alcance, fraccional	280	320, 321
3EL	2 filos, punta cuadrada, longitud extendida, fraccional	280	320, 321
3CR	2 filos, radio angulado, longitud estándar, fraccional	280	320, 321
3M	2 filos, punta cuadrada, longitud estándar, métrico	285	326
3XLM	2 filos, punta cuadrada, alcance extralargo, métrico	285	326
3B	2 filos, punta esférica, longitud estándar, fraccional	283	320
3LB	2 filos, punta esférica, largo alcance, fraccional	283	320
3ELB	2 filos, punta esférica, longitud extendida, fraccional	283	320
3MB	2 filos, punta esférica, longitud estándar, métrico	286	326
3XLMB	2 filos, punta esférica, alcance extralargo, métrico	286	326
15	2 filos, pieza doble de punta cuadrada, fraccional	287	321
15M	2 filos, pieza doble de punta cuadrada, métrico	289	326
15B	2 filos, pieza doble de punta esférica, fraccional	288	322
15MB	2 filos, pieza doble de punta esférica, métrico	290	326
17	2 filos, pieza de punta cuadrada, fraccional	291	321

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA	S&F PÁGINA
17M	2 filos, pieza de punta cuadrada, métrico	291	326
52	2 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	292	323
52M	2 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	292	328
59	2 filos, punta cuadrada, largo alcance, fraccional	293	321
59M	2 filos, punta cuadrada, largo alcance, métrico	295	326
59B	2 filos, punta esférica, largo alcance, fraccional	294	321
59MB	2 filos, punta esférica, largo alcance, métrico	296	327
5	3 filos, punta cuadrada, longitud estándar, fraccional	297	321
5M	3 filos, punta cuadrada, longitud estándar, métrico	299	326
5XLM	3 filos, punta cuadrada, alcance extralargo, métrico	299	326
5B	3 filos, punta esférica, longitud estándar, fraccional	298	321
5MB	3 filos, punta esférica, longitud estándar, métrico	300	326
5XLMB	3 filos, punta esférica, alcance extralargo, métrico	300	326
23	3 filos, cónico, punta cuadrada, longitud estándar, fraccional	301	321
24	3 filos, cónico, radio angulado, longitud estándar, fraccional	302	321
1	4 filos, punta cuadrada, longitud estándar, fraccional	303	320, 321
1L	4 filos, punta cuadrada, largo alcance, fraccional	303	320, 321
1EL	4 filos, punta cuadrada, longitud extendida, fraccional	303	320, 321
1CR	4 filos, radio angulado, longitud estándar, fraccional	303	320, 321
1M	4 filos, punta cuadrada, longitud estándar, métrico	309	326
1XLM	4 filos, punta cuadrada, alcance extralargo, métrico	309	326
1MCR	4 filos, radio angulado, longitud estándar, métrico	309	326
1B	4 filos, punta esférica, longitud estándar, fraccional	307	320
1LB	4 filos, punta esférica, largo alcance, fraccional	307	320
1ELB	4 filos, punta esférica, longitud extendida, fraccional	307	320
1MB	4 filos, punta esférica, longitud estándar, métrico	312	326
1XLMB	4 filos, punta esférica, alcance extralargo, métrico	312	326
14	4 filos, pieza doble de punta cuadrada, fraccional	313	321
14M	4 filos, pieza doble de punta cuadrada, métrico	313	326
14B	4 filos, pieza doble de punta esférica, fraccional	314	321
14MB	4 filos, pieza doble de punta esférica, métrico	314	326
16	4 filos, pieza de punta cuadrada, fraccional	303	321
16M	4 filos, pieza de punta cuadrada, métrico	309	326
54	4 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	315	323
54M	4 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	315	328
61	Filo múltiple, paso grueso, desbastador, fraccional	316	324
61M	Filo múltiple, paso grueso, desbastador, métrico	316	330
62	Filo múltiple, paso fino, desbastador, fraccional	317	325
62M	Filo múltiple, paso fino, desbastador, métrico	317	331
Juegos de fresas	2, 3 y 4 filos, punta cuadrada, series 1, 3, 5, 14, 15	318	320, 321
	2, 3 y 4 filos, punta esférica, series 1B, 3B, 5B, 14B, 15B	319	320, 321

Recomendaciones de Velocidad y Avance mostrados al final de esta sección.

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE	S&F PAGE
3	2 dents non rayonné longueur standard (fractionnel)	280	320, 321
3L	2 dents non rayonné longue portée (fractionnel)	280	320, 321
3EL	2 dents non rayonné extra-long (fractionnel)	280	320, 321
3CR	2 dents rayonné longueur standard (fractionnel)	280	320, 321
3M	2 dents non rayonné longueur standard (métrique)	285	326
3XLM	2 dents non rayonné portée extra-longue (métrique)	285	326
3B	2 dents à bout hémisphérique longueur standard (fractionnel)	283	320
3LB	2 dents à bout hémisphérique longue portée (fractionnel)	283	320
3ELB	2 dents à bout hémisphérique extra-long (fractionnel)	283	320
3MB	2 dents à bout hémisphérique longueur standard (métrique)	286	326
3XLMB	2 dents à bout hémisphérique portée extra-longue (métrique)	286	326
15	2 dents à double bouts plats court (fractionnel)	287	321
15M	2 dents à double bouts plats court (métrique)	289	326
15B	2 dents à double bouts hémisphériques court (fractionnel)	288	322
15MB	2 dents à double bouts hémisphériques court (métrique)	290	326
17	2 dents non rayonné court (fractionnel)	291	321
17M	2 dents non rayonné court (métrique)	291	326
52	2 dents cisaillement élevé non rayonné longueur standard (fractionnel)	292	323
52M	2 dents cisaillement élevé non rayonné longueur standard (métrique)	292	328
59	2 dents non rayonné longue portée (fractionnel)	293	321
59M	2 dents non rayonné longue portée (métrique)	295	326
59B	2 dents à bout hémisphérique longue portée (fractionnel)	294	321
59MB	2 dents à bout hémisphérique longue portée (métrique)	296	327
5	3 dents non rayonné longueur standard (fractionnel)	297	321
5M	3 dents non rayonné longueur standard (métrique)	299	326
5XLM	3 dents non rayonné portée extra-longue (métrique)	299	326
5B	3 dents à bout hémisphérique longueur standard (fractionnel)	298	321
5MB	3 dents à bout hémisphérique longueur standard (métrique)	300	326
5XLMB	3 dents à bout hémisphérique portée extra-longue (métrique)	300	326
23	3 dents conique non rayonné longueur standard (fractionnel)	301	321
24	3 dents conique rayonné longueur standard (fractionnel)	302	321
1	4 dents non rayonné longueur standard (fractionnel)	303	320, 321
1L	4 dents non rayonné longue portée (fractionnel)	303	320, 321
1EL	4 dents non rayonné extra-long (fractionnel)	303	320, 321
1CR	4 dents rayonné longueur standard (fractionnel)	303	320, 321
1M	4 dents non rayonné longueur standard (métrique)	309	326
1XLM	4 dents non rayonné portée extra-longue (métrique)	309	326
1MCR	4 dents rayonné longueur standard (métrique)	309	326
1B	4 dents à bout hémisphérique longueur standard (fractionnel)	307	320
1LB	4 dents à bout hémisphérique longue portée (fractionnel)	307	320

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE	S&F PAGE
1ELB	4 dents à bout hémisphérique extra-long (fractionnel)	307	320
1MB	4 dents à bout hémisphérique longueur standard (métrique)	312	326
1XLMB	4 dents à bout hémisphérique portée extra-longue (métrique)	312	326
14	4 dents à double bouts plats court (fractionnel)	313	321
14M	4 dents à double bouts plats court (métrique)	313	326
14B	4 dents à double bouts hémisphériques court (fractionnel)	314	321
14MB	4 dents à double bouts hémisphériques court (métrique)	314	326
16	4 dents non rayonné court (fractionnel)	303	321
16M	4 dents non rayonné court (métrique)	309	326
54	4 dents cisaillement élevé non rayonné longueur standard (fractionnel)	315	323
54M	4 dents cisaillement élevé non rayonné longueur standard (métrique)	315	328
61	Multi-dents à pas gros d'ébauche (fractionnel)	316	324
61M	Multi-dents à pas gros d'ébauche (métrique)	316	330
62	Multi-dents à pas fin d'ébauche (fractionnel)	317	325
62M	Multi-dents à pas fin d'ébauche (métrique)	317	331
Jeux de fraises	2, 3, & 4 Série goujure non rayonné 1,3,5,14,15	318	320, 321
	2, 3, & 4 Série goujure à bout hémisphérique 15B, 15MB, 15B, 15MB, 15B, 15MB	319	320, 321


Les avances et les vitesses recommandées se trouvent à la fin du chapitre.

SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE	S&F SEITE
3	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	280	320, 321
3L	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	280	320, 321
3EL	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, extra lang	280	320, 321
3CR	Zölliger Schaftfräser mit 2 Schneiden mit Eckenradien, Standardlänge	280	320, 321
3M	Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	285	326
3XLM	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	285	326
3B	Zölliger Radiuschaftfräser mit 2 Schneiden, Standardlänge	283	320
3LB	Zölliger Langloch-Radiuschaftfräser mit 2 Schneiden	283	320
3ELB	Zölliger Schaftfräser mit 2 Schneiden, Extra lang	283	320
3MB	Schaftfräser mit 2 Schneiden, Standardlänge	286	326
3XLMB	Superlangloch-Schaftfräser mit 2 Schneiden	286	326
15	Zölliger Schaftfräser mit 2 Schneiden, kurze Ausführung	287	321
15M	Schaftfräser mit 2 Schneiden, kurze Ausführung	289	326
15B	Zölliger Doppelend-Radiuschaftfräser mit 2 Schneiden, kurze Ausführung	288	322
15MB	Doppelend-Radiuschaftfräser mit 2 Schneiden, kurze Ausführung	290	326
17	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	291	321
17M	Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	291	326
52	Zölliger Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	292	323
52M	Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	292	328
59	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	293	321
59M	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	295	326
59B	Zölliger Langloch-Radiuschaftfräser mit 2 Schneiden	294	321
59MB	Langloch-Radiuschaftfräser mit 2 Schneiden	296	327
5	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	297	321
5M	Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	299	326
5XLM	Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	299	326
5B	Zölliger Schaftfräser mit 3 Schneiden, Standardlänge	298	321
5MB	Schaftfräser mit 3 Schneiden, Standardlänge	300	326
5XLMB	Langloch-Schaftfräser mit 3 Schneiden	300	326
23	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	301	321
24	Zölliger Schaftfräser mit 3 Schneiden mit Eckenradien, Standardlänge	302	321
1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	303	320, 321
1L	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	303	320, 321
1EL	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, extra lang	303	320, 321
1CR	Zölliger Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	303	320, 321
1M	Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	309	326
1XLM	Superlangloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	309	326
1MCR	Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	309	326
1B	Zölliger Schaftfräser mit 4 Schneiden, Standardlänge	307	320


SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE	S&F SEITE
1LB	Zölliger Langloch-Radiusschaftfräser mit 4 Schneiden	307	320
1ELB	Zölliger Schaftfräser mit 4 Schneiden, Extra lang	307	320
1MB	Schaftfräser mit 4 Schneiden, Standardlänge	312	326
1XLMB	Langloch-Radiusschaftfräser mit 4 Schneiden	312	326
14	Zölliger Schaftfräser mit 4 Schneiden, kurze Ausführung	313	321
14M	Schaftfräser mit 4 Schneiden, kurze Ausführung	313	326
14B	Zölliger Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	314	321
14MB	Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	314	326
16	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	303	321
16M	Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	309	326
54	Zölliger Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	315	323
54M	Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	315	328
61	Zölliger mehrschneidiger fein verzahnter Schruppfräser	316	324
61M	Mehrschneidiger fein verzahnter Schruppfräser	316	330
62	Zölliger mehrschneidiger fein verzahnter Schruppfräser	317	325
62M	Mehrschneidiger fein verzahnter Schruppfräser	317	331
Richtwerte zum Fräsen	Schaftfräser mit 2, 3 und 4 Schneiden ohne Eckenradien, Serien 1, 3, 5, 14, 15	318	320, 321
	Radiusschaftfräser mit 2, 3 und 4 Schneiden, Serien 1B, 3B, 5B, 14B, 15B	319	320, 321

Schnittwertempfehlungen finden Sie am Ende dieses Abschnitts

2 Flute Square End • 2 Flute Corner Radius



3•3L•
3EL•3CR
FRACTIONAL SERIES

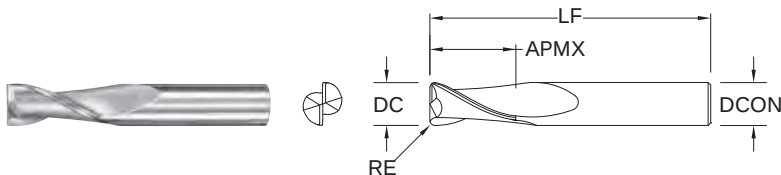

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000/-0.002

3CR DC = -0.001/-0.002

DCON = h_6

RE = +0.000/-0.002




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch				WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	—			30301	39301	39501	30397	3
1/32	5/64	1-1/2	1/8	—			30303	39303	39503	30398	3
3/64	7/64	1-1/2	1/8	—			30305	39305	39505	30399	3
*1/16	3/16	1-1/2	1/8	—			30307	39307	39507	30400	3
5/64	3/16	1-1/2	1/8	—			30309	39309	39509	30435	3
3/32	9/32	1-1/2	1/8	—			30311	39311	39511	30436	3
7/64	3/8	1-1/2	1/8	—			30313	39313	39513	30437	3
1/8	3/8	1-1/2	1/8	—			30377	39377	39577	30469	3
*1/8	1/2	1-1/2	1/8	—			30315	39315	39515	30438	3
1/8	1/2	1-1/2	1/8	.015			38201	38202	38315	38357	3CR
1/8	1/2	1-1/2	1/8	.020			38203	38204	38316	38358	3CR
1/8	3/4	2-1/4	1/8	—			33341	31800	31810	31850	3L
1/8	1	3	1/8	—			33343	31938	31948	31958	3EL
9/64	1/2	2	3/16	—			30317	39317	39517	30439	3
5/32	1/2	2	3/16	—			30319	39319	39519	30440	3
11/64	5/8	2	3/16	—			30321	39321	39521	30441	3
*3/16	5/8	2	3/16	—			30323	39323	39523	30442	3
3/16	5/8	2	3/16	.015			38209	38210	38317	38359	3CR
3/16	5/8	2	3/16	.020			38211	38212	38318	38360	3CR
3/16	5/8	2	3/16	.030			38213	38214	38319	38361	3CR
3/16	3/4	2-1/2	3/16	—			33301	31820	31825	31851	3L
3/16	1-1/8	3	3/16	—			33321	31939	31949	31959	3EL
13/64	5/8	2-1/2	1/4	—			30325	39325	39525	30443	3
7/32	5/8	2-1/2	1/4	—			30327	39327	39527	30444	3
15/64	3/4	2-1/2	1/4	—			30329	39329	39529	30445	3
*1/4	3/4	2-1/2	1/4	—			30331	39331	39531	30446	3
1/4	3/4	2-1/2	1/4	.015			38219	38220	38320	38362	3CR
1/4	3/4	2-1/2	1/4	.020			38221	38222	38321	38363	3CR
1/4	3/4	2-1/2	1/4	.030			38223	38224	38322	38364	3CR
1/4	3/4	2-1/2	1/4	.045			38225	38226	38323	38365	3CR
1/4	1-1/8	3	1/4	—			33303	31802	31812	31852	3L
1/4	1-1/2	4	1/4	—			33323	31940	31950	31960	3EL
17/64	3/4	2-1/2	5/16	—			30333	39333	39533	30447	3
9/32	3/4	2-1/2	5/16	—			30335	39335	39535	30448	3

continued on next page

2 Flute Square End • 2 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

3CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

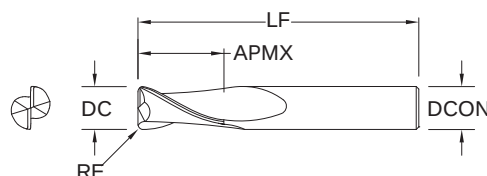

**3•3L•
3EL•3CR**
FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
19/64	13/16	2-1/2	5/16	—		30337	39337	39537	30449	3
*15/16	13/16	2-1/2	5/16	—		30339	39339	39539	30450	3
5/16	13/16	2-1/2	5/16	.015		38231	38232	38324	38366	3CR
5/16	13/16	2-1/2	5/16	.020		38233	38234	38325	38367	3CR
5/16	13/16	2-1/2	5/16	.030		38235	38236	38326	38368	3CR
5/16	13/16	2-1/2	5/16	.045		38237	38238	38327	38369	3CR
5/16	1-1/8	3	5/16	—		33305	31821	31826	31853	3L
5/16	1-5/8	4	5/16	—		33325	31941	31951	31961	3EL
21/64	1	2-1/2	3/8	—		30341	39341	39541	30451	3
11/32	1	2-1/2	3/8	—		30343	39343	39543	30452	3
23/64	1	2-1/2	3/8	—		30345	39345	39545	30453	3
*13/8	1	2-1/2	3/8	—		30347	39347	39547	30454	3
3/8	1	2-1/2	3/8	.015	•	38245	38246	38328	38370	3CR
3/8	1	2-1/2	3/8	.020	•	38247	38248	38329	38371	3CR
3/8	1	2-1/2	3/8	.030	•	38249	38250	38330	38372	3CR
3/8	1	2-1/2	3/8	.045	•	38251	38252	38331	38373	3CR
3/8	1-1/8	3	3/8	—		33307	31804	31814	31854	3L
3/8	1-3/4	4	3/8	—		33327	31942	31952	31962	3EL
25/64	1	2-3/4	7/16	—		30349	39349	39549	30455	3
13/32	1	2-3/4	7/16	—		30351	39351	39551	30456	3
27/64	1	2-3/4	7/16	—		30353	39353	39553	30457	3
7/16	1	2-3/4	7/16	—		30355	39355	39555	30458	3
7/16	2	4-1/2	7/16	—		33309	31822	31827	31855	3L
7/16	3	6	7/16	—		33329	31943	31953	31963	3EL
29/64	1	3	1/2	—		30357	39357	39557	30459	3
15/32	1	3	1/2	—		30359	39359	39559	30460	3
31/64	1	3	1/2	—		30361	39361	39561	30461	3
*11/2	1	3	1/2	—		30363	39363	39563	30462	3
1/2	1	3	1/2	.015	•	38259	38260	38332	38374	3CR
1/2	1	3	1/2	.020	•	38261	38262	38333	38375	3CR
1/2	1	3	1/2	.030	•	38263	38264	38334	38376	3CR
1/2	1	3	1/2	.045	•	38265	38266	38335	38377	3CR
1/2	1	3	1/2	.060	•	38267	38268	38336	38378	3CR
1/2	2	4-1/2	1/2	—		33311	31806	31816	31856	3L


continued on next page

CONTINUED


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

2 Flute Square End • 2 Flute Corner Radius



**3•3L•
3EL•3CR**
FRACTIONAL SERIES

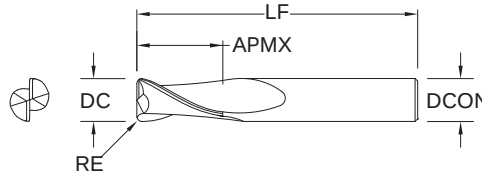

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER


DC = +0.000/-0.002

3CR DC = -0.001/-0.002

DCON = h_6

RE = +0.000/-0.002

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		CORNER RADIUS RE	WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/2	3	6	1/2	—		33331	31944	31954	31964	3EL
9/16	1-1/8	3-1/2	9/16	—		30365	39365	39565	30463	3
5/8	1-1/4	3-1/2	5/8	—		30367	39367	39567	30464	3
5/8	1-1/4	3-1/2	5/8	.015	•	38273	38274	38337	38379	3CR
5/8	1-1/4	3-1/2	5/8	.020	•	38275	38276	38338	38380	3CR
5/8	1-1/4	3-1/2	5/8	.030	•	38277	38278	38339	38381	3CR
5/8	1-1/4	3-1/2	5/8	.045	•	38279	38280	38340	38382	3CR
5/8	1-1/4	3-1/2	5/8	.060	•	38281	38282	38341	38383	3CR
5/8	1-1/4	3-1/2	5/8	.090	•	38283	38284	38342	38384	3CR
5/8	2-1/4	5	5/8	—		33313	31823	31817	31857	3L
5/8	3	6	5/8	—		33333	31945	31955	31965	3EL
11/16	1-3/8	4	3/4	—		30369	39369	39569	30465	3
3/4	1-1/2	4	3/4	—		30371	39371	39571	30466	3
3/4	1-1/2	4	3/4	.015	•	38287	38288	38343	38385	3CR
3/4	1-1/2	4	3/4	.020	•	38289	38290	38344	38386	3CR
3/4	1-1/2	4	3/4	.030	•	38291	38292	38345	38387	3CR
3/4	1-1/2	4	3/4	.045	•	38293	38294	38346	38388	3CR
3/4	1-1/2	4	3/4	.060	•	38295	38296	38347	38389	3CR
3/4	1-1/2	4	3/4	.090	•	38297	38298	38348	38390	3CR
3/4	1-1/2	4	3/4	.125	•	38299	38300	38349	38391	3CR
3/4	2-1/4	5	3/4	—		33315	31808	31818	31858	3L
3/4	3	6	3/4	—		33335	31946	31956	31966	3EL
7/8	1-1/2	4	7/8	—		30373	39373	39573	30467	3
1	1-1/2	4	1	—		30375	39375	39575	30468	3
1	1-1/2	4	1	.015	•	38301	38302	38350	38392	3CR
1	1-1/2	4	1	.020	•	38303	38304	38351	38393	3CR
1	1-1/2	4	1	.030	•	38305	38306	38352	38394	3CR
1	1-1/2	4	1	.045	•	38307	38308	38353	38395	3CR
1	1-1/2	4	1	.060	•	38309	38310	38354	38396	3CR
1	1-1/2	4	1	.090	•	38311	38312	38355	38397	3CR
1	1-1/2	4	1	.125	•	38313	38314	38356	38398	3CR
1	2-1/4	5	1	—		33317	31824	31819	31859	3L
1	3	6	1	—		33337	31947	31957	31967	3EL
*Series 3 Set						30389	39389	39589	30470	3

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

FRACTIONAL 2 Flute Ball End



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6


RE = +0.000 / -0.001

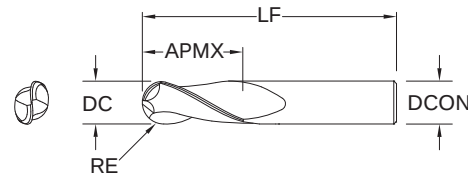

**3B•3LB•
3ELB**
FRACTIONAL SERIES



inch				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	30302	39302	39502	30471	3B
1/32	5/64	1-1/2	1/8	30304	39304	39504	30472	3B
3/64	7/64	1-1/2	1/8	30306	39306	39506	30473	3B
1/16	3/16	1-1/2	1/8	30308	39308	39508	30474	3B
5/64	3/16	1-1/2	1/8	30310	39310	39510	30475	3B
3/32	9/32	1-1/2	1/8	30312	39312	39512	30476	3B
7/64	3/8	1-1/2	1/8	30314	39314	39514	30477	3B
1/8	3/8	1-1/2	1/8	30378	39378	39578	30599	3B
*1/8	1/2	1-1/2	1/8	30316	39316	39516	30478	3B
1/8	3/4	2-1/4	1/8	33342	31830	31840	31890	3LB
1/8	1	3	1/8	33344	31968	31978	31988	3ELB
9/64	1/2	2	3/16	30318	39318	39518	30479	3B
5/32	1/2	2	3/16	30320	39320	39520	30480	3B
11/64	5/8	2	3/16	30322	39322	39522	30481	3B
*3/16	5/8	2	3/16	30324	39324	39524	30482	3B
3/16	3/4	2-1/2	3/16	33302	31831	31841	31891	3LB
3/16	1-1/8	3	3/16	33322	31969	31979	31989	3ELB
13/64	5/8	2-1/2	1/4	30326	39326	39526	30483	3B
7/32	5/8	2-1/2	1/4	30328	39328	39528	30484	3B
15/64	3/4	2-1/2	1/4	30330	39330	39530	30485	3B
*1/4	3/4	2-1/2	1/4	30332	39332	39532	30486	3B
1/4	1-1/8	3	1/4	33304	31832	31842	31892	3LB
1/4	1-1/2	4	1/4	33324	31970	31980	31990	3ELB
17/64	3/4	2-1/2	5/16	30334	39334	39534	30487	3B
9/32	3/4	2-1/2	5/16	30336	39336	39536	30488	3B
19/64	13/16	2-1/2	5/16	30338	39338	39538	30489	3B
*5/16	13/16	2-1/2	5/16	30340	39340	39540	30490	3B
5/16	1-1/8	3	5/16	33306	31833	31843	31893	3LB
5/16	1-5/8	4	5/16	33326	31971	31981	31991	3ELB
21/64	1	2-1/2	3/8	30342	39342	39542	30491	3B
11/32	1	2-1/2	3/8	30344	39344	39544	30492	3B
23/64	1	2-1/2	3/8	30346	39346	39546	30493	3B

continued on next page



For patent
information visit
www.ksptpatents.com

2 Flute Ball End

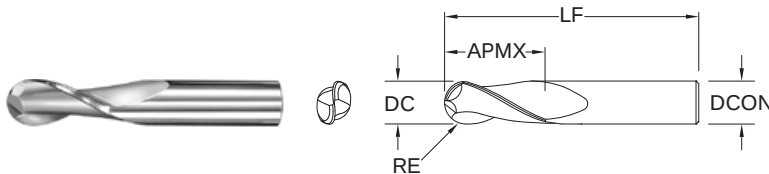
**3B•3LB•
3ELB**
FRACTIONAL SERIES


TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

RE = +0.000 / -0.001


- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
*3/8	1	2-1/2	3/8	30348	39348	39548	30494	3B
3/8	1-1/8	3	3/8	33308	31834	31844	31894	3LB
3/8	1-3/4	4	3/8	33328	31972	31982	31992	3ELB
25/64	1	2-3/4	7/16	30350	39350	39550	30495	3B
13/32	1	2-3/4	7/16	30352	39352	39552	30496	3B
27/64	1	2-3/4	7/16	30354	39354	39554	30497	3B
7/16	1	2-3/4	7/16	30356	39356	39556	30498	3B
7/16	2	4-1/2	7/16	33310	31835	31845	31895	3LB
7/16	3	6	7/16	33330	31973	31983	31993	3ELB
29/64	1	3	1/2	30358	39358	39558	30499	3B
15/32	1	3	1/2	30360	39360	39560	30500	3B
31/64	1	3	1/2	30362	39362	39562	30591	3B
*1/2	1	3	1/2	30364	39364	39564	30592	3B
1/2	2	4-1/2	1/2	33312	31836	31846	31896	3LB
1/2	3	6	1/2	33332	31974	31984	31994	3ELB
9/16	1-1/8	3-1/2	9/16	30366	39366	39566	30593	3B
5/8	1-1/4	3-1/2	5/8	30368	39368	39568	30594	3B
5/8	2-1/4	5	5/8	33314	31837	31847	31897	3LB
5/8	3	6	5/8	33334	31975	31985	31995	3ELB
11/16	1-3/8	4	3/4	30370	39370	39570	30595	3B
3/4	1-1/2	4	3/4	30372	39372	39572	30596	3B
3/4	2-1/4	5	3/4	33316	31838	31848	31898	3LB
3/4	3	6	3/4	33336	31976	31986	31996	3ELB
7/8	1-1/2	4	7/8	30374	39374	39574	30597	3B
1	1-1/2	4	1	30376	39376	39576	30598	3B
1	2-1/4	5	1	33318	31839	31849	31899	3LB
1	3	6	1	33338	31977	31987	31997	3ELB
*Series 3B Set				30390	39390	39590	30600	3B

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000/-0.0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000/-0.0508


DCON = h_6

RE = +0,0000/-0.0508

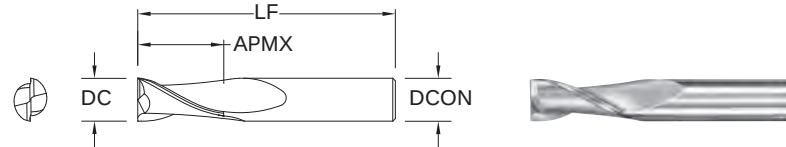

**3M•
3XLM**
METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40305	48628	48650	48671	3M
1,5	4,5	38,0	3,0	40309	48629	48651	48672	3M
2,0	6,3	38,0	3,0	40313	48630	48652	48673	3M
2,5	9,5	38,0	3,0	40317	48631	48653	48674	3M
3,0	12,0	38,0	3,0	40321	48632	48654	48675	3M
3,0	25,0	75,0	3,0	43301	49427	49440	49453	3XLM
3,5	12,0	50,0	4,0	40325	48633	48655	48676	3M
4,0	14,0	50,0	4,0	40329	48634	48656	48677	3M
4,0	25,0	75,0	4,0	43303	49428	49441	49454	3XLM
4,5	16,0	50,0	6,0	40333	48635	48657	48678	3M
5,0	16,0	50,0	6,0	40337	48636	48658	48679	3M
5,0	25,0	75,0	5,0	43307	49430	49443	49456	3XLM
6,0	19,0	50,0	6,0	40341	48637	48659	48680	3M
6,0	25,0	75,0	6,0	43305	49429	49442	49455	3XLM
7,0	19,0	63,0	8,0	40345	48638	48660	48681	3M
8,0	20,0	63,0	8,0	40349	48639	48661	48682	3M
8,0	25,0	75,0	8,0	43315	49431	49444	49457	3XLM
9,0	22,0	75,0	10,0	40353	48640	48662	48683	3M
10,0	22,0	75,0	10,0	40357	48641	48663	48684	3M
10,0	38,0	100,0	10,0	43325	49432	49445	49458	3XLM
11,0	25,0	75,0	12,0	40361	48642	48664	48685	3M
12,0	25,0	75,0	12,0	40365	48643	48665	48686	3M
12,0	50,0	100,0	12,0	43335	49433	49446	49459	3XLM
12,0	75,0	150,0	12,0	43345	49434	49447	49460	3XLM
14,0	32,0	89,0	14,0	40369	48644	48666	48687	3M
14,0	75,0	150,0	14,0	43355	49435	49448	49461	3XLM
16,0	32,0	89,0	16,0	40373	48645	48667	48688	3M
16,0	75,0	150,0	16,0	43365	49436	49449	49462	3XLM
18,0	38,0	100,0	18,0	40377	48646	48668	48689	3M
18,0	75,0	150,0	18,0	43375	49437	49450	49463	3XLM
20,0	38,0	100,0	20,0	40381	48647	48669	48690	3M
20,0	75,0	150,0	20,0	43385	49438	49451	49464	3XLM
25,0	38,0	100,0	25,0	40385	48648	48670	48691	3M
25,0	75,0	150,0	25,0	43395	49439	49452	49465	3XLM




For patent information visit
www.ksptpatents.com

2 Flute Ball End



3MB• 3XLMB

METRIC SERIES

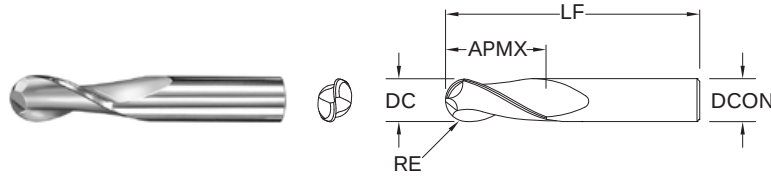

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40306	48692	48714	48735	3MB
1,5	4,5	38,0	3,0	40310	48693	48715	48736	3MB
2,0	6,3	38,0	3,0	40314	48694	48716	48737	3MB
2,5	9,5	38,0	3,0	40318	48695	48717	48738	3MB
3,0	12,0	38,0	3,0	40322	48696	48718	48739	3MB
3,0	25,0	75,0	3,0	43302	49544	49557	49570	3XLMB
3,5	12,0	50,0	4,0	40326	48697	48719	48740	3MB
4,0	14,0	50,0	4,0	40330	48698	48720	48741	3MB
4,0	25,0	75,0	4,0	43304	49545	49558	49571	3XLMB
4,5	16,0	50,0	6,0	40334	48699	48721	48742	3MB
5,0	16,0	50,0	6,0	40338	48700	48722	48743	3MB
5,0	25,0	75,0	5,0	43308	49547	49560	49573	3XLMB
6,0	19,0	50,0	6,0	40342	48701	48723	48744	3MB
6,0	25,0	75,0	6,0	43306	49546	49559	49572	3XLMB
7,0	19,0	63,0	8,0	40346	48702	48724	48745	3MB
8,0	20,0	63,0	8,0	40350	48703	48725	48746	3MB
8,0	25,0	75,0	8,0	43316	49548	49561	49574	3XLMB
9,0	22,0	75,0	10,0	40354	48704	48726	48747	3MB
10,0	22,0	75,0	10,0	40358	48705	48727	48748	3MB
10,0	38,0	100,0	10,0	43326	49549	49562	49575	3XLMB
11,0	25,0	75,0	12,0	40362	48706	48728	48749	3MB
12,0	25,0	75,0	12,0	40366	48707	48729	48750	3MB
12,0	50,0	100,0	12,0	43336	49550	49563	49576	3XLMB
12,0	75,0	150,0	12,0	43346	49551	49564	49577	3XLMB
14,0	32,0	89,0	14,0	40370	48708	48730	48751	3MB
14,0	75,0	150,0	14,0	43356	49552	49565	49578	3XLMB
16,0	32,0	89,0	16,0	40374	48709	48731	48752	3MB
16,0	75,0	150,0	16,0	43366	49553	49566	49579	3XLMB
18,0	38,0	100,0	18,0	40378	48710	48732	48753	3MB
18,0	75,0	150,0	18,0	43376	49554	49567	49580	3XLMB
20,0	38,0	100,0	20,0	40382	48711	48733	48754	3MB
20,0	75,0	150,0	20,0	43386	49555	49568	49581	3XLMB
25,0	38,0	100,0	25,0	40386	48712	48734	48755	3MB
25,0	75,0	150,0	25,0	43396	49556	49569	49582	3XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL 2 Flute Double End

TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

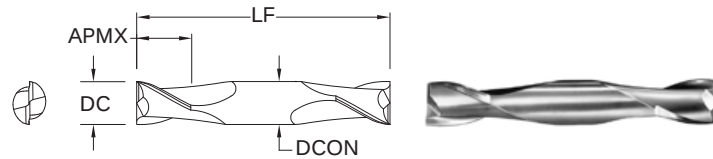


15
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31501	31541	39651	31316
3/64	3/32	1-1/2	1/8	31503	31543	39653	31317
1/16	1/8	1-1/2	1/8	31505	31545	39655	31318
5/64	1/8	1-1/2	1/8	31507	31547	39657	31319
3/32	3/16	1-1/2	1/8	31509	31549	39659	31320
7/64	3/16	1-1/2	1/8	31511	31551	39661	31321
*1/8	1/4	1-1/2	1/8	31513	31553	39663	31322
9/64	5/16	2	3/16	31515	31555	39665	31323
5/32	5/16	2	3/16	31517	31557	39667	31324
11/64	5/16	2	3/16	31519	31559	39669	31325
*3/16	3/8	2	3/16	31521	31561	39671	31326
13/64	1/2	2-1/2	1/4	31523	31563	39673	31327
7/32	1/2	2-1/2	1/4	31525	31565	39675	31328
15/64	1/2	2-1/2	1/4	31527	31567	39677	31329
*1/4	1/2	2-1/2	1/4	31529	31569	39679	31330
9/32	1/2	2-1/2	5/16	31531	31571	39681	31331
*5/16	1/2	2-1/2	5/16	31533	31573	39683	31332
*3/8	9/16	2-1/2	3/8	31535	31575	39685	31333
7/16	9/16	2-3/4	7/16	31537	31577	39687	31334
*1/2	5/8	3	1/2	31539	31579	39689	31335
*Series 15 Set				31589	31581	39691	31336

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

2 Flute Double End Ball End



15B

FRACTIONAL SERIES

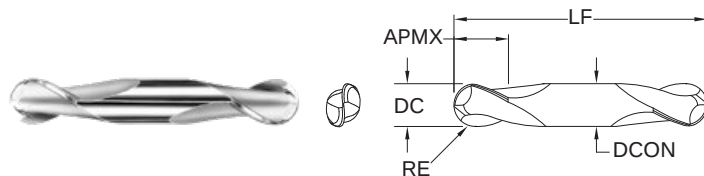

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.0005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

RE = +0.000 / -0.001

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31502	31542	39652	31337
3/64	3/32	1-1/2	1/8	31504	31544	39654	31338
1/16	1/8	1-1/2	1/8	31506	31546	39656	31339
5/64	1/8	1-1/2	1/8	31508	31548	39658	31340
3/32	3/16	1-1/2	1/8	31510	31550	39660	31341
7/64	3/16	1-1/2	1/8	31512	31552	39662	31342
*1/8	1/4	1-1/2	1/8	31514	31554	39664	31343
9/64	5/16	2	3/16	31516	31556	39666	31344
5/32	5/16	2	3/16	31518	31558	39668	31345
11/64	5/16	2	3/16	31520	31560	39670	31346
*3/16	3/8	2	3/16	31522	31562	39672	31347
13/64	1/2	2-1/2	1/4	31524	31564	39674	31348
7/32	1/2	2-1/2	1/4	31526	31566	39676	31349
15/64	1/2	2-1/2	1/4	31528	31568	39678	31350
*1/4	1/2	2-1/2	1/4	31530	31570	39680	31351
9/32	1/2	2-1/2	5/16	31532	31572	39682	31352
*5/16	1/2	2-1/2	5/16	31534	31574	39684	31353
*3/8	9/16	2-1/2	3/8	31536	31576	39686	31354
7/16	9/16	2-3/4	7/16	31538	31578	39688	31355
*1/2	5/8	3	1/2	31540	31580	39690	31356
*Series 15B Set				31590	31582	39692	31357

RE = 1/2 Cutting Diameter (DC)

METRIC

2 Flute Double End



TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000 / -0,0254

DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

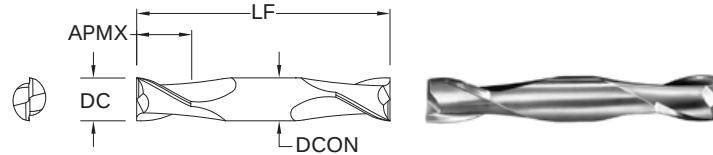


15M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41505	49010	49031	49052
1,5	3,0	38,0	3,0	41509	49011	49032	49053
2,0	4,0	38,0	3,0	41513	49012	49033	49054
2,5	5,0	38,0	3,0	41517	49013	49034	49055
3,0	6,0	38,0	3,0	41521	49014	49035	49056
3,5	7,0	50,0	4,0	41525	49015	49036	49057
4,0	8,0	50,0	4,0	41529	49016	49037	49058
4,5	9,5	63,0	4,5	41533	49017	49038	49059
5,0	10,0	63,0	5,0	41537	49018	49039	49060
6,0	12,0	63,0	6,0	41541	49019	49040	49061
7,0	12,0	63,0	8,0	41545	49020	49041	49062
8,0	12,0	63,0	8,0	41549	49021	49042	49063
9,0	14,0	75,0	9,0	41553	49022	49043	49064
10,0	14,0	75,0	10,0	41557	49023	49044	49065
11,0	14,0	75,0	12,0	41561	49024	49045	49066
12,0	16,0	75,0	12,0	41565	49025	49046	49067


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

2 Flute Double End Ball End



15MB
METRIC SERIES

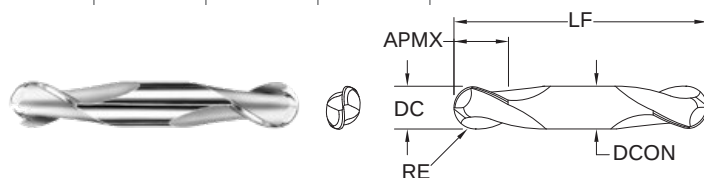

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_6


RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_6

RE = +0,0000 / -0.0254



For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41506	49073	49094	49115
1,5	3,0	38,0	3,0	41510	49074	49095	49116
2,0	4,0	38,0	3,0	41514	49075	49096	49117
2,5	5,0	38,0	3,0	41518	49076	49097	49118
3,0	6,0	38,0	3,0	41522	49077	49098	49119
3,5	7,0	50,0	4,0	41526	49078	49099	49120
4,0	8,0	50,0	4,0	41530	49079	49100	49121
4,5	9,5	63,0	4,5	41534	49080	49101	49122
5,0	10,0	63,0	5,0	41538	49081	49102	49123
6,0	12,0	63,0	6,0	41542	49082	49103	49124
7,0	12,0	63,0	8,0	41546	49083	49104	49125
8,0	12,0	63,0	8,0	41550	49084	49105	49126
9,0	14,0	75,0	9,0	41554	49085	49106	49127
10,0	14,0	75,0	10,0	41558	49086	49107	49128
11,0	14,0	75,0	12,0	41562	49087	49108	49129
12,0	16,0	75,0	12,0	41566	49088	49109	49130

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End Stub

TOLERANCES (inch)


<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

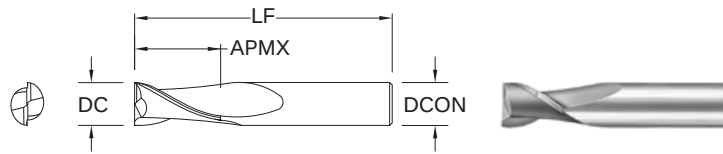DCON = h_6 
17
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/16	1/8	1-1/2	1/8	31701	31750	31303	31358
3/32	3/16	1-1/2	1/8	31703	31751	31304	31359
1/8	1/4	1-1/2	1/8	31705	31752	31305	31360
5/32	5/16	2	3/16	31707	31753	31306	31361
3/16	3/8	2	3/16	31709	31754	31307	31362
7/32	7/16	2	1/4	31711	31755	31308	31363
1/4	1/2	2	1/4	31713	31756	31309	31364
5/16	1/2	2	5/16	31715	31757	31310	31365
3/8	5/8	2	3/8	31717	31758	31311	31366
7/16	5/8	2-1/2	7/16	31719	31759	31312	31367
1/2	5/8	2-1/2	1/2	31721	31760	31313	31368
5/8	3/4	3	5/8	31723	31761	31314	31369
3/4	1	3	3/4	31725	31762	31315	31370

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)


<3 DIAMETER

DC = +0.0000/-0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000/-0.0508

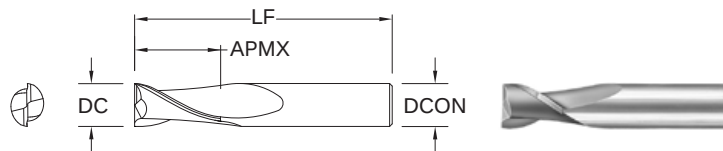
DCON = h_6 
17M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41705	49262	49283	49304
1,5	3,0	38,0	3,0	41709	49263	49284	49305
2,0	4,0	38,0	3,0	41713	49264	49285	49306
2,5	5,0	38,0	3,0	41717	49265	49286	49307
3,0	6,0	38,0	3,0	41721	49266	49287	49308
3,5	7,0	50,0	4,0	41725	49267	49288	49309
4,0	8,0	50,0	4,0	41729	49268	49289	49310
4,5	9,5	50,0	4,5	41733	49269	49290	49311
5,0	10,0	50,0	5,0	41737	49270	49291	49312
6,0	12,0	50,0	6,0	41741	49271	49292	49313
7,0	12,0	50,0	8,0	41745	49272	49293	49314
8,0	12,0	50,0	8,0	41749	49273	49294	49315
9,0	14,0	50,0	9,0	41753	49274	49295	49316
10,0	16,0	50,0	10,0	41757	49275	49296	49317
11,0	19,0	63,0	12,0	41761	49276	49297	49318
12,0	19,0	63,0	12,0	41765	49277	49298	49319

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

2 Flute High Shear



52

FRACTIONAL SERIES

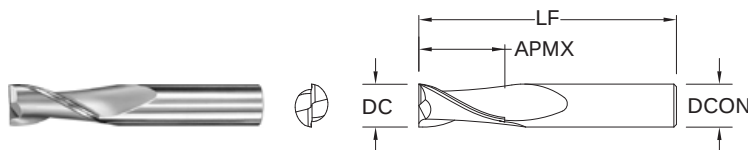

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

inch

EDP NO.


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
1/16	3/16	1-1/2	1/8	35273	35300
3/32	3/8	1-1/2	1/8	35275	35301
1/8	7/16	1-1/2	1/8	35277	35302
5/32	9/16	2	3/16	35278	35303
3/16	9/16	2	3/16	35279	35304
7/32	5/8	2-1/2	1/4	35280	35305
1/4	3/4	2-1/2	1/4	35281	35306
9/32	3/4	2-1/2	5/16	35282	35307
5/16	13/16	2-1/2	5/16	35283	35308
3/8	7/8	2-1/2	3/8	35285	35309
7/16	1	2-3/4	7/16	35287	35310
1/2	1	3	1/2	35289	35311
9/16	1-1/8	3-1/2	9/16	35291	35312
5/8	1-1/4	3-1/2	5/8	35293	35313
3/4	1-1/2	4	3/4	35295	35314
1	1-1/2	4	1	35297	35315

NON-FERROUS

For patent
information visit
www.ksptpatents.com

52M

METRIC SERIES

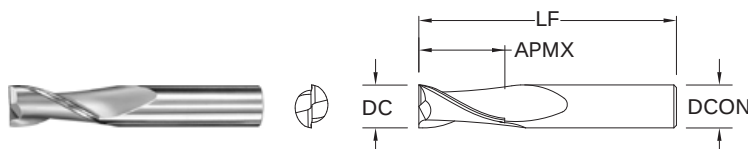

TOLERANCES (mm)

<3 DIAMETER

DC = +0.0000 / -0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000 / -0.0508

DCON = h_6

mm

EDP NO.

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
3,0	7,0	38,0	3,0	45277	49829
3,5	7,0	57,0	6,0	45279	49830
4,0	8,0	57,0	6,0	45281	49831
4,5	8,0	57,0	6,0	45283	49832
5,0	10,0	57,0	6,0	45285	49833
6,0	10,0	57,0	6,0	45287	49834
8,0	16,0	63,0	8,0	45289	49835
10,0	19,0	72,0	10,0	45291	49836
12,0	22,0	83,0	12,0	45293	49837
14,0	22,0	83,0	14,0	45295	49838
16,0	26,0	92,0	16,0	45297	49839
20,0	32,0	104,0	20,0	45299	49840

NON-FERROUS

For patent
information visit
www.ksptpatents.com

2 Flute Square End Long Reach

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000 / -0.0012

DCON = h_6

>1/4–3/8 DIAMETER


DC = +0.0000 / -0.0016

DCON = h_6

>3/8–3/4 DIAMETER

DC = +0.0000 / -0.0020

DCON = h_6

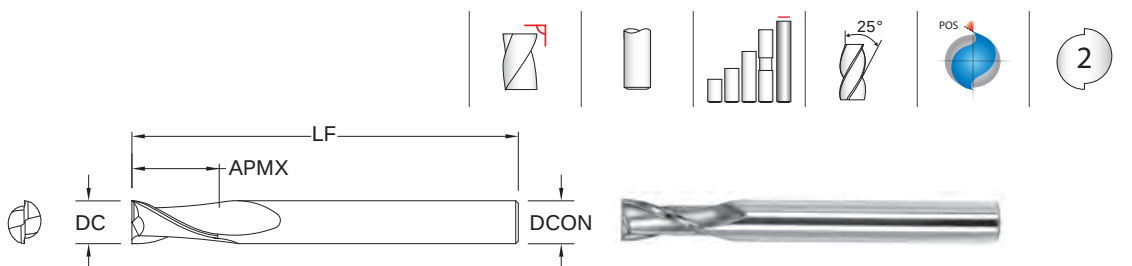

59

FRACTIONAL SERIES

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	32280	32260	32270
3/16	9/16	3	1/4	32281	32261	32271
1/4	5/8	3-1/2	1/4	32282	32262	32272
5/16	11/16	4	5/16	32283	32263	32273
3/8	7/8	4	3/8	32284	32264	32274
1/2	1	4-1/2	1/2	32285	32265	32275
5/8	1-1/8	5	5/8	32286	32266	32276
3/4	1-3/8	5-1/4	3/4	32287	32267	32277

Neck Option Available

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

2 Flute Ball End Long Reach

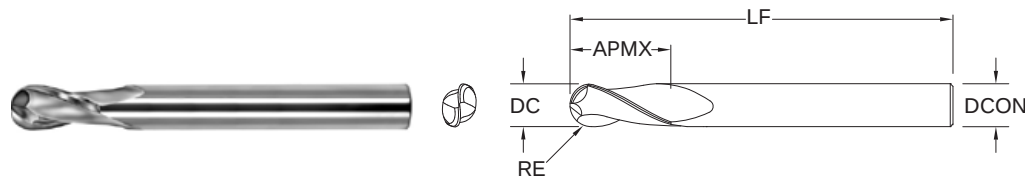

59B

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0012

DCON = h_6

RE = +0.0000/–0.0006

>1/4–3/8 DIAMETER

DC = +0.0000/–0.0016

DCON = h_6

RE = +0.0000/–0.0008

>3/8–3/4 DIAMETER

DC = +0.0000/–0.0020

DCON = h_6

RE = +0.0000/–0.0010

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/8	3/8	2-1/2	1/4	32210	32290	32200
3/16	9/16	3	1/4	32211	32291	32201
1/4	5/8	3-1/2	1/4	32212	32292	32202
5/16	11/16	4	5/16	32213	32293	32203
3/8	7/8	4	3/8	32214	32294	32204
1/2	1	4-1/2	1/2	32215	32295	32205
5/8	1-1/8	5	5/8	32216	32296	32206
3/4	1-3/8	5-1/4	3/4	32217	32297	32207

Neck Option Available

RE = 1/2 Cutting Diameter (DC)

2 Flute Square End Long Reach



TOLERANCES (mm)

3-6 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

>6-10 DIAMETER


DC = +0,0000 / -0,0406

DCON = h_6

>10-20 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

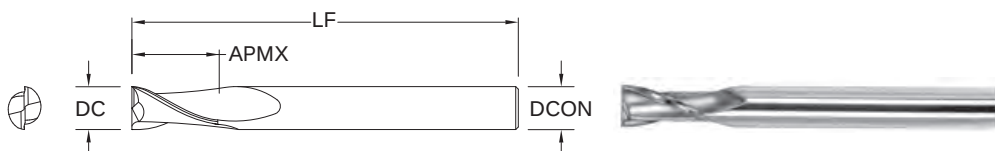

59M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
3,0	9,0	60,0	6,0	43910	43920	43930	43950
4,0	12,0	70,0	6,0	43911	43921	43931	43951
6,0	15,0	80,0	6,0	43912	43922	43932	43952
8,0	20,0	89,0	8,0	43913	43923	43933	43953
10,0	25,0	100,0	10,0	43914	43924	43934	43954
12,0	30,0	110,0	12,0	43915	43925	43935	43955
14,0	35,0	120,0	16,0	43916	43926	43936	43956
16,0	40,0	120,0	16,0	43917	43927	43937	43957
18,0	40,0	130,0	20,0	43918	43928	43938	43958
20,0	45,0	130,0	20,0	43919	43929	43939	43959

Neck Option Available

STEELS

STAINLESS STEELS



CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

2 Flute Ball End Long Reach

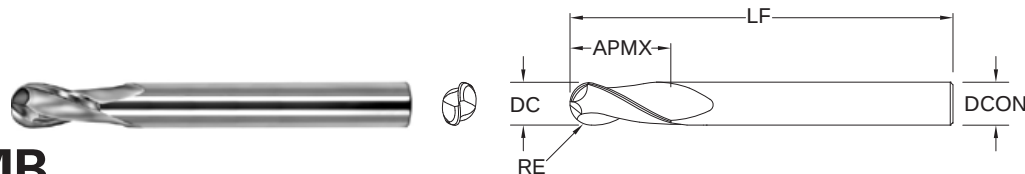

59MB
METRIC SERIES

TOLERANCES (mm)

3–6 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

>6–10 DIAMETER

DC = +0,0000 / -0,0406

DCON = h_6

RE = +0,0000 / -0,0203

>10–20 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
3,0	9,0	60,0	6,0	43900	49622	49632	49642
4,0	12,0	70,0	6,0	43901	49623	49633	49643
6,0	15,0	80,0	6,0	43902	49624	49634	49644
8,0	20,0	89,0	8,0	43903	49625	49635	49645
10,0	25,0	100,0	10,0	43904	49626	49636	49646
12,0	30,0	110,0	12,0	43905	49627	49637	49647
14,0	35,0	120,0	16,0	43906	49628	49638	49648
16,0	40,0	120,0	16,0	43907	49629	49639	49649
18,0	40,0	130,0	20,0	43908	49630	49640	49650
20,0	45,0	130,0	20,0	43909	49631	49641	49651

Neck Option Available
RE = 1/2 Cutting Diameter (DC)

FRACTIONAL 3 Flute Square End



TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

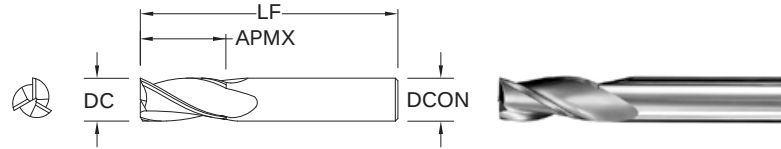

5
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/64	1/32	1-1/2	1/8	30501	39701	30771	30811
1/32	5/64	1-1/2	1/8	30503	39703	30772	30812
3/64	7/64	1-1/2	1/8	30505	39705	30773	30813
1/16	3/16	1-1/2	1/8	30507	39707	30774	30814
5/64	3/16	1-1/2	1/8	30509	39709	30775	30815
3/32	9/32	1-1/2	1/8	30511	39711	30776	30816
7/64	3/8	1-1/2	1/8	30513	39713	30777	30817
1/8	3/8	1-1/2	1/8	30577	39777	30809	30849
*1/8	1/2	1-1/2	1/8	30515	39715	30778	30818
9/64	1/2	2	3/16	30517	39717	30779	30819
5/32	1/2	2	3/16	30519	39719	30780	30820
11/64	5/8	2	3/16	30521	39721	30781	30821
*3/16	5/8	2	3/16	30523	39723	30782	30822
13/64	5/8	2-1/2	1/4	30525	39725	30783	30823
7/32	5/8	2-1/2	1/4	30527	39727	30784	30824
15/64	3/4	2-1/2	1/4	30529	39729	30785	30825
*1/4	3/4	2-1/2	1/4	30531	39731	30786	30826
17/64	3/4	2-1/2	5/16	30533	39733	30787	30827
9/32	3/4	2-1/2	5/16	30535	39735	30788	30828
19/64	13/16	2-1/2	5/16	30537	39737	30789	30829
*5/16	13/16	2-1/2	5/16	30539	39739	30790	30830
21/64	1	2-1/2	3/8	30541	39741	30791	30831
11/32	1	2-1/2	3/8	30543	39743	30792	30832
23/64	1	2-1/2	3/8	30545	39745	30793	30833
*3/8	1	2-1/2	3/8	30547	39747	30794	30834
25/64	1	2-3/4	7/16	30549	39749	30795	30835
13/32	1	2-3/4	7/16	30551	39751	30796	30836
27/64	1	2-3/4	7/16	30553	39753	30797	30837
7/16	1	2-3/4	7/16	30555	39755	30798	30838
29/64	1	3	1/2	30557	39757	30799	30839
15/32	1	3	1/2	30559	39759	30800	30840
31/64	1	3	1/2	30561	39761	30801	30841
*1/2	1	3	1/2	30563	39763	30802	30842
9/16	1-1/8	3-1/2	9/16	30565	39765	30803	30843
5/8	1-1/4	3-1/2	5/8	30567	39767	30804	30844
11/16	1-3/8	4	3/4	30569	39769	30805	30845
3/4	1-1/2	4	3/4	30571	39771	30806	30846
7/8	1-1/2	4	7/8	30573	39773	30807	30847
1	1-1/2	4	1	30575	39775	30808	30848
*Series 5 Set				30589	39789	30810	30850

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS


For patent information visit www.ksptpatents.com

3 Flute Ball End



5B

FRACTIONAL SERIES

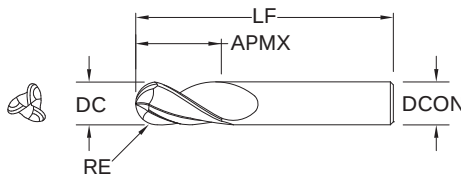

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS


HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/64	1/32	1-1/2	1/8	30502	30851	30602	31130
1/32	5/64	1-1/2	1/8	30504	30852	30604	31131
3/64	7/64	1-1/2	1/8	30506	30853	30606	31132
1/16	3/16	1-1/2	1/8	30508	30854	30608	31133
5/64	3/16	1-1/2	1/8	30510	30855	30610	31134
3/32	9/32	1-1/2	1/8	30512	30856	30612	31135
7/64	3/8	1-1/2	1/8	30514	30857	30902	31136
1/8	3/8	1-1/2	1/8	30518	30889	30943	31168
*1/8	1/2	1-1/2	1/8	30516	30858	30904	31137
9/64	1/2	2	3/16	30518	30859	30906	31138
5/32	1/2	2	3/16	30520	30860	30908	31139
11/64	5/8	2	3/16	30522	30861	30910	31140
*3/16	5/8	2	3/16	30524	30862	30912	31141
13/64	5/8	2-1/2	1/4	30526	30863	30914	31142
7/32	5/8	2-1/2	1/4	30528	30864	30916	31143
15/64	3/4	2-1/2	1/4	30530	30865	30918	31144
*1/4	3/4	2-1/2	1/4	30532	30866	30920	31145
17/64	3/4	2-1/2	5/16	30534	30867	30921	31146
9/32	3/4	2-1/2	5/16	30536	30868	30922	31147
19/64	13/16	2-1/2	5/16	30538	30869	30923	31148
*5/16	13/16	2-1/2	5/16	30540	30870	30924	31149
21/64	1	2-1/2	3/8	30542	30871	30925	31150
11/32	1	2-1/2	3/8	30544	30872	30926	31151
23/64	1	2-1/2	3/8	30546	30873	30927	31152
*3/8	1	2-1/2	3/8	30548	30874	30928	31153
25/64	1	2-3/4	7/16	30550	30875	30929	31154
13/32	1	2-3/4	7/16	30552	30876	30930	31155
27/64	1	2-3/4	7/16	30554	30877	30931	31156
7/16	1	2-3/4	7/16	30556	30878	30932	31157
29/64	1	3	1/2	30558	30879	30933	31158
15/32	1	3	1/2	30560	30880	30934	31159
31/64	1	3	1/2	30562	30881	30935	31160
*1/2	1	3	1/2	30564	30882	30936	31161
9/16	1-1/8	3-1/2	9/16	30566	30883	30937	31162
5/8	1-1/4	3-1/2	5/8	30568	30884	30938	31163
11/16	1-3/8	4	3/4	30570	30885	30939	31164
3/4	1-1/2	4	3/4	30572	30886	30940	31165
7/8	1-1/2	4	7/8	30574	30887	30941	31166
1	1-1/2	4	1	30576	30888	30942	31167
*Series 5B Set				30590	30900	30944	31169

RE = 1/2 Cutting Diameter (DC)

3 Flute Square End



TOLERANCES (mm)


<3 DIAMETER

DC = +0,0000/-0,0254

DCON = h_6

≥3 DIAMETER

DC = +0,0000/-0,0508

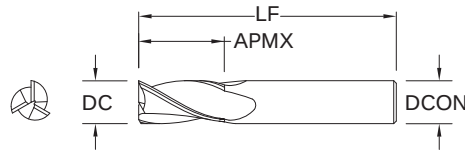DCON = h_6 


**5M•
5XLM**
METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40505	48756	48778	48799	5M
1,5	4,5	38,0	3,0	40509	48757	48779	48800	5M
2,0	6,3	38,0	3,0	40513	48758	48780	48801	5M
2,5	9,5	38,0	3,0	40517	48759	48781	48802	5M
3,0	12,0	38,0	3,0	40521	48760	48782	48803	5M
3,0	25,0	75,0	3,0	43501	49466	49479	49492	5XLM
3,5	12,0	50,0	4,0	40525	48761	48783	48804	5M
4,0	14,0	50,0	4,0	40529	48762	48784	48805	5M
4,0	25,0	75,0	4,0	43503	49467	49480	49493	5XLM
4,5	16,0	50,0	6,0	40533	48763	48785	48806	5M
5,0	16,0	50,0	6,0	40537	48764	48786	48807	5M
5,0	25,0	75,0	5,0	43507	49469	49482	49495	5XLM
6,0	19,0	50,0	6,0	40541	48765	48787	48808	5M
6,0	25,0	75,0	6,0	43505	49468	49481	49494	5XLM
7,0	19,0	63,0	8,0	40545	48766	48788	48809	5M
8,0	20,0	63,0	8,0	40549	48767	48789	48810	5M
8,0	25,0	75,0	8,0	43515	49470	49483	49496	5XLM
9,0	22,0	75,0	10,0	40553	48768	48790	48811	5M
10,0	22,0	75,0	10,0	40557	48769	48791	48812	5M
10,0	38,0	100,0	10,0	43525	49471	49484	49497	5XLM
11,0	25,0	75,0	12,0	40561	48770	48792	48813	5M
12,0	25,0	75,0	12,0	40565	48771	48793	48814	5M
12,0	50,0	100,0	12,0	43535	49472	49485	49498	5XLM
12,0	75,0	150,0	12,0	43545	49473	49486	49499	5XLM
14,0	32,0	89,0	14,0	40569	48772	48794	48815	5M
14,0	75,0	150,0	14,0	43555	49474	49487	49500	5XLM
16,0	32,0	89,0	16,0	40573	48773	48795	48816	5M
16,0	75,0	150,0	16,0	43565	49475	49488	49501	5XLM
18,0	38,0	100,0	18,0	40577	48774	48796	48817	5M
18,0	75,0	150,0	18,0	43575	49476	49489	49502	5XLM
20,0	38,0	100,0	20,0	40581	48775	48797	48818	5M
20,0	75,0	150,0	20,0	43585	49477	49490	49503	5XLM
25,0	38,0	100,0	25,0	40585	48776	48798	48819	5M
25,0	75,0	150,0	25,0	43595	49478	49491	49504	5XLM

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

3 Flute Ball End



5MB• 5XLMB

METRIC SERIES

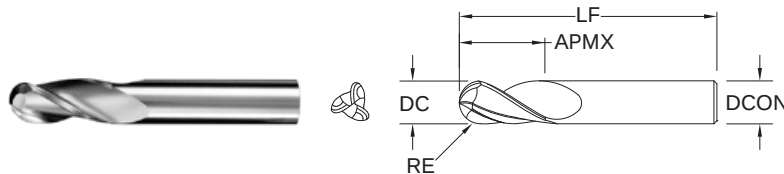

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_8

RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_8

RE = +0,0000 / -0.0254


STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40506	48820	48842	48863	5MB
1,5	4,5	38,0	3,0	40510	48821	48843	48864	5MB
2,0	6,3	38,0	3,0	40514	48822	48844	48865	5MB
2,5	9,5	38,0	3,0	40518	48823	48845	48866	5MB
3,0	12,0	38,0	3,0	40522	48824	48846	48867	5MB
3,0	25,0	75,0	3,0	43502	49583	49596	49609	5XLMB
3,5	12,0	50,0	4,0	40526	48825	48847	48868	5MB
4,0	14,0	50,0	4,0	40530	48826	48848	48869	5MB
4,0	25,0	75,0	4,0	43504	49584	49597	49610	5XLMB
4,5	16,0	50,0	6,0	40534	48827	48849	48870	5MB
5,0	16,0	50,0	6,0	40538	48828	48850	48871	5MB
5,0	25,0	75,0	5,0	43508	49586	49599	49612	5XLMB
6,0	19,0	50,0	6,0	40542	48829	48851	48872	5MB
6,0	25,0	75,0	6,0	43506	49585	49598	49611	5XLMB
7,0	19,0	63,0	8,0	40546	48830	48852	48873	5MB
8,0	20,0	63,0	8,0	40550	48831	48853	48874	5MB
8,0	25,0	75,0	8,0	43516	49587	49600	49613	5XLMB
9,0	22,0	75,0	10,0	40554	48832	48854	48875	5MB
10,0	22,0	75,0	10,0	40558	48833	48855	48876	5MB
10,0	38,0	100,0	10,0	43526	49588	49601	49614	5XLMB
11,0	25,0	75,0	12,0	40562	48834	48856	48877	5MB
12,0	25,0	75,0	12,0	40566	48835	48857	48878	5MB
12,0	50,0	100,0	12,0	43536	49589	49602	49615	5XLMB
12,0	75,0	150,0	12,0	43546	49590	49603	49616	5XLMB
14,0	32,0	89,0	14,0	40570	48836	48858	48879	5MB
14,0	75,0	150,0	14,0	43556	49591	49604	49617	5XLMB
16,0	32,0	89,0	16,0	40574	48837	48859	48880	5MB
16,0	75,0	150,0	16,0	43566	49592	49605	49618	5XLMB
18,0	38,0	100,0	18,0	40578	48838	48860	48881	5MB
18,0	75,0	150,0	18,0	43576	49593	49606	49619	5XLMB
20,0	38,0	100,0	20,0	40582	48839	48861	48882	5MB
20,0	75,0	150,0	20,0	43586	49594	49607	49620	5XLMB
25,0	38,0	100,0	25,0	40586	48840	48862	48883	5MB
25,0	75,0	150,0	25,0	43596	49595	49608	49621	5XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL Tapered Square End




TOLERANCES (inch)

DC = +0.001 / -0.002

DCON = h_6

α = +10' / -10'

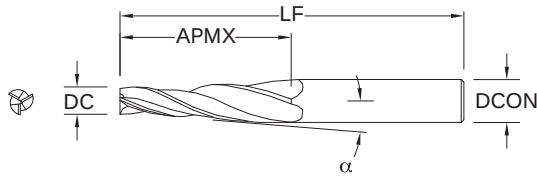

23


FRACTIONAL SERIES

inch					EDP NO.			
SHANK DIAMETER DCON	CENTER LINE ANGLE α	SMALL DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/4	1°	1/8	1-1/2	3	32301	32370	32302	32345
1/4	1°30'	1/8	1-1/2	3	32303	32371	32304	32346
1/4	2°	1/8	1-1/4	3	32305	32372	32306	32347
1/4	3°	1/8	1	3	32307	32373	32308	32348
1/4	5°	1/8	3/4	3	32309	32374	32310	32349
1/4	7°	1/8	1/2	3	32311	32375	32312	32350
1/4	10°	3/32	1/2	3	32313	32376	32314	32351
3/8	1°	3/16	1-3/4	3-1/2	32315	32377	32316	32352
3/8	1°30'	3/16	1-3/4	3-1/2	32317	32378	32318	32353
3/8	2°	3/16	1-3/4	3-1/2	32319	32379	32320	32354
3/8	3°	5/32	1-3/4	3-1/2	32321	32380	32322	32355
3/8	5°	1/8	1-1/2	3-1/2	32323	32381	32324	32356
3/8	7°	1/8	1	3-1/2	32325	32382	32326	32357
3/8	10°	1/8	3/4	3-1/2	32327	32383	32328	32358
1/2	1°	1/4	2	4	32329	32384	32330	32359
1/2	2°	1/4	2	4	32333	32385	32334	32360
1/2	3°	1/4	2	4	32335	32386	32336	32361
1/2	5°	1/4	1-1/4	4	32337	32387	32338	32362
1/2	7°	3/16	1-1/4	4	32339	32388	32340	32363
1/2	10°	1/8	1	4	32341	32389	32342	32364

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent
information visit
www.ksptpatents.com

Tapered Ball End



24

FRACTIONAL SERIES

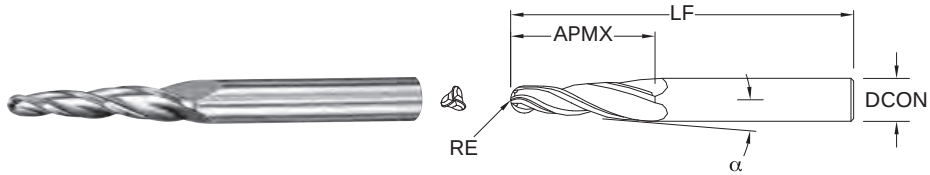

TOLERANCES (inch)


DCON = h_6
 RE = $+0.0000/-0.0010$
 α = $+10' / -10'$

- STEELS
- STAINLESS STEELS
- CAST IRON
- NON-FERROUS
- HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

SHANK DIAMETER DCON	CENTER LINE ANGLE α	inch			EDP NO.			
		RADIUS RE	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/4	1°	.062	1-1/2	3	32402	32403	32445	32470
1/4	1°30'	.062	1-1/2	3	32404	32405	32446	32471
1/4	2°	.062	1-1/4	3	32406	32407	32447	32472
1/4	3°	.062	1	3	32408	32409	32448	32473
1/4	5°	.062	3/4	3	32410	32411	32449	32474
1/4	7°	.062	1/2	3	32412	32413	32450	32475
1/4	10°	.047	1/2	3	32414	32415	32451	32476
3/8	1°	.093	1-3/4	3-1/2	32416	32417	32452	32477
3/8	1°30'	.093	1-3/4	3-1/2	32418	32419	32453	32478
3/8	2°	.093	1-3/4	3-1/2	32420	32421	32454	32479
3/8	3°	.078	1-3/4	3-1/2	32422	32423	32455	32480
3/8	5°	.062	1-1/2	3-1/2	32424	32425	32456	32481
3/8	7°	.062	1	3-1/2	32426	32427	32457	32482
3/8	10°	.062	3/4	3-1/2	32428	32429	32458	32483
1/2	1°	.125	2	4	32430	32431	32459	32484
1/2	2°	.125	2	4	32434	32435	32460	32485
1/2	3°	.125	2	4	32436	32437	32461	32486
1/2	5°	.125	1-1/4	4	32438	32439	32462	32487
1/2	7°	.093	1-1/4	4	32440	32441	32463	32488
1/2	10°	.062	1	4	32442	32443	32464	32489

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000/-0.002

1CR DC = -0.001/-0.002

DCON = h_6

RE = +0.000/-0.002

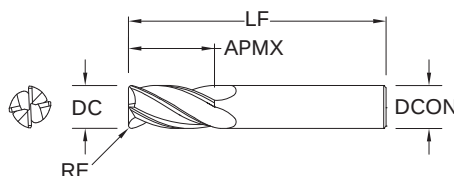

1 • 1L • 1EL •
1CR • 16
 FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8	—		30101	39101	39001	30191	1
1/32	5/64	1-1/2	1/8	—		30103	39103	39003	30192	1
3/64	7/64	1-1/2	1/8	—		30105	39105	39005	30193	1
1/16	1/8	1-1/2	1/8	—		31601	31650	31238	31251	16
† 1/16	3/16	1-1/2	1/8	—		30107	39107	39007	30194	1
5/64	3/16	1-1/2	1/8	—		30109	39109	39009	30195	1
3/32	3/16	1-1/2	1/8	—		31603	31651	31239	31252	16
3/32	9/32	1-1/2	1/8	—		30111	39111	39011	30196	1
7/64	3/8	1-1/2	1/8	—		30113	39113	39013	30197	1
1/8	1/4	1-1/2	1/8	—		31605	31652	31240	31253	16
1/8	3/8	1-1/2	1/8	—		30177	39177	39077	30029	1
*† 1/8	1/2	1-1/2	1/8	—		30115	39115	39015	30198	1
1/8	1/2	1-1/2	1/8	.015		38001	38002	38115	38157	1CR
1/8	1/2	1-1/2	1/8	.020		38003	38004	38116	38158	1CR
1/8	3/4	2-1/4	1/8	—		33141	31727	31737	31747	1L
1/8	1	3	1/8	—		33143	31860	31870	31880	1EL
9/64	1/2	2	3/16	—		30117	39117	39017	30199	1
5/32	5/16	2	3/16	—		31607	31653	31241	31254	16
5/32	1/2	2	3/16	—		30119	39119	39019	30000	1
11/64	5/8	2	3/16	—		30121	39121	39021	30001	1
3/16	3/8	2	3/16	—		31609	31654	31242	31255	16
*† 3/16	5/8	2	3/16	—		30123	39123	39023	30002	1
3/16	5/8	2	3/16	.015		38009	38010	38117	38159	1CR
3/16	5/8	2	3/16	.020		38011	38012	38118	38160	1CR
3/16	5/8	2	3/16	.030		38013	38014	38119	38161	1CR
3/16	3/4	2-1/2	3/16	—		33101	31728	31738	31748	1L
3/16	1-1/8	3	3/16	—		33121	31861	31871	31881	1EL
13/64	5/8	2-1/2	1/4	—		30125	39125	39025	30003	1
7/32	7/16	2	1/4	—		31611	31655	31243	31256	16
7/32	5/8	2-1/2	1/4	—		30127	39127	39027	30004	1
15/64	3/4	2-1/2	1/4	—		30129	39129	39029	30005	1
1/4	1/2	2	1/4	—		31613	31656	31244	31257	16
*† 1/4	3/4	2-1/2	1/4	—		30131	39131	39031	30006	1
1/4	3/4	2-1/2	1/4	—	•	30300	—	—	—	1

STEELS

STAINLESS STEELS

CAST IRON


NON-FERROUS

HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com


continued on next page

4 Flute Square End • 4 Flute Corner Radius



**1•1L•1EL •
1CR • 16**

FRACTIONAL SERIES

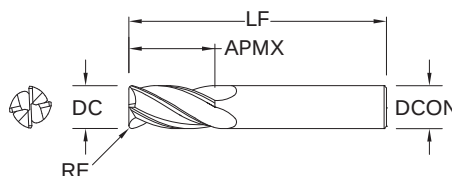

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER


DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED




For patent
information visit
www.ksptpatents.com

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/4	3/4	2-1/2	1/4	.015		38019	38020	38120	38162	1CR
1/4	3/4	2-1/2	1/4	.020		38021	38022	38121	38163	1CR
1/4	3/4	2-1/2	1/4	.030		38023	38024	38122	38164	1CR
1/4	3/4	2-1/2	1/4	.045		38025	38026	38123	38165	1CR
1/4	1-1/8	3	1/4	—		33103	31729	31739	31749	1L
1/4	1-1/2	4	1/4	—		33123	31862	31872	31882	1EL
17/64	3/4	2-1/2	5/16	—		30133	39133	39033	30007	1
9/32	3/4	2-1/2	5/16	—		30135	39135	39035	30008	1
19/64	13/16	2-1/2	5/16	—		30137	39137	39037	30009	1
5/16	1/2	2	5/16	—		31615	31657	31245	31258	16
*1/5/16	13/16	2-1/2	5/16	—		30139	39139	39039	30010	1
5/16	13/16	2-1/2	5/16	.015		38031	38032	38124	38166	1CR
5/16	13/16	2-1/2	5/16	.020		38033	38034	38125	38167	1CR
5/16	13/16	2-1/2	5/16	.030		38035	38036	38126	38168	1CR
5/16	13/16	2-1/2	5/16	.045		38037	38038	38127	38169	1CR
5/16	1-1/8	3	5/16	—		33105	31730	31740	31763	1L
5/16	1-5/8	4	5/16	—		33125	31863	31873	31883	1EL
21/64	1	2-1/2	3/8	—		30141	39141	39041	30011	1
11/32	1	2-1/2	3/8	—		30143	39143	39043	30012	1
23/64	1	2-1/2	3/8	—		30145	39145	39045	30013	1
3/8	5/8	2	3/8	—		31617	31658	31246	31259	16
*1/3/8	1	2-1/2	3/8	—		30147	39147	39047	30014	1
3/8	1	2-1/2	3/8	—	•	30179	—	—	30379	1
3/8	1	2-1/2	3/8	.015	•	38045	38046	38128	38170	1CR
3/8	1	2-1/2	3/8	.020	•	38047	38048	38129	38171	1CR
3/8	1	2-1/2	3/8	.030	•	38049	38050	38130	38172	1CR
3/8	1	2-1/2	3/8	.045	•	38051	38052	38131	38173	1CR
3/8	1-1/8	3	3/8	—		33107	31731	31741	31764	1L
3/8	1-3/4	4	3/8	—		33127	31864	31874	31884	1EL
25/64	1	2-3/4	7/16	—		30149	39149	39049	30015	1
13/32	1	2-3/4	7/16	—		30151	39151	39051	30016	1
27/64	1	2-3/4	7/16	—		30153	39153	39053	30017	1

continued on next page

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6


≥1/8 DIAMETER

DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

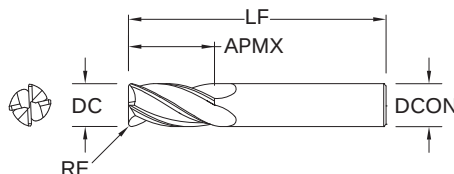


1 • 1L • 1EL •
1CR • 16

FRACTIONAL SERIES

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
7/16	5/8	2-1/2	7/16	—		31619	31659	31247	31260	16
7/16	1	2-3/4	7/16	—		30155	39155	39055	30018	1
7/16	2	4-1/2	7/16	—		33109	31732	31742	31765	1L
7/16	3	6	7/16	—		33129	31865	31875	31885	1EL
29/64	1	3	1/2	—		30157	39157	39057	30019	1
15/32	1	3	1/2	—		30159	39159	39059	30020	1
31/64	1	3	1/2	—		30161	39161	39061	30021	1
1/2	5/8	2-1/2	1/2	—		31621	31660	31248	31261	16
*1/2	1	3	1/2	—		30163	39163	39063	30022	1
1/2	1	3	1/2	—	•	30180	—	—	30380	1
1/2	1	3	1/2	.015	•	38059	38060	38132	38174	1CR
1/2	1	3	1/2	.020	•	38061	38062	38133	38175	1CR
1/2	1	3	1/2	.030	•	38063	38064	38134	38176	1CR
1/2	1	3	1/2	.045	•	38065	38066	38135	38177	1CR
1/2	1	3	1/2	.060	•	38067	38068	38136	38178	1CR
1/2	2	4-1/2	1/2	—		33111	31733	31743	31766	1L
1/2	3	6	1/2	—		33131	31866	31876	31886	1EL
9/16	1-1/8	3-1/2	9/16	—		30165	39165	39065	30023	1
5/8	3/4	3	5/8	—		31623	31661	31249	31262	16
5/8	1-1/4	3-1/2	5/8	—		30167	39167	39067	30024	1
5/8	1-1/4	3-1/2	5/8	—	•	30181	—	—	30381	1
5/8	1-1/4	3-1/2	5/8	.015	•	38073	38074	38137	38179	1CR
5/8	1-1/4	3-1/2	5/8	.020	•	38075	38076	38138	38180	1CR
5/8	1-1/4	3-1/2	5/8	.030	•	38077	38078	38139	38181	1CR
5/8	1-1/4	3-1/2	5/8	.045	•	38079	38080	38140	38182	1CR
5/8	1-1/4	3-1/2	5/8	.060	•	38081	38082	38141	38183	1CR
5/8	1-1/4	3-1/2	5/8	.090	•	38083	38084	38142	38184	1CR
5/8	2-1/4	5	5/8	—		33113	31734	31744	31767	1L
5/8	3	6	5/8	—		33133	31867	31877	31887	1EL
11/16	1-3/8	4	3/4	—		30169	39169	39069	30025	1
3/4	1	3	3/4	—		31625	31662	31250	31263	16
3/4	1-1/2	4	3/4	—		30171	39171	39071	30026	1


continued on next page

CONTINUED




For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius



**1•1L•1EL •
1CR • 16**
FRACTIONAL SERIES

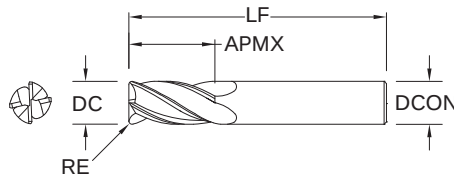

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER


DC = +0.000 / -0.002

1CR DC = -0.001 / -0.002

DCON = h_6

RE = +0.000 / -0.002

CONTINUED




For patent
information visit
www.ksptpatents.com

inch						EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	WELDON FLAT	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
3/4	1-1/2	4	3/4	—	•	30182	—	—	30382	1
3/4	1-1/2	4	3/4	.015	•	38087	38088	38143	38185	1CR
3/4	1-1/2	4	3/4	.020	•	38089	38090	38144	38186	1CR
3/4	1-1/2	4	3/4	.030	•	38091	38092	38145	38187	1CR
3/4	1-1/2	4	3/4	.045	•	38093	38094	38146	38188	1CR
3/4	1-1/2	4	3/4	.060	•	38095	38096	38147	38189	1CR
3/4	1-1/2	4	3/4	.090	•	38097	38098	38148	38190	1CR
3/4	1-1/2	4	3/4	.125	•	38099	38100	38149	38191	1CR
3/4	2-1/4	5	3/4	—		33115	31735	31745	31768	1L
3/4	3	6	3/4	—		33135	31868	31878	31888	1EL
7/8	1-1/2	4	7/8	—		30173	39173	39073	30027	1
1	1-1/2	4	1	—		30175	39175	39075	30028	1
1	1-1/2	4	1	—		30183	—	—	30383	1
1	1-1/2	4	1	.015	•	38101	38102	38150	38192	1CR
1	1-1/2	4	1	.020	•	38103	38104	38151	38193	1CR
1	1-1/2	4	1	.030	•	38105	38106	38152	38194	1CR
1	1-1/2	4	1	.045	•	38107	38108	38153	38195	1CR
1	1-1/2	4	1	.060	•	38109	38110	38154	38196	1CR
1	1-1/2	4	1	.090	•	38111	38112	38155	38197	1CR
1	1-1/2	4	1	.125	•	38113	38114	38156	38198	1CR
1	2-1/4	5	1	—		33117	31736	31746	31769	1L
1	3	6	1	—		33137	31869	31879	31889	1EL
*Series 1 Set						30189	39189	39089	30030	1

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

FRACTIONAL 4 Flute Ball End



TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6


RE = +0.000/-0.0005

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

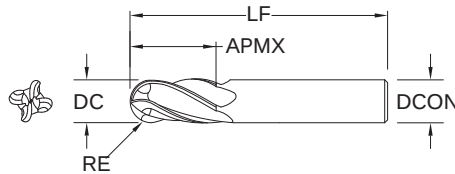


**1B • 1LB •
1ELB**
FRACTIONAL SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON		UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1/64	1/32	1-1/2	1/8		30102	39102	39002	30031	1B
1/32	5/64	1-1/2	1/8		30104	39104	39004	30032	1B
3/64	7/64	1-1/2	1/8		30106	39106	39006	30033	1B
*1/16	3/16	1-1/2	1/8		30108	39108	39008	30034	1B
5/64	3/16	1-1/2	1/8		30110	39110	39010	30035	1B
3/32	9/32	1-1/2	1/8		30112	39112	39012	30036	1B
7/64	3/8	1-1/2	1/8		30114	39114	39014	30037	1B
*1/8	3/8	1-1/2	1/8		30178	39178	39078	30069	1B
*1/8	1/2	1-1/2	1/8		30116	39116	39016	30038	1B
1/8	3/4	2-1/4	1/8		33142	31770	31780	31790	1LB
1/8	1	3	1/8		33144	31900	31918	31928	1ELB
9/64	1/2	2	3/16		30118	39118	39018	30039	1B
5/32	1/2	2	3/16		30120	39120	39020	30040	1B
11/64	5/8	2	3/16		30122	39122	39022	30041	1B
*1/32	5/8	2	3/16		30124	39124	39024	30042	1B
3/16	3/4	2-1/2	3/16		33102	31771	31781	31791	1LB
3/16	1-1/8	3	3/16		33122	31902	31919	31929	1ELB
13/64	5/8	2-1/2	1/4		30126	39126	39026	30043	1B
7/32	5/8	2-1/2	1/4		30128	39128	39028	30044	1B
15/64	3/4	2-1/2	1/4		30130	39130	39030	30045	1B
*1/4	3/4	2-1/2	1/4		30132	39132	39032	30046	1B
1/4	1-1/8	3	1/4		33104	31772	31782	31792	1LB
1/4	1-1/2	4	1/4		33124	31904	31920	31930	1ELB
17/64	3/4	2-1/2	5/16		30134	39134	39034	30047	1B
9/32	3/4	2-1/2	5/16		30136	39136	39036	30048	1B
19/64	13/16	2-1/2	5/16		30138	39138	39038	30049	1B
*1/5	13/16	2-1/2	5/16		30140	39140	39040	30050	1B
5/16	1-1/8	3	5/16		33106	31773	31783	31793	1LB
5/16	1-5/8	4	5/16		33126	31906	31921	31931	1ELB
21/64	1	2-1/2	3/8		30142	39142	39042	30051	1B
11/32	1	2-1/2	3/8		30144	39144	39044	30052	1B
23/64	1	2-1/2	3/8		30146	39146	39046	30053	1B



RE = 1/2 Cutting Diameter (DC)

continued on next page



For patent
information visit
www.ksptpatents.com

4 Flute Ball End

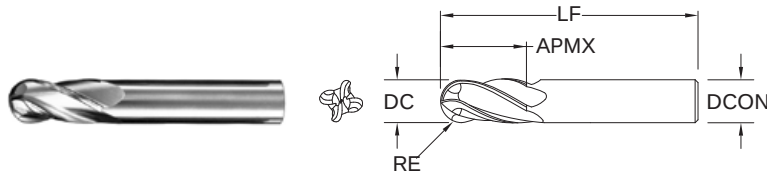
**1B•1LB•
1ELB**
FRACTIONAL SERIES


TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000/-0.001

DCON = h_6

RE = +0.000/-0.0005


≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h_6

RE = +0.000/-0.001

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		WELDON FLAT	EDP NO.				SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON		UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
*1/8	1	2-1/2	3/8		30148	39148	39048	30054	1B
3/8	1	2-1/2	3/8	•	30184	—	—	30384	1B
3/8	1-1/8	3	3/8		33108	31774	31784	31794	1LB
3/8	1-3/4	4	3/8		33128	31908	31922	31932	1ELB
25/64	1	2-3/4	7/16		30150	39150	39050	30055	1B
13/32	1	2-3/4	7/16		30152	39152	39052	30056	1B
27/64	1	2-3/4	7/16		30154	39154	39054	30057	1B
7/16	1	2-3/4	7/16		30156	39156	39056	30058	1B
7/16	2	4-1/2	7/16		33110	31775	31785	31795	1LB
7/16	3	6	7/16		33130	31910	31923	31933	1ELB
29/64	1	3	1/2		30158	39158	39058	30059	1B
15/32	1	3	1/2		30160	39160	39060	30060	1B
31/64	1	3	1/2		30162	39162	39062	30061	1B
*1/2	1	3	1/2		30164	39164	39064	30062	1B
1/2	1	3	1/2	•	30185	—	—	30385	1B
1/2	2	4-1/2	1/2		33112	31776	31786	31796	1LB
1/2	3	6	1/2		33132	31912	31924	31934	1ELB
9/16	1-1/8	3-1/2	9/16		30166	39166	39066	30063	1B
5/8	1-1/4	3-1/2	5/8		30168	39168	39068	30064	1B
5/8	1-1/4	3-1/2	5/8	•	30186	—	—	30386	1B
5/8	2-1/4	5	5/8		33114	31777	31787	31797	1LB
5/8	3	6	5/8		33134	31914	31925	31935	1ELB
11/16	1-3/8	4	3/4		30170	39170	39070	30065	1B
3/4	1-1/2	4	3/4		30172	39172	39072	30066	1B
3/4	1-1/2	4	3/4	•	30187	—	—	30387	1B
3/4	2-1/4	5	3/4		33116	31778	31788	31798	1LB
3/4	3	6	3/4		33136	31916	31926	31936	1ELB
7/8	1-1/2	4	7/8		30174	39174	39074	30067	1B
1	1-1/2	4	1		30176	39176	39076	30068	1B
1	1-1/2	4	1	•	30188	—	—	30388	1B
1	2-1/4	5	1		33118	31779	31789	31799	1LB
1	3	6	1		33138	31917	31927	31937	1ELB
*Series 1B Set					30190	39190	39090	30070	1B

RE = 1/2 Cutting Diameter (DC)

† Di-NAMITE® coating offered standard for this configuration. Please contact your KSPT Representative for more information.

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6


RE = +0,0000 / -0,0508

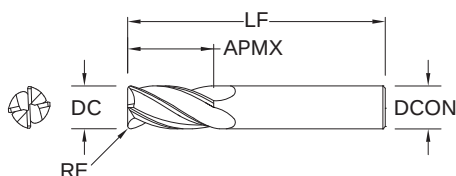

**1M • 1XLM •
1MCR • 16M**
METRIC SERIES


mm					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	2,0	38,0	—	3,0	41605	49136	49157	49178	16M
1,0	4,0	38,0	—	3,0	40105	48500	48522	48543	1M
1,5	3,0	38,0	—	3,0	41609	49137	49158	49179	16M
1,5	4,5	38,0	—	3,0	40109	48501	48523	48544	1M
2,0	4,0	38,0	—	3,0	41613	49138	49159	49180	16M
2,0	6,3	38,0	—	3,0	40113	48502	48524	48545	1M
2,5	5,0	38,0	—	3,0	41617	49139	49160	49181	16M
2,5	9,5	38,0	—	3,0	40117	48503	48525	48546	1M
3,0	6,0	38,0	—	3,0	41621	49140	49161	49182	16M
3,0	12,0	38,0	—	3,0	40121	48504	48526	48547	1M
3,0	25,0	75,0	—	3,0	43101	49388	49401	49414	1XLM
3,5	7,0	50,0	—	4,0	41625	49141	49162	49183	16M
3,5	12,0	50,0	—	4,0	40125	48505	48527	48548	1M
4,0	8,0	50,0	—	4,0	41629	49142	49163	49184	16M
4,0	14,0	50,0	—	4,0	40129	48506	48528	48549	1M
4,0	14,0	50,0	0,25	4,0	—	—	—	40000	1MCR
4,0	14,0	50,0	0,50	4,0	—	—	—	40001	1MCR
4,0	14,0	50,0	1,00	4,0	—	—	—	40003	1MCR
4,0	25,0	75,0	—	4,0	43103	49389	49402	49415	1XLM
4,5	9,5	50,0	—	4,5	41633	49143	49164	49185	16M
4,5	16,0	50,0	—	6,0	40133	48507	48529	48550	1M
5,0	10,0	50,0	—	5,0	41637	49144	49165	49186	16M
5,0	16,0	50,0	—	6,0	40137	48508	48530	48551	1M
5,0	16,0	50,0	0,25	6,0	—	—	—	40004	1MCR
5,0	16,0	50,0	0,50	6,0	—	—	—	40005	1MCR
5,0	16,0	50,0	1,00	6,0	—	—	—	40007	1MCR
5,0	25,0	75,0	—	5,0	43107	49391	49404	49417	1XLM
6,0	12,0	50,0	—	6,0	41641	49145	49166	49187	16M
6,0	19,0	50,0	—	6,0	40141	48509	48531	48552	1M
6,0	19,0	50,0	0,25	6,0	—	—	—	40009	1MCR
6,0	19,0	50,0	0,50	6,0	—	—	—	40010	1MCR
6,0	19,0	50,0	0,75	6,0	—	—	—	40011	1MCR

continued on next page




For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius



**1M • 1XLM •
1MCR • 16M**

METRIC SERIES

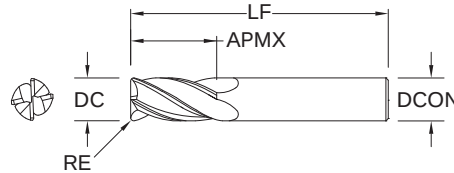

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000/-0,0254

DCON = h_6


≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h_6

RE = +0,0000/-0,0508

CONTINUED




For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm			SHANK DIAMETER DCON	EDP NO.				SERIES
		OVERALL LENGTH LF	CORNER RADIUS RE			UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
6,0	19,0	50,0	1,00	6,0	—	—	—	—	40012	1MCR
6,0	25,0	75,0	—	6,0	43105	49390	49403	49416	49416	1XLM
7,0	12,0	50,0	—	8,0	41645	49146	49167	49188	49188	16M
7,0	19,0	63,0	—	8,0	40145	48510	48532	48553	48553	1M
8,0	12,0	50,0	—	8,0	41649	49147	49168	49189	49189	16M
8,0	20,0	63,0	—	8,0	40149	48511	48533	48554	48554	1M
8,0	20,0	63,0	0,50	8,0	—	—	—	—	40015	1MCR
8,0	20,0	63,0	0,75	8,0	—	—	—	—	40016	1MCR
8,0	20,0	63,0	1,00	8,0	—	—	—	—	40017	1MCR
8,0	20,0	63,0	1,50	8,0	—	—	—	—	40019	1MCR
8,0	20,0	63,0	2,00	8,0	—	—	—	—	40020	1MCR
8,0	25,0	75,0	—	8,0	43115	49392	49405	49418	49418	1XLM
9,0	14,0	50,0	—	9,0	41653	49148	49169	49190	49190	16M
9,0	22,0	75,0	—	10,0	40153	48512	48534	48555	48555	1M
10,0	16,0	50,0	—	10,0	41657	49149	49170	49191	49191	16M
10,0	22,0	75,0	—	10,0	40157	48513	48535	48556	48556	1M
10,0	22,0	75,0	0,50	10,0	—	—	—	—	40021	1MCR
10,0	22,0	75,0	1,00	10,0	—	—	—	—	40023	1MCR
10,0	22,0	75,0	1,50	10,0	—	—	—	—	40024	1MCR
10,0	22,0	75,0	2,00	10,0	—	—	—	—	40025	1MCR
10,0	38,0	100,0	—	10,0	43125	49393	49406	49419	49419	1XLM
11,0	19,0	63,0	—	12,0	41661	49150	49171	49192	49192	16M
11,0	25,0	75,0	—	12,0	40161	48514	48536	48557	48557	1M
12,0	19,0	63,0	—	12,0	40165	49151	49172	49193	49193	16M
12,0	25,0	75,0	—	12,0	41665	48515	48537	48558	48558	1M
12,0	25,0	75,0	0,50	12,0	—	—	—	—	40028	1MCR
12,0	25,0	75,0	1,00	12,0	—	—	—	—	40030	1MCR
12,0	25,0	75,0	1,50	12,0	—	—	—	—	40031	1MCR
12,0	25,0	75,0	2,00	12,0	—	—	—	—	40032	1MCR
12,0	50,0	100,0	—	12,0	43135	49394	49407	49420	49420	1XLM
12,0	75,0	150,0	—	12,0	43145	49395	49408	49421	49421	1XLM
14,0	32,0	89,0	—	14,0	40169	48516	48538	48559	48559	1M
14,0	75,0	150,0	—	14,0	43155	49396	49409	49422	49422	1XLM
16,0	32,0	89,0	—	16,0	40173	48517	48539	48560	48560	1M
16,0	32,0	89,0	0,50	16,0	—	—	—	—	40035	1MCR
16,0	32,0	89,0	1,00	16,0	—	—	—	—	40037	1MCR

continued on next page

4 Flute Square End • 4 Flute Corner Radius



TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254


DCON = h_6

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0508

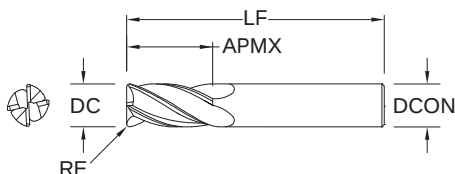


**1M • 1XLM •
1MCR • 16M**

METRIC SERIES


mm					EDP NO.				SERIES
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
16,0	32,0	89,0	1,50	16,0	—	—	—	40038	1MCR
16,0	32,0	89,0	2,00	16,0	—	—	—	40039	1MCR
16,0	75,0	150,0	—	16,0	43165	49397	49410	49423	1XLM
18,0	38,0	100,0	—	18,0	40177	48518	48540	48561	1M
18,0	75,0	150,0	—	18,0	43175	49398	49411	49424	1XLM
20,0	38,0	100,0	—	20,0	40181	48519	48541	48562	1M
20,0	75,0	150,0	—	20,0	43185	49399	49412	49425	1XLM
25,0	38,0	100,0	—	25,0	40185	48520	48542	48563	1M
25,0	75,0	150,0	—	25,0	43195	49400	49413	49426	1XLM

CONTINUED




For patent information visit
www.ksptpatents.com

4 Flute Ball End



**1MB•
1XLMB**
METRIC SERIES

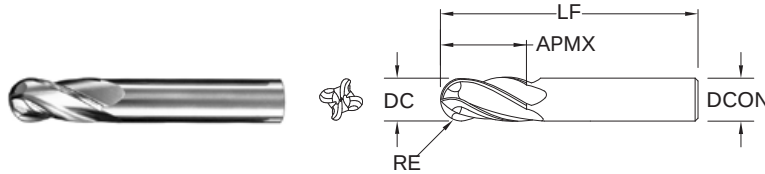

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0.0254

DCON = h_6

RE = +0,0000 / -0.0127

≥3 DIAMETER

DC = +0,0000 / -0.0508

DCON = h_6

RE = +0,0000 / -0.0254

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)	
1,0	4,0	38,0	3,0	40106	48564	48586	48607	1MB
1,5	4,5	38,0	3,0	40110	48565	48587	48608	1MB
2,0	6,3	38,0	3,0	40114	48566	48588	48609	1MB
2,5	9,5	38,0	3,0	40118	48567	48589	48610	1MB
3,0	12,0	38,0	3,0	40122	48568	48590	48611	1MB
3,0	25,0	75,0	3,0	43102	49505	49518	49531	1XLMB
3,5	12,0	50,0	4,0	40126	48569	48591	48612	1MB
4,0	14,0	50,0	4,0	40130	48570	48592	48613	1MB
4,0	25,0	75,0	4,0	43104	49506	49519	49532	1XLMB
4,5	16,0	50,0	6,0	40134	48571	48593	48614	1MB
5,0	16,0	50,0	6,0	40138	48572	48594	48615	1MB
5,0	25,0	75,0	5,0	43108	49508	49521	49534	1XLMB
6,0	19,0	50,0	6,0	40142	48573	48595	48616	1MB
6,0	25,0	75,0	6,0	43106	49507	49520	49533	1XLMB
7,0	19,0	63,0	8,0	40146	48574	48596	48617	1MB
8,0	20,0	63,0	8,0	40150	48575	48597	48618	1MB
8,0	25,0	75,0	8,0	43116	49509	49522	49535	1XLMB
9,0	22,0	75,0	10,0	40154	48576	48598	48619	1MB
10,0	22,0	75,0	10,0	40158	48577	48599	48620	1MB
10,0	38,0	100,0	10,0	43126	49510	49523	49536	1XLMB
11,0	25,0	75,0	12,0	40162	48578	48600	48621	1MB
12,0	25,0	75,0	12,0	40166	48579	48601	48622	1MB
12,0	50,0	100,0	12,0	43136	49511	49524	49537	1XLMB
12,0	75,0	150,0	12,0	43146	49512	49525	49538	1XLMB
14,0	32,0	89,0	14,0	40170	48580	48602	48623	1MB
14,0	75,0	150,0	14,0	43156	49513	49526	49539	1XLMB
16,0	32,0	89,0	16,0	40174	48581	48603	48624	1MB
16,0	75,0	150,0	16,0	43166	49514	49527	49540	1XLMB
18,0	38,0	100,0	18,0	40178	48582	48604	48625	1MB
18,0	75,0	150,0	18,0	43176	49515	49528	49541	1XLMB
20,0	38,0	100,0	20,0	40182	48583	48605	48626	1MB
20,0	75,0	150,0	20,0	43186	49516	49529	49542	1XLMB
25,0	38,0	100,0	25,0	40186	48584	48606	48627	1MB
25,0	75,0	150,0	25,0	43196	49517	49530	49543	1XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC 4 Flute Double End

TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000 / -0.001

DCON = h_6

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6

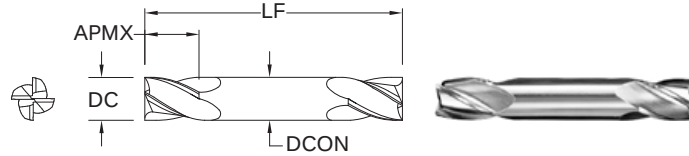

14
FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31401	31441	39601	31170
3/64	3/32	1-1/2	1/8	31403	31443	39603	31171
1/16	1/8	1-1/2	1/8	31405	31445	39605	31172
5/64	1/8	1-1/2	1/8	31407	31447	39607	31173
3/32	3/16	1-1/2	1/8	31409	31449	39609	31174
7/64	3/16	1-1/2	1/8	31411	31451	39611	31175
*1/8	1/4	1-1/2	1/8	31413	31453	39613	31176
9/64	5/16	2	3/16	31415	31455	39615	31177
5/32	5/16	2	3/16	31417	31457	39617	31178
11/64	5/16	2	3/16	31419	31459	39619	31179
*3/16	3/8	2	3/16	31421	31461	39621	31180
13/64	1/2	2-1/2	1/4	31423	31463	39623	31181
7/32	1/2	2-1/2	1/4	31425	31465	39625	31182
15/64	1/2	2-1/2	1/4	31427	31467	39627	31183
*1/4	1/2	2-1/2	1/4	31429	31469	39629	31184
9/32	1/2	2-1/2	5/16	31431	31471	39631	31185
*5/16	1/2	2-1/2	5/16	31433	31473	39633	31186
*3/8	9/16	2-1/2	3/8	31435	31475	39635	31187
7/16	9/16	2-3/4	7/16	31437	31477	39637	31188
*1/2	5/8	3	1/2	31439	31479	39639	31189
*Series 14 Set				31489	31481	39641	31190

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

<3 DIAMETER


DC = +0.0000 / -0.0254

DCON = h_6

≥3 DIAMETER

DC = +0.0000 / -0.0508

DCON = h_6

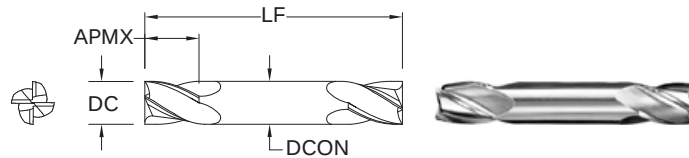

14M
METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41405	48884	48905	48926
1,5	3,0	38,0	3,0	41409	48885	48906	48927
2,0	4,0	38,0	3,0	41413	48886	48907	48928
2,5	5,0	38,0	3,0	41417	48887	48908	48929
3,0	6,0	38,0	3,0	41421	48888	48909	48930
3,5	7,0	50,0	4,0	41425	48889	48910	48931
4,0	8,0	50,0	4,0	41429	48890	48911	48932
4,5	9,5	63,0	4,5	41433	48891	48912	48933
5,0	10,0	63,0	5,0	41437	48892	48913	48934
6,0	12,0	63,0	6,0	41441	48893	48914	48935
7,0	12,0	63,0	8,0	41445	48894	48915	48936
8,0	12,0	63,0	8,0	41449	48895	48916	48937
9,0	14,0	75,0	9,0	41453	48896	48917	48938
10,0	14,0	75,0	10,0	41457	48897	48918	48939
11,0	14,0	75,0	12,0	41461	48898	48919	48940
12,0	16,0	75,0	12,0	41465	48899	48920	48941

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS


For patent information visit
www.ksptpatents.com

4 Flute Double End Ball End



14B

FRACTIONAL SERIES

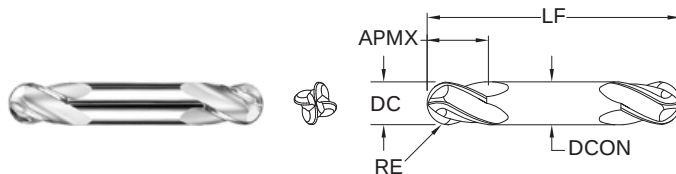

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.000 / -0.001

DCON = h_6

RE = +0.000 / -0.005

≥1/8 DIAMETER

DC = +0.000 / -0.002

DCON = h_6


RE = +0.000 / -0.001

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1/32	1/16	1-1/2	1/8	31402	31442	39602	31218
3/64	3/32	1-1/2	1/8	31404	31444	39604	31219
1/16	1/8	1-1/2	1/8	31406	31446	39606	31220
5/64	1/8	1-1/2	1/8	31408	31448	39608	31221
3/32	3/16	1-1/2	1/8	31410	31450	39610	31222
7/64	3/16	1-1/2	1/8	31412	31452	39612	31223
*1/8	1/4	1-1/2	1/8	31414	31454	39614	31224
9/64	5/16	2	3/16	31416	31456	39616	31225
5/32	5/16	2	3/16	31418	31458	39618	31226
11/64	5/16	2	3/16	31420	31460	39620	31227
*3/16	3/8	2	3/16	31422	31462	39622	31228
13/64	1/2	2-1/2	1/4	31424	31464	39624	31229
7/32	1/2	2-1/2	1/4	31426	31466	39626	31230
15/64	1/2	2-1/2	1/4	31428	31468	39628	31231
*1/4	1/2	2-1/2	1/4	31430	31470	39630	31232
9/32	1/2	2-1/2	5/16	31432	31472	39632	31233
*5/16	1/2	2-1/2	5/16	31434	31474	39634	31234
*3/8	9/16	2-1/2	3/8	31436	31476	39636	31235
7/16	9/16	2-3/4	7/16	31438	31478	39638	31236
*1/2	5/8	3	1/2	31440	31480	39640	31237
*Series 14B Set				31490	31482	39642	31217

RE = 1/2 Cutting Diameter (DC)

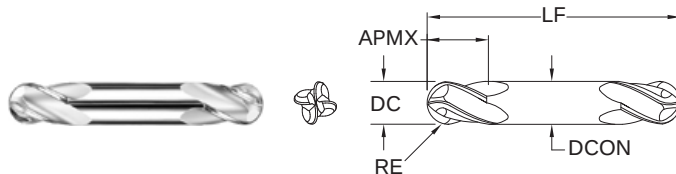

TOLERANCES (mm)

<3 DIAMETER

DC = +0,0000 / -0,0254

DCON = h_6

RE = +0,0000 / -0,0127

≥3 DIAMETER

DC = +0,0000 / -0,0508

DCON = h_6

RE = +0,0000 / -0,0254

14MB

METRIC SERIES

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
1,0	2,0	38,0	3,0	41406	48947	48968	48989
1,5	3,0	38,0	3,0	41410	48948	48969	48990
2,0	4,0	38,0	3,0	41414	48949	48970	48991
2,5	5,0	38,0	3,0	41418	48950	48971	48992
3,0	6,0	38,0	3,0	41422	48951	48972	48993
3,5	7,0	50,0	4,0	41426	48952	48973	48994
4,0	8,0	50,0	4,0	41430	48953	48974	48995
4,5	9,5	63,0	4,5	41434	48954	48975	48996
5,0	10,0	63,0	5,0	41438	48955	48976	48997
6,0	12,0	63,0	6,0	41442	48956	48977	48998
7,0	12,0	63,0	8,0	41446	48957	48978	48999
8,0	12,0	63,0	8,0	41450	48958	48979	49000
9,0	14,0	75,0	9,0	41454	48959	48980	49001
10,0	14,0	75,0	10,0	41458	48960	48981	49002
11,0	14,0	75,0	12,0	41462	48961	48982	49003
12,0	16,0	75,0	12,0	41466	48962	48983	49004

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC 4 Flute High Shear



TOLERANCES (inch)

<1/8 DIAMETER


DC = +0.000/-0.001

DCON = h₆

≥1/8 DIAMETER

DC = +0.000/-0.002

DCON = h₆

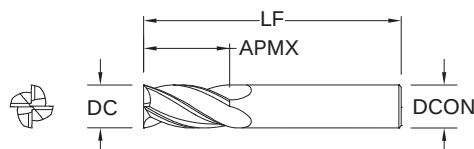

54
FRACTIONAL SERIES

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
1/16	3/16	1-1/2	1/8	35473	35500
3/32	3/8	1-1/2	1/8	35475	35501
1/8	7/16	1-1/2	1/8	35477	35502
5/32	9/16	2	3/16	35478	35503
3/16	9/16	2	3/16	35479	35504
7/32	5/8	2-1/2	1/4	35480	35505
1/4	3/4	2-1/2	1/4	35481	35506
9/32	3/4	2-1/2	5/16	35482	35507
5/16	13/16	2-1/2	5/16	35483	35508
3/8	7/8	2-1/2	3/8	35485	35509
7/16	1	2-3/4	7/16	35487	35510
1/2	1	3	1/2	35489	35511
9/16	1-1/8	3-1/2	9/16	35491	35512
5/8	1-1/4	3-1/2	5/8	35493	35513
3/4	1-1/2	4	3/4	35495	35514
1	1-1/2	4	1	35497	35515

NON-FERROUS

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

<3 DIAMETER


DC = +0,0000/-0,0254

DCON = h₆

≥3 DIAMETER

DC = +0,0000/-0,0508

DCON = h₆

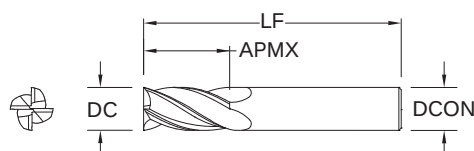


54M
METRIC SERIES

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE®-C (TiCN)
3,0	8,0	38,0	3,0	45477	45478
3,5	10,0	57,0	6,0	45479	45480
4,0	11,0	57,0	6,0	45481	45482
4,5	11,0	57,0	6,0	45483	45484
5,0	13,0	57,0	6,0	45485	45486
6,0	13,0	57,0	6,0	45487	45488
8,0	19,0	63,0	8,0	45489	45490
10,0	22,0	72,0	10,0	45491	45492
12,0	26,0	83,0	12,0	45493	45494
14,0	26,0	83,0	14,0	45495	45496
16,0	32,0	92,0	16,0	45497	45498
20,0	38,0	104,0	20,0	45499	45500

NON-FERROUS

For patent information visit
www.ksptpatents.com

Single End Roughers (Coarse Pitch)

**61**

FRACTIONAL SERIES

**TOLERANCES (inch)**

DC = +0.0000/-0.0040

DCON = h_6

RE = +0.0050/-0.0050


STEELS

CAST IRON

For patent
information visit
www.ksptpatents.com

inch						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36107	36106	36110
*5/16	3/4	2-1/2	5/16	.045	3	36109	36108	36111
3/8	7/8	2-1/2	3/8	.060	3	36113	36112	36114
1/2	1	3	1/2	.060	4	36117	36116	36118
5/8	1-1/4	3-1/2	5/8	.060	4	36121	36120	36122
3/4	1-5/8	4	3/4	.060	4	36125	36124	36126
1	1-3/4	4	1	.060	5	36129	36128	36130

*Without Flat



DIN6535 HB

**TOLERANCES (mm)**

DC = +0,000 / -0,100

DCON = h_6

RE = +0,127/-0,127

61M

METRIC SERIES

STEELS

CAST IRON

For patent
information visit
www.ksptpatents.com

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46107	46106	46110
8,0	19,0	63,0	8,0	1,14	3	46109	46108	46111
10,0	22,0	72,0	10,0	1,52	3	46113	46112	46114
12,0	26,0	83,0	12,0	1,52	4	46117	46116	46118
16,0	32,0	92,0	16,0	1,52	4	46121	46120	46122
20,0	38,0	104,0	20,0	1,52	4	46129	46128	46132
25,0	44,0	104,0	25,0	1,52	5	46131	46130	46133

Single End Roughers (Fine Pitch)




TOLERANCES (inch)

DC = +0.0000/-0.0040

DCON = h_6

RE = +0.0050/-0.0050

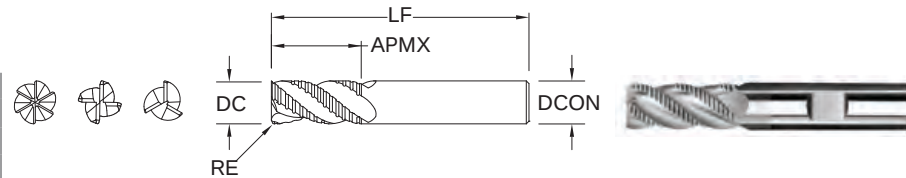

62


FRACTIONAL SERIES

inch						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36207	36206	36210
*5/16	3/4	2-1/2	5/16	.045	3	36209	36208	36211
3/8	7/8	2-1/2	3/8	.060	3	36213	36212	36214
1/2	1	3	1/2	.060	4	36217	36216	36218
5/8	1-1/4	3-1/2	5/8	.060	4	36221	36220	36222
3/4	1-5/8	4	3/4	.060	4	36225	36224	36226
1	1-3/4	4	1	.060	6	36229	36228	36230

*Without Flat

STAINLESS STEELS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com




TOLERANCES (mm)

DC = +0,000 / -0,100

DCON = h_6

RE = +0,127/-0,127

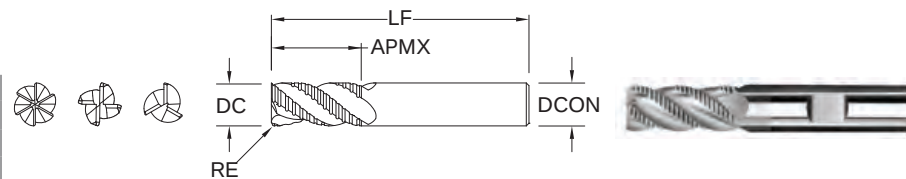

62M

METRIC SERIES


mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46207	46206	46210
8,0	19,0	63,0	8,0	1,14	3	46209	46208	46211
10,0	22,0	72,0	10,0	1,52	3	46213	46212	46214
12,0	26,0	83,0	12,0	1,52	4	46217	46216	46218
16,0	32,0	92,0	16,0	1,52	4	46221	46220	46222
20,0	38,0	104,0	20,0	1,52	4	46229	46228	46232
25,0	44,0	104,0	25,0	1,52	5	46231	46230	46233

STAINLESS STEELS
HIGH TEMP ALLOYS

For patent information visit
www.ksptpatents.com

FRACTIONAL

End Mill Sets

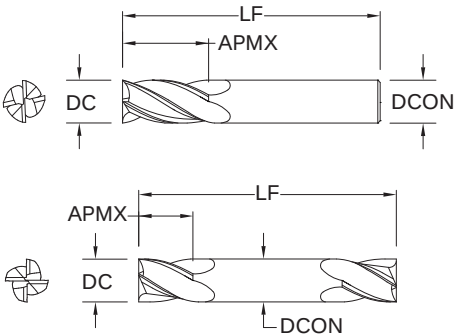

Pictured:
Series 1 4 Flute
Single End Square
Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

Square End


FRACTIONAL SERIES



For patent
information visit
www.ksptpatents.com

DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
Series 1 – 4 Flute, Single End	30189	39189	39089	30030
Series 3 – 2 Flute, Single End	30389	39389	39589	30470
Series 5 – 3 Flute, Single End	30589	39789	30810	30850
Series 14 – 4 Flute, Double End	31489	31481	39641	31190
Series 15 – 2 Flute, Double End	31589	31581	39691	31336

FRACTIONAL End Mill Sets

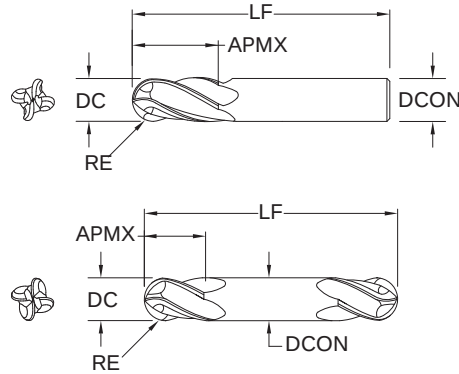

Pictured:
Series 1 4 Flute Single
End Ball Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

RE = 1/2 Cutting Diameter (DC)

Ball End FRACTIONAL SERIES


DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE® (TiN)	Ti-NAMITE®-C (TiCN)	Ti-NAMITE®-A (AlTiN)
Series 1B – 4 Flute, Single End	30190	39190	39090	30070
Series 3B – 2 Flute, Single End	30390	39390	39590	30600
Series 5B – 3 Flute, Single End	30590	30900	30944	31169
Series 14B – 4 Flute, Double End	31490	31482	39642	31217
Series 15B – 2 Flute, Double End	31590	31582	39692	31357



For patent
information visit
www.ksptpatents.com

2 Flute: Square & Ball End

4 Flute: Square & Ball End



Diamond 1, 1B, 3, 3B Fractional			Vc (sfm)	DC • in						
	Ae x DC	Ap x DC			1/8	1/4	5/16	3/8	1/2	
GRAPHITE Ultrafine, Superfine	 Profile	≤ 0.25	≤ 1.5	720	RPM	22003	11002	8801	7334	5501
				(576-864)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	38.3	50.6	63.4	63.1	63.8
					Feed 4 flutes (ipm)	76.6	101.2	126.7	126.2	127.6
	 Slot	≤ 1	≤ 1	580	RPM	17725	8862	7090	5908	4431
				(464-696)	Fz	0.0075	0.0020	0.0031	0.0038	0.0050
					Feed 2 flutes (ipm)	265.9	35.4	44.0	44.9	44.3
					Feed 4 flutes (ipm)	531.7	70.9	87.9	89.8	88.6
COMPOSITES FRP, CFRP, GRP	 Profile	≤ 0.25	≤ 1.5	385	RPM	11766	5883	4706	3922	2941
				(308-462)	Fz	0.0005	0.0014	0.0022	0.0026	0.0035
					Feed 2 flutes (ipm)	12.2	16.5	20.7	20.4	20.6
					Feed 4 flutes (ipm)	24.5	32.9	41.4	40.8	41.2
	 Slot	≤ 1	≤ 1	350	RPM	10696	5348	4278	3565	2674
				(280-420)	Fz	0.0005	0.0012	0.0019	0.0023	0.0030
					Feed 2 flutes (ipm)	9.6	12.8	16.3	16.4	16.0
					Feed 3 flutes (ipm)	19.3	25.7	32.5	32.8	32.1
PLASTICS Polycarbonate, PVC, Polypropylene	 Profile	≤ 0.25	≤ 1.5	1200	RPM	36672	18336	14669	12224	9168
				(960-1440)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	63.8	84.3	105.6	105.1	106.3
					Feed 4 flutes (ipm)	127.6	168.7	211.2	210.3	212.7
	 Slot	≤ 1	≤ 1	960	RPM	29338	14669	11735	9779	7334
				(768-1152)	Fz	0.0008	0.0020	0.0031	0.0038	0.0050
					Feed 2 flutes (ipm)	44.0	58.7	72.8	74.3	73.3
					Feed 3 flutes (ipm)	88.0	117.4	145.5	148.6	146.7

rpm = (Vc x 3.82) / DC


ipm = Fz x number of flutes x rpm

finish cuts typically require reduced feed and cut depths (.02 x D maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius
3 Flute: Square, Ball, Tapered
4 Flute: Square, Double, Stub, Ball, Corner Radius
Tapered: Square, Radius



Series 1, 3, 5, 14, 15, 16, 17, 23, 24, 59 Fractional								DC • in										
Hardness		Flutes		Ae x DC		Ap x DC		Vc (sfm)		1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc		Profile		(368-552)	460	RPM	112461	56230	28115	14058	7029	4686	3514	2343	1757	
				2			≤ 0.50	≤ 1.5	Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028
				3			≤ 0.25	≤ 1.5	Feed (ipm)	6.7	6.7	7.3	8.4	11.2	14.1	14.1	11.2	9.8
				4			≤ 0.25	≤ 1.5		10.1	10.1	11.0	12.7	16.9	21.1	21.1	16.9	14.8
			13.5		13.5	14.6	16.9	22.5	28.1	28.1	22.5	19.7						
			81901		40950	20475	10238	5119	3413	2559	1706	1280						
			Slot		(268-402)	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280		
			2			1	≤ 1	Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
			3			1	≤ 0.5	Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2	
			4			1	≤ 0.4		7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7	
			9.8			9.8	10.6	12.3	16.4	20.5	20.5	16.4	14.3					
			81901			40950	20475	10238	5119	3413	2559	1706	1280					
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc		Profile		(268-402)	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280	
				2			≤ 0.50	≤ 1.5	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021
				3			≤ 0.25	≤ 1.5	Feed (ipm)	3.3	4.1	3.7	4.1	6.1	7.5	7.7	6.1	5.4
				4			≤ 0.25	≤ 1.5		4.9	6.1	5.5	6.1	9.2	11.3	11.5	9.2	8.1
			6.6		8.2	7.4	8.2	12.3	15.0	15.4	12.3	10.7						
			59898		29949	14974	7487	3744	2496	1872	1248	936						
			Slot		(196-294)	245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936		
			2			1	≤ 1	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
			3			1	≤ 0.5	Feed (ipm)	2.4	3.0	2.7	3.0	4.5	5.5	5.6	4.5	3.9	
			4			1	≤ 0.4		3.6	4.5	4.0	4.5	6.7	8.2	8.4	6.7	5.9	
			4.8			6.0	5.4	6.0	9.0	11.0	11.2	9.0	7.9					
			81901			40950	20475	10238	5119	3413	2559	1706	1280					
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc		Profile		(252-378)	315	RPM	77011	38506	19253	9626	4813	3209	2407	1604	1203		
			2			≤ 0.50	≤ 1.5	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
			3			≤ 0.25	≤ 1.5	Feed (ipm)	3.1	3.9	3.5	3.9	5.8	7.1	7.2	5.8	5.1	
			4			≤ 0.25	≤ 1.5		4.6	5.8	5.2	5.8	8.7	10.6	10.8	8.7	7.6	
		6.2		7.7	6.9	7.7	11.6	14.1	14.4	11.6	10.1							
		56230		28115	14058	7029	3514	2343	1757	1171	879							
		Slot		(184-276)	230	RPM	56230	28115	14058	7029	3514	2343	1757	1171	879			
		2			1	≤ 1	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021		
		3			1	≤ 0.5	Feed (ipm)	2.2	2.8	2.5	2.8	4.2	5.2	5.3	4.2	3.7		
		4			1	≤ 0.4		3.4	4.2	3.8	4.2	6.3	7.7	7.9	6.3	5.5		
		4.5			5.6	5.1	5.6	8.4	10.3	10.5	8.4	7.4						
		81901			40950	20475	10238	5119	3413	2559	1706	1280						
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275 Bhn or ≤ 28 HRc		Profile		(296-444)	370	RPM	90458	45229	22614	11307	5654	3769	2827	1885	1413	
				2			≤ 0.50	≤ 1.5	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021
				3			≤ 0.25	≤ 1.5	Feed (ipm)	3.6	4.5	4.1	4.5	6.8	8.3	8.5	6.8	5.9
				4			≤ 0.25	≤ 1.5		5.4	6.8	6.1	6.8	10.2	12.4	12.7	10.2	8.9
			7.2		9.0	8.1	9.0	13.6	16.6	17.0	13.6	11.9						
			66010		33005	16502	8251	4126	2750	2063	1375	1031						
		Slot		(216-324)	270	RPM	66010	33005	16502	8251	4126	2750	2063	1375	1031			
		2			1	≤ 1	Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021		
		3			1	≤ 0.5	Feed (ipm)	2.6	3.3	3.0	3.3	5.0	6.1	6.2	5.0	4.3		
		4			1	≤ 0.4		4.0	5.0	4.5	5.0	7.4	9.1	9.3	7.4	6.5		
		5.3			6.6	5.9	6.6	9.9	12.1	12.4	9.9	8.7						
		62342			31171	15586	7793	3896	2598	1948	1299	974						
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4 PH, 15-5, 13-4, Custom 450	≤ 275 Bhn or ≤ 28 HRc		Profile		(204-306)	255	RPM	62342	31171	15586	7793	3896	2598	1948	1299	974		
			2			≤ 0.50	≤ 1.5	Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
			3			≤ 0.25	≤ 1.5	Feed (ipm)	2.5	2.5	2.5	2.6	3.9	4.7	4.7	3.6	3.3	
			4			≤ 0.25	≤ 1.5		3.7	3.7	3.7	4.0	5.8	7.0	7.0	5.5	5.0	
		5.0		5.0	5.0	5.3	7.8	9.4	9.4	7.3	6.6							
		45229		22614	11307	5654	2827	1885	1413	942	707							
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		Profile		(268-402)	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280	
				2			≤ 0.50	≤ 1.5	Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028
				3			≤ 0.25	≤ 1.5	Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2
				4			≤ 0.25	≤ 1.5		7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7
			9.8		9.8	10.6	12.3	16.4	20.5	20.5	16.4	14.3						
			59898		29949	14974	7487	3744	2496	1872	1248	936						
		Slot		(196-294)	245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936			
		2			1	≤ 1	Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028		
		3			1	≤ 0.5	Feed (ipm)	3.6	3.6	3.9	4.5	6.0	7.5	7.5	6.0	5.2		
		4			1	≤ 0.4		5.4	5.4	5.8	6.7	9.0	11.2	11.2	9.0	7.9		
		7.2			7.2	7.8	9.0	12.0	15.0	15.0	12.0	10.5						
		81901			40950	20475	10238	5119	3413	2559	1706	1280						
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb		Profile		(704-1056)	880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362	
				2			≤ 0.50	≤ 1.5	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056
				3			≤ 0.25	≤ 1.5	Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6
				38.7			42.0	40.3		48.4	64.5	80.7	80.7	64.5	56.5			
				Slot		(512-768)	640	RPM	156467	78234	39117	19558	9779	6519	4890	3260	2445	
				2			1	≤ 1	Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056
				3			1	≤ 0.5	Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4
				28.2			30.5	29.3		35.2	46.9	58.7	58.7	46.9	41.1			
				156467			78234	39117	19558	9779	6519	4890	3260	2445				

continued on next page


FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius

3 Flute: Square, Ball, Tapered

4 Flute: Square, Double, Stub, Ball, Corner Radius

Tapered: Square, Radius



Series
1, 3, 5, 14, 15, 16,
17, 23, 24, 59
Fractional

Hardness

Flutes

Ae x DC

Ap x DC

Vc
(sfm)

DC • in

N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	Profile		2	≤ 0.50	≤ 1.5	(388-582)	485	RPM	118573	59286	29643	14822	7411	4941	3705	2470	1853					
											Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028				
											Feed (ipm)	7.1	7.1	7.7	8.9	11.9	14.8	14.8	11.9	10.4				
												10.7	10.7	11.6	13.3	17.8	22.2	22.2	17.8	15.6				
			Slot		2	1	≤ 1	(280-420)	350	RPM	85568	42784	21392	10696	5348	3565	2674	1783	1337					
											Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028				
											Feed (ipm)	5.1	5.1	5.6	6.4	8.6	10.7	10.7	8.6	7.5				
												7.7	7.7	8.3	9.6	12.8	16.0	16.0	12.8	11.2				
			PLASTICS Polycarbonate, PVC, Polypropylene	Polycarbonate, PVC, Polypropylene	≤ 140 Bhn or ≤ 3 HRc	Profile		2	≤ 0.50	≤ 1.5	(704-1056)	880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362		
														Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
														Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6	
															38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5	
	Slot					2	1	≤ 1	(512-768)	640	RPM	156467	78234	39117	19558	9779	6519	4890	3260	2445				
												Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056			
												Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4			
													28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1			
	GRAPHITE	GRAPHITE				≤ 140 Bhn or ≤ 3 HRc	Profile		2	≤ 0.50	≤ 1.5	(528-792)	660	RPM	161357	80678	40339	20170	10085	6723	5042	3362	2521	
															Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056
															Feed (ipm)	19.4	21.0	20.2	24.2	32.3	40.3	40.3	32.3	28.2
29.0																31.5	30.3	36.3	48.4	60.5	60.5	48.4	42.4	
Slot					2		1	≤ 1	(384-576)	480	RPM	117350	58675	29338	14669	7334	4890	3667	2445	1834				
	Fz											0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056				
	Feed (ipm)											14.1	15.3	14.7	17.6	23.5	29.3	29.3	23.5	20.5				
												21.1	22.9	22.0	26.4	35.2	44.0	44.0	35.2	30.8				
HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400,Rene, Waspalloy	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400,Rene, Waspalloy			≤ 300 Bhn or ≤ 32 HRc	Profile			2	≤ 0.50	≤ 1.5	(52-78)	65	RPM	15891	7946	3973	1986	993	662	497	331	248		
			Fz											0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014		
		Feed (ipm)	0.6			0.5								0.5	0.7	0.7	1.1	1.0	0.8	0.7				
			1.0			0.7								0.7	1.1	1.0	1.6	1.5	1.2	1.0				
		Slot			2	1	≤ 1	(36-54)	45	RPM	11002	5501	2750	1375	688	458	344	229	172					
											Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014				
											Feed (ipm)	0.4	0.3	0.3	0.5	0.5	0.7	0.7	0.6	0.5				
												0.7	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7				
		TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al		≤ 350 Bhn or ≤ 38 HRc	Profile		2	≤ 0.50	≤ 1.5	(144-216)	180	RPM	44006	22003	11002	5501	2750	1834	1375	917	688		
														Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
														Feed (ipm)	1.8	1.8	1.8	2.2	2.8	3.3	3.3	2.6	2.3	
															2.6	2.6	2.6	3.3	4.1	5.0	5.0	3.9	3.5	
Slot				2		1	≤ 1	(104-156)	130	RPM	31782	15891	7946	3973	1986	1324	993	662	497					
											Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017				
											Feed (ipm)	1.3	1.3	1.3	1.6	2.0	2.4	2.4	1.9	1.7				
												1.9	1.9	1.9	2.4	3.0	3.6	3.6	2.8	2.5				

Bhn (Brinell) HRC (Rockwell C) HRB (Rockwell B)

rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed
for tapered end mills, base the speed on the largest diameter contacting
the workpiece and the feed on the smallest diameter

limit cut depths of long and extra long flute mills to .05 x DC when slotting
or profiling


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

2 Flute: High Shear

4 Flute: High Shear



Series 52, 54 Fractional	Hardness	Flutes	Ae x DC		Ap x DC	Vc (sfm)	DC • in								
							1/8	1/4	3/8	1/2	3/4	1			
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb	 Profile				1360	RPM	41562	20781	13854	10390	6927	5195		
						(1088-1632)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064		
							Feed (ipm)	57.4	74.8	94.2	95.6	76.2	66.5		
			2	≤ 0.3	≤ 1.5		114.7	149.6	188.4	191.2	152.4	133.0			
		 Slot				1090	RPM	33310	16655	11103	8328	5552	4164		
						(872-1308)	Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059		
							Feed (ipm)	42.0	56.6	71.1	70.0	55.5	49.1		
			2	1	≤ 1		83.9	113.3	142.1	139.9	111.0	98.3			
		ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	 Profile				510	RPM	15586	7793	5195	3896	2598	1948
								(408-612)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064
					Feed (ipm)	21.5	28.1		35.3	35.8	28.6	24.9			
2	≤ 0.3				≤ 1.5	43.0	56.1		70.7	71.7	57.1	49.9			
 Slot				410	RPM	12530	6265	4177	3132	2088	1566				
				(328-492)	Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059				
					Feed (ipm)	15.8	21.3	26.7	26.3	20.9	18.5				
	2				1	≤ 1	31.6	42.6	53.5	52.6	41.8	37.0			
COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass	≤ 140 Bhn or ≤ 3 HRc			 Profile				590	RPM	18030	9015	6010	4508	3005	2254
								(472-708)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037
					Feed (ipm)	14.1	18.0		24.0	23.4	18.6	16.7			
		2	≤ 0.3		≤ 1.5	28.1	36.1		48.1	46.9	37.3	33.4			
		 Slot				475	RPM	14516	7258	4839	3629	2419	1815		
						(380-570)	Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034		
							Feed (ipm)	10.5	14.5	17.4	17.4	14.0	12.3		
			2	1	≤ 1		20.9	29.0	34.8	34.8	28.1	24.7			
		COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	 Profile				235	RPM	7182	3591	2394	1795	1197	898
								(188-282)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037
					Feed (ipm)	5.6	7.2		9.6	9.3	7.4	6.6			
2	≤ 0.3				≤ 1.5	11.2	14.4		19.2	18.7	14.8	13.3			
 Slot				190	RPM	5806	2903	1935	1452	968	726				
				(152-228)	Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034				
					Feed (ipm)	4.2	5.8	7.0	7.0	5.6	4.9				
	2				1	≤ 1	8.4	11.6	13.9	13.9	11.2	9.9			
PLASTICS ABS, Polycarbonate, PVC, Polypropylene				 Profile				1600	RPM	48896	24448	16299	12224	8149	6112
								(1280-1920)	Fz	0.00110	0.0030	0.0056	0.0074	0.0089	0.0100
					Feed (ipm)	107.6	146.7		182.5	180.9	145.1	122.2			
		2	≤ 0.3		≤ 1.5	215.1	293.4		365.1	361.8	290.1	244.5			
		 Slot				1280	RPM	39117	19558	13039	9779	6519	4890		
						(1024-1536)	Fz	0.00100	0.0027	0.0051	0.0068	0.0082	0.0095		
							Feed (ipm)	78.2	105.6	133.0	133.0	106.9	92.9		
			2	1	≤ 1		156.5	211.2	266.0	266.0	213.8	185.8			
		PLASTICS Fiberglass, Glass Filled		 Profile				720	RPM	22003	11002	7334	5501	3667	2750
								(576-864)	Fz	0.00082	0.0022	0.0041	0.0055	0.0065	0.0076
					Feed (ipm)	36.1	48.4		60.1	60.5	47.7	41.8			
2	≤ 0.3				≤ 1.5	72.2	96.8		120.3	121.0	95.3	83.6			
 Slot				575	RPM	17572	8786	5857	4393	2929	2197				
				(460-690)	Fz	0.00075	0.0020	0.0037	0.0050	0.0060	0.0070				
					Feed (ipm)	26.4	35.1	43.3	43.9	35.1	30.8				
	2				1	≤ 1	52.7	70.3	86.7	87.9	70.3	61.5			

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 3.82) / DC


ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Coarse Pitch)



Series 61 Fractional	Hardness			Vc (sfm)	DC • in					
		Ae x DC	Ap x DC		1/4	3/8	1/2	3/4	1	
P <										

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series 62 Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)		DC • in						
						1/4	3/8	1/2	3/4	1		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	405	RPM	6188	4126	3094	2063	1547
						(324-486)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
							Feed (ipm)	11.1	13.6	18.6	15.7	19.5
			Slot 	1	≤ 1	325	RPM	4966	3311	2483	1655	1242
						(260-390)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
							Feed (ipm)	8.9	10.9	14.9	12.6	15.6
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	280	RPM	4278	2852	2139	1426	1070
						(224-336)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	6.4	7.7	10.3	8.6	10.9
			Slot 	1	≤ 1	225	RPM	3438	2292	1719	1146	860
						(180-270)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	5.2	6.2	8.3	6.9	8.8
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
						(56-84)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
							Feed (ipm)	1.3	1.7	2.1	1.9	2.2
			Slot 	1	≤ 1	56	RPM	856	570	428	285	214
						(45-67)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
							Feed (ipm)	1.0	1.4	1.7	1.5	1.8
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	155	RPM	2368	1579	1184	789	592
						(124-186)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	3.6	4.3	5.7	4.7	6.0
			Slot 	1	≤ 1	195	RPM	2980	1986	1490	993	745
						(156-234)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
							Feed (ipm)	4.5	5.4	7.2	6.0	7.6

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 3.82) / DC

ipm = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

METRIC

2 Flute: Square, Double, Stub, Long Reach, Ball

3 Flute: Square, Long Reach, Ball

4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius



Series
1M, 3M, 5M,
14M, 15M, 16M,
17M, 59M
Metric


14M, 15M, 16M, 17M, 59M						DC • mm																	
Metric	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)	0.4	0.75	1.5	3	6	10	12	20	25									
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	4 ≤ 0.25 ≤ 1.5	(112-168)	140	RPM	111483	59458	29729	14864	7432	4459	3716	2230	1784						
							Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070							
							Feed (mm/min)	178	178	184	208	282	357	357	285	250							
								268	268	276	312	424	535	535	428	375							
								357	357	369	416	565	713	713	571	499							
							102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299						
		Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070												
			2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(82-123)	Fz	130	130	134	152	206	260	260	208	182							
							Feed (mm/min)	195	195	201	227	309	390	390	312	273							
								260	260	268	303	411	520	520	416	364							
								102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299					
							Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052							
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100							2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	4 ≤ 0.25 ≤ 1.5	(82-123)	81	104	95	130	152	188	195	156	135			
		Feed (mm/min)	122	156	143	195						227	283	292	234	203							
			162	208	191	260						303	377	390	312	270							
			75	RPM	59377	31668						15834	7917	3958	2375	1979	1188	950					
		Fz	0.0005	0.0012	0.0022	0.006						0.014	0.029	0.036	0.048	0.052							
			2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(60-90)						59	76	70	95	111	138	143	114	99			
							Feed (mm/min)	119	152	139	190	222	276	285	228	198							
								119	152	139	190	222	276	285	228	198							
								96	RPM	76342	40715	20358	10179	5089	3054	2545	1527	1221					
							Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052							
							TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	4 ≤ 0.25 ≤ 1.5	(77-115)	76	98	90	122	143	177	183	147	127		
		Feed (mm/min)	115	147	134	183							214	266	275	220	191						
153	195		179	244	285	354							366	293	254								
70	RPM		55741	29729	14864	7432							3716	2230	1858	1115	892						
Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029							0.036	0.048	0.052								
	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(56-84)	56	71							65	89	104	129	134	107	93				
					Feed (mm/min)	84		107	98	134	156	194	201	161	139								
						111		143	131	178	208	259	268	214	186								
						M		STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F		2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	4 ≤ 0.25 ≤ 1.5	(90-135)	113	RPM	89671	47825	23912	11956	5978	3587	2989	1793
					Fz									0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052	
					Feed (mm/min)									90	115	105	143	167	208	215	172	149	
135	172	158	215	251										312	323	258	224						
179	230	210	287	335			416							430	344	298							
82	RPM	65436	34899	17449	8725		4362							2617	2181	1309	1047						
Fz	0.0005	0.0012	0.0022	0.006	0.014		0.029		0.036	0.048	0.052												
	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(66-99)	65		84		77	105	122	152	157	126	109								
					Feed (mm/min)		98		126	115	157	183	228	236	188	163							
							131		168	154	209	244	304	314	251	218							
							78		RPM	61800	32960	16480	8240	4120	2472	2060	1236	989					
					Fz		0.0005		0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042							
							2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	4 ≤ 0.25 ≤ 1.5	(62-93)	62	66	63	66	99	119	119	91	83				
Feed (mm/min)	93	99	94	99							148	178	179	137	125								
	124	132	125	132							198	237	239	183	166								
	56	RPM	44836	23912							11956	5978	2989	1793	1495	897	717						
Fz	0.0005	0.0010	0.0019	0.004							0.012	0.024	0.029	0.037	0.042								
	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(45-68)							45	48	45	48	72	86	87	66	60				
					Feed (mm/min)		67	72	68	72	108	129	130	100	90								
							90	96	91	96	143	172	173	133	121								
							K	CAST IRONS Gray, Malleable, Ductile		2 ≤ 0.50 ≤ 1.5	3 ≤ 0.25 ≤ 1.5	4 ≤ 0.25 ≤ 1.5	(82-123)	102	RPM	81189	43301	21650	10825	5413	3248	2706	1624
					Fz									0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070	
					Feed (mm/min)									130	130	134	152	206	260	260	208	182	
195	195	201	227	309										390	390	312	273						
260	260	268	303	411		520								520	416	364							
75	RPM	59377	31668	15834	7917	3958								2375	1979	1188	950						
Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040			0.048	0.064	0.070												
	2 1 ≤ 1	3 1 ≤ 0.5	4 1 ≤ 0.4	(60-90)	95	95			98	111	150	190	190	152	133								
					Feed (mm/min)	143			143	147	166	226	285	285	228	200							
						190			190	196	222	301	380	380	304	266							

continued on next page

2 Flute: Square, Double, Stub, Long Reach, Ball

3 Flute: Square, Long Reach, Ball


4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius



Series 1M, 3M, 5M, 14M, 15M, 16M, 17M, 59M Metric	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)	DC • mm												
						0.4	0.75	1.5	3	6	10	12	20	25				
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 88 HRb	Profile		2	≤ 0.50	≤ 1.5	(215-322)	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412	
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140	
								Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955	
		Slot		2	1	≤ 1	(156-234)	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482	
								Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140	
								Feed (mm/min)	465	529	496	579	786	993	993	794	695	
	≤ 140 Bhn or ≤ 3 HRc	Profile		2	≤ 0.50	≤ 1.5	(118-177)	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881	
								Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070	
								Feed (mm/min)	188	188	194	219	298	376	376	301	263	
		Slot		2	1	≤ 1	(156-234)	RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357	
								Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070	
								Feed (mm/min)	282	282	292	329	447	564	564	451	395	
COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	Profile		2	≤ 0.50	≤ 1.5	(118-177)	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881	
								Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070	
								Feed (mm/min)	376	376	389	439	596	752	752	602	527	
		Slot		2	1	≤ 1	(156-234)	RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357	
								Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070	
								Feed (mm/min)	136	136	140	158	215	271	271	217	190	
	PLASTICS Polycarbonate, PVC, Polypropylene		Profile		2	≤ 0.50	≤ 1.5	(215-322)	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412
									Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
									Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955
			Slot		2	1	≤ 1	(156-234)	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482
									Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
									Feed (mm/min)	960	1092	1024	1194	1621	2047	2047	1638	1433
GRAPHITE			Profile		2	≤ 0.50	≤ 1.5	(161-241)	RPM	159954	85309	42654	21327	10664	6398	5332	3199	2559
									Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
									Feed (mm/min)	1280	1456	1365	1592	2161	2730	2730	2184	1911
			Slot		2	1	≤ 1	(117-176)	RPM	116330	62043	31021	15511	7755	4653	3878	2327	1861
									Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
									Feed (mm/min)	698	794	745	869	1179	1489	1489	1191	1042
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc	Profile		2	≤ 0.50	≤ 1.5	(16-24)	RPM	15753	8402	4201	2100	1050	630	525	315	252
									Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035
									Feed (mm/min)	16	12	12	17	21	26	25	20	18
			Slot		2	1	≤ 1	(11-16)	RPM	10906	5816	2908	1454	727	436	364	218	174
									Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035
									Feed (mm/min)	32	24	24	34	42	53	50	40	35
TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al		≤ 350 Bhn or ≤ 38 HRc	Profile		2	≤ 0.50	≤ 1.5	(44-66)	RPM	43624	23266	11633	5816	2908	1745	1454	872	698
									Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
									Feed (mm/min)	44	47	44	47	70	84	84	65	59
			Slot		2	1	≤ 1	(32-48)	RPM	31506	16803	8402	4201	2100	1260	1050	630	504
									Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
									Feed (mm/min)	32	34	32	34	50	60	61	47	42

2 Flute: High Shear

4 Flute: High Shear




Series 52M, 54M Metric					DC • mm										
Hardness		Flutes	Ae x DC	Ap x DC	Vc (m/min)	366 3 6 10 12 20 25									
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 88 HRb		Profile		415	RPM	43947	21973	13184	10987	6592	5274			
					(332-497)	Fz	0.0166	0.043	0.091	0.110	0.147	0.160			
						Feed (mm/min)	1459	1890	2399	2417	1938	1688			
			2 ≤ 0.3 ≤ 1.5		2918		3779	4799	4834	3876	3375				
		4 ≤ 0.3 ≤ 1.5		332	RPM	35222	17611	10567	8806	5283	4227				
			Slot		(266-399)	Fz	0.0151	0.041	0.085	0.101	0.133	0.148			
						Feed (mm/min)	1064	1444	1796	1779	1405	1251			
			2 1 ≤ 1		2127		2888	3593	3557	2811	2502				
			4 1 ≤ 0.25												
		ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb		Profile		155	RPM	16480	8240	4944	4120	2472	1978	
							(124-187)	Fz	0.0166	0.043	0.091	0.110	0.147	0.160	
								Feed (mm/min)	547	709	900	906	727	633	
	2 ≤ 0.3 ≤ 1.5				1094	1417	1800		1813	1454	1266				
	4 ≤ 0.3 ≤ 1.5			125	RPM	13249	6624	3975	3312	1987	1590				
				Slot		(100-150)	Fz	0.0151	0.041	0.085	0.101	0.133	0.148		
							Feed (mm/min)	400	543	676	669	529	471		
				2 1 ≤ 1		800		1086	1351	1338	1057	941			
				4 1 ≤ 0.25											
	COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass			≤ 140 Bhn or ≤ 3 HRc		Profile		180	RPM	19065	9533	5720	4766	2860	2288
								(144-216)	Fz	0.0094	0.024	0.053	0.062	0.083	0.093
									Feed (mm/min)	358	458	606	591	475	426
		2 ≤ 0.3 ≤ 1.5				717	915	1213		1182	949	851			
		4 ≤ 0.3 ≤ 1.5			145	RPM	15349	7675	4605	3837	2302	1842			
			Slot		(116-174)	Fz	0.0086	0.024	0.048	0.058	0.077	0.085			
			Feed (mm/min)			264	368	442	445	355	313				
2 1 ≤ 1					528	737	884	890	709	626					
4 1 ≤ 0.25															
COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze		≤ 200 Bhn or ≤ 23 HRc			Profile		72	RPM	7594	3797	2278	1898	1139	911	
							(57-86)	Fz	0.0094	0.024	0.053	0.062	0.083	0.093	
								Feed (mm/min)	143	182	241	235	189	169	
	2 ≤ 0.3 ≤ 1.5			286	365	483	471		378	339					
	4 ≤ 0.3 ≤ 1.5		58	RPM	6140	3070	1842	1535	921	737					
			Slot		(46-69)	Fz	0.0086	0.024	0.048	0.058	0.077	0.085			
						Feed (mm/min)	106	147	177	178	142	125			
			2 1 ≤ 1		211		295	354	356	284	250				
			4 1 ≤ 0.25												

continued on next page

2 Flute: High Shear

4 Flute: High Shear



Series 52M, 54M Metric	Hardness	Flutes			Vc (m/min)	DC • mm							
			Ae x DC	Ap x DC		3	6	10	12	20	25		
N	PLASTICS ABS, Polycarbonate, PVC, Polypropylene	 Profile			488	RPM	51702	25851	15511	12926	7755	6204	
					(390-585)	Fz	0.0264	0.072	0.149	0.178	0.237	0.250	
			2	≤ 0.3		≤ 1.5	Feed (mm/min)	2730	3723	4622	4601	3676	3102
			4	≤ 0.3		≤ 1.5		5460	7445	9244	9203	7352	6204
		 Slot			390	RPM	41362	20681	12409	10340	6204	4963	
					(312-468)	Fz	0.0240	0.065	0.136	0.163	0.210	0.238	
			2	1		≤ 1	Feed (mm/min)	1985	2689	3375	3371	2606	2363
			4	1		≤ 0.25		3971	5377	6750	6742	5212	4725
	PLASTICS Fiberglass, Glass Filled	 Profile			219	RPM	23266	11633	6980	5816	3490	2792	
					(176-263)	Fz	0.0197	0.053	0.109	0.132	0.173	0.190	
			2	≤ 0.3		≤ 1.5	Feed (mm/min)	917	1233	1522	1536	1208	1061
			4	≤ 0.3		≤ 1.5		1833	2466	3043	3071	2415	2122
		 Slot			175	RPM	18580	9290	5574	4645	2787	2230	
					(140-210)	Fz	0.0180	0.048	0.101	0.120	0.160	0.175	
			2	1		≤ 1	Feed (mm/min)	669	892	1126	1115	892	780
			4	1		≤ 0.25		1338	1784	2252	2230	1784	1561

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Single End Roughers (Coarse Pitch)



Series 61M	Metric	Hardness			Vc (m/min)	DC • mm						
			Ae x DC	Ap x DC		6	10	12	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc		≤ 0.5	≤ 1.5	152	RPM	8078	4847	4039	2424	1939
						(122-183)	Fz	0.014	0.029	0.034	0.045	0.050
						Feed (mm/min)	339	422	549	436	485	
				1	≤ 1	122	RPM	6463	3878	3231	1939	1551
						(98-146)	Fz	0.014	0.029	0.034	0.045	0.050
						Feed (mm/min)	271	337	439	349	388	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc		≤ 0.5	≤ 1.5	111	RPM	5897	3538	2949	1769	1415
						(89-134)	Fz	0.010	0.021	0.026	0.035	0.038
						Feed (mm/min)	177	223	307	248	269	
				1	≤ 1	90	RPM	4766	2860	2383	1430	1144
						(72-108)	Fz	0.010	0.021	0.026	0.035	0.038
						Feed (mm/min)	143	180	248	200	217	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc		≤ 0.5	≤ 1.5	105	RPM	5574	3344	2787	1672	1338
						(84-126)	Fz	0.014	0.024	0.036	0.048	0.053
						Feed (mm/min)	234	241	401	321	355	
				1	≤ 1	84	RPM	4443	2666	2222	1333	1066
						(67-101)	Fz	0.014	0.024	0.036	0.048	0.053
						Feed (mm/min)	187	192	320	256	283	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc		≤ 0.5	≤ 1.5	111	RPM	5897	3538	2949	1769	1415
						(89-134)	Fz	0.019	0.040	0.048	0.064	0.070
						Feed (mm/min)	336	425	566	453	495	
				1	≤ 1	90	RPM	4766	2860	2383	1430	1144
						(72-108)	Fz	0.019	0.040	0.048	0.064	0.070
						Feed (mm/min)	272	343	458	366	400	

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)

Series 62M Metric		Hardness			Vc (m/min)	DC • mm						
			Ae x DC	Ap x DC		6	10	12	20	25		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRC	 Profile	≤ 0.5	≤ 1.5	123	RPM	6544	3926	3272	1963	1570
						(99-148)	Fz	0.014	0.029	0.036	0.051	0.053
							Feed (mm/min)	283	345	471	398	495
			 Slot	1	≤ 1	99	RPM	5251	3151	2626	1575	1260
						(79-119)	Fz	0.014	0.029	0.036	0.051	0.053
							Feed (mm/min)	227	277	378	319	397
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRC	 Profile	≤ 0.5	≤ 1.5	85	RPM	4524	2714	2262	1357	1086
						(68-102)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	163	195	261	217	277
			 Slot	1	≤ 1	69	RPM	3635	2181	1818	1091	872
						(55-82)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	131	157	209	174	222
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRC	 Profile	≤ 0.5	≤ 1.5	21	RPM	1131	679	565	339	271
						(17-26)	Fz	0.010	0.021	0.024	0.035	0.035
							Feed (mm/min)	33	43	54	47	57
			 Slot	1	≤ 1	17	RPM	905	543	452	271	217
						(14-20)	Fz	0.010	0.021	0.024	0.035	0.035
							Feed (mm/min)	26	35	43	38	46
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10V2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRC	 Profile	≤ 0.5	≤ 1.5	47	RPM	2504	1503	1252	751	601
						(38-57)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	90	108	144	120	153
			 Slot	1	≤ 1	59	RPM	3151	1890	1575	945	756
						(48-71)	Fz	0.012	0.024	0.029	0.040	0.043
							Feed (mm/min)	113	136	181	151	193

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

General Application Drills



Hole Making

GENERAL APPLICATION DRILLS	SERIES	DESCRIPTION	PAGE	S&F PAGE
2 Flute	101	2 Flute Slow Spiral	336	344
Short Length Self Centering (DIN6539)	108M Plus	2 Flute Short Length DIN 6539	341	346
Straight Flute	106	Straight Flute 140 Point Geometry	348	351
3 Flute with 150 Point Geometry	103	3 Flute 150 Point Geometry	352	356
GENERAL APPLICATION COUNTERSINKS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Combined Drill & Countersink	301	2 Flute Straight Flute Combined Drill and Countersink Fractional	358	361
	301M	2 Flute Straight Flute Combined Drill and Countersink Metric	358	362
Single Flute Countersink	601	Single Flute Fractional	364	365
3 Flute Countersink	603	3 Flute Fractional	367	368
6 Flute Countersink	606	6 Flute Fractional	370	371
GENERAL APPLICATION REAMERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Straight Flute Accu-Reamer	200	Accu-Reamer	374	376
Straight Flute Reamer	201M	Metric Reamer	378	379

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
2 filos	101	2 filos, espiral de avance lento	336	344
Autocentrante de longitud corta (DIN6539)	108M Plus	2 filos, longitud corta, DIN 6539	341	346
Filo recto	106	Filo recto, geometría de 140 puntos	348	351
3 filos con geometría de 150 puntos	103	3 filos, geometría de 150 puntos	352	356

BROCAS DE USO AVELLANADORES	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Broca y avellanador combinados	301	2 filos, filo recto, broca y avellanador combinados, fraccional	358	361
	301M	2 filos, filo recto, broca y avellanador combinados, métrico	358	362
Avellanador de filo único	601	Filo único, fraccional	364	365
Avellanador de 3 filos	603	3 filos, fraccional	367	368
Avellanador de 6 filos	606	6 filos, fraccional	370	371

BROCAS DE USO ESCARIADORES	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Escariador Accu de filo recto	200	Escariador Accu	374	376
Escariador de filo recto	201M	Escariador métrico	378	379

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS UNIVERSELS	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
2 dents	101	2 dents à spirale lente	336	344
Court autocentrant (DIN 6539)	108M Plus	2 dents court DIN 6539	341	346
Denture droite	106	Denture droite à angle de pointe 140°	348	351
3 dents à angle de pointe 150°	103	3 dents à angle de pointe 150°	352	356

FORETS À FRAISER	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Foret et foret à fraiser combinés	301	2 dents denture droite foret et foret à fraiser combinés (fractionnel)	358	361
	301M	2 dents denture droite foret et foret à fraiser combinés (métrique)	358	362
Foret à fraiser à dent simple	601	Foret à dent simple (fractionnel)	364	365
Foret à fraiser 3 dents	603	3 dents (fractionnel)	367	368
Foret à fraiser 6 dents	606	6 dents (fractionnel)	370	371

FORETS À ALÉSOIRS	SÉRIES	DESCRIPTION	PAGE	S&F PAGE
Alésoir denture droite Accu-Reamer	200	Alésoir Accu-Reamer	374	376
Alésoir denture droite	201M	Alésoir (métrique)	378	379

Recommandations de vitesse et avance indiquées après chaque série



STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
2 Schneiden	101	2 Schneiden mit kleinem Spanwinkel	336	344
Kurze Bauform Selbstzentrierung (DIN 6539)	108M Plus	2 Schneiden Kurze Bauform DIN 6539	341	346
Gerade Schneiden	106	Gerade Schneiden Spitzengeometrie 140	348	351
3 Schneiden mit Spitzengeometrie 150	103	3 Schneiden Spitzengeometrie 150	352	356

STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Senkbohrer	301	Zölliger Senkbohrer mit 2 geraden Schneiden	358	361
	301M	Metrischer Senkbohrer mit 2 geraden Schneiden	358	362
Senker mit 1 Schneide	601	Zölliger Bohrer mit 1 Schneide	364	365
Senkbohrer mit 1 Schneide	603	Zölliger Bohrer mit 3 Schneiden	367	368
Senkbohrer mit 6 Schneiden	606	Zölliger Bohrer mit 6 Schneiden	370	371

STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Reibahlen mit gerader Schneide	200	Accu-Reamer	374	376
Reibahle mit gerader Schneide	201M	Metrische Reibahle	378	379

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

2 Flute Drills • Metric: DIN 338

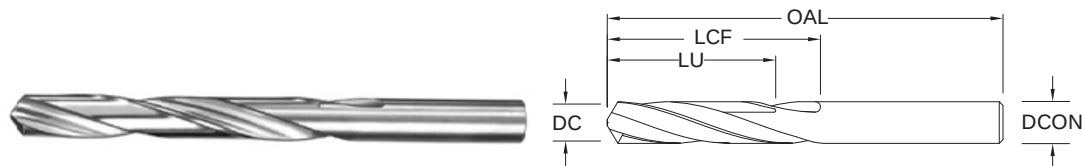

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.0135	0,340 mm	#80	3/4	3/16	—	51080	57076
0.0145	0,370 mm	#79	3/4	3/16	—	51079	57077
0.0156	0,400 mm	1/64	3/4	3/16	—	51101	57078
0.0160	0,410 mm	#78	3/4	3/16	—	51078	57079
0.0180	0,460 mm	#77	3/4	3/16	—	51077	57080
0.0200	0,510 mm	#76	7/8	1/4	—	51076	57081
0.0210	0,530 mm	#75	7/8	1/4	—	51075	57082
0.0225	0,570 mm	#74	7/8	1/4	—	51074	57083
0.0240	0,610 mm	#73	7/8	1/4	—	51073	57084
0.0250	0,640 mm	#72	1	5/16	—	51072	57085
0.0260	0,660 mm	#71	1	5/16	—	51071	57086
0.0276	0,700 mm		28,0	9,0	—	61001	68268
0.0280	0,710 mm	#70	1-1/4	1/2	—	51070	57087
0.0292	0,740 mm	#69	1-1/4	1/2	—	51069	57088
0.0310	0,790 mm	#68	1-1/4	1/2	—	51068	57089
0.0312	0,790 mm	1/32	1-1/4	1/2	—	51102	57090
0.0315	0,800 mm		30,0	10,0	—	61003	68269
0.0320	0,810 mm	#67	1-1/4	1/2	—	51067	57091
0.0330	0,840 mm	#66	1-1/4	1/2	—	51066	57092
0.0350	0,890 mm	#65	1-3/8	5/8	1/2	51065	57093
0.0354	0,900 mm		32,0	11,0	8,0	61005	68270
0.0360	0,910 mm	#64	1-3/8	5/8	1/2	51064	57094
0.0370	0,940 mm	#63	1-3/8	5/8	1/2	51063	57095
0.0380	0,970 mm	#62	1-3/8	5/8	1/2	51062	57096
0.0390	0,990 mm	#61	1-3/8	5/8	1/2	51061	57097
0.0394	1,000 mm		34,0	12,0	9,0	61007	68271
0.0400	1,020 mm	#60	1-1/2	3/4	39/64	51060	57098
0.0410	1,040 mm	#59	1-1/2	3/4	39/64	51059	57099
0.0420	1,070 mm	#58	1-1/2	3/4	39/64	51058	57100
0.0430	1,090 mm	#57	1-1/2	3/4	39/64	51057	57101
0.0433	1,000 mm		36,0	14,0	11,0	61052	68294
0.0465	1,180 mm	#56	1-1/2	3/4	39/64	51056	57102
0.0469	1,190 mm	3/64	1-1/2	3/4	39/64	51103	57103
0.0472	1,200 mm		38,0	16,0	12,0	61053	68295
0.0512	1,300 mm		38,0	16,0	12,0	61054	68296
0.0520	1,320 mm	#55	1-1/2	3/4	39/64	51055	57104
0.0550	1,400 mm	#54	1-1/2	3/4	39/64	51054	57105
0.0551	1,400 mm		40,0	18,0	14,0	61055	68297
0.0591	1,500 mm		40,0	18,0	14,0	61009	68272
0.0595	1,510 mm	#53	1-1/2	3/4	39/64	51053	57106
0.0625	1,590 mm	*1/16	1-1/2	3/4	39/64	51104	57107
0.0630	1,600 mm		43,0	20,0	16,0	61056	68298
0.0635	1,610 mm	#52	1-1/2	3/4	39/64	51052	57108
0.0669	1,700 mm		43,0	20,0	17,0	61057	68299


continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0.0000/-0.0127



For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338

101



FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.0670	1,700 mm	#51	1-1/2	3/4	39/64	51051	57109
0.0700	1,780 mm	#50	1-3/4	7/8	45/64	51050	57110
0.0709	1,800 mm		46,0	22,0	17,0	61058	68300
0.0730	1,850 mm	#49	1-3/4	7/8	45/64	51049	57111
0.0748	1,900 mm		46,0	22,0	17,0	61059	68301
0.0760	1,930 mm	#48	1-3/4	7/8	45/64	51048	57112
0.0781	1,980 mm	5/64	1-3/4	7/8	45/64	51105	57113
0.0785	1,990 mm	#47	1-3/4	7/8	45/64	51047	57114
0.0787	2,000 mm		49,0	24,0	19,0	61011	68273
0.0810	2,060 mm	#46	1-3/4	7/8	45/64	51046	57115
0.0820	2,080 mm	#45	1-3/4	7/8	45/64	51045	57116
0.0827	2,100 mm		49,0	24,0	19,0	61060	68302
0.0860	2,180 mm	#44	2	1	51/64	51044	57117
0.0866	2,200 mm		53,0	27,0	21,0	61061	68303
0.0890	2,260 mm	#43	2	1	51/64	51043	57118
0.0906	2,300 mm		53,0	27,0	21,0	61062	68304
0.0935	2,370 mm	#42	2	1	51/64	51042	57119
0.0938	2,380 mm	3/32	2	1	51/64	51106	57120
0.0945	2,400 mm		57,0	30,0	24,0	61063	68305
0.0960	2,440 mm	#41	2	1	51/64	51041	57121
0.0980	2,490 mm	#40	2	1	51/64	51040	57122
0.0984	2,500 mm		57,0	30,0	24,0	61013	68274
0.0995	2,530 mm	#39	2-1/4	1-1/4	1	51039	57123
0.1015	2,580 mm	#38	2-1/4	1-1/4	1	51038	57124
0.1024	2,600 mm		57,0	30,0	24,0	61064	68306
0.1040	2,640 mm	#37	2-1/4	1-1/4	1	51037	57125
0.1063	2,700 mm		61,0	33,0	26,0	61065	68307
0.1065	2,710 mm	#36	2-1/4	1-1/4	1	51036	57126
0.1094	2,780 mm	7/64	2-1/4	1-1/4	1	51107	57127
0.1100	2,790 mm	#35	2-1/4	1-1/4	1	51035	57128
0.1102	2,800 mm		61,0	33,0	26,0	61066	68308
0.1110	2,820 mm	#34	2-1/4	1-1/4	1	51034	57129
0.1130	2,870 mm	#33	2-1/4	1-1/4	1	51033	57130
0.1142	2,900 mm		61,0	33,0	26,0	61067	68309
0.1160	2,950 mm	#32	2-1/4	1-1/4	1	51032	57131
0.1181	3,000 mm		61,0	33,0	26,0	61015	68275
0.1200	3,050 mm	#31	2-1/4	1-1/4	1	51031	57132
0.1220	3,100 mm		65,0	36,0	28,0	61068	68310
0.1250	3,180 mm	*1/8	2-1/4	1-1/4	1	51108	57133
0.1260	3,200 mm		65,0	36,0	28,0	61069	68311
0.1285	3,260 mm	#30	2-1/4	1-1/4	1	51030	57134
0.1299	3,300 mm		65,0	36,0	28,0	61070	68312
0.1339	3,400 mm		70,0	39,0	31,0	61071	68313
0.1360	3,450 mm	#29	2-1/2	1-3/8	1-7/64	51029	57135
0.1378	3,500 mm		70,0	39,0	31,0	61017	68276
0.1405	3,570 mm	#28	2-1/2	1-3/8	1-7/64	51028	57136
0.1406	3,570 mm	9/64	2-1/2	1-3/8	1-7/64	51109	57137
0.1417	3,600 mm		70,0	39,0	31,0	61072	68314
0.1440	3,660 mm	#27	2-1/2	1-3/8	1-7/64	51027	57138
0.1457	3,700 mm		70,0	39,0	31,0	61073	68315
0.1470	3,730 mm	#26	2-1/2	1-3/8	1-7/64	51026	57139
0.1495	3,800 mm	#25	2-1/2	1-3/8	1-7/64	51025	57140
0.1496	3,800 mm		75,0	43,0	34,0	61074	68316
0.1520	3,860 mm	#24	2-1/2	1-3/8	1-7/64	51024	57141

continued on next page

2 Flute Drills • Metric: DIN 338

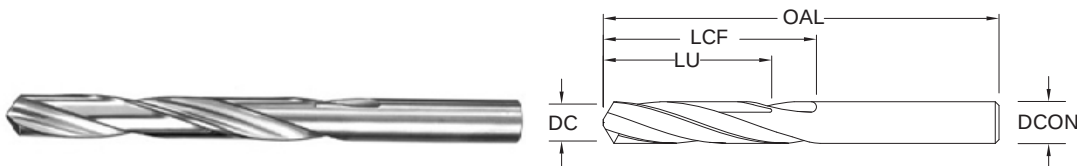

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.1535	3,900 mm		75,0	43,0	34,0	61075	68317
0.1540	3,910 mm	#23	2-1/2	1-3/8	1-7/64	51023	57142
0.1562	3,970 mm	5/32	2-1/2	1-3/8	1-7/64	51110	57143
0.1570	3,990 mm	#22	2-1/2	1-3/8	1-7/64	51022	57144
0.1575	4,000 mm		75,0	43,0	34,0	61019	68277
0.1590	4,040 mm	#21	2-1/2	1-3/8	1-7/64	51021	57145
0.1610	4,090 mm	#20	2-1/2	1-3/8	1-7/64	51020	57146
0.1614	4,100 mm		75,0	43,0	34,0	61076	68318
0.1654	4,200 mm		75,0	43,0	34,0	61077	68319
0.1660	4,220 mm	#19	2-3/4	1-5/8	1-19/64	51019	57147
0.1693	4,300 mm		80,0	47,0	37,0	61078	68320
0.1695	4,310 mm	#18	2-3/4	1-5/8	1-19/64	51018	57148
0.1719	4,370 mm	11/64	2-3/4	1-5/8	1-19/64	51111	57149
0.1730	4,390 mm	#17	2-3/4	1-5/8	1-19/64	51017	57150
0.1732	4,400 mm		80,0	47,0	37,0	61079	68321
0.1770	4,500 mm	#16	2-3/4	1-5/8	1-19/64	51016	57151
0.1772	4,500 mm		80,0	47,0	37,0	61021	68278
0.1800	4,570 mm	#15	2-3/4	1-5/8	1-19/64	51015	57152
0.1811	4,600 mm		80,0	47,0	37,0	61080	68322
0.1820	4,620 mm	#14	2-3/4	1-5/8	1-19/64	51014	57153
0.1850	4,700 mm		80,0	47,0	37,0	61081	68323
0.1850	4,700 mm	#13	2-3/4	1-5/8	1-19/64	51013	57154
0.1875	4,760 mm	*3/16	2-3/4	1-5/8	1-19/64	51112	57155
0.1890	4,800 mm		86,0	52,0	41,0	61082	68324
0.1890	4,800 mm	#12	2-3/4	1-5/8	1-19/64	51012	57156
0.1910	4,850 mm	#11	2-3/4	1-5/8	1-19/64	51011	57157
0.1929	4,900 mm		86,0	52,0	41,0	61083	68325
0.1935	4,910 mm	#10	2-3/4	1-5/8	1-19/64	51010	57158
0.1960	4,980 mm	#9	3	1-3/4	1-13/32	51009	57159
0.1969	5,000 mm		86,0	52,0	41,0	61023	68279
0.1990	5,050 mm	#8	3	1-3/4	1-13/32	51008	57160
0.2008	5,010 mm		86,0	52,0	41,0	61084	68326
0.2010	5,110 mm	#7	3	1-3/4	1-13/32	51007	57161
0.2031	5,160 mm	13/64	3	1-3/4	1-13/32	51113	57162
0.2040	5,180 mm	#6	3	1-3/4	1-13/32	51006	57163
0.2047	5,200 mm		86,0	52,0	41,0	61085	68327
0.2055	5,220 mm	#5	3	1-3/4	1-13/32	51005	57164
0.2087	5,300 mm		86,0	52,0	41,0	61086	68328
0.2090	5,310 mm	#4	3	1-3/4	1-13/32	51004	57165
0.2126	5,400 mm		93,0	57,0	45,0	61087	68329
0.2130	5,410 mm	#3	3	1-3/4	1-13/32	51003	57166
0.2165	5,500 mm		93,0	57,0	1-13/32	61025	68280
0.2188	5,560 mm	7/32	3	1-3/4	1-13/32	51114	57167
0.2205	5,600 mm		93,0	57,0	45,0	61088	68330

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0.0000/-0.0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338

101



FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2210	5,610 mm	#2	3	1-3/4	1-13/32	51002	57168
0.2244	5,700 mm		93,0	57,0	45,0	61089	68331
0.2280	5,790 mm	#1	3	1-3/4	1-13/32	51001	57169
0.2283	5,800 mm		93,0	57,0	45,0	61090	68332
0.2323	5,900 mm		93,0	57,0	45,0	61091	68333
0.2340	5,940 mm	A	3-1/4	2	1-39/64	51201	57170
0.2344	5,950 mm	15/64	3-1/4	2	1-39/64	51115	57171
0.2362	6,000 mm		93,0	57,0	45,0	61027	68281
0.2380	6,050 mm	B	3-1/4	2	1-39/64	51202	57172
0.2402	6,100 mm		101,0	63,0	50,0	61092	68334
0.2420	6,150 mm	C	3-1/4	2	1-39/64	51203	57173
0.2441	6,200 mm		101,0	63,0	50,0	61093	68335
0.2460	6,250 mm	D	3-1/4	2	1-39/64	51204	57174
0.2480	6,300 mm		101,0	63,0	50,0	61094	68336
0.2500	6,350 mm	*1/4	3-1/4	2	1-39/64	51116	57176
0.2520	6,400 mm		101,0	63,0	50,0	61095	68337
0.2559	6,500 mm		101,0	63,0	50,0	61029	68282
0.2570	6,530 mm	F	3-1/4	2	1-39/64	51206	57177
0.2598	6,600 mm		101,0	63,0	50,0	61096	68338
0.2610	6,630 mm	G	3-1/2	2-1/8	1-45/64	51207	57178
0.2638	6,700 mm		101,0	63,0	50,0	61097	68339
0.2656	6,750 mm	17/64	3-1/2	2-1/8	1-45/64	51117	57179
0.2660	6,760 mm	H	3-1/2	2-1/8	1-45/64	51208	57180
0.2677	6,800 mm		109,0	69,0	55,0	61098	68340
0.2717	6,900 mm		109,0	69,0	55,0	61099	68341
0.2720	6,910 mm	I	3-1/2	2-1/8	1-45/64	51209	57181
0.2756	7,000 mm		109,0	69,0	55,0	61031	68283
0.2770	7,040 mm	J	3-1/2	2-1/8	1-45/64	51210	57182
0.2795	7,100 mm		109,0	69,0	55,0	61100	68342
0.2810	7,140 mm	K	3-1/2	2-1/8	1-45/64	51211	57183
0.2812	7,140 mm	9/32	3-1/2	2-1/8	1-45/64	51118	57184
0.2835	7,200 mm		109,0	69,0	55,0	61101	68343
0.2874	7,300 mm		109,0	69,0	55,0	61102	68344
0.2900	7,370 mm	L	3-1/2	2-1/8	1-45/64	51212	57185
0.2913	7,400 mm		109,0	69,0	55,0	61103	68345
0.2950	7,490 mm	M	3-3/4	2-3/8	1-29/32	51213	57186
0.2953	7,500 mm		109,0	69,0	55,0	61033	68284
0.2969	7,540 mm	19/64	3-3/4	2-3/8	1-29/32	51119	57187
0.2992	7,600 mm		117,0	75,0	60,0	61104	68346
0.3020	7,670 mm	N	3-3/4	2-3/8	1-29/32	51214	57188
0.3031	7,700 mm		117,0	75,0	60,0	61105	68347
0.3071	7,800 mm		117,0	75,0	60,0	61106	68348
0.3110	7,900 mm		117,0	75,0	60,0	61107	68349
0.3125	7,940 mm	*5/16	3-3/4	2-3/8	1-29/32	51120	57189
0.3150	8,000 mm		117,0	75,0	60,0	61035	68285
0.3160	8,030 mm	O	3-3/4	2-3/8	1-29/32	51215	57190
0.3189	8,100 mm		117,0	75,0	60,0	61108	68350
0.3228	8,200 mm		117,0	75,0	60,0	61109	68351
0.3230	8,200 mm	P	3-3/4	2-3/8	1-29/32	51216	57191
0.3268	8,300 mm		117,0	75,0	60,0	61110	68352
0.3281	8,330 mm	21/64	4	2-1/2	2	51121	57192
0.3307	8,400 mm		117,0	75,0	60,0	61111	68353
0.3320	8,430 mm	Q	4	2-1/2	2	51217	57193
0.3346	8,500 mm		117,0	75,0	60,0	61037	68286

continued on next page

2 Flute Drills • Metric: DIN 338

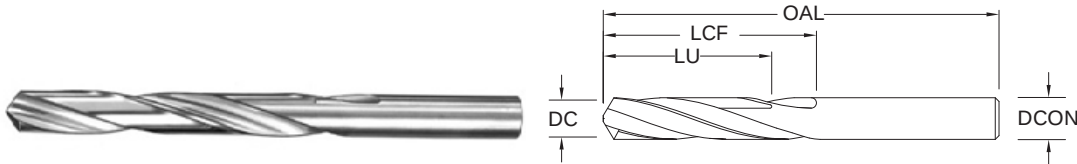

101

FRACTIONAL & METRIC SERIES

Pictured:
Series 101 Drill Set



CONTINUED

inch & mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	TI-NAMITE®-A (AITiN)
0.3386	8,600 mm		125,0	81,0	64,0	61112	68354
0.3390	8,610 mm	R	4	2-1/2	2	51218	57194
0.3425	8,700 mm		125,0	81,0	64,0	61113	68355
0.3438	8,730 mm	11/32	4	2-1/2	2	51122	57195
0.3465	8,800 mm		125,0	81,0	64,0	61114	68356
0.3480	8,840 mm	S	4	2-1/2	2	51219	57196
0.3504	8,900 mm		125,0	81,0	64,0	61115	68357
0.3543	9,000 mm		125,0	81,0	64,0	61039	68287
0.3580	9,090 mm	T	4-1/4	2-3/4	2-13/64	51220	57197
0.3583	9,100 mm		125,0	81,0	64,0	61116	68358
0.3594	9,130 mm	23/64	4-1/4	2-3/4	2-13/64	51123	57198
0.3622	9,200 mm		125,0	81,0	64,0	61117	68359
0.3661	9,300 mm		125,0	81,0	64,0	61118	68360
0.3680	9,350 mm	U	4-1/4	2-3/4	2-13/64	51221	57199
0.3701	9,400 mm		125,0	81,0	64,0	61119	68361
0.3740	9,500 mm		125,0	81,0	64,0	61041	68288
0.3750	9,530 mm	*3/8	4-1/4	2-3/4	2-13/64	51124	57200
0.3770	9,580 mm	V	4-1/4	2-3/4	2-13/64	51222	57201
0.3780	9,600 mm		133,0	87,0	69,0	61120	68362
0.3819	9,700 mm		133,0	87,0	69,0	61121	68363
0.3858	9,800 mm		133,0	87,0	69,0	61122	68364
0.3860	9,800 mm	W	4-1/2	2-7/8	2-19/64	51223	57202
0.3898	9,900 mm		133,0	87,0	69,0	61123	68365
0.3906	9,920 mm	25/64	4-1/2	2-7/8	2-19/64	51125	57203
0.3937	10,000 mm		133,0	87,0	69,0	61043	68289
0.3970	10,080 mm	X	4-1/2	2-7/8	2-19/64	51224	57204
0.4016	10,010 mm		133,0	87,0	69,0	61124	68366
0.4040	10,260 mm	Y	4-1/2	2-7/8	2-19/64	51225	57205
0.4062	10,320 mm	13/32	4-1/2	2-7/8	2-19/64	51126	57206
0.4130	10,490 mm	Z	4-1/2	2-7/8	2-19/64	51226	57207
0.4134	10,500 mm		133,0	87,0	69,0	61045	68290
0.4219	10,720 mm	27/64	4-1/2	2-7/8	2-19/64	51127	57208
0.4331	11,000 mm		142,0	94,0	75,0	61047	68291
0.4375	11,110 mm	7/16	4-1/2	2-7/8	2-19/64	51128	57209
0.4528	11,500 mm		142,0	94,0	75,0	61049	68292
0.4531	11,510 mm	29/64	4-3/4	3	2-13/32	51129	57210
0.4688	11,910 mm	15/32	4-3/4	3	2-13/32	51130	57211
0.4724	12,000 mm		151,0	101,0	80,0	61051	68293
0.4844	12,300 mm	31/64	4-3/4	3	2-13/32	51131	57212
0.5000	12,700 mm	1/2	4-3/4	3	2-13/32	51132	57213
*Series 101 Set						61175	57351

TOLERANCES (inch)

DC = +0.0000/-0.0005


TOLERANCES (mm)

DC = +0.0000/-0.0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

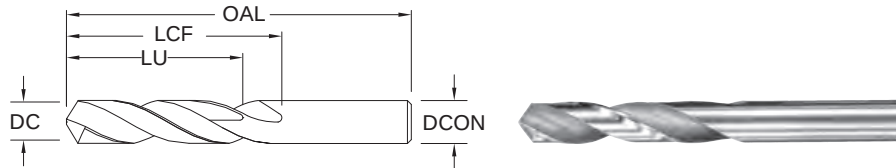

108M Plus

METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h_6

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h_6

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h_6

>10-16 DIAMETER

DC = +0,000/-0,018

DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com


mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.0197	0,500 mm		20,0	3,0	—	62001	68643
0.0217	0,550 mm		21,0	3,5	—	62003	68644
0.0236	0,600 mm		21,0	3,5	—	62005	68645
0.0256	0,650 mm		22,0	4,0	—	62007	68646
0.0276	0,700 mm		23,0	4,5	—	62009	68647
0.0295	0,750 mm		23,0	4,5	—	62011	68648
0.0315	0,800 mm		24,0	5,0	—	62013	68649
0.0335	0,850 mm		24,0	5,0	—	62015	68650
0.0354	0,900 mm		25,0	5,5	4,0	62017	68651
0.0374	0,950 mm		25,0	5,5	4,0	62019	68652
0.0394	1,000 mm		26,0	6,0	4,7	62021	68653
0.0413	1,050 mm		26,0	6,0	4,7	62023	68654
0.0433	1,100 mm		28,0	7,0	5,4	62025	68655
0.0453	1,150 mm		28,0	7,0	5,4	62027	68656
0.0472	1,200 mm		30,0	8,0	6,0	62029	68657
0.0492	1,250 mm		30,0	8,0	6,0	62031	68658
0.0512	1,300 mm		30,0	8,0	6,0	62033	68659
0.0531	1,350 mm		32,0	9,0	7,0	62035	68660
0.0551	1,400 mm		32,0	9,0	7,0	62037	68661
0.0571	1,450 mm		32,0	9,0	7,0	62039	68662
0.0591	1,500 mm		32,0	9,0	7,0	62041	68663
0.0630	1,600 mm		34,0	10,0	7,0	62043	68664
0.0669	1,700 mm		34,0	10,0	7,0	62045	68665
0.0709	1,800 mm		36,0	11,0	8,0	62047	68666
0.0748	1,900 mm		36,0	11,0	8,0	62049	68667
0.0748	2,000 mm		38,0	12,0	9,0	62051	68668
0.0827	2,100 mm		38,0	12,0	9,0	62053	68669
0.0866	2,200 mm		40,0	13,0	10,0	62055	68670
0.0906	2,300 mm		40,0	13,0	10,0	62057	68671
0.0945	2,400 mm		43,0	14,0	11,0	62059	68672
0.0984	2,500 mm		43,0	14,0	11,0	62061	68673
0.1024	2,600 mm		43,0	14,0	11,0	62063	68674
0.1063	2,700 mm		46,0	16,0	12,0	62065	68675
0.1102	2,800 mm		46,0	16,0	12,0	62067	68676

continued on next page

Short Length Self Centering Drills • DIN 6539



3xD

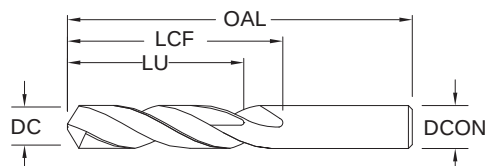

108M Plus

METRIC SERIES

CONTINUED

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.1142	2,900 mm		46,0	16,0	12,0	62069	68677
0.1181	3,000 mm		46,0	16,0	12,0	62071	68678
0.1220	3,100 mm		49,0	18,0	14,0	62073	68679
0.1260	3,200 mm		49,0	18,0	14,0	62075	68680
0.1299	3,300 mm		49,0	18,0	14,0	62077	68681
0.1339	3,400 mm		52,0	20,0	15,0	62079	68682
0.1378	3,500 mm		52,0	20,0	15,0	62081	68683
0.1417	3,600 mm		52,0	20,0	15,0	62083	68684
0.1457	3,700 mm		52,0	20,0	15,0	62085	68685
0.1496	3,800 mm		55,0	22,0	17,0	62087	68686
0.1535	3,900 mm		55,0	22,0	17,0	62089	68687
0.1575	4,000 mm		55,0	22,0	17,0	62091	68688
0.1614	4,100 mm		55,0	22,0	17,0	62093	68689
0.1654	4,200 mm		55,0	22,0	17,0	62095	68690
0.1693	4,300 mm		58,0	24,0	18,0	62097	68691
0.1732	4,400 mm		58,0	24,0	18,0	62099	68692
0.1772	4,500 mm		58,0	24,0	18,0	62101	68693
0.1811	4,600 mm		58,0	24,0	18,0	62103	68694
0.1850	4,700 mm	#13	58,0	24,0	18,0	62105	68695
0.1890	4,800 mm	#12	62,0	26,0	20,0	62107	68696
0.1929	4,900 mm		62,0	26,0	20,0	62109	68697
0.1969	5,000 mm		62,0	26,0	20,0	62111	68698
0.2008	5,100 mm		62,0	26,0	20,0	62113	68699
0.2047	5,200 mm		62,0	26,0	20,0	62115	68700
0.2087	5,300 mm		62,0	26,0	20,0	62117	68701
0.2126	5,400 mm		66,0	28,0	21,0	62119	68702
0.2165	5,500 mm		66,0	28,0	21,0	62121	68703
0.2205	5,600 mm		66,0	28,0	21,0	62123	68704
0.2244	5,700 mm		66,0	28,0	21,0	62125	68705
0.2283	5,800 mm		66,0	28,0	21,0	62127	68706
0.2323	5,900 mm		66,0	28,0	21,0	62129	68707
0.2362	6,000 mm		66,0	28,0	21,0	62131	68708

continued on next page

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/-0,010

DCON = h₆

>3-6 DIAMETER

DC = +0,000/-0,012

DCON = h₆

>6-10 DIAMETER

DC = +0,000/-0,015

DCON = h₆

>10-16 DIAMETER



DC = +0,000/-0,018

DCON = h₆

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

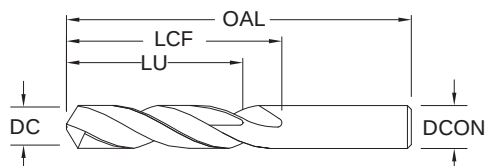

108M Plus
METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,000/−0,010

DCON = h_6

>3–6 DIAMETER

DC = +0,000/−0,012

DCON = h_6

>6–10 DIAMETER

DC = +0,000/−0,015

DCON = h_6

>10–16 DIAMETER

DC = +0,000/−0,018

DCON = h_6

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
DECIMAL DC/DCON	METRIC DC/DCON	LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2402	6,100 mm		70,0	31,0	23,0	62133	68709
0.2441	6,200 mm		70,0	31,0	23,0	62135	68710
0.2480	6,300 mm		70,0	31,0	23,0	62137	68711
0.2520	6,400 mm		70,0	31,0	23,0	62139	68712
0.2559	6,500 mm		70,0	31,0	23,0	62141	68713
0.2598	6,800 mm		70,0	31,0	23,0	62142	68603
0.2756	7,000 mm		74,0	34,0	25,0	62143	68718
0.2953	7,500 mm		74,0	34,0	25,0	62145	68723
0.3071	7,800 mm		79,0	37,0	27,0	62146	68604
0.3150	8,000 mm		79,0	37,0	27,0	62147	68728
0.3346	8,500 mm		79,0	37,0	27,0	62149	68733
0.3543	9,000 mm		84,0	40,0	29,0	62151	68738
0.3740	9,500 mm		84,0	40,0	29,0	62153	68743
0.3858	9,800 mm		89,0	43,0	31,0	62154	68606
0.3937	10,000 mm		89,0	43,0	31,0	62155	68748
0.4016	10,200 mm		89,0	43,0	31,0	62156	68607
0.4134	10,500 mm		89,0	43,0	31,0	62066	68753
0.4331	11,000 mm		95,0	47,0	33,0	62157	68758
0.4528	11,500 mm		95,0	47,0	33,0	62084	68763
0.4646	11,800 mm		102,0	51,0	35,0	62158	68608
0.4724	12,000 mm		102,0	51,0	35,0	62159	68768
0.4921	12,500 mm		102,0	51,0	35,0	62102	68773
0.5118	13,000 mm		102,0	51,0	35,0	62112	68778
0.5433	13,800 mm		107,0	54,0	37,0	62164	68609
0.5512	14,000 mm		107,0	54,0	37,0	62116	68780
0.5709	14,500 mm		111,0	56,0	38,0	62166	68611
0.5827	14,800 mm		111,0	56,0	38,0	62167	68612
0.5906	15,000 mm		111,0	56,0	38,0	62168	68613
0.6221	15,800 mm		115,0	58,0	38,0	62170	68614
0.6299	16,000 mm		115,0	58,0	38,0	62171	68616

CONTINUED

2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)		DC • in						
				1/64	1/32	1/16	1/8	1/4	3/8	1/2
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	265 (212-318)	RPM	64787	32394	16197	8098	4049	2699	2025
			Fr	0.00021	0.0004	0.0008	0.0017	0.0033	0.0050	0.0067
			Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5	13.5
		125 (100-150)	RPM	30560	15280	7640	3820	1910	1273	955
			Fr	0.00020	0.0004	0.0008	0.0016	0.0031	0.0047	0.0063
			Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
		85 (68-102)	RPM	20781	10390	5195	2598	1299	866	649
			Fr	0.00011	0.0002	0.0004	0.0008	0.0017	0.0025	0.0034
			Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230 (184-276)	RPM	56230	28115	14058	7029	3514	2343	1757
			Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
			Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		145 (116-174)	RPM	35450	17725	8862	4431	2216	1477	1108
			Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
			Feed (ipm)	6.6	6.6	6.6	6.6	6.6	6.6	6.6
		60 (48-72)	RPM	14669	7334	3667	1834	917	611	458
			Fr	0.00008	0.0002	0.0003	0.0007	0.0013	0.0020	0.0026
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85 (68-102)	RPM	20781	10390	5195	2598	1299	866	649
			Fr	0.00011	0.0002	0.0004	0.0009	0.0018	0.0027	0.0035
			Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		55 (44-66)	RPM	13446	6723	3362	1681	840	560	420
			Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0017
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	210 (168-252)	RPM	51341	25670	12835	6418	3209	2139	1604
			Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
		110 (88-132)	RPM	26893	13446	6723	3362	1681	1121	840
			Fr	0.00009	0.0002	0.0004	0.0007	0.0015	0.0022	0.0030
			Feed (ipm)	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65 (52-78)	RPM	15891	7946	3973	1986	993	662	497
			Fr	0.00010	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		55 (44-66)	RPM	13446	6723	3362	1681	840	560	420
			Fr	0.00010	0.0002	0.0004	0.0008	0.0015	0.0023	0.0031
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
K	CAST IRONS Gray, Malleable, Ductile	280 (224-336)	RPM	68454	34227	17114	8557	4278	2852	2139
			Fr	0.00026	0.0005	0.0010	0.0020	0.0041	0.0061	0.0082
			Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5
		250 (200-300)	RPM	61120	30560	15280	7640	3820	2547	1910
			Fr	0.00025	0.0005	0.0010	0.0020	0.0041	0.0061	0.0081
			Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5

continued on next page

FRACTIONAL 2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)	DC • in							
			1/64	1/32	1/16	1/8	1/4	3/8	1/2	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540	RPM	132019	<u>66010</u>	33005	16502	8251	5501	4126
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.00030	0.0006	0.0012	0.0024	0.0048	0.0073	0.0097
		(432-648)	Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0
		455	RPM	111238	55619	27810	13905	6952	4635	3476
		≤ 150 Bhn or ≤ 88 HRb	Fr	0.00031	0.0006	0.0013	0.0025	0.0050	0.0076	0.0101
		(364-546)	Feed (ipm)	35.0	35.0	35.0	35.0	35.0	35.0	35.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	190	RPM	<u>46451</u>	23226	11613	5806	2903	1935	1452
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
		(152-228)	Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
		175	RPM	42784	21392	10696	5348	2674	1783	1337
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
		(140-210)	Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
	PLASTICS Polycarbonate, PVC	500	RPM	122240	<u>61120</u>	<u>30560</u>	15280	7640	5093	3820
		(400-600)	Fr	0.00031	0.0006	0.0012	0.0025	0.0050	0.0075	0.0099
			Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	40	RPM	9779	4890	2445	1222	611	407	306
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0025	0.0033
		(32-48)	Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		25	RPM	6112	3056	1528	764	382	255	191
		≤ 320 Bhn or ≤ 34 HRc	Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0024	0.0031
		(20-30)	Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		20	RPM	4890	2445	1222	611	306	204	153
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.00004	0.0001	0.0002	0.0003	0.0007	0.0010	0.0013
		(16-24)	Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		85	RPM	20781	10390	5195	2598	1299	866	649
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.00020	0.0004	0.0008	0.0016	0.0032	0.0049	0.0065
		(68-102)	Feed (ipm)	4.2	4.2	4.2	4.2	4.2	4.2	4.2
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	65	RPM	15891	7946	3973	1986	993	662	497
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.00011	0.0002	0.0004	0.0009	0.0017	0.0026	0.0034
		(52-78)	Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		55	RPM	13446	6723	3362	1681	840	560	420
		≤ 440 Bhn or ≤ 47 HRc	Fr	0.00010	0.0002	0.0004	0.0008	0.0015	0.0023	0.0031
		(44-66)	Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40	RPM	9779	4890	2445	1222	611	407	306
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0016
		(32-48)	Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Hardness	Vc (m/min)	DC • mm							
			1	3	6	8	10	12	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	81	RPM	25690	8563	4282	3211	2569	2141	1606
		(65-97)	Fr	0.014	0.041	0.082	0.109	0.136	0.163	0.218
			Feed (mm/min)	350	350	350	350	350	350	350
		38	RPM	12118	4039	2020	1515	1212	1010	757
		(30-46)	Fr	0.012	0.036	0.072	0.096	0.120	0.144	0.191
			Feed (mm/min)	145	145	145	145	145	145	145
		26	RPM	8240	2747	1373	1030	824	687	515
		(21-31)	Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	22297	7432	3716	2787	2230	1858	1394
		(56-84)	Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
			Feed (mm/min)	270	270	270	270	270	270	270
		44	RPM	14057	4686	2343	1757	1406	1171	879
		(35-53)	Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
			Feed (mm/min)	170	170	170	170	170	170	170
		18	RPM	5816	1939	969	727	582	485	364
		(15-22)	Fr	0.005	0.015	0.030	0.040	0.050	0.060	0.080
			Feed (mm/min)	29	29	29	29	29	29	29
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	8240	2747	1373	1030	824	687	515
		(21-31)	Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
		17	RPM	5332	1777	889	666	533	444	333
		(13-20)	Fr	0.003	0.010	0.020	0.027	0.034	0.041	0.054
			Feed (mm/min)	18	18	18	18	18	18	18
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	64	RPM	20358	6786	3393	2545	2036	1696	1272
		(51-77)	Fr	0.010	0.029	0.059	0.079	0.098	0.118	0.157
			Feed (mm/min)	200	200	200	200	200	200	200
		34	RPM	10664	3555	1777	1333	1066	889	666
		(27-40)	Fr	0.006	0.017	0.034	0.045	0.056	0.068	0.090
			Feed (mm/min)	60	60	60	60	60	60	60
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	20	RPM	6301	2100	1050	788	630	525	394
		(16-24)	Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45
		17	RPM	5332	1777	889	666	533	444	333
		(13-20)	Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
			Feed (mm/min)	35	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	85	RPM	27144	9048	4524	3393	2714	2262	1696
		(68-102)	Fr	0.016	0.049	0.097	0.130	0.162	0.195	0.259
			Feed (mm/min)	440	440	440	440	440	440	440
		76	RPM	24235	8078	4039	3029	2424	2020	1515
		(61-91)	Fr	0.017	0.050	0.099	0.132	0.165	0.198	0.264
			Feed (mm/min)	400	400	400	400	400	400	400

continued on next page

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Hardness	Vc (m/min)	DC • mm								
			1	3	6	8	10	12	16		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	165	RPM	52348	17449	8725	6544	5235	4362	3272
			(132-198)	Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.319
			Feed (mm/min)	1045	1045	1045	1045	1045	1045	1045	
		≤ 150 Bhn or ≤ 88 HRb	139	RPM	44108	14703	7351	5514	4411	3676	2757
			(111-166)	Fr	0.020	0.060	0.120	0.160	0.200	0.239	0.319
			Feed (mm/min)	880	880	880	880	880	880	880	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	58	RPM	18419	6140	3070	2302	1842	1535	1151
			(46-69)	Fr	0.010	0.030	0.060	0.080	0.100	0.121	0.161
			Feed (mm/min)	185	185	185	185	185	185	185	
		≤ 200 Bhn or ≤ 23 HRc	53	RPM	16965	5655	2827	2121	1696	1414	1060
			(43-64)	Fr	0.010	0.030	0.060	0.080	0.100	0.120	0.160
			Feed (mm/min)	170	170	170	170	170	170	170	
PLASTICS Polycarbonate, PVC	152 (122-183)	RPM	48471	16157	8078	6059	4847	4039	3029		
		Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320		
		Feed (mm/min)	970	970	970	970	970	970	970		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.006	0.019	0.039	0.052	0.064	0.077	0.103
			Feed (mm/min)	25	25	25	25	25	25	25	
		≤ 320 Bhn or ≤ 34 HRc	8	RPM	2424	808	404	303	242	202	151
			(6-9)	Fr	0.006	0.019	0.037	0.050	0.062	0.074	0.099
			Feed (mm/min)	15	15	15	15	15	15	15	
	≤ 425 Bhn or ≤ 45 HRc	6	RPM	1939	646	323	242	194	162	121	
		(5-7)	Fr	0.005	0.015	0.031	0.041	0.052	0.062	0.083	
		Feed (mm/min)	10	10	10	10	10	10	10		
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	26	RPM	8240	2747	1373	1030	824	687	515
			(21-31)	Fr	0.013	0.040	0.080	0.107	0.133	0.160	0.214
			Feed (mm/min)	110	110	110	110	110	110	110	
		≤ 350 Bhn or ≤ 38 HRc	20	RPM	6301	2100	1050	788	630	525	394
			(16-24)	Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45	
	≤ 440 Bhn or ≤ 47 HRc	17	RPM	5332	1777	889	666	533	444	333	
		(13-20)	Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105	
		Feed (mm/min)	35	35	35	35	35	35	35		
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.003	0.009	0.019	0.025	0.031	0.037	0.050
			Feed (mm/min)	12	12	12	12	12	12	12	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Straight Flute Drills • Metric: DIN 6539




3xD



106

FRACTIONAL & METRIC SERIES

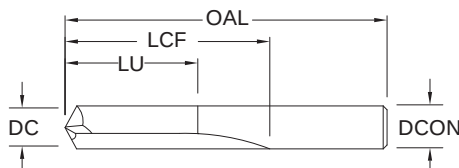

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AITiN)
0.0394	1,000 mm		26,0	6,0	4,5	66001	66002
0.0400	1,020 mm	#60	1-1/2	1/2	13/32	56060	56269
0.0410	1,040 mm	#59	1-1/2	1/2	13/32	56059	56268
0.0420	1,070 mm	#58	1-1/2	1/2	13/32	56058	56267
0.0430	1,090 mm	#57	1-1/2	1/2	13/32	56057	56266
0.0465	1,180 mm	#56	1-1/2	1/2	13/32	56056	56265
0.0469	1,190 mm	3/64	1-1/2	1/2	13/32	56103	56135
0.0520	1,320 mm	#55	1-1/2	1/2	13/32	56055	56264
0.0550	1,400 mm	#54	1-1/2	1/2	13/32	56054	56263
0.0591	1,500 mm		32,0	9,0	7,0	66003	66004
0.0595	1,510 mm	#53	1-1/2	1/2	13/32	56053	56262
0.0625	1,590 mm	1/16	1-1/2	5/8	1/2	56104	56136
0.0635	1,610 mm	#52	1-11/16	11/16	35/64	56052	56261
0.0670	1,700 mm	#51	1-11/16	11/16	35/64	56051	56260
0.0700	1,780 mm	#50	1-11/16	11/16	35/64	56050	56259
0.0730	1,850 mm	#49	1-11/16	11/16	35/64	56049	56258
0.0760	1,930 mm	#48	1-11/16	11/16	35/64	56048	56257
0.0781	1,980 mm	5/64	1-11/16	11/16	35/64	56105	56137
0.0785	1,990 mm	#47	1-3/4	3/4	39/64	56047	56256
0.0787	2,000 mm		38,0	12,0	9,0	66005	66006
0.0810	2,060 mm	#46	1-3/4	3/4	39/64	56046	56255
0.0820	2,080 mm	#45	1-3/4	3/4	39/64	56045	56254
0.0860	2,180 mm	#44	1-3/4	3/4	39/64	56044	56253
0.0890	2,260 mm	#43	1-3/4	3/4	39/64	56043	56252
0.0935	2,370 mm	#42	1-3/4	3/4	39/64	56042	56251
0.0938	2,380 mm	3/32	1-3/4	3/4	39/64	56106	56138
0.0960	2,440 mm	#41	1-13/16	13/16	21/32	56041	56250
0.0980	2,490 mm	#40	1-13/16	13/16	21/32	56040	56249
0.0984	2,500 mm		43,0	14,0	11,0	66007	66008
0.0995	2,530 mm	#39	1-13/16	13/16	21/32	56039	56248
0.1015	2,580 mm	#38	1-13/16	13/16	21/32	56038	56247
0.1040	2,640 mm	#37	1-13/16	13/16	21/32	56037	56246
0.1065	2,710 mm	#36	1-13/16	13/16	21/32	56036	56245
0.1094	2,780 mm	7/64	1-13/16	13/16	21/32	56107	56139
0.1100	2,790 mm	#35	1-7/8	7/8	45/64	56035	56244
0.1110	2,820 mm	#34	1-7/8	7/8	45/64	56034	56243

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

Straight Flute Drills • Metric: DIN 6539

106

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AITiN)
0.1130	2,870 mm	#33	1-7/8	7/8	45/64	56033	56242
0.1160	2,950 mm	#32	1-7/8	7/8	45/64	56032	56241
0.1181	3,000 mm		46,0	16,0	12,0	66009	66010
0.1200	3,050 mm	#31	1-7/8	7/8	45/64	56031	56240
0.1250	3,180 mm	1/8	1-7/8	7/8	45/64	56108	56140
0.1285	3,260 mm	#30	1-15/16	15/16	3/4	56030	56239
0.1360	3,450 mm	#29	1-15/16	15/16	3/4	56029	56238
0.1378	3,500 mm		52,0	20,0	15,0	66011	66012
0.1405	3,570 mm	#28	1-15/16	15/16	3/4	56028	56237
0.1406	3,570 mm	9/64	1-15/16	15/16	3/4	56109	56141
0.1440	3,660 mm	#27	2-1/16	1	51/64	56027	56236
0.1470	3,730 mm	#26	2-1/16	1	51/64	56026	56235
0.1495	3,800 mm	#25	2-1/16	1	51/64	56025	56234
0.1520	3,860 mm	#24	2-1/16	1	51/64	56024	56233
0.1540	3,910 mm	#23	2-1/16	1	51/64	56023	56232
0.1562	3,970 mm	5/32	2-1/16	1	51/64	56110	56142
0.1570	3,990 mm	#22	2-1/8	1-1/16	55/64	56022	56231
0.1575	4,000 mm		55,0	22,0	17,0	66013	66014
0.1590	4,040 mm	#21	2-1/8	1-1/16	55/64	56021	56230
0.1610	4,090 mm	#20	2-1/8	1-1/16	55/64	56020	56229
0.1660	4,220 mm	#19	2-1/8	1-1/16	55/64	56019	56228
0.1695	4,310 mm	#18	2-1/8	1-1/16	55/64	56018	56227
0.1719	4,370 mm	11/64	2-1/8	1-1/16	55/64	56111	56143
0.1730	4,390 mm	#17	2-3/16	1-1/8	29/32	56017	56226
0.1770	4,500 mm	#16	2-3/16	1-1/8	29/32	56016	56225
0.1772	4,500 mm		58,0	24,0	18,0	66015	66016
0.1800	4,570 mm	#15	2-3/16	1-1/8	29/32	56015	56224
0.1820	4,620 mm	#14	2-3/16	1-1/8	29/32	56014	56223
0.1850	4,700 mm	#13	2-3/16	1-1/8	29/32	56013	56222
0.1875	4,760 mm	3/16	2-3/16	1-1/8	29/32	56112	56144
0.1890	4,800 mm	#12	2-3/16	1-1/8	29/32	56012	56221
0.1910	4,850 mm	#11	2-3/16	1-1/8	29/32	56011	56220
0.1935	4,910 mm	#10	2-3/16	1-1/8	29/32	56010	56219
0.1960	4,980 mm	#9	2-1/4	1-3/16	61/64	56009	56218
0.1969	5,000 mm		62,0	26,0	20,0	66017	66018
0.1990	5,050 mm	#8	2-1/4	1-3/16	61/64	56008	56217
0.2010	5,110 mm	#7	2-1/4	1-3/16	61/64	56007	56216
0.2031	5,160 mm	13/64	2-1/4	1-3/16	61/64	56113	56145
0.2040	5,180 mm	#6	2-3/8	1-1/4	1	56006	56215
0.2055	5,220 mm	#5	2-3/8	1-1/4	1	56005	56214
0.2090	5,310 mm	#4	2-3/8	1-1/4	1	56004	56213
0.2130	5,410 mm	#3	2-3/8	1-1/4	1	56003	56212
0.2165	5,500 mm		66,0	28,0	21,0	66019	66020
0.2188	5,560 mm	7/32	2-3/8	1-1/4	1	56114	56146
0.2210	5,610 mm	#2	2-7/16	1-5/16	1-3/64	56002	56211
0.2280	5,790 mm	#1	2-7/16	1-5/16	1-3/64	56001	56210

continued on next page

Straight Flute Drills • Metric: DIN 6539




3xD



106

FRACTIONAL & METRIC SERIES

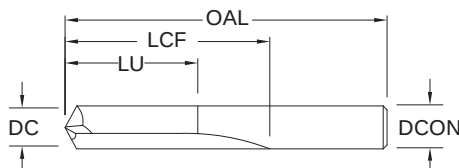

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2344	5,950 mm	15/64	2-7/16	1-5/16	1-3/64	56115	56147
0.2362	6,000 mm		66,0	28,0	21,0	66021	66045
0.2500	6,350 mm	1/4	2-1/2	1-3/8	1-7/64	56116	56148
0.2559	6,500 mm		70,0	31,0	23,0	66022	66046
0.2656	6,750 mm	17/64	2-5/8	1-7/16	1-7/64	56117	56149
0.2756	7,000 mm		74,0	34,0	25,0	66023	66024
0.2812	7,140 mm	9/32	2-11/16	1-1/2	1-13/64	56118	56150
0.2953	7,500 mm		74,0	34,0	25,0	66025	66026
0.2969	7,540 mm	19/64	2-3/4	1-9/16	1-1/4	56119	56151
0.3125	7,940 mm	5/16	2-13/16	1-5/8	1-19/64	56120	56152
0.3150	8,000 mm		79,0	37,0	27,0	66027	66028
0.3281	8,330 mm	21/64	2-15/16	1-11/16	1-23/64	56121	56153
0.3346	8,500 mm		79,0	37,0	27,0	66029	66030
0.3438	8,730 mm	11/32	3	1-11/16	1-23/64	56122	56154
0.3543	9,000 mm		84,0	40,0	29,0	66031	66032
0.3594	9,130 mm	23/64	3-1/16	1-3/4	1-13/32	56123	56155
0.3740	9,500 mm		84,0	40,0	29,0	66033	66034
0.3750	9,530 mm	3/8	3-1/8	1-13/16	1-29/64	56124	56156
0.3906	9,920 mm	25/64	3-1/4	1-7/8	1-1/2	56125	56157
0.3937	10,000 mm		89,0	43,0	31,0	66035	66036
0.4062	10,320 mm	13/32	3-5/16	1-15/16	1-35/64	56126	56158
0.4134	10,500 mm		89,0	43,0	31,0	66037	66038
0.4219	10,720 mm	27/64	3-3/8	2	1-39/64	56127	56159
0.4331	11,000 mm		95,0	47,0	33,0	66039	66040
0.4375	11,110 mm	7/16	3-7/16	2-1/16	1-21/32	56128	56160
0.4528	11,500 mm		95,0	47,0	33,0	66041	66042
0.4531	11,510 mm	29/64	3-9/16	2-1/8	1-45/64	56129	56161
0.4688	11,910 mm	15/32	3-5/8	2-1/8	1-45/64	56130	56162
0.4724	12,000 mm		102,0	51,0	35,0	66043	66044
0.4844	12,300 mm	31/64	3-11/16	2-3/16	1-3/4	56131	56163
0.5000	12,700 mm	1/2	3-3/4	2-1/4	1-51/64	56132	56164

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

FRACTIONAL & METRIC

Straight Flute Drills

Series 106 Fractional	Hardness	Vc (sfm)	DC • in							
			1/16	1/8	3/16	1/4	3/8	1/2		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 500 Bhn or ≤ 52 HRc	60	RPM	3667	1834	1222	917	611	458
		(48-72)	Fr	0.0004	0.0007	0.0011	0.0014	0.0021	0.0028	
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	
		≤ 615 Bhn or ≤ 58 HRc	50	RPM	3056	1528	1019	764	509	382
		(40-60)	Fr	0.0004	0.0008	0.0012	0.0016	0.0024	0.0031	
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	250	RPM	15280	7640	5093	3820	2547	1910
		(200-300)	Fr	0.0010	0.0020	0.0030	0.0041	0.0061	0.0081	
			Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	
		≤ 330 Bhn or ≤ 36 HRc	195	RPM	11918	5959	3973	2980	1986	1490
		(156-234)	Fr	0.0010	0.0020	0.0030	0.0040	0.0060	0.0081	
			Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 500 Bhn or ≤ 52 HRc	60	RPM	3667	1834	1222	917	611	458
		(48-72)	Fr	0.0004	0.0007	0.0011	0.0014	0.0021	0.0028	
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	
		≤ 615 Bhn or ≤ 58 HRc	50	RPM	3056	1528	1019	764	509	382
		(40-60)	Fr	0.0004	0.0008	0.0012	0.0016	0.0024	0.0031	
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	

Bhn (Brinell) HRc (Rockwell C)

$\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$

$\text{ipm} = \text{Fr} \times \text{rpm}$

reduce speed and feed 30 percent when using uncoated drills

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

Series 106M Metric	Hardness	Vc (m/min)	DC • mm							
			1	3	6	8	10	12		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 500 Bhn or ≤ 52 HRc	18	RPM	5816	1939	969	727	582	485
		(15-22)	Fr	0.006	0.018	0.035	0.047	0.058	0.070	
			Feed (mm/min)	34	34	34	34	34	34	
		≤ 615 Bhn or ≤ 58 HRc	15	RPM	4847	1616	808	606	485	404
		(12-18)	Fr	0.006	0.017	0.033	0.045	0.056	0.067	
			Feed (mm/min)	27	27	27	27	27	27	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	76	RPM	24235	8078	4039	3029	2424	2020
		(61-91)	Fr	0.016	0.048	0.096	0.128	0.160	0.192	
			Feed (mm/min)	395	395	395	395	395	395	
		≤ 330 Bhn or ≤ 36 HRc	59	RPM	18904	6301	3151	2363	1890	1575
		(48-71)	Fr	0.016	0.048	0.096	0.128	0.160	0.192	
			Feed (mm/min)	305	305	305	305	305	305	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 500 Bhn or ≤ 52 HRc	18	RPM	5816	1939	969	727	582	485
		(15-22)	Fr	0.006	0.018	0.035	0.047	0.058	0.070	
			Feed (mm/min)	34	34	34	34	34	34	
		≤ 615 Bhn or ≤ 58 HRc	15	RPM	4847	1616	808	606	485	404
		(12-18)	Fr	0.006	0.017	0.033	0.045	0.056	0.067	
			Feed (mm/min)	27	27	27	27	27	27	

Bhn (Brinell) HRc (Rockwell C)

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fr} \times \text{rpm}$

reduce speed and feed 30 percent when using uncoated drills


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgtool.com)

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

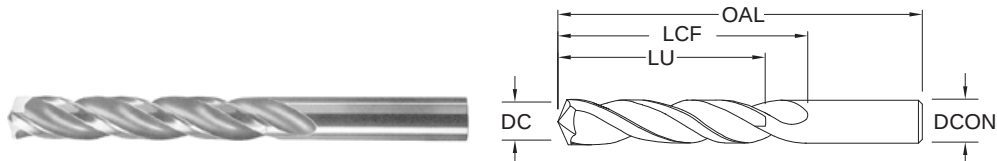

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm			USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF		UNCOATED	Ti-NAMITE®-A (AlTiN)
0.1065	2,710 mm	#36	2-1/4	1-1/4	1	53036	58011
0.1094	2,780 mm	7/64	2-1/4	1-1/4	1	53107	58012
0.1100	2,790 mm	#35	2-1/4	1-1/4	1	53035	58013
0.1110	2,820 mm	#34	2-1/4	1-1/4	1	53034	58014
0.1130	2,870 mm	#33	2-1/4	1-1/4	1	53033	58015
0.1160	2,950 mm	#32	2-1/4	1-1/4	1	53032	58016
0.1181	3,000 mm		46,0	16,0	12,0	63000	68965
0.1200	3,050 mm	#31	2-1/4	1-1/4	1	53031	58017
0.1220	3,100 mm		49,0	18,0	14,0	63044	68966
0.1250	3,180 mm	1/8	2-1/4	1-1/4	1	53108	58018
0.1260	3,200 mm		49,0	18,0	14,0	63045	68967
0.1285	3,260 mm	#30	2-1/4	1-1/4	1	53030	58019
0.1299	3,300 mm		49,0	18,0	14,0	63001	68968
0.1339	3,400 mm		52,0	20,0	15,0	63046	68969
0.1360	3,450 mm	#29	2-1/2	1-3/8	1-7/64	53029	58020
0.1378	3,500 mm		52,0	20,0	15,0	63002	68970
0.1405	3,570 mm	#28	2-1/2	1-3/8	1-7/64	53028	58021
0.1406	3,570 mm	9/64	2-1/2	1-3/8	1-7/64	53109	58022
0.1417	3,600 mm		52,0	20,0	15,0	63047	68971
0.1440	3,660 mm	#27	2-1/2	1-3/8	1-7/64	53027	58023
0.1457	3,700 mm		52,0	20,0	15,0	63003	68972
0.1470	3,730 mm	#26	2-1/2	1-3/8	1-7/64	53026	58024
0.1495	3,800 mm	#25	2-1/2	1-3/8	1-7/64	53025	58025
0.1496	3,800 mm		55,0	22,0	17,0	63048	68973
0.1520	3,860 mm	#24	2-1/2	1-3/8	1-7/64	53024	58026
0.1535	3,900 mm		55,0	22,0	17,0	63049	68974
0.1540	3,910 mm	#23	2-1/2	1-3/8	1-7/64	53023	58027
0.1562	3,970 mm	5/32	2-1/2	1-3/8	1-7/64	53110	58028
0.1570	3,990 mm	#22	2-1/2	1-3/8	1-7/64	53022	58029
0.1575	4,000 mm		55,0	22,0	17,0	63004	68975
0.1590	4,040 mm	#21	2-1/2	1-3/8	1-7/64	53021	58030
0.1610	4,090 mm	#20	2-1/2	1-3/8	1-7/64	53020	58031
0.1614	4,100 mm		55,0	22,0	17,0	63050	68976
0.1654	4,200 mm		55,0	22,0	17,0	63005	68977
0.1660	4,220 mm	#19	2-3/4	1-5/8	1-19/64	53019	58032
0.1693	4,300 mm		58,0	24,0	18,0	63051	68978
0.1695	4,310 mm	#18	2-3/4	1-5/8	1-19/64	53018	58033
0.1719	4,370 mm	11/64	2-3/4	1-5/8	1-19/64	53111	58034
0.1730	4,390 mm	#17	2-3/4	1-5/8	1-19/64	53017	58035
0.1732	4,400 mm		58,0	24,0	18,0	63052	68979

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127

DCON = h₆

STEELS

CAST IRON

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

continued on next page

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.1770	4,500 mm	#16	2-3/4	1-5/8	1-19/64	53016	58036
0.1772	4,500 mm		58,0	24,0	18,0	63006	68980
0.1800	4,570 mm	#15	2-3/4	1-5/8	1-19/64	53015	58037
0.1811	4,600 mm		58,0	24,0	18,0	63053	68981
0.1820	4,620 mm	#14	2-3/4	1-5/8	1-19/64	53014	58038
0.1850	4,700 mm	#13	2-3/4	1-5/8	1-19/64	53013	58039
0.1850	4,700 mm		58,0	24,0	18,0	63054	68982
0.1875	4,760 mm	3/16	2-3/4	1-5/8	1-19/64	53112	58040
0.1890	4,800 mm	#12	2-3/4	1-5/8	1-19/64	53012	58041
0.1890	4,800 mm		62,0	26,0	20,0	63055	68983
0.1910	4,850 mm	#11	2-3/4	1-5/8	1-19/64	53011	58042
0.1929	4,900 mm		62,0	26,0	20,0	63056	68984
0.1935	4,910 mm	#10	2-3/4	1-5/8	1-19/64	53010	58043
0.1960	4,980 mm	#9	3	1-3/4	1-13/32	53009	58044
0.1969	5,000 mm		62,0	26,0	20,0	63007	68985
0.1990	5,050 mm	#8	3	1-3/4	1-13/32	53008	58045
0.2008	5,100 mm		62,0	26,0	20,0	63057	68986
0.2010	5,110 mm	#7	3	1-3/4	1-13/32	53007	58046
0.2031	5,160 mm	13/64	3	1-3/4	1-13/32	53113	58047
0.2040	5,180 mm	#6	3	1-3/4	1-13/32	53006	58048
0.2047	5,200 mm		62,0	26,0	20,0	63008	68987
0.2055	5,220 mm	#5	3	1-3/4	1-13/32	53005	58049
0.2087	5,300 mm		62,0	26,0	20,0	63058	68988
0.2090	5,310 mm	#4	3	1-3/4	1-13/32	53004	58050
0.2126	5,400 mm		66,0	28,0	21,0	63059	68989
0.2130	5,410 mm	#3	3	1-3/4	1-13/32	53003	58051
0.2165	5,500 mm		66,0	28,0	21,0	63009	68990
0.2188	5,560 mm	7/32	3	1-3/4	1-13/32	53114	58052
0.2205	5,600 mm		66,0	28,0	21,0	63060	68991
0.2210	5,610 mm	#2	3	1-3/4	1-13/32	53002	58053
0.2244	5,700 mm		66,0	28,0	21,0	63061	68992
0.2280	5,790 mm	#1	3	1-3/4	1-13/32	53001	58054
0.2283	5,800 mm		66,0	28,0	21,0	63062	68993
0.2323	5,900 mm		66,0	28,0	21,0	63063	68994
0.2340	5,940 mm	A	3-1/4	2	1-39/64	53201	58055
0.2344	5,950 mm	15/64	3-1/4	2	1-39/64	53115	58056
0.2362	6,000 mm		66,0	28,0	21,0	63010	68995
0.2380	6,050 mm	B	3-1/4	2	1-39/64	53202	58057
0.2402	6,100 mm		70,0	31,0	23,0	63064	68996
0.2420	6,150 mm	C	3-1/4	2	1-39/64	53203	58058
0.2441	6,200 mm		70,0	31,0	23,0	63011	68997
0.2460	6,250 mm	D	3-1/4	2	1-39/64	53204	58059
0.2480	6,300 mm		70,0	31,0	23,0	63065	68998
0.2500	6,350 mm	1/4	3-1/4	2	1-39/64	53116	58061
0.2520	6,400 mm		70,0	31,0	23,0	63066	68999
0.2559	6,500 mm		70,0	31,0	23,0	63012	69000
0.2570	6,530 mm	F	3-1/4	2	1-39/64	53206	58062
0.2598	6,600 mm		70,0	31,0	23,0	63067	69001
0.2610	6,630 mm	G	3-1/2	2-1/8	1-45/64	53207	58063
0.2638	6,700 mm		70,0	31,0	23,0	63068	69002


continued on next page

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

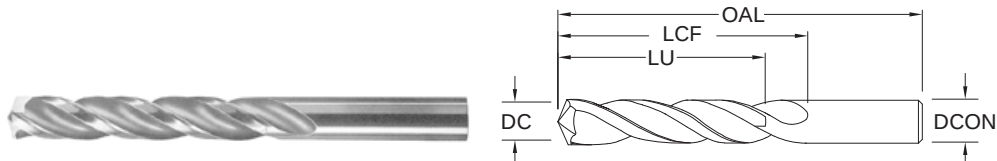

DECIMAL DC/DCON	METRIC DC/DCON	inch & mm				EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL	FLUTE LENGTH LCF	USABLE LENGTH LU	UNCOATED	Ti-NAMITE®-A (AlTiN)
0.2656	6,750 mm	17/64	3-1/2	2-1/8	1-45/64	53117	58064
0.2660	6,760 mm	H	3-1/2	2-1/8	1-45/64	53208	58065
0.2677	6,800 mm		74,0	34,0	25,0	63013	69003
0.2717	6,900 mm		74,0	34,0	25,0	63069	69004
0.2720	6,910 mm	I	3-1/2	2-1/8	1-45/64	53209	58066
0.2756	7,000 mm		74,0	34,0	25,0	63014	69005
0.2770	7,040 mm	J	3-1/2	2-1/8	1-45/64	53210	58067
0.2795	7,100 mm		74,0	34,0	25,0	63070	69006
0.2810	7,140 mm	K	3-1/2	2-1/8	1-45/64	53211	58068
0.2812	7,140 mm	9/32	3-1/2	2-1/8	1-45/64	53118	58069
0.2835	7,200 mm		74,0	34,0	25,0	63015	69007
0.2874	7,300 mm		74,0	34,0	25,0	63071	69008
0.2900	7,370 mm	L	3-1/2	2-1/8	1-45/64	53212	58070
0.2913	7,400 mm		74,0	34,0	25,0	63072	69009
0.2950	7,490 mm	M	3-3/4	2-3/8	1-29/32	53213	58071
0.2953	7,500 mm		74,0	34,0	25,0	63016	69010
0.2969	7,540 mm	19/64	3-3/4	2-3/8	1-29/32	53119	58072
0.2992	7,600 mm		79,0	37,0	27,0	63073	69011
0.3020	7,670 mm	N	2-3/8	2-3/8	1-29/32	53214	58073
0.3031	7,700 mm		79,0	37,0	27,0	63074	69012
0.3071	7,800 mm		79,0	37,0	27,0	63075	69013
0.3110	7,900 mm		79,0	37,0	27,0	63076	69014
0.3125	7,940 mm	5/16	3-3/4	2-3/8	1-29/32	53120	58074
0.3150	8,000 mm		79,0	37,0	27,0	63017	69015
0.3160	8,030 mm	O	3-3/4	2-3/8	1-29/32	53215	58075
0.3189	8,100 mm		79,0	37,0	27,0	63077	69016
0.3228	8,200 mm		79,0	37,0	27,0	63018	69017
0.3230	8,200 mm	P	3-3/4	2-3/8	1-29/32	53216	58076
0.3268	8,300 mm		79,0	37,0	27,0	63078	69018
0.3281	8,330 mm	21/64	4	2-1/2	2	53121	58077
0.3307	8,400 mm		79,0	37,0	27,0	63019	69019
0.3320	8,430 mm	Q	4	2-1/2	2	53217	58078
0.3346	8,500 mm		79,0	37,0	27,0	63020	69020
0.3386	8,600 mm		84,0	40,0	29,0	63021	69021
0.3390	8,610 mm	R	4	2-1/2	2	53218	58079
0.3425	8,700 mm		84,0	40,0	29,0	63079	69022
0.3438	8,730 mm	11/32	4	2-1/2	2	53122	58080
0.3465	8,800 mm		84,0	40,0	29,0	63022	69023
0.3480	8,840 mm	S	4	2-1/2	2	53219	58081
0.3504	8,900 mm		84,0	40,0	29,0	63080	69024
0.3543	9,000 mm		84,0	40,0	29,0	63023	69025
0.3580	9,090 mm	T	4-1/4	2-3/4	2-13/64	53220	58082

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

DCON = h₆

TOLERANCES (mm)

DC = +0,0000/-0,0127

DCON = h₆

STEELS

CAST IRON

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CONTINUED

DECIMAL DC / DCON	METRIC DC / DCON	inch & mm		FLUTE LENGTH LCF	USABLE LENGTH LU	EDP NO.	
		FRACTIONAL/ LETTER/WIRE DC	OVERALL LENGTH OAL			UNCOATED	Ti-NAMITE®-A (AlTiN)
0.3583	9,100 mm		84,0	40,0	29,0	63081	69026
0.3594	9,130 mm	23/64	4-1/4	2-3/4	2-13/64	53123	58083
0.3622	9,200 mm		84,0	40,0	29,0	63024	69027
0.3661	9,300 mm		84,0	40,0	29,0	63082	69028
0.3680	9,350 mm	U	4-1/4	2-3/4	2-13/64	53221	58084
0.3701	9,400 mm		84,0	40,0	29,0	63083	69029
0.3740	9,500 mm		84,0	40,0	29,0	63025	69030
0.3750	9,530 mm	3/8	4-1/4	2-3/4	2-13/64	53124	58085
0.3770	9,580 mm	V	4-1/4	2-3/4	2-13/64	53222	58086
0.3780	9,600 mm		89,0	43,0	31,0	63084	69031
0.3819	9,700 mm		89,0	43,0	31,0	63085	69032
0.3858	9,800 mm		89,0	43,0	31,0	63086	69033
0.3860	9,800 mm	W	4-1/2	2-7/8	2-19/64	53223	58087
0.3898	9,900 mm		89,0	43,0	31,0	63087	69034
0.3906	9,920 mm	25/64	4-1/2	2-7/8	2-19/64	53125	58088
0.3937	10,000 mm		89,0	43,0	31,0	63026	69035
0.3970	10,080 mm	X	4-1/2	2-7/8	2-19/64	53224	58089
0.3976	10,100 mm		89,0	43,0	31,0	63088	69036
0.4016	10,200 mm		89,0	43,0	31,0	63027	69037
0.4040	10,260 mm	Y	4-1/2	2-7/8	2-19/64	53225	58090
0.4062	10,320 mm	13/32	4-1/2	2-7/8	2-19/64	53126	58091
0.4094	10,400 mm		89,0	43,0	31,0	63028	69038
0.4130	10,490 mm	Z	4-1/2	2-7/8	2-19/64	53226	58092
0.4134	10,500 mm		89,0	43,0	31,0	63029	69039
0.4213	10,700 mm		95,0	47,0	33,0	63030	69040
0.4219	10,720 mm	27/64	4-1/2	2-7/8	2-19/64	53127	58093
0.4252	10,800 mm		95,0	47,0	33,0	63031	69041
0.4331	11,000 mm		95,0	47,0	33,0	63032	69042
0.4375	11,110 mm	7/16	4-1/2	2-7/8	2-19/64	53128	58094
0.4528	11,500 mm		95,0	47,0	33,0	63033	69043
0.4531	11,510 mm	29/64	4-3/4	3	2-13/32	53129	58095
0.4688	11,910 mm	15/32	4-3/4	3	2-13/32	53130	58096
0.4724	12,000 mm		102,0	51,0	35,0	63034	69044
0.4844	12,300 mm	31/64	4-3/4	3	2-13/32	53131	58097
0.4921	12,500 mm		102,0	51,0	35,0	63035	69045
0.5000	12,700 mm	1/2	4-3/4	3	2-13/32	53132	58098
0.5039	12,800 mm		102,0	51,0	35,0	63036	69046
0.5118	13,000 mm		102,0	51,0	35,0	63089	69047
0.5156	13,100 mm	33/64	4-3/4	3	2-13/32	53135	58099
0.5157	13,100 mm		102,0	51,0	35,0	63037	69048
0.5315	13,500 mm		107,0	54,0	37,0	63090	69049
0.5512	14,000 mm		107,0	54,0	37,0	63038	69050
0.5625	14,290 mm	9/16	4-3/4	3	2-13/32	53136	58100
0.5630	14,300 mm		111,0	56,0	38,0	63039	69051
0.5709	14,500 mm		111,0	56,0	38,0	63040	69052
0.5906	15,000 mm		111,0	56,0	38,0	63091	69053
0.6250	15,880 mm	5/8	5-3/4	3-1/2	2-51/64	53133	58101
0.6875	17,460 mm	11/16	5-3/4	3-1/2	2-51/64	53137	58102
0.6890	17,500 mm		123,0	62,0	40,0	63041	69054
0.7500	19,050 mm	3/4	5-3/4	4-1/4	3 13/32	53134	58103
0.7677	19,500 mm		131,0	66,0	42,0	63042	69055
0.7874	20,000 mm		131,0	66,0	42,0	63043	69056

3 Flute Drills

Series 103 Fractional	Hardness	Vc (sfm)	DC • in						
				1/8	1/4	3/8	1/2	5/8	3/4
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	295	RPM	9015	4508	3005	2254	1803	1503
		≤ 175 Bhn or ≤ 7 HRc	Fr	0.0026	0.0051	0.0077	0.0102	0.0128	0.0153
		(236-354)	Feed (ipm)	23.0	23.0	23.0	23.0	23.0	23.0
		260	RPM	7946	3973	2649	1986	1589	1324
		≤ 300 Bhn or ≤ 32 HRc	Fr	0.0023	0.0045	0.0068	0.0091	0.0113	0.0136
		(208-312)	Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0
		150	RPM	4584	2292	1528	1146	917	764
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0013	0.0026	0.0039	0.0052	0.0065	0.0079
		(120-180)	Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	7029	3514	2343	1757	1406	1171
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.0019	0.0038	0.0058	0.0077	0.0096	0.0115
		(184-276)	Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5
		145	RPM	4431	2216	1477	1108	886	739
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.0019	0.0038	0.0058	0.0077	0.0096	0.0115
		(116-174)	Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5
		115	RPM	3514	1757	1171	879	703	586
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0005	0.0010	0.0015	0.0020	0.0026	0.0031
		(92-138)	Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	2598	1299	866	649	520	433
		≤ 250 Bhn or ≤ 24 HRc	Fr	0.0013	0.0026	0.0039	0.0052	0.0065	0.0079
		(68-102)	Feed (ipm)	3.4	3.4	3.4	3.4	3.4	3.4
		65	RPM	1986	993	662	497	397	331
		≤ 375 Bhn or ≤ 40 HRc	Fr	0.0007	0.0013	0.0020	0.0026	0.0033	0.0039
		(52-78)	Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
K	CAST IRONS Gray, Malleable, Ductile	250	RPM	7640	3820	2547	1910	1528	1273
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.0026	0.0052	0.0079	0.0105	0.0131	0.0157
		(200-300)	Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0
		195	RPM	5959	2980	1986	1490	1192	993
		≤ 330 Bhn or ≤ 36 HRc	Fr	0.0026	0.0052	0.0078	0.0104	0.0130	0.0156
		(156-234)	Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540	RPM	16502	8251	5501	4126	3300	2750
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.0032	0.0064	0.0096	0.0128	0.0161	0.0193
		(432-648)	Feed (ipm)	53.0	53.0	53.0	53.0	53.0	53.0
		455	RPM	13905	6952	4635	3476	2781	2317
		≤ 150 Bhn or ≤ 88 HRb	Fr	0.0032	0.0065	0.0097	0.0129	0.0162	0.0194
		(364-546)	Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	305	RPM	9321	4660	3107	2330	1864	1553
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.0019	0.0039	0.0058	0.0077	0.0097	0.0116
		(244-366)	Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0
		160	RPM	4890	2445	1630	1222	978	815
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.0016	0.0033	0.0049	0.0065	0.0082	0.0098
		(128-192)	Feed (ipm)	8.0	8.0	8.0	8.0	8.0	8.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3
		50	RPM	1528	764	509	382	306	255
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.0007	0.0013	0.0020	0.0026	0.0033	0.0039
		(40-60)	Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 103M Metric	Hardness	Vc (m/min)	DC • mm						
			3	6	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	90	RPM	9533	4766	2860	2383	1787	1430
		≤ 175 Bhn or ≤ 7 HRc (72-108)	Fr	0.062	0.124	0.206	0.248	0.330	0.413
			Feed (mm/min)	590	590	590	590	590	590
		79	RPM	8402	4201	2520	2100	1575	1260
		≤ 300 Bhn or ≤ 32 HRc (63-95)	Fr	0.055	0.110	0.183	0.219	0.292	0.365
			Feed (mm/min)	460	460	460	460	460	460
		46	RPM	4847	2424	1454	1212	909	727
		≤ 425 Bhn or ≤ 45 HRc (37-55)	Fr	0.032	0.064	0.107	0.128	0.171	0.213
			Feed (mm/min)	155	155	155	155	155	155
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	70	RPM	7432	3716	2230	1858	1394	1115
		≤ 275 Bhn or ≤ 28 HRc (56-84)	Fr	0.046	0.093	0.155	0.186	0.248	0.309
			Feed (mm/min)	345	345	345	345	345	345
		44	RPM	4686	2343	1406	1171	879	703
		≤ 375 Bhn or ≤ 40 HRc (35-53)	Fr	0.046	0.092	0.153	0.184	0.245	0.306
			Feed (mm/min)	215	215	215	215	215	215
		35	RPM	3716	1858	1115	929	697	557
		≤ 450 Bhn or ≤ 48 HRc (28-42)	Fr	0.012	0.024	0.040	0.048	0.065	0.081
			Feed (mm/min)	45	45	45	45	45	45
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	26	RPM	2747	1373	824	687	515	412
		≤ 250 Bhn or ≤ 24 HRc (21-31)	Fr	0.031	0.062	0.103	0.124	0.165	0.206
			Feed (mm/min)	85	85	85	85	85	85
		20	RPM	2100	1050	630	525	394	315
		≤ 375 Bhn or ≤ 40 HRc (16-24)	Fr	0.017	0.033	0.056	0.067	0.089	0.111
			Feed (mm/min)	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	76	RPM	8078	4039	2424	2020	1515	1212
		≤ 220 Bhn or ≤ 19 HRc (61-91)	Fr	0.063	0.126	0.210	0.253	0.337	0.421
			Feed (mm/min)	510	510	510	510	510	510
		59	RPM	6301	3151	1890	1575	1181	945
		≤ 330 Bhn or ≤ 36 HRc (48-71)	Fr	0.052	0.105	0.175	0.209	0.279	0.349
			Feed (mm/min)	330	330	330	330	330	330
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	165	RPM	17449	8725	5235	4362	3272	2617
		≤ 80 Bhn or ≤ 47 HRb (132-198)	Fr	0.078	0.156	0.260	0.312	0.416	0.520
			Feed (mm/min)	1360	1360	1360	1360	1360	1360
		139	RPM	14703	7351	4411	3676	2757	2205
		≤ 150 Bhn or ≤ 7 HRc (111-166)	Fr	0.078	0.156	0.261	0.313	0.417	0.521
			Feed (mm/min)	1150	1150	1150	1150	1150	1150
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	93	RPM	9856	4928	2957	2464	1848	1478
		≤ 140 Bhn or ≤ 3 HRc (74-112)	Fr	0.047	0.094	0.157	0.189	0.252	0.315
			Feed (mm/min)	465	465	465	465	465	465
		49	RPM	5170	2585	1551	1293	969	776
		≤ 200 Bhn or ≤ 23 HRc (39-59)	Fr	0.039	0.077	0.129	0.155	0.206	0.258
			Feed (mm/min)	200	200	200	200	200	200
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	15	RPM	1616	808	485	404	303	242
		≤ 475 Bhn or ≤ 50 HRc (12-18)	Fr	0.015	0.031	0.052	0.062	0.083	0.103
			Feed (mm/min)	25	25	25	25	25	25


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $rpm = (Vc \times 1000) / (DC \times 3.14)$
 $mm/min = Fr \times rpm$
 reduce speed and feed 30 percent when using uncoated drills
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Combined Drill & Countersink



301
FRACTIONAL SERIES

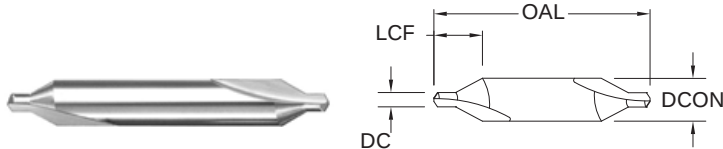

Pictured:
Series 301 Set



SIZE	inch				EDP NO.	
	DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE®-A (AlTiN)
*00	.025	1/8	1-1/2	.312	57005	57015
*0	1/32	1/8	1-1/2	.312	57006	57016
*1	3/64	1/8	1-1/2	.375	57007	57017
*2	5/64	3/16	1-7/8	.562	57008	57018
*3	7/64	1/4	2	.625	57009	57019
*4	1/8	5/16	2-1/8	.750	57010	57020
*5	3/16	7/16	2-3/4	.875	57011	57021
*6	7/32	1/2	3	.938	57012	57022
*Series 301 Set	—	—	—	—	57075	—

TOLERANCES (inch)

DC = +0.003/–0.000
DCON = –0.0001/–0.0005

STEELS

STAINLESS STEELS

CAST IRON



NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Combined Drill & Countersink

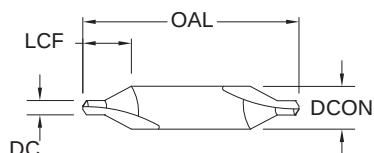

301M
METRIC SERIES

TOLERANCES (mm)

DC = +0,076/-0,000
DCON = -0,0025/-0,0127

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

mm				EDP NO.	
DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE®-A (AlTiN)
0,5	3,15	20,0	7,1	67005	67035
0,8	3,15	20,0	7,1	67007	67037
1	3,15	31,5	8,3	67009	67039
1,25	3,15	31,5	9,9	67011	67041
1,6	4,0	35,5	12,7	67013	67043
2	5,0	40,0	14,7	67015	67045
2,5	6,3	45,0	15,9	67017	67047
3,15	8,0	50,0	19,4	67019	67049
4	10,0	56,0	21,4	67021	67051
5	12,5	63,0	23,0	67023	67053

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)	DC • in						
			1/32	5/64	1/8	3/16	7/32		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	265	RPM	8098	5399	3239	2314	2025	
		≤ 175 Bhn or ≤ 7 HRc	(212-318)	Fr	0.00068	0.0010	0.0017	0.0024	0.0027
			Feed (ipm)	5.5	5.5	5.5	5.5	5.5	
		125	RPM	3820	2547	1528	1091	955	
		≤ 300 Bhn or ≤ 32 HRc	(100-150)	Fr	0.00065	0.0010	0.0016	0.0023	0.0026
			Feed (ipm)	2.5	2.5	2.5	2.5	2.5	
		85	RPM	2598	1732	1039	742	649	
		≤ 425 Bhn or ≤ 45 HRc	(68-102)	Fr	0.00038	0.0006	0.0010	0.0013	0.0015
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	230	RPM	7029	4686	2812	2008	1757	
		≤ 275 Bhn or ≤ 28 HRc	(184-276)	Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	4.5	4.5	4.5	4.5	4.5	
		145	RPM	4431	2954	1772	1266	1108	
		≤ 375 Bhn or ≤ 40 HRc	(116-174)	Fr	0.00059	0.0009	0.0015	0.0021	0.0023
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6	
		60	RPM	1834	1222	733	524	458	
		≤ 425 Bhn or ≤ 45 HRc	(48-72)	Fr	0.00027	0.0004	0.0007	0.0010	0.0011
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	85	RPM	2598	1732	1039	742	649	
		≤ 250 Bhn or ≤ 24 HRc	(68-102)	Fr	0.00035	0.0005	0.0009	0.0012	0.0014
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9	
		55	RPM	1681	1121	672	480	420	
		≤ 375 Bhn or ≤ 40 HRc	(44-66)	Fr	0.00016	0.0002	0.0004	0.0006	0.0006
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	210	RPM	6418	4278	2567	1834	1604	
		≤ 250 Bhn or ≤ 24 HRc	(168-252)	Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	3.1	3.1	3.1	3.1	3.1	
		110	RPM	3362	2241	1345	960	840	
		≤ 330 Bhn or ≤ 36 HRc	(88-132)	Fr	0.00028	0.0004	0.0007	0.0010	0.0011
			Feed (ipm)	0.9	0.9	0.9	0.9	0.9	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65	RPM	1986	1324	795	568	497	
		≤ 275 Bhn or ≤ 28 HRc	(52-78)	Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	
		55	RPM	1681	1121	672	480	420	
		≤ 375 Bhn or ≤ 40 HRc	(44-66)	Fr	0.00032	0.0005	0.0008	0.0011	0.0013
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	
K	CAST IRONS Gray, Malleable, Ductile	280	RPM	8557	5705	3423	2445	2139	
		≤ 220 Bhn or ≤ 19 HRc	(224-336)	Fr	0.00084	0.0013	0.0021	0.0029	0.0034
			Feed (ipm)	7.2	7.2	7.2	7.2	7.2	
		250	RPM	7640	5093	3056	2183	1910	
		≤ 330 Bhn or ≤ 36 HRc	(200-300)	Fr	0.00084	0.0013	0.0021	0.0029	0.0034
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	

continued on next page

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)		DC • in				
				1/32	5/64	1/8	3/16	7/32
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	540 (432-648)	RPM	16502	11002	6601	4715	4126
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5
		455 (364-546)	RPM	13905	9270	5562	3973	3476
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	13.9	13.9	13.9	13.9	13.9
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	190 (152-228)	RPM	5806	3871	2323	1659	1452
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	2.8	2.8	2.8	2.8	2.8
		175 (140-210)	RPM	5348	3565	2139	1528	1337
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
			Feed (ipm)	2.6	2.6	2.6	2.6	2.6
S	PLASTICS Polycarbonate, PVC	500 (400-600)	RPM	15280	10187	6112	4366	3820
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
			Feed (ipm)	15.3	15.3	15.3	15.3	15.3
	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4
		25 (20-30)	RPM	764	509	306	218	191
			Fr	0.00033	0.0005	0.0008	0.0011	0.0013
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3
		20 (16-24)	RPM	611	407	244	175	153
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	85 (68-102)	RPM	2598	1732	1039	742	649
			Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7
		65 (52-78)	RPM	1986	1324	795	568	497
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DCON

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Combined Drill & Countersink

Series 301M Metric		Hardness	Vc (m/min)	DC • mm					
				1	1.6	2.5	4	5	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	81	RPM	8155	6422	4078	2569	2055
		(65-97)	Fr	0.017	0.022	0.034	0.054	0.068	
			Feed (mm/min)	139	139	139	139	139	
		≤ 300 Bhn or ≤ 32 HRc	38	RPM	3847	3029	1923	1212	969
		(30-46)	Fr	0.016	0.020	0.032	0.051	0.064	
			Feed (mm/min)	62	62	62	62	62	
		≤ 425 Bhn or ≤ 45 HRc	26	RPM	2616	2060	1308	824	659
		(21-31)	Fr	0.010	0.013	0.020	0.032	0.039	
			Feed (mm/min)	26	26	26	26	26	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	70	RPM	7078	5574	3539	2230	1784
		(56-84)	Fr	0.016	0.020	0.032	0.051	0.063	
			Feed (mm/min)	113	113	113	113	113	
		≤ 375 Bhn or ≤ 40 HRc	44	RPM	4462	3514	2231	1406	1125
		(35-53)	Fr	0.015	0.019	0.030	0.048	0.060	
			Feed (mm/min)	67	67	67	67	67	
		≤ 425 Bhn or ≤ 45 HRc	18	RPM	1847	1454	923	582	465
		(15-22)	Fr	0.007	0.009	0.014	0.022	0.028	
			Feed (mm/min)	13	13	13	13	13	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	26	RPM	2616	2060	1308	824	659
		(21-31)	Fr	0.009	0.012	0.018	0.029	0.036	
			Feed (mm/min)	24	24	24	24	24	
		≤ 375 Bhn or ≤ 40 HRc	17	RPM	1693	1333	846	533	427
		(13-20)	Fr	0.004	0.005	0.008	0.013	0.016	
			Feed (mm/min)	7	7	7	7	7	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	64	RPM	6463	5089	3231	2036	1629
		(51-77)	Fr	0.012	0.015	0.024	0.038	0.048	
			Feed (mm/min)	78	78	78	78	78	
		≤ 330 Bhn or ≤ 36 HRc	34	RPM	3385	2666	1693	1066	853
		(27-40)	Fr	0.007	0.009	0.014	0.023	0.028	
			Feed (mm/min)	24	24	24	24	24	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	20	RPM	2000	1575	1000	630	504
		(16-24)	Fr	0.009	0.011	0.018	0.029	0.036	
			Feed (mm/min)	18	18	18	18	18	
		≤ 375 Bhn or ≤ 40 HRc	17	RPM	1693	1333	846	533	427
		(13-20)	Fr	0.008	0.011	0.017	0.026	0.033	
			Feed (mm/min)	14	14	14	14	14	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	85	RPM	8617	6786	4309	2714	2171
		(68-102)	Fr	0.021	0.027	0.042	0.067	0.083	
			Feed (mm/min)	181	181	181	181	181	
		≤ 330 Bhn or ≤ 36 HRc	76	RPM	7694	6059	3847	2424	1939
		(61-91)	Fr	0.021	0.027	0.042	0.067	0.084	
			Feed (mm/min)	162	162	162	162	162	

continued on next page

Combined Drill & Countersink

Series 301M Metric	Hardness	Vc (m/min)	DC • mm					
			1	1.6	2.5	4	5	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	165	RPM	16619	13087	8309	5235	4188
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.025	0.032	0.050	0.079	0.099
		(132-198)	Feed (mm/min)	415	415	415	415	415
		139	RPM	14003	11027	7001	4411	3529
		≤ 150 Bhn or ≤ 88 HRc	Fr	0.025	0.032	0.050	0.079	0.099
		(111-166)	Feed (mm/min)	350	350	350	350	350
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	58	RPM	5847	4605	2924	1842	1474
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.012	0.015	0.024	0.038	0.048
		(46-69)	Feed (mm/min)	70	70	70	70	70
		53	RPM	5386	4241	2693	1696	1357
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.012	0.015	0.024	0.038	0.048
		(43-64)	Feed (mm/min)	65	65	65	65	65
	PLASTICS Polycarbonate, PVC	152	RPM	15388	12118	7694	4847	3878
		(122-183)	Fr	0.025	0.032	0.050	0.079	0.099
			Feed (mm/min)	385	385	385	385	385
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	12	RPM	1231	969	616	388	310
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.009	0.011	0.018	0.028	0.035
		(10-15)	Feed (mm/min)	11	11	11	11	11
		8	RPM	769	606	385	242	194
		≤ 320 Bhn or ≤ 34 HRc	Fr	0.008	0.010	0.016	0.025	0.031
		(6-9)	Feed (mm/min)	6	6	6	6	6
		6	RPM	616	485	308	194	155
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.003	0.004	0.006	0.010	0.013
		(5-7)	Feed (mm/min)	2	2	2	2	2
		26	RPM	2616	2060	1308	824	659
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.016	0.020	0.032	0.051	0.064
		(21-31)	Feed (mm/min)	42	42	42	42	42
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	20	RPM	2000	1575	1000	630	504
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.009	0.011	0.018	0.029	0.036
		(16-24)	Feed (mm/min)	18	18	18	18	18
17		RPM	1693	1333	846	533	427	
≤ 440 Bhn or ≤ 47 HRc		Fr	0.008	0.011	0.017	0.026	0.033	
(13-20)		Feed (mm/min)	14	14	14	14	14	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	12	RPM	1231	969	616	388	310
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.004	0.005	0.008	0.013	0.016
		(10-15)	Feed (mm/min)	5	5	5	5	5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DCON x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single Flute Countersink



601

FRACTIONAL SERIES

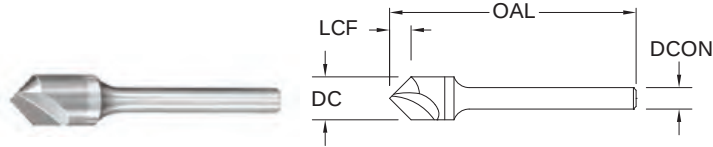

inch				EDP NO.		
CUTTING DIAMETER DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.062	—	—	74201
1/8	1/8	1-1/2	.072	—	74101	—
1/8	1/8	1-1/2	.108	74001	—	—
3/16	3/16	2	.094	—	—	74204
3/16	3/16	2	.108	—	74104	—
3/16	3/16	2	.163	74004	—	—
1/4	1/4	2	.125	—	—	74207
1/4	1/4	2	.144	—	74107	—
1/4	1/4	2	.217	74007	—	—
*3/8	1/4	2-13/16	.188	—	—	74210
*3/8	1/4	2-13/16	.216	—	74110	—
*3/8	1/4	2-13/16	.325	74010	—	—
*1/2	1/4	2-7/8	.250	—	—	74213
*1/2	1/4	2-7/8	.288	—	74113	—
*1/2	1/4	2-7/8	.433	74013	—	—
*5/8	3/8	3	.313	—	—	74216
*5/8	3/8	3	.360	—	74116	—
*5/8	3/8	3	.541	74016	—	—
*3/4	1/2	3	.375	—	—	74219
*3/4	1/2	3	.431	—	74119	—
*3/4	1/2	3	.650	74019	—	—
*1	1/2	3-1/4	.500	—	—	74222
*1	1/2	3-1/4	.575	—	74122	—
*1	1/2	3-1/4	.866	74022	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Single Flute Countersink

Series 601 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0005	0.0008	0.0010	0.0016	0.0021	0.0031	0.0042
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0029	0.0039
				Feed (ipm)	0.9	0.9	0.9	0.9	0.9	0.9	0.9
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fr	0.0003	0.0004	0.0006	0.0009	0.0012	0.0017	0.0023
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0004	0.0007	0.0009	0.0013	0.0018	0.0027	0.0036
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035
				Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0001	0.0002	0.0003	0.0004	0.0005	0.0008	0.0010
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0002	0.0003	0.0004	0.0006	0.0009	0.0013	0.0017
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105	RPM	3209	2139	1604	1070	802	535	401
			(84-126)	Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0047
				Feed (ipm)	1.9	1.9	1.9	1.9	1.9	1.9	1.9
		≤ 330 Bhn or ≤ 36 HRc	75	RPM	2292	1528	1146	764	573	382	287
			(60-90)	Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0037	0.0049
				Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4

continued on next page

Single Flute Countersink

	Series 601 Fractional	Hardness	Vc (sfm)	DC • in							
	1/8			3/16	1/4	3/8	1/2	3/4	1		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225	RPM	6876	4584	3438	2292	1719	1146	860
		(180-270)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061	
			Feed (ipm)	5.2	5.2	5.2	5.2	5.2	5.2	5.2	
		≤ 150 Bhn or ≤ 88 HRb	190	RPM	5806	3871	2903	1935	1452	968	726
		(152-228)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061	
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95	RPM	2903	1935	1452	968	726	484	363
		(76-114)	Fr	0.0004	0.0006	0.0008	0.0011	0.0015	0.0023	0.0030	
			Feed (ipm)	1.1	1.1	1.1	1.1	1.1	1.1	1.1	
		≤ 200 Bhn or ≤ 23 HRc	80	RPM	2445	1630	1222	815	611	407	306
		(64-96)	Fr	0.0004	0.0006	0.0008	0.0012	0.0016	0.0025	0.0033	
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	18	RPM	550	367	275	183	138	92	69
		(14-22)	Fr	0.0002	0.0003	0.0004	0.0005	0.0007	0.0011	0.0015	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
		≤ 320 Bhn or ≤ 34 HRc	14	RPM	428	285	214	143	107	71	53
		(11-17)	Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
	≤ 425 Bhn or ≤ 45 HRc	12	RPM	367	244	183	122	92	61	46	
	(10-14)	Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022		
		Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	36	RPM	1100	733	550	367	275	183	138
		(29-43)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036	
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
≤ 350 Bhn or ≤ 38 HRc		28	RPM	856	570	428	285	214	143	107	
(22-34)		Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028		
		Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
≤ 440 Bhn or ≤ 47 HRc	21	RPM	642	428	321	214	160	107	80		
(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012			
	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1			
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	611	407	306	204	153	102	76
		(16-24)	Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

3 Flute Countersink

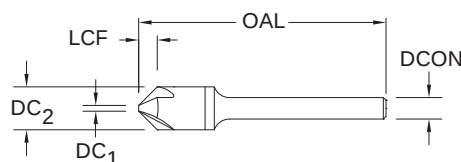

603
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS

STAINLESS STEELS

CAST IRON

NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	inch			TIP DIAMETER DC ₁	EDP NO.		
		OVERALL LENGTH OAL	FLUTE LENGTH LCF			UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.040	—	—	74225	—
1/8	1/8	1-1/2	.049	.040	—	74125	—	—
1/8	1/8	1-1/2	.078	.035	74025	—	—	—
3/16	3/16	2	.071	.060	—	—	74228	—
3/16	3/16	2	.073	.060	—	74128	—	—
3/16	3/16	2	.123	.045	74028	—	—	—
1/4	1/4	2	.090	.100	—	—	74231	—
1/4	1/4	2	.086	.100	—	74131	—	—
1/4	1/4	2	.156	.070	74031	—	—	—
*3/8	1/4	2-13/16	.138	.108	—	—	74234	—
*3/8	1/4	2-13/16	.154	.108	—	74134	—	—
*3/8	1/4	2-13/16	.238	.100	74034	—	—	—
*1/2	1/4	2-7/8	.194	.122	—	—	74237	—
*1/2	1/4	2-7/8	.217	.122	—	74137	—	—
*1/2	1/4	2-7/8	.335	.113	74037	—	—	—
*5/8	3/8	3	.249	.138	—	—	74240	—
*5/8	3/8	3	.280	.138	—	74140	—	—
*5/8	3/8	3	.430	.128	74040	—	—	—
*3/4	1/2	3	.304	.153	—	—	74243	—
*3/4	1/2	3	.343	.153	—	74143	—	—
*3/4	1/2	3	.526	.143	74043	—	—	—
*1	1/2	3-1/4	.421	.168	—	—	74246	—
*1	1/2	3-1/4	.479	.168	—	74146	—	—
*1	1/2	3-1/4	.729	.158	74046	—	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

3 Flute Countersink

Series 603 Fractional	Hardness	Vc (sfm)	DC • in								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
		(100-150)	Fr	0.0008	0.0012	0.0016	0.0024	0.0031	0.0047	0.0063	
			Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
		(48-72)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0043	0.0057	
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
		(36-54)	Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035	
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
		(76-114)	Fr	0.0007	0.0010	0.0014	0.0021	0.0028	0.0041	0.0055	
			Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
		(48-72)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0039	0.0052	
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2	
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
		(28-42)	Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030	
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
		(28-42)	Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030	
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
		(20-30)	Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021	
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
		(42-64)	Fr	0.0004	0.0006	0.0009	0.0013	0.0017	0.0026	0.0035	
			Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
		(37-55)	Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028	
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
		(22-34)	Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037	
			Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
		(17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012	
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105	RPM	3209	2139	1604	1070	802	535	401
		(84-126)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072	
			Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9	
		≤ 330 Bhn or ≤ 36 HRc	75	RPM	2292	1528	1146	764	573	382	287
		(60-90)	Fr	0.0009	0.0014	0.0018	0.0027	0.0037	0.0055	0.0073	
			Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1	

continued on next page

3 Flute Countersink

Series 603 Fractional	Hardness	Vc (sfm)		DC • in						
				1/8	3/16	1/4	3/8	1/2	3/4	1
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	225	RPM	6876	4584	3438	2292	1719	1146	860
		≤ 80 Bhn or ≤ 47 HRb	Fr	0.0011	0.0017	0.0023	0.0034	0.0045	0.0068	0.0091
		(180-270)	Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8
		190	RPM	5806	3871	2903	1935	1452	968	726
		≤ 150 Bhn or ≤ 88 HRb	Fr	0.0011	0.0017	0.0022	0.0034	0.0045	0.0067	0.0090
		(152-228)	Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	95	RPM	2903	1935	1452	968	726	484	363
		≤ 140 Bhn or ≤ 3 HRc	Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047
		(76-114)	Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		80	RPM	2445	1630	1222	815	611	407	306
		≤ 200 Bhn or ≤ 23 HRc	Fr	0.0006	0.0009	0.0011	0.0017	0.0023	0.0034	0.0046
		(64-96)	Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	18	RPM	550	367	275	183	138	92	69
		≤ 220 Bhn or ≤ 19 HRc	Fr	0.0004	0.0005	0.0007	0.0011	0.0015	0.0022	0.0029
		(14-22)	Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		14	RPM	428	285	214	143	107	71	53
		≤ 320 Bhn or ≤ 34 HRc	Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019
		(11-17)	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		12	RPM	367	244	183	122	92	61	46
		≤ 425 Bhn or ≤ 45 HRc	Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
		(10-14)	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	36	RPM	1100	733	550	367	275	183	138
		≤ 275 Bhn or ≤ 28 HRc	Fr	0.0007	0.0011	0.0015	0.0022	0.0029	0.0044	0.0058
		(29-43)	Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
		28	RPM	856	570	428	285	214	143	107
		≤ 350 Bhn or ≤ 38 HRc	Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047
		(22-34)	Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	20	RPM	611	407	306	204	153	102	76
		≤ 475 Bhn or ≤ 50 HRc	Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013
		(16-24)	Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

6 Flute Countersink



606

FRACTIONAL SERIES

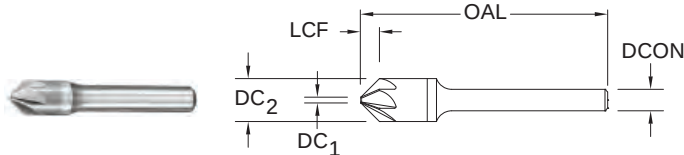

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	inch			EDP NO.		
		OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.035	—	—	74249
1/8	1/8	1-1/2	.052	.035	—	74149	—
1/8	1/8	1-1/2	.078	.035	74049	—	—
3/16	3/16	2	.071	.045	—	—	74252
3/16	3/16	2	.082	.045	—	74152	—
3/16	3/16	2	.123	.045	74052	—	—
1/4	1/4	2	.090	.070	—	—	74255
1/4	1/4	2	.104	.070	—	74155	—
1/4	1/4	2	.156	.070	74055	—	—
*3/8	1/4	2-13/16	.138	.100	—	—	74258
*3/8	1/4	2-13/16	.158	.100	—	74158	—
*3/8	1/4	2-13/16	.238	.100	74058	—	—
*1/2	1/4	2-7/8	.170	.160	—	—	74261
*1/2	1/4	2-7/8	.196	.160	—	74161	—
*1/2	1/4	2-7/8	.294	.160	74061	—	—
*5/8	3/8	3	.218	.190	—	—	74264
*5/8	3/8	3	.250	.190	—	74164	—
*5/8	3/8	3	.377	.190	74064	—	—
*3/4	1/2	3	.265	.220	—	—	74267
*3/4	1/2	3	.305	.220	—	74167	—
*3/4	1/2	3	.459	.220	74067	—	—
*1	1/2	3-1/4	.370	.260	—	—	74270
*1	1/2	3-1/4	.426	.260	—	74170	—
*1	1/2	3-1/4	.641	.260	74070	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/–0.0005

3/8–1 DIAMETER

DC = +0.003/–0.000

Included Angle +1°/–1°

STEELS
STAINLESS STEELS
CAST IRON
NON-FERROUS
HIGH TEMP ALLOYS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

6 Flute Countersink

Series 606 Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0010	0.0016	0.0021	0.0031	0.0042	0.0063	0.0084
				Feed (ipm)	4.0	4.0	4.0	4.0	4.0	4.0	4.0
		≤ 300 Bhn or ≤ 32 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0010	0.0015	0.0020	0.0029	0.0039	0.0059	0.0079
				Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8
		≤ 425 Bhn or ≤ 45 HRc	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fr	0.0006	0.0009	0.0012	0.0017	0.0023	0.0035	0.0047
				Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0009	0.0013	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (ipm)	2.6	2.6	2.6	2.6	2.6	2.6	2.6
		≤ 375 Bhn or ≤ 40 HRc	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0009	0.0014	0.0019	0.0028	0.0037	0.0056	0.0074
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		≤ 425 Bhn or ≤ 45 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 375 Bhn or ≤ 40 HRc	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0006	0.0009	0.0012	0.0019	0.0025	0.0037	0.0049
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 330 Bhn or ≤ 36 HRc	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0030	0.0040
				Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 375 Bhn or ≤ 40 HRc	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2

continued on next page

6 Flute Countersink

Series 606 Fractional				DC • in							
Hardness				Vc (sfm)	1/8	3/16	1/4	3/8	1/2	3/4	1
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105 (84-126)	RPM	3209	2139	1604	1070	802	535	401
				Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0073	0.0097
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 330 Bhn or ≤ 36 HRc	75 (60-90)	RPM	2292	1528	1146	764	573	382	287
				Fr	0.0012	0.0018	0.0024	0.0037	0.0049	0.0073	0.0098
				Feed (ipm)	2.8	2.8	2.8	2.8	2.8	2.8	2.8
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225 (180-270)	RPM	6876	4584	3438	2292	1719	1146	860
				Fr	0.0015	0.0022	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (ipm)	10.3	10.3	10.3	10.3	10.3	10.3	10.3
		≤ 150 Bhn or ≤ 88 HRb	190 (152-228)	RPM	5806	3871	2903	1935	1452	968	726
				Fr	0.0015	0.0022	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (ipm)	8.7	8.7	8.7	8.7	8.7	8.7	8.7
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	484	363
				Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
				Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
		≤ 200 Bhn or ≤ 23 HRc	80 (64-96)	RPM	2445	1630	1222	815	611	407	306
				Fr	0.0008	0.0012	0.0016	0.0023	0.0031	0.0047	0.0062
				Feed (ipm)	1.9	1.9	1.9	1.9	1.9	1.9	1.9

continued on next page

6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)		DC • in						
				1/8	3/16	1/4	3/8	1/2	3/4	1
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	18 (14-22)	RPM	550	367	275	183	138	92	69
			Fr	0.0005	0.0008	0.0011	0.0016	0.0022	0.0033	0.0044
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		14 (11-17)	RPM	428	285	214	143	107	71	53
			Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		12 (10-14)	RPM	367	244	183	122	92	61	46
			Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	36 (29-43)	RPM	1100	733	550	367	275	183	138
			Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0055	0.0073
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		28 (22-34)	RPM	856	570	428	285	214	143	107
			Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		21 (17-25)	RPM	642	428	321	214	160	107	80
			Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	20 (16-24)	RPM	611	407	306	204	153	102	76
			Fr	0.0003	0.0005	0.0007	0.0010	0.0013	0.0020	0.0026
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = Vc x 3.82 / DC

ipm = Fr x rpm


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Straight Flute Accu-Reamer

**200**

FRACTIONAL SERIES

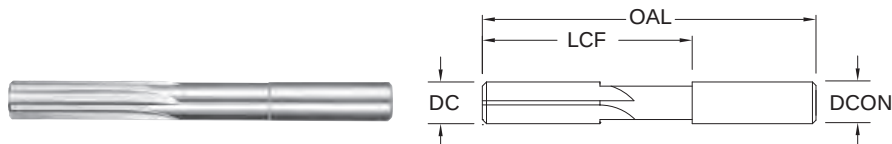

inch					EDP NO.
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	NO. OF FLUTES	UNCOATED
3/64	3/64	3/4	1-1/2	4	70003
1/16	1/16	3/4	1-1/2	4	70004
5/64	5/64	1	2	4	70005
3/32	3/32	1-1/4	2-1/4	4	70006
7/64	7/64	1-1/4	2-1/4	4	70007
1/8	1/8	1-1/4	2-1/4	4	70008
9/64	9/64	1-1/2	2-1/2	4	70009
5/32	5/32	1-1/2	2-1/2	4	70010
11/64	11/64	1-3/4	2-3/4	4	70011
3/16	3/16	1-3/4	2-3/4	4	70012
13/64	13/64	2	3	4	70013
7/32	7/32	2	3	4	70014
15/64	15/64	2	3	4	70015
1/4	1/4	2	3	4	70016
17/64	17/64	2-1/4	3-1/4	6	70017
9/32	9/32	2-1/4	3-1/4	6	70018
19/64	19/64	2-1/4	3-1/4	6	70019
5/16	5/16	2-1/4	3-1/4	6	70020
21/64	21/64	2-3/8	3-1/2	6	70021
11/32	11/32	2-3/8	3-1/2	6	70022
23/64	23/64	2-3/8	3-1/2	6	70023
3/8	3/8	2-3/8	3-1/2	6	70024
25/64	25/64	2-7/8	4	6	70025
13/32	13/32	2-7/8	4	6	70026
27/64	27/64	2-7/8	4	6	70027
7/16	7/16	2-7/8	4	6	70028
29/64	29/64	2-7/8	4	6	70029
15/32	15/32	2-7/8	4	6	70030
31/64	31/64	2-7/8	4	6	70031
1/2	1/2	2-7/8	4	6	70032

continued on next page

TOLERANCES (inch)

DC = +0.0002/-0.0000

DCON = +0.0002/-0.0000

STEELS

STAINLESS STEELS

CAST IRON


NON-FERROUS

HIGH TEMP ALLOYS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

Straight Flute Accu-Reamer



200
FRACTIONAL SERIES

CONTINUED

inch				NO. OF FLUTES
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	
.0470 – .0625	1/16	3/4	1-1/2	4
.0626 – .0781	5/64	1	2	4
.0782 – .0938	3/32	1-1/4	2-1/4	4
.0939 – .1094	7/64	1-1/4	2-1/4	4
.1095 – .1250	1/8	1-1/4	2-1/4	4
.1251 – .1406	9/64	1-1/2	2-1/2	4
.1407 – .1562	5/32	1-1/2	2-1/2	4
.1563 – .1719	11/64	1-3/4	2-3/4	4
.1720 – .1875	3/16	1-3/4	2-3/4	4
.1876 – .2031	13/64	2	3	4
.2032 – .2188	7/32	2	3	4
.2189 – .2344	15/64	2	3	4
.2345 – .2500	1/4	2	3	4
.2501 – .2656	17/64	2-1/4	3-1/4	6
.2657 – .2812	9/32	2-1/4	3-1/4	6
.2813 – .2969	19/64	2-1/4	3-1/4	6
.2970 – .3125	5/16	2-1/4	3-1/4	6
.3126 – .3281	21/64	2-3/8	3-1/2	6
.3282 – .3438	11/32	2-3/8	3-1/2	6
.3439 – .3594	23/64	2-3/8	3-1/2	6
.3595 – .3750	3/8	2-3/8	3-1/2	6
.3751 – .3906	25/64	2-7/8	4	6
.3907 – .4062	13/32	2-7/8	4	6
.4063 – .4219	27/64	2-7/8	4	6
.4220 – .4375	7/16	2-7/8	4	6
.4376 – .4531	29/64	2-7/8	4	6
.4532 – .4688	15/32	2-7/8	4	6
.4689 – .4844	31/64	2-7/8	4	6
.4845 – .5000	1/2	2-7/8	4	6

SER 200 Fractional reamers can be ordered to specific diameters according to the size range of Cutting Diameter DC. Please order as:

- 200. Then the size of the cut diameter in fractional format.
- i.e. 200.0492
- Description: Series 200 size 0.0492
- For Metric sizes convert to fractional inches (i.e. $\div 25.4$)
- The above sample would be a 1.25mm size ($1.25 \div 25.4 = 0.0492$)

All other dimensions are fractional as per table including the Shank

Straight Flute Accu-Reamer

Series 200 Fractional	Hardness	Vc (sfm)		DC • in						
				1/16	1/8	3/16	1/4	5/16	3/8	1/2
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	150	RPM	9168	4584	3056	2292	1834	1528	1146
		≤ 175 Bhn or ≤ 7 HRc (120-180)	Fr	0.0018	0.0035	0.0053	0.0071	0.0088	0.0106	0.0141
			Feed (ipm)	16.5	16.0	16.2	16.3	16.1	16.2	16.2
		75	RPM	4584	2292	1528	1146	917	764	573
		≤ 300 Bhn or ≤ 32 HRc (60-90)	Fr	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0124
			Feed (ipm)	7.3	7.1	7.2	7.1	7.2	7.1	7.1
		55	RPM	3362	1681	1121	840	672	560	420
		≤ 425 Bhn or ≤ 45 HRc (44-66)	Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
			Feed (ipm)	3.0	3.2	3.1	3.1	3.1	3.1	3.1
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	115	RPM	7029	3514	2343	1757	1406	1171	879
		≤ 275 Bhn or ≤ 28 HRc (92-138)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
			Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		70	RPM	4278	2139	1426	1070	856	713	535
		≤ 375 Bhn or ≤ 40 HRc (56-84)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
			Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
		45	RPM	2750	1375	917	688	550	458	344
		≤ 425 Bhn or ≤ 45 HRc (36-54)	Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
			Feed (ipm)	2.5	2.6	2.6	2.5	2.5	2.6	2.5
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	40	RPM	2445	1222	815	611	489	407	306
		≤ 250 Bhn or ≤ 24 HRc (32-48)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	2.4	2.4	2.4	2.4	2.4	2.4	2.4
		25	RPM	1528	764	509	382	306	255	191
		≤ 375 Bhn or ≤ 40 HRc (20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
			Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	75	RPM	4584	2292	1528	1146	917	764	573
		≤ 250 Bhn or ≤ 24 HRc (60-90)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	4.6	4.6	4.4	4.5	4.5	4.5	4.5
		55	RPM	3362	1681	1121	840	672	560	420
		≤ 330 Bhn or ≤ 36 HRc (44-66)	Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
			Feed (ipm)	2.7	2.5	2.6	2.5	2.6	2.5	2.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	35	RPM	2139	1070	713	535	428	357	267
		≤ 275 Bhn or ≤ 28 HRc (28-42)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
			Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		25	RPM	1528	764	509	382	306	255	191
		≤ 375 Bhn or ≤ 40 HRc (20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
			Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
K	CAST IRONS Gray, Malleable, Ductile	125	RPM	7640	3820	2547	1910	1528	1273	955
		≤ 220 Bhn or ≤ 19 HRc (100-150)	Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
			Feed (ipm)	15.3	15.3	15.3	15.5	15.4	15.4	15.4
		95	RPM	5806	2903	1935	1452	1161	968	726
		≤ 330 Bhn or ≤ 36 HRc (76-114)	Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
			Feed (ipm)	11.6	11.6	11.6	11.8	11.7	11.7	11.7

continued on next page

Straight Flute Accu-Reamer

	Series 200 Fractional	Hardness	Vc (sfm)	DC • in							
	1/16			1/8	3/16	1/4	5/16	3/8	1/2		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	270	RPM	16502	8251	5501	4126	3300	2750	2063
			(216-324)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (ipm)	41.3	41.3	41.3	41.3	41.3	41.3	41.3
		≤ 150 Bhn or ≤ 88 HRb	230	RPM	14058	7029	4686	3514	2812	2343	1757
			(184-276)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (ipm)	35.1	35.1	35.1	35.1	35.1	35.1	35.1
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	115	RPM	7029	3514	2343	1757	1406	1171	879
			(92-138)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (ipm)	9.1	9.1	8.9	9.0	9.0	9.0	9.0
		≤ 200 Bhn or ≤ 23 HRc	95	RPM	5806	2903	1935	1452	1161	968	726
			(76-114)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (ipm)	7.5	7.5	7.4	7.4	7.4	7.5	7.4
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
				Feed (ipm)	1.0	0.9	0.9	0.9	0.9	0.9	0.9
		≤ 320 Bhn or ≤ 34 HRc	15	RPM	917	458	306	229	183	153	115
			(12-18)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		≤ 425 Bhn or ≤ 45 HRc	10	RPM	611	306	204	153	122	102	76
			(8-12)	Fr	0.0004	0.0007	0.0011	0.0015	0.0018	0.0022	0.0029
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	45	RPM	2750	1375	917	688	550	458	344
			(36-54)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
				Feed (ipm)	4.1	4.1	4.1	4.1	4.1	4.1	4.1
		≤ 350 Bhn or ≤ 38 HRc	35	RPM	2139	1070	713	535	428	357	267
			(28-42)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
				Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		≤ 440 Bhn or ≤ 47 HRc	25	RPM	1528	764	509	382	306	255	191
			(20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (ipm)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0004	0.0008	0.0012	0.0016	0.0019	0.0023	0.0031
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
		≤ 655 Bhn or ≤ 60 HRc	14	RPM	856	428	285	214	171	143	107
			(11-17)	Fr	0.0003	0.0007	0.0011	0.0014	0.0018	0.0021	0.0028
				Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC


ipm = Fr x rpm

increase speed and feed 30 percent when using coated reamers


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Straight Flute Reamer



201M
METRIC SERIES

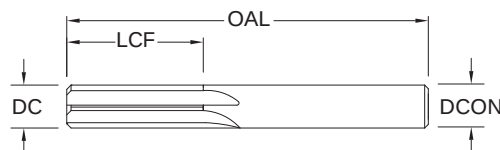

CUTTING DIAMETER DC	SHANK DIAMETER DCON	mm		NO. OF FLUTES	EDP NO. UNCOATED
		MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL		
1,0	1,0	6,0	32,0	4	81001
1,5	1,5	9,5	38,0	4	81003
2,0	2,0	12,7	44,0	4	81005
2,5	2,5	12,7	50,0	4	81007
3,0	3,0	16,0	57,0	4	81009
3,5	3,5	19,0	63,0	4	81011
4,0	4,0	19,0	63,0	4	81013
4,5	4,5	22,0	70,0	4	81015
5,0	5,0	25,0	75,0	4	81017
5,5	5,5	25,0	75,0	4	81019
6,0	6,0	25,0	75,0	4	81021
7,0	7,0	28,0	82,0	6	81023
8,0	8,0	28,0	82,0	6	81025
9,0	9,0	31,0	89,0	6	81027
10,0	10,0	31,0	89,0	6	81029


TOLERANCES (mm)

1–6 DIAMETER

DC = +0,008/–0,000

>6–10 DIAMETER

DC = +0,010/–0,000



For patent
information visit
www.ksptpatents.com

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
			1	2	3	4	6	8	10	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	46 or ≤ 7 HRc (37-55)	RPM	14541	7271	4847	3635	2424	1818	1454
			Fr	0.028	0.056	0.085	0.113	0.169	0.226	0.282
			Feed (mm/min)	410	410	410	410	410	410	410
		23 or ≤ 32 HRc (18-27)	RPM	7271	3635	2424	1818	1212	909	727
			Fr	0.025	0.050	0.074	0.099	0.149	0.198	0.248
			Feed (mm/min)	180	180	180	180	180	180	180
		17 or ≤ 45 HRc (13-20)	RPM	5332	2666	1777	1333	889	666	533
			Fr	0.015	0.030	0.044	0.059	0.089	0.119	0.148
			Feed (mm/min)	79	79	79	79	79	79	79
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	35 or ≤ 28 HRc (28-42)	RPM	11148	5574	3716	2787	1858	1394	1115
			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
			Feed (mm/min)	268	268	268	268	268	268	268
		21 or ≤ 40 HRc (17-26)	RPM	6786	3393	2262	1696	1131	848	679
			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
			Feed (mm/min)	163	163	163	163	163	163	163
		14 or ≤ 45 HRc (11-16)	RPM	4362	2181	1454	1091	727	545	436
			Fr	0.015	0.030	0.045	0.060	0.089	0.119	0.149
			Feed (mm/min)	65	65	65	65	65	65	65
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	12 or ≤ 24 HRc (10-15)	RPM	3878	1939	1293	969	646	485	388
			Fr	0.015	0.031	0.046	0.062	0.093	0.124	0.155
			Feed (mm/min)	60	60	60	60	60	60	60
		8 or ≤ 40 HRc (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	23 or ≤ 24 HRc (18-27)	RPM	7271	3635	2424	1818	1212	909	727
			Fr	0.015	0.030	0.045	0.059	0.089	0.119	0.149
			Feed (mm/min)	108	108	108	108	108	108	108
		17 or ≤ 36 HRc (13-20)	RPM	5332	2666	1777	1333	889	666	533
			Fr	0.012	0.024	0.036	0.048	0.072	0.096	0.120
			Feed (mm/min)	64	64	64	64	64	64	64
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	11 or ≤ 28 HRc (9-13)	RPM	3393	1696	1131	848	565	424	339
			Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147
			Feed (mm/min)	50	50	50	50	50	50	50
		8 or ≤ 40 HRc (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm								
			1	2	3	4	6	8	10		
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	38	RPM	12118	6059	4039	3029	2020	1515	1212
		(30-46)	Fr	0.032	0.064	0.097	0.129	0.193	0.257	0.322	
			Feed (mm/min)	390	390	390	390	390	390	390	
		≤ 330 Bhn or ≤ 36 HRc	29	RPM	9209	4605	3070	2302	1535	1151	921
		(23-35)	Fr	0.032	0.064	0.096	0.128	0.192	0.256	0.320	
			Feed (mm/min)	295	295	295	295	295	295	295	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	82	RPM	26174	13087	8725	6544	4362	3272	2617
		(66-99)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400	
			Feed (mm/min)	1047	1047	1047	1047	1047	1047	1047	
		≤ 150 Bhn or ≤ 88 HRb	70	RPM	22297	11148	7432	5574	3716	2787	2230
		(56-84)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400	
			Feed (mm/min)	892	892	892	892	892	892	892	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	35	RPM	11148	5574	3716	2787	1858	1394	1115
		(28-42)	Fr	0.020	0.041	0.061	0.081	0.122	0.163	0.204	
			Feed (mm/min)	227	227	227	227	227	227	227	
		≤ 200 Bhn or ≤ 23 HRc	29	RPM	9209	4605	3070	2302	1535	1151	921
		(23-35)	Fr	0.020	0.041	0.061	0.082	0.122	0.163	0.204	
			Feed (mm/min)	188	188	188	188	188	188	188	

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm								
			1	2	3	4	6	8	10		
S	HIGH TEMP ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	6	RPM	1939	969	646	485	323	242	194	
		(5-7)	Fr	0.012	0.024	0.036	0.047	0.071	0.095	0.119	
			Feed (mm/min)	23	23	23	23	23	23	23	
		≤ 320 Bhn or ≤ 34 HRc	5	RPM	1454	727	485	364	242	182	145
		(4-5)	Fr	0.010	0.021	0.031	0.041	0.062	0.083	0.103	
			Feed (mm/min)	15	15	15	15	15	15	15	
		≤ 425 Bhn or ≤ 45 HRc	3	RPM	969	485	323	242	162	121	97
		(2-4)	Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062	
			Feed (mm/min)	6	6	6	6	6	6	6	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	14	RPM	4362	2181	1454	1091	727	545	436	
		(11-16)	Fr	0.024	0.048	0.072	0.096	0.144	0.193	0.241	
			Feed (mm/min)	105	105	105	105	105	105	105	
		≤ 350 Bhn or ≤ 38 HRc	11	RPM	3393	1696	1131	848	565	424	339
		(9-13)	Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147	
			Feed (mm/min)	50	50	50	50	50	50	50	
		≤ 440 Bhn or ≤ 47 HRc	8	RPM	2424	1212	808	606	404	303	242
		(6-9)	Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099	
			Feed (mm/min)	24	24	24	24	24	24	24	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	6	RPM	1939	969	646	485	323	242	194	
		(5-7)	Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062	
			Feed (mm/min)	12	12	12	12	12	12	12	
		≤ 655 Bhn or ≤ 60 HRc	4	RPM	1272	636	424	318	212	159	127
		(3-5)	Fr	0.006	0.013	0.019	0.025	0.038	0.050	0.063	
			Feed (mm/min)	8	8	8	8	8	8	8	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

increase speed and feed 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Routers



Routing

HIGH PERFORMANCE ROUTERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Carbon Composite	20-CCR	Multi-Flute Carbon Composite Fractional	386	388
	20M-CCR	Multi-Flute Carbon Composite Metric	386	389
	20-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Fractional	387	388
	20M-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Metric	387	389
Coarse Cut Carbon Composite	31-CCR	Multi-Flute Coarse Composite Fractional	390	391
	31M-CCR	Multi-Flute Coarse Composite Metric	390	392
Compression	25	Multi-Flute Compression Fractional	393	394
	25M	Multi-Flute Compression Metric	393	395
GENERAL APPLICATION ROUTERS	SERIES	DESCRIPTION	PAGE	S&F PAGE
Up Cut	21	2 Flute Up Cut Fractional	396	398
	21M	2 Flute Up Cut Metric	396	399
Down Cut	22	2 Flute Down Cut Fractional	397	398
	22M	2 Flute Down Cut Metric	397	399

Speed & Feed Recommendations listed after each series

Ranurado

RANURADORES DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Compuesto de carbono	20-CCR	Filo múltiple, compuesto de carbono, fraccional	386	388
	20M-CCR	Filo múltiple, compuesto de carbono, métrico	386	389
	20-CCR-LHC	Filo múltiple, carbon composite corte hélice izquierda fraccional	387	388
	20M-CCR-LHC	Filo múltiple, carbo composite corte hélice izquierda métrico	387	389
Compuesto de carbono de corte grueso	31-CCR	Filo múltiple, compuesto grueso, fraccional	390	391
	31M-CCR	Filo múltiple, compuesto grueso, métrico	390	392
Compresión	25	Filo múltiple, compresión, fraccional	393	394
	25M	Filo múltiple, compresión, métrico	393	395

RANURADORES DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA	S&F PÁGINA
Corte ascendente	21	2 filos, corte ascendente, fraccional	396	398
	21M	2 filos, corte ascendente, métrico	396	399
Corte descendente	22	2 filos, corte descendente, fraccional	397	398
	22M	2 filos, corte descendente, métrico	397	399

Recomendaciones de velocidades y avances mostradas tras cada serie

Détourage

FRAISES A DETOURER HAUTE PERFORMANCE	SÈRIES	DESCRIPTION	PAGE	S&F PAGE
Composites carbone	20-CCR	Multi-dents pour composites carbone (fractionnel)	386	388
	20M-CCR	Multi-dents pour composites carbone (métrique)	386	389
	20-CCR-LHC	Multi-dents carbon composite coupe à gauche (fractionnel)	387	388
	20M-CCR-LHC	Multi-dents carbon composite coupe à gauche (métrique)	387	389
Pour composites carbone coupe grossière	31-CCR	Multi-dents pour composites grossiers (fractionnel)	390	391
	31M-CCR	Multi-dents pour composites grossiers (métrique)	390	392
Compression	25	Multi-dents de compression (fractionnel)	393	394
	25M	Multi-dents de compression (métrique)	393	395

FRAISES À DÉTOURER UNIVERSELLES	SÈRIES	DESCRIPTION	PAGE	S&F PAGE
Coupe ascendante	21	2 dents coupe ascendante (fractionnel)	396	398
	21M	2 dents coupe ascendante (métrique)	396	399
Coupe descendante	22	2 dents coupe descendante (fractionnel)	397	398
	22M	2 dents coupe descendante (métrique)	397	399


Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Kohlefaserverbundwerkstoff	20-CCR	Zölliger Konturenfräser für Kohlefaserverbundwerkstoff	386	388
	20M-CCR	Konturenfräser für Kohlefaserverbundwerkstoff	386	389
	20-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene zöllig	387	388
	20M-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene metrisch	387	389
Grobschnitt Kohlefaserverbundwerkstoff	31-CCR	Zölliger Konturenfräser für Verbundkunststoff	390	391
	31M-CCR	Konturenfräser für Verbundkunststoff	390	392
Gegenläufiger Drall	25	Zölliger Gegenläufiger Konturenfräser	393	394
	25M	Gegenläufiger Konturenfräser	393	395

STANDARD-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE	S&F SEITE
Rechtsspirale	21	Zölliger VHM-Fräser mit 2 Schneiden (ziehend)	396	398
	21M	VHM-Fräser mit 2 Schneiden (ziehend)	396	399
Linksspirale	22	Zölliger VHM-Fräser mit 2 Schneiden (drückend)	397	398
	22M	VHM-Fräser mit 2 Schneiden (drückend)	397	399

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie


Carbon Composite



20-CCR

FRACTIONAL SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

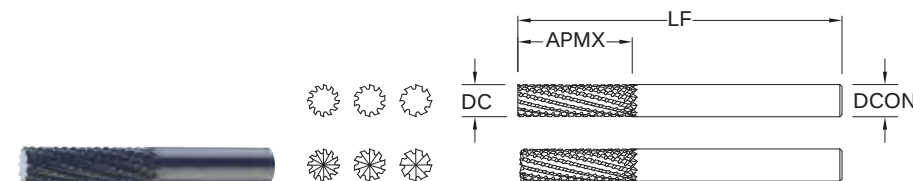

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	72930	73013
1/4	1	2-1/2	1/4	8	End Cutting	72947	73012
5/16	1	2-1/2	5/16	10	No End Cutting	72948	73026
5/16	1	2-1/2	5/16	10	End Cutting	72949	73014
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	72950	73028
3/8	1-1/8	2-1/2	3/8	12	End Cutting	72951	73027
1/2	1-1/2	3-1/2	1/2	12	No End Cutting	72952	73041
1/2	1-1/2	3-1/2	1/2	12	End Cutting	72953	73029

TOLERANCES (inch)

DC = +.000/- .005

DCON = h₆


NON-FERROUS

For patent
information visit
www.ksptpatents.com

20M-CCR

METRIC SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

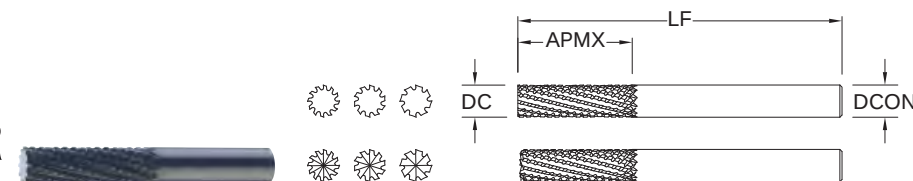

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
2,0	6,0	38,0	3,0	5	End Cutting	82930	83100	83070
3,0	10,0	38,0	3,0	6	End Cutting	82931	83101	83071
4,0	12,0	50,0	4,0	7	End Cutting	82932	83102	83072
5,0	15,0	50,0	6,0	8	End Cutting	82933	83103	83073
6,0	25,0	63,0	6,0	8	No End Cutting	82966	83104	83027
6,0	25,0	63,0	6,0	8	End Cutting	82967	83105	83026
8,0	25,0	63,0	8,0	10	No End Cutting	82968	83106	83029
8,0	25,0	63,0	8,0	10	End Cutting	82969	83107	83028
10,0	28,0	63,0	10,0	12	No End Cutting	82970	83108	83042
10,0	28,0	63,0	10,0	12	End Cutting	82971	83109	83041
12,0	38,0	89,0	12,0	12	No End Cutting	82972	83110	83044
12,0	38,0	89,0	12,0	12	End Cutting	82973	83111	83043

TOLERANCES (mm)

DC = +0,000/-0,130


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com



FRACTIONAL & METRIC Carbon Composite

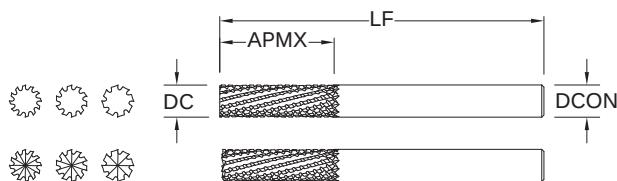

20-CCR-LHC FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/- .005


DCON = h_6

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	73070	73078
1/4	1	2-1/2	1/4	8	End Cutting	73071	73079
5/16	1	2-1/2	5/16	10	No End Cutting	73072	73080
5/16	1	2-1/2	5/16	10	End Cutting	73073	73081
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	73074	73082
3/8	1-1/8	2-1/2	3/8	12	End Cutting	73075	73083

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

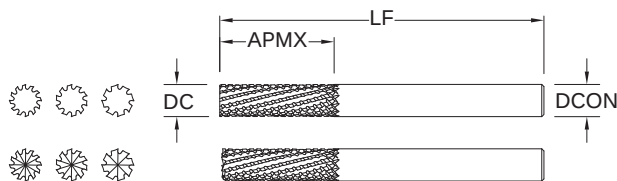

20M-CCR-LHC METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,130

DCON = h_6


NON-FERROUS

For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	8	No End Cutting	83220	83230
6,0	25,0	63,0	6,0	8	End Cutting	83221	83231
8,0	25,0	63,0	8,0	10	No End Cutting	83222	83232
8,0	25,0	63,0	8,0	10	End Cutting	83223	83233
10,0	28,0	63,0	10,0	12	No End Cutting	83224	83234
10,0	28,0	63,0	10,0	12	End Cutting	83225	83235

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

Carbon Composite



Series 20 Fractional			Vc (sfm)	DC • in						
	Ae x DC	Ap x DC			1/4	5/16	3/8	1/2		
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Slot	1	≤ 1	400 (320-480)	RPM	6112	4890	4075	3056
						Fr	0.0049	0.0094	0.0135	0.0180
						Feed (ipm)	30	46	55	55
		 Profile	≤ 0.5	≤ 1.5	500 (400-600)	RPM	7640	6112	5093	3820
						Fr	0.0049	0.0094	0.0135	0.0180
						Feed (ipm)	38	58	69	69
		 HSM	≤ 0.05	≤ 2	825 (660-990)	RPM	12606	10085	8404	6303
						Fr	0.0111	0.0215	0.0309	0.0413
						Feed (ipm)	140	217	260	260
	GFRP (FIBERGLASS)	 Slot	1	≤ 1	320 (256-384)	RPM	4890	3912	3260	2445
						Fr	0.0049	0.0095	0.0135	0.0180
						Feed (ipm)	24	37	44	44
		 Profile	≤ 0.5	≤ 1.5	400 (320-480)	RPM	6112	4890	4075	3056
						Fr	0.0049	0.0095	0.0135	0.0180
						Feed (ipm)	30	46	55	55
		 HSM	≤ 0.05	≤ 2	660 (528-792)	RPM	10085	8068	6723	5042
						Fr	0.0110	0.0214	0.0311	0.0414
						Feed (ipm)	111	173	209	209
	CARBON, GRAPHITE	 Slot	1	≤ 1	480 (384-576)	RPM	7334	5868	4890	3667
						Fr	0.0064	0.0124	0.0180	0.0240
						Feed (ipm)	47	73	88	88
		 Profile	≤ 0.5	≤ 1.5	600 (480-720)	RPM	9168	7334	6112	4584
						Fr	0.0064	0.0124	0.0180	0.0240
						Feed (ipm)	59	91	110	110
		 HSM	≤ 0.05	≤ 2	990 (792-1188)	RPM	15127	12102	10085	7564
						Fr	0.0147	0.0287	0.0412	0.0549
						Feed (ipm)	223	347	415	415
	PLASTICS	 Slot	1	≤ 1	665 (640-690)	RPM	10161	8129	6774	5081
						Fr	0.0077	0.0150	0.0217	0.0241
						Feed (ipm)	78	122	147	147
		 Profile	≤ 0.5	≤ 1.5	1000 (800-1200)	RPM	15280	12224	10187	7640
						Fr	0.0077	0.0150	0.0217	0.0241
						Feed (ipm)	118	183	221	184
		 HSM	≤ 0.05	≤ 2	1650 (1320-1980)	RPM	25212	20170	16808	12606
						Fr	0.0147	0.0287	0.0413	0.0551
						Feed (ipm)	370	579	694	694

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Carbon Composite

Series 20M Metric				Vc (m/min)	DC • mm						
	Ae x DC	Ap x DC			3	6	8	10	12		
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	700	720	1160	1395	1395
			≤ 0.5	≤ 1.5	150 (120-180)	RPM	15903	7951	5963	4771	3976
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	875	900	1450	1744	1744
			≤ 0.05	≤ 2	250 (200-300)	RPM	26504	13252	9939	7951	6626
						Fr	0.126	0.260	0.556	0.833	1.000
						Feed (mm/min)	3350	3450	5527	6625	6625
	GFRP (FIBERGLASS)		1	≤ 1	100 (80-120)	RPM	10602	5301	3976	3181	2650
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	570	587	940	1135	1135
			≤ 0.5	≤ 1.5	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	684	704	1128	1362	1362
			≤ 0.05	≤ 2	200 (160-240)	RPM	21203	10602	7951	6361	5301
						Fr	0.124	0.261	0.557	1.011	1.213
						Feed (mm/min)	2629	2765	4430	6430	6430
	CARBON, GRAPHITE		1	≤ 1	145 (116-174)	RPM	15372	7686	5765	4612	3843
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1061	1165	1860	2224	2224
			≤ 0.5	≤ 1.5	185 (148-222)	RPM	19613	9807	7355	5884	4903
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1353	1486	2373	2838	2838
			≤ 0.05	≤ 2	300 (240-360)	RPM	31805	15903	11927	9542	7951
						Fr	0.159	0.348	0.740	1.109	1.331
						Feed (mm/min)	5057	5535	8820	10580	10580
	PLASTICS		1	≤ 1	245 (196-294)	RPM	25974	12987	9740	7792	6494
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	1792	1945	3107	3717	3717
			≤ 0.5	≤ 1.5	305 (244-366)	RPM	32335	16168	12126	9701	8084
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	2231	2421	3868	4627	4627
			≤ 0.05	≤ 2	505 (404-606)	RPM	53538	26769	20077	16062	13385
						Fr	0.159	0.344	0.732	1.097	1.316
						Feed (mm/min)	8513	9220	14690	17617	17617

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)


Coarse Cut Carbon Composite



31-CCR

FRACTIONAL SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

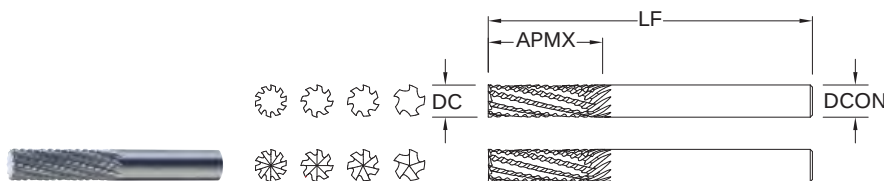

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	5	End Cutting	72954	72955
1/4	1	2-1/2	1/4	5	No End Cutting	72956	72957
5/16	1	2-1/2	5/16	7	End Cutting	72958	72959
5/16	1	2-1/2	5/16	7	No End Cutting	72960	72961
3/8	1-1/8	2-1/2	3/8	8	End Cutting	72962	72963
3/8	1-1/8	2-1/2	3/8	8	No End Cutting	72964	72965
1/2	1-1/2	3-1/2	1/2	10	End Cutting	72966	72967
1/2	1-1/2	3-1/2	1/2	10	No End Cutting	72968	72969

TOLERANCES (inch)

DC = +.000/- .005

DCON = h₆


NON-FERROUS

For patent information visit
www.ksptpatents.com

31M-CCR

METRIC SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

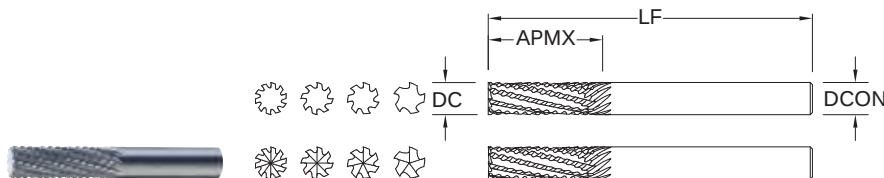

mm						EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	5	End Cutting	82974	83200	82982
6,0	25,0	63,0	6,0	5	No End Cutting	82975	83201	82983
8,0	25,0	63,0	8,0	7	End Cutting	82976	83202	82984
8,0	25,0	63,0	8,0	7	No End Cutting	82977	83203	82985
10,0	28,0	63,0	10,0	8	End Cutting	82978	83204	82986
10,0	28,0	63,0	10,0	8	No End Cutting	82979	83205	82987
12,0	38,0	89,0	12,0	10	End Cutting	82980	83206	82988
12,0	38,0	89,0	12,0	10	No End Cutting	82981	83207	82989

TOLERANCES (mm)


DC = +0,000/-0,130

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

Coarse Cut Carbon Composite

Series 31 Fractional		 Ae x DC Ap x DC		Vc (sfm)	DC • in			
					1/4	5/16	3/8	1/2
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Slot 1 ≤ 1	400 (320-480)	RPM	6112	4890	4075	3056
				Fr	0.0029	0.0065	0.0088	0.0147
				Feed (ipm)	18	32	36	45
		 Profile ≤ 0.5 ≤ 1.5	500 (400-600)	RPM	7640	6112	5093	3820
				Fr	0.0029	0.0065	0.0088	0.0147
				Feed (ipm)	23	40	45	56
		 HSM ≤ 0.05 ≤ 2	825 (660-990)	RPM	12606	10085	8404	6303
				Fr	0.0069	0.0151	0.0206	0.0344
				Feed (ipm)	87	152	173	217
	GFRP (FIBERGLASS)	 Slot 1 ≤ 1	320 (256-384)	RPM	4890	3912	3260	2445
				Fr	0.0031	0.0066	0.0089	0.0147
				Feed (ipm)	15	26	29	36
		 Profile ≤ 0.5 ≤ 1.5	400 (320-480)	RPM	6112	4890	4075	3056
				Fr	0.0031	0.0066	0.0089	0.0147
				Feed (ipm)	19	33	36	45
		 HSM ≤ 0.05 ≤ 2	660 (528-792)	RPM	10085	8068	6723	5042
				Fr	0.0069	0.0150	0.0205	0.0343
				Feed (ipm)	70	121	138	173
	CARBON, GRAPHITE	 Slot 1 ≤ 1	480 (384-576)	RPM	7334	5868	4890	3667
				Fr	0.0040	0.0087	0.0119	0.0199
				Feed (ipm)	29	51	58	73
		 Profile ≤ 0.5 ≤ 1.5	600 (480-720)	RPM	9168	7334	6112	4584
				Fr	0.0040	0.0087	0.0119	0.0199
				Feed (ipm)	36	64	73	91
		 HSM ≤ 0.05 ≤ 2	990 (792-1188)	RPM	15127	12102	10085	7564
				Fr	0.0092	0.0201	0.0275	0.0459
				Feed (ipm)	139	243	277	347
	PLASTICS	 Slot 1 ≤ 1	800 (640-690)	RPM	12224	9779	8149	6112
				Fr	0.0040	0.0087	0.0119	0.0200
				Feed (ipm)	49	85	97	122
		 Profile ≤ 0.5 ≤ 1.5	1000 (800-1200)	RPM	15280	12224	10187	7640
				Fr	0.0040	0.0087	0.0119	0.0200
				Feed (ipm)	61	106	121	153
		 HSM ≤ 0.05 ≤ 2	1650 (1320-1980)	RPM	25212	20170	16808	12606
				Fr	0.0092	0.0201	0.0275	0.0459
				Feed (ipm)	232	405	462	578

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgtool.com)



Coarse Cut Carbon Composite



Series 31M Metric			Vc (m/min)	DC • mm						
	Ae x DC	Ap x DC		6	8	10	12			
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181	
				(96-164)	Fr	0.071	0.170	0.244	0.366	
					Feed (mm/min)	450	810	930	1165	
		≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	
				(120-180)	Fr	0.071	0.170	0.244	0.366	
					Feed (mm/min)	563	1013	1163	1456	
		≤ 0.05	≤ 2	250	RPM	13252	9939	7951	6626	
				(200-300)	Fr	0.162	0.388	0.555	0.832	
					Feed (mm/min)	2150	3860	4415	5515	
	GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650
					(80-120)	Fr	0.069	0.165	0.237	0.357
						Feed (mm/min)	365	655	755	945
		≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	
				(96-164)	Fr	0.069	0.165	0.237	0.357	
					Feed (mm/min)	438	786	906	1134	
		≤ 0.05	≤ 2	200	RPM	10602	7951	6361	5301	
				(160-240)	Fr	0.163	0.390	0.557	0.834	
					Feed (mm/min)	1725	3100	3540	4420	
CARBON, GRAPHITE			1	≤ 1	145	RPM	7686	5765	4612	3843
					(116-174)	Fr	0.095	0.226	0.321	0.483
						Feed (mm/min)	728	1300	1480	1855
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	
				(148-222)	Fr	0.095	0.226	0.321	0.483	
					Feed (mm/min)	929	1659	1888	2367	
		≤ 0.05	≤ 2	300	RPM	15903	11927	9542	7951	
				(240-360)	Fr	0.217	0.517	0.739	1.111	
					Feed (mm/min)	3450	6170	7050	8830	
	PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494
					(196-294)	Fr	0.094	0.223	0.318	0.477
						Feed (mm/min)	1215	2175	2475	3100
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	
				(244-366)	Fr	0.094	0.223	0.318	0.477	
					Feed (mm/min)	1513	2708	3081	3859	
		≤ 0.05	≤ 2	505	RPM	26769	20077	16062	13385	
				(404-606)	Fr	0.215	0.512	0.731	1.098	
					Feed (mm/min)	5760	10280	11745	14700	

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 $\text{mm/min} = \text{Fr} \times \text{rpm}$
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)

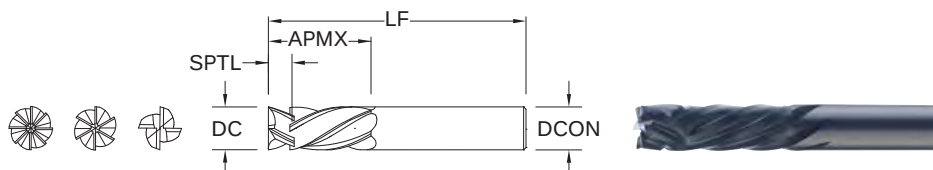

25

FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/-.003


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	SPLIT LENGTH SPTL	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	11/64	4	72970	72971
5/16	1	2-1/2	5/16	7/32	4	72972	72973
3/8	1-1/8	2-1/2	3/8	17/64	6	72974	72975
1/2	1-1/2	3-1/2	1/2	23/64	8	72976	72977

- Compression-style helixes direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

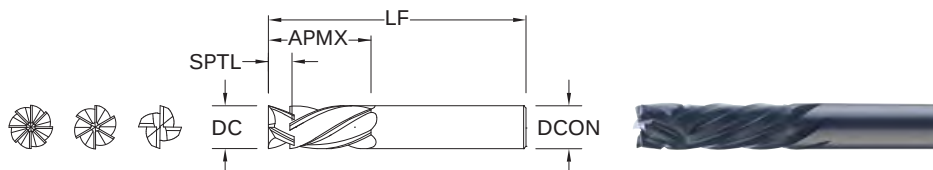

25M

METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,080

DCON = h₆


NON-FERROUS


For patent
information visit
www.ksptpatents.com

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	SPLIT LENGTH SPTL	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	4,10	4	82990	82991
8,0	25,0	63,0	8,0	5,58	4	82992	82993
10,0	28,0	63,0	10,0	7,05	6	82994	82995
12,0	38,0	89,0	12,0	8,60	8	82996	82997

- Compression-style helixes direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

Compression



Series 25 Fractional				Vc (sfm)		DC • in				
		1/4 5/16 3/8 1/2								
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Profile	≤ 0.5	≤ 1.5	500	RPM	7640	6112	5093	3820
					(400-600)	Fz	0.0016	0.0030	0.0040	0.0048
						Feed (ipm)	49	73	122	147
		 HSM	≤ 0.05	≤ 2	825	RPM	12606	10085	8404	6303
					(660-990)	Fz	0.0037	0.0069	0.0092	0.0110
						Feed (ipm)	187	278	464	555
	GFRP (FIBERGLASS)	 Profile	≤ 0.5	≤ 1.5	400	RPM	6112	4890	4075	3056
					(320-480)	Fz	0.0016	0.0030	0.0040	0.0048
						Feed (ipm)	39	59	98	117
		 HSM	≤ 0.05	≤ 2	660	RPM	10085	8068	6723	5042
					(528-792)	Fz	0.0037	0.0069	0.0092	0.0110
						Feed (ipm)	149	223	371	444
	CARBON, GRAPHITE	 Profile	≤ 0.5	≤ 1.5	600	RPM	9168	7334	6112	4584
					(480-720)	Fz	0.0020	0.0038	0.0050	0.0060
						Feed (ipm)	73	111	183	220
		 HSM	≤ 0.05	≤ 2	990	RPM	15127	12102	10085	7564
					(792-1188)	Fz	0.0046	0.0086	0.0115	0.0138
						Feed (ipm)	278	416	696	835
PLASTICS	 Profile	≤ 0.5	≤ 1.5	1000	RPM	15280	12224	10187	7640	
				(800-1200)	Fz	0.0020	0.0038	0.0050	0.0060	
					Feed (ipm)	122	186	306	367	
	 HSM	≤ 0.05	≤ 2	1650	RPM	25212	20170	16808	12606	
				(1320-1980)	Fz	0.0046	0.0086	0.0115	0.0138	
					Feed (ipm)	464	694	1160	1392	
MACHINABLE CERAMICS MACHINABLE GLASS	 Profile	≤ 0.5	≤ 1.5	50	RPM	764	611	509	382	
				(40-60)	Fz	0.0008	0.0015	0.0020	0.0024	
					Feed (ipm)	2.4	3.7	6.1	7.3	
	 HSM	≤ 0.05	≤ 2	85	RPM	1299	1039	866	649	
				(68-102)	Fz	0.0018	0.0034	0.0046	0.0055	
					Feed (ipm)	9.4	14.1	23.9	28.6	

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fz x number of flutes x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Compression



Series 25M Metric

Ae x DC

Ap x DC

Vc (m/min)

DC • mm

6

8

10

12

CFRP, AFRP (CARBON FIBER, ARAMID FIBER)

Profile

≤ 0.5

≤ 1.5

150

RPM

7951

5963

4771

3976

(96-164)

Fz

0.040

0.065

0.075

0.100

Feed (mm/min)

1272

1550

2147

3181

HSM

≤ 0.05

≤ 2

250

RPM

13252

9939

7951

6626

(200-300)

Fz

0.095

0.145

0.175

0.235

Feed (mm/min)

5036

5765

8349

12457

GFRP (FIBERGLASS)

Profile

≤ 0.5

≤ 1.5

120

RPM

6361

4771

3817

3181

(96-164)

Fz

0.040

0.065

0.075

0.100

Feed (mm/min)

1018

1240

1717

2544

HSM

≤ 0.05

≤ 2

200

RPM

10602

7951

6361

5301

(160-240)

Fz

0.095

0.145

0.175

0.235

Feed (mm/min)

4029

4612

6679

9966

N CARBON, GRAPHITE

Profile

≤ 0.5

≤ 1.5

185

RPM

9807

7355

5884

4903

(148-222)

Fz

0.050

0.080

0.095

0.125

Feed (mm/min)

1961

2354

3354

4903

HSM

≤ 0.05

≤ 2

300

RPM

15903

11927

9542

7951

(240-360)

Fz

0.115

0.185

0.220

0.290

Feed (mm/min)

7315

8826

12595

18447

PLASTICS

Profile

≤ 0.5

≤ 1.5

305

RPM

16168

12126

9701

8084

(244-366)

Fz

0.050

0.080

0.095

0.125

Feed (mm/min)

3234

3880

5529

8084

HSM

≤ 0.05

≤ 2

505

RPM

26769

20077

16062

13385

(404-606)

Fz

0.115

0.185

0.220

0.290

Feed (mm/min)

12314

14857

21201

31052

MACHINABLE CERAMICS MACHINABLE GLASS

Profile

≤ 0.5

≤ 1.5

15

RPM

795

596

477

398

(12-18)

Fz

0.020

0.035

0.045

0.050

Feed (mm/min)

64

83

129

159

HSM

≤ 0.05

≤ 2

25

RPM

1325

994

795

663

(20-30)

Fz

0.045

0.075

0.085

0.115

Feed (mm/min)

239

298

406

610

HSM (high speed machining)

$\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$

$\text{mm/min} = \text{Fz} \times \text{number of flutes} \times \text{rpm}$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials


refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Up Cut

**21**

FRACTIONAL SERIES

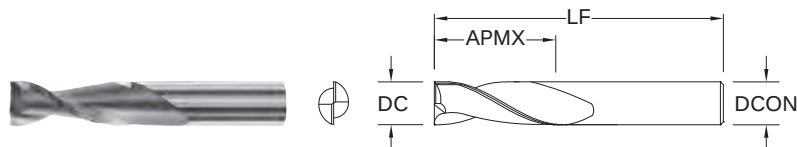

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	90001
5/32	5/8	2-1/2	1/4	90005
3/16	3/4	2-1/2	1/4	90009
1/4	3/4	2-1/2	1/4	90013
1/4	1	2-1/2	1/4	90017
5/16	1	2-1/2	5/16	90021
5/16	1	3	1/2	90025
3/8	1	2-1/2	3/8	90029
3/8	1-1/4	3	1/2	90033
1/2	1-1/4	3	1/2	90037
1/2	1-1/2	3-1/2	1/2	90041
1/2	2	4	1/2	90045
5/8	2	4-1/2	5/8	90049
3/4	2	4-1/2	3/4	90053

TOLERANCES (inch)

DC = +.000/- .003


DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

21M

METRIC SERIES

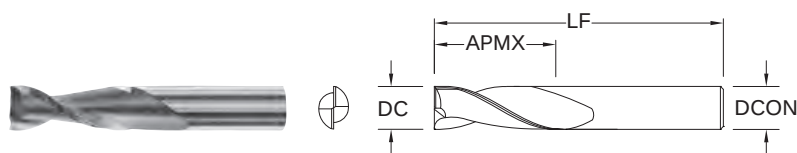

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	90101
4,0	16,0	63,0	6,0	90107
5,0	19,0	63,0	6,0	90109
6,0	25,0	63,0	6,0	90113
8,0	25,0	63,0	8,0	90121
10,0	31,0	75,0	10,0	90129
12,0	31,0	75,0	12,0	90137

TOLERANCES (mm)



DC = +0,000/-0,080

DCON = h₆

NON-FERROUS

For patent
information visit
www.ksptpatents.com

Down Cut

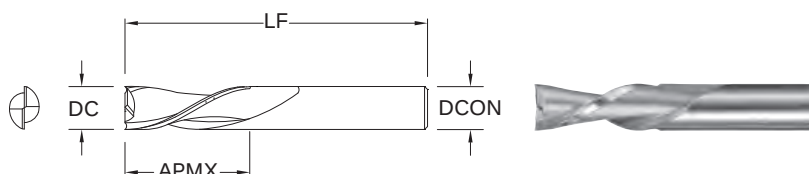**22**

FRACTIONAL SERIES


TOLERANCES (inch)

DC = +.000/-0.003

DCON = h_6 **NON-FERROUS**

For patent
information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	91001
5/32	5/8	2-1/2	1/4	91005
3/16	3/4	2-1/2	1/4	91009
1/4	3/4	2-1/2	1/4	91013
1/4	1	2-1/2	1/4	91017
5/16	1	2-1/2	5/16	91021
5/16	1	3	1/2	91025
3/8	1	2-1/2	3/8	91029
3/8	1-1/4	3	1/2	91033
1/2	1-1/4	3	1/2	91037
1/2	1-1/2	3-1/2	1/2	91041
1/2	2	4	1/2	91045
5/8	2	4-1/2	5/8	91049
3/4	2	4-1/2	3/4	91053

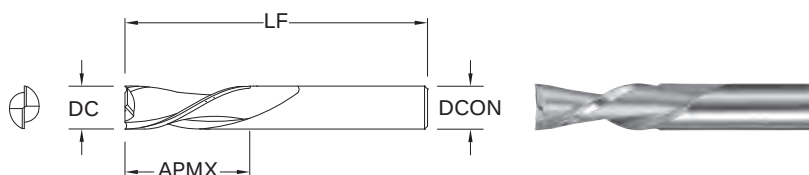**22M**

METRIC SERIES

TOLERANCES (mm)


DC = +0,000/-0,080

DCON = h_6 **NON-FERROUS**

For patent
information visit
www.ksptpatents.com


mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	91101
4,0	16,0	63,0	6,0	91107
5,0	19,0	63,0	6,0	91109
6,0	25,0	63,0	6,0	91113
8,0	25,0	63,0	8,0	91121
10,0	31,0	75,0	10,0	91129
12,0	31,0	75,0	12,0	91137

Up Cut Down Cut



Series 21, 22 Fractional						Vc (sfm)	DC • in				
		Ae x DC	Ap x DC	1/8	1/4		3/8	1/2	3/4		
HARDWOODS		1	≤ 1	1550	RPM	47368	23684	15789	11842	7895	
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030	0.0045	
					Feed (ipm)	76	71	79	71	71	
		≤ 0.5	≤ 1.5	1550	RPM	47368	23684	15789	11842	7895	
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030	0.0045	
					Feed (ipm)	76	71	79	71	71	
	SOFTWOODS		1	≤ 1	1950	RPM	59592	29796	19864	14898	9932
					(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035	0.0055
						Feed (ipm)	119	119	119	104	109
			≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932
					(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035	0.0055
						Feed (ipm)	119	119	119	104	109
PLYWOODS		1	≤ 1	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050	0.0075	
					Feed (ipm)	155	149	159	149	149	
		≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050	0.0075	
					Feed (ipm)	155	149	159	149	149	
N PLASTICS		1	≤ 1	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035	0.0050	
					Feed (ipm)	95	101	99	104	99	
		≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898	9932	
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035	0.0050	
					Feed (ipm)	95	101	99	104	99	

rpm = Vc x 3.82 / DC
ipm = Fz x 2 x rpm

Series 21M, 22M Metric				Vc (m/min)	DC • mm						
		Ae x DC	Ap x DC		3	6	10	12	20		
HARDWOODS	 Slot	1	≤ 1	470	RPM	49828	24914	14948	12457	7474	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1943	1869	1719	
	 Profile	≤ 0.5	≤ 1.5	470	RPM	49828	24914	8155	4241	1509	
				(376-564)	Fz	0.020	0.040	0.065	0.075	0.115	
					Feed (mm/min)	1993	1993	1060	636	347	
	SOFTWOODS	 Slot	1	≤ 1	600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.025	0.050	0.075	0.090	0.140
						Feed (mm/min)	3181	3181	2862	2862	2672
		 Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	303467
					(480-720)	Fz	0.025	0.050	0.075	0.090	0.140
						Feed (mm/min)	3181	3181	2862	2862	84971
PLYWOODS	 Slot	1	≤ 1	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	3626	
	 Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	303467	
				(480-720)	Fz	0.030	0.065	0.100	0.125	0.190	
					Feed (mm/min)	3817	4135	3817	3976	115318	
N PLASTICS	 Slot	1	≤ 1	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.020	0.040	0.065	0.090	0.125	
					Feed (mm/min)	2544	2544	2481	2862	2385	
	 Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083	15903	9542	
				(480-720)	Fz	0.020	0.040	0.065	0.090	0.125	
					Feed (mm/min)	2544	2544	2481	2862	2385	

rpm = (Vc x 1000) / (DC x 3.14)
mm/min = Fz x 2 x rpm

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30000	303	30108	307	30188	308	30366	284	30483	283	30563	297	30813	297
30001	303	30109	303	30189	306	30367	282	30484	283	30564	298	30814	297
30002	303	30110	307	30189	318	30368	284	30485	283	30565	297	30815	297
30003	303	30111	303	30190	308	30369	282	30486	283	30566	298	30816	297
30004	303	30112	307	30190	319	30370	284	30487	283	30567	297	30817	297
30005	303	30113	303	30191	303	30371	282	30488	283	30568	298	30818	297
30006	303	30114	307	30192	303	30372	284	30489	283	30569	297	30819	297
30007	304	30115	303	30193	303	30373	282	30490	283	30570	298	30820	297
30008	304	30116	307	30194	303	30374	284	30491	283	30571	297	30821	297
30009	304	30117	303	30195	303	30375	282	30492	283	30572	298	30822	297
30010	304	30118	307	30196	303	30376	284	30493	283	30573	297	30823	297
30011	304	30119	303	30197	303	30377	280	30494	284	30574	298	30824	297
30012	304	30120	307	30198	303	30378	283	30495	284	30575	297	30825	297
30013	304	30121	303	30199	303	30379	304	30496	284	30576	298	30826	297
30014	304	30122	307	30300	303	30380	305	30497	284	30577	297	30827	297
30015	304	30123	303	30301	280	30381	305	30498	284	30578	298	30828	297
30016	304	30124	307	30302	283	30382	306	30499	284	30589	297	30829	297
30017	304	30125	303	30303	280	30383	306	30500	284	30589	318	30830	297
30018	305	30126	307	30304	283	30384	308	30501	297	30590	298	30831	297
30019	305	30127	303	30305	280	30385	308	30502	298	30590	319	30832	297
30020	305	30128	307	30306	283	30386	308	30503	297	30591	284	30833	297
30021	305	30129	303	30307	280	30387	308	30504	298	30592	284	30834	297
30022	305	30130	307	30308	283	30388	308	30505	297	30593	284	30835	297
30023	305	30131	303	30309	280	30389	282	30506	298	30594	284	30836	297
30024	305	30132	307	30310	283	30389	318	30507	297	30595	284	30837	297
30025	305	30133	304	30311	280	30390	284	30508	298	30596	284	30838	297
30026	305	30134	307	30312	283	30390	319	30509	297	30597	284	30839	297
30027	306	30135	304	30313	280	30397	280	30510	298	30598	284	30840	297
30028	306	30136	307	30314	283	30398	280	30511	297	30599	283	30841	297
30029	303	30137	304	30315	280	30399	280	30512	298	30600	284	30842	297
30030	306	30138	307	30316	283	30400	280	30513	297	30600	319	30843	297
30030	318	30139	304	30317	280	30435	280	30514	298	30602	298	30844	297
30031	307	30140	307	30318	283	30436	280	30515	297	30604	298	30845	297
30032	307	30141	304	30319	280	30437	280	30516	298	30606	298	30846	297
30033	307	30142	307	30320	283	30438	280	30517	297	30608	298	30847	297
30034	307	30143	304	30321	280	30439	280	30518	298	30610	298	30848	297
30035	307	30144	307	30322	283	30440	280	30519	297	30612	298	30849	297
30036	307	30145	304	30323	280	30441	280	30520	298	30771	297	30850	297
30037	307	30146	307	30324	283	30442	280	30521	297	30772	297	30850	318
30038	307	30147	304	30325	280	30443	280	30522	298	30773	297	30851	298
30039	307	30148	308	30326	283	30444	280	30523	297	30774	297	30852	298
30040	307	30149	304	30327	280	30445	280	30524	298	30775	297	30853	298
30041	307	30150	308	30328	283	30446	280	30525	297	30776	297	30854	298
30042	307	30151	304	30329	280	30447	280	30526	298	30777	297	30855	298
30043	307	30152	308	30330	283	30448	280	30527	297	30778	297	30856	298
30044	307	30153	304	30331	280	30449	281	30528	298	30779	297	30857	298
30045	307	30154	308	30332	283	30450	281	30529	297	30780	297	30858	298
30046	307	30155	305	30333	280	30451	281	30530	298	30781	297	30859	298
30047	307	30156	308	30334	283	30452	281	30531	297	30782	297	30860	298
30048	307	30157	305	30335	280	30453	281	30532	298	30783	297	30861	298
30049	307	30158	308	30336	283	30454	281	30533	297	30784	297	30862	298
30050	307	30159	305	30337	281	30455	281	30534	298	30785	297	30863	298
30051	307	30160	308	30338	283	30456	281	30535	297	30786	297	30864	298
30052	307	30161	305	30339	281	30457	281	30536	298	30787	297	30865	298
30053	307	30162	308	30340	283	30458	281	30537	297	30788	297	30866	298
30054	308	30163	305	30341	281	30459	281	30538	298	30789	297	30867	298
30055	308	30164	308	30342	283	30460	281	30539	297	30790	297	30868	298
30056	308	30165	305	30343	281	30461	281	30540	298	30791	297	30869	298
30057	308	30166	308	30344	283	30462	281	30541	297	30792	297	30870	298
30058	308	30167	305	30345	281	30463	282	30542	298	30793	297	30871	298
30059	308	30168	308	30346	283	30464	282	30543	297	30794	297	30872	298
30060	308	30169	305	30347	281	30465	282	30544	298	30795	297	30873	298
30061	308	30170	308	30348	284	30466	282	30545	297	30796	297	30874	298
30062	308	30171	305	30349	281	30467	282	30546	298	30797	297	30875	298
30063	308	30172	308	30350	284	30468	282	30547	297	30798	297	30876	298
30064	308	30173	306	30351	281	30469	280	30548	298	30799	297	30877	298
30065	308	30174	308	30352	284	30470	282	30549	297	30800	297	30878	298
30066	308	30175	306	30353	281	30470	318	30550	298	30801	297	30879	298
30067	308	30176	308	30354	284	30471	283	30551	297	30802	297	30880	298
30068	308	30177	303	30355	281	30472	283	30552	298	30803	297	30881	298
30069	307	30178	307	30356	284	30473	283	30553	297	30804	297	30882	298
30070	308	30179	304	30357	281	30474	283	30554	298	30805	297	30883	298
30070	319	30180	305	30358	284	30475	283	30555	297	30806	297	30884	298
30101	303	30181	305	30359	281	30476	283</						

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30902.....	298	31175	313	31319.....	287	31428	314	31521.....	287	31650	303
30904.....	298	31176	313	31320.....	287	31429	313	31522.....	288	31651	303
30906.....	298	31177	313	31321.....	287	31430	314	31523.....	287	31652	303
30908.....	298	31178	313	31322.....	287	31431	313	31524.....	288	31653	303
30910.....	298	31179	313	31323.....	287	31432	314	31525.....	287	31654	303
30912.....	298	31180	313	31324.....	287	31433	313	31526.....	288	31655	303
30914.....	298	31181	313	31325.....	287	31434	314	31527.....	287	31656	303
30916.....	298	31182	313	31326.....	287	31435	313	31528.....	288	31657	304
30918.....	298	31183	313	31327.....	287	31436	314	31529.....	287	31658	304
30920.....	298	31184	313	31328.....	287	31437	313	31530.....	288	31659	305
30921.....	298	31185	313	31329.....	287	31438	314	31531.....	287	31660	305
30922.....	298	31186	313	31330.....	287	31439	313	31532.....	288	31661	305
30923.....	298	31187	313	31331.....	287	31440	314	31533.....	287	31662	305
30924.....	298	31188	313	31332.....	287	31441	313	31534.....	288	31701	291
30925.....	298	31189	313	31333.....	287	31442	314	31535.....	287	31703	291
30926.....	298	31190.....	313	31334.....	287	31443	313	31536.....	288	31705	291
30927.....	298	31190.....	318	31335.....	287	31444	314	31537.....	287	31707	291
30928.....	298	31217.....	314	31336.....	287	31445	313	31538.....	288	31709	291
30929.....	298	31217.....	319	31336.....	318	31446	314	31539.....	287	31711	291
30930.....	298	31218	314	31337.....	288	31447	313	31540.....	288	31713	291
30931.....	298	31219	314	31338.....	288	31448	314	31541.....	287	31715	291
30932.....	298	31220	314	31339.....	288	31449	313	31542.....	288	31717	291
30933.....	298	31221	314	31340.....	288	31450	314	31543.....	287	31719	291
30934.....	298	31222	314	31341.....	288	31451	313	31544.....	288	31721	291
30935.....	298	31223	314	31342.....	288	31452	314	31545.....	287	31723	291
30936.....	298	31224	314	31343.....	288	31453	313	31546.....	288	31725	291
30937.....	298	31225	314	31344.....	288	31454	314	31547.....	287	31727	303
30938.....	298	31226	314	31345.....	288	31455	313	31548.....	288	31728	303
30939.....	298	31227	314	31346.....	288	31456	314	31549.....	287	31729	304
30940.....	298	31228	314	31347.....	288	31457	313	31550.....	288	31730	304
30941.....	298	31229	314	31348.....	288	31458	314	31551.....	287	31731	304
30942.....	298	31230	314	31349.....	288	31459	313	31552.....	288	31732	305
30943.....	298	31231	314	31350.....	288	31460	314	31553.....	287	31733	305
30944.....	298	31232	314	31351.....	288	31461	313	31554.....	288	31734	305
30944.....	319	31233	314	31352.....	288	31462	314	31555.....	287	31735	306
31130	298	31234	314	31353.....	288	31463	313	31556.....	288	31736	306
31131	298	31235	314	31354.....	288	31464	314	31557.....	287	31737	303
31132	298	31236	314	31355.....	288	31465	313	31558.....	288	31738	303
31133	298	31237	314	31356.....	288	31466	314	31559.....	287	31739	304
31134	298	31238	303	31357.....	288	31467	313	31560.....	288	31740	304
31135	298	31239	303	31357.....	319	31468	314	31561.....	287	31741	304
31136	298	31240	303	31358	291	31469	313	31562.....	288	31742	305
31137	298	31241	303	31359	291	31470	314	31563.....	287	31743	305
31138	298	31242	303	31360	291	31471	313	31564.....	288	31744	305
31139	298	31243	303	31361	291	31472	314	31565.....	287	31745	306
31140	298	31244	303	31362	291	31473	313	31566.....	288	31746	306
31141	298	31245	304	31363	291	31474	314	31567.....	287	31747	303
31142	298	31246	304	31364	291	31475	313	31568.....	288	31748	303
31143	298	31247	305	31365	291	31476	314	31569.....	287	31749	304
31144	298	31248	305	31366	291	31477	313	31570.....	288	31750.....	291
31145	298	31249	305	31367	291	31478	314	31571.....	287	31751.....	291
31146	298	31250	305	31368	291	31479	313	31572.....	288	31752.....	291
31147	298	31251	303	31369	291	31480	314	31573.....	287	31753.....	291
31148	298	31252	303	31370	291	31481.....	313	31574.....	288	31754.....	291
31149	298	31253	303	31401	313	31481.....	318	31575.....	287	31755.....	291
31150	298	31254	303	31402	314	31482.....	314	31576.....	288	31756.....	291
31151	298	31255	303	31403	313	31482.....	319	31577.....	287	31757.....	291
31152	298	31256	303	31404	314	31489.....	313	31578.....	288	31758.....	291
31153	298	31257	303	31405	313	31489.....	318	31579.....	287	31759.....	291
31154	298	31258	304	31406	314	31490.....	314	31580.....	288	31760.....	291
31155	298	31259	304	31407	313	31490.....	319	31581.....	287	31761.....	291
31156	298	31260	305	31408	314	31501.....	287	31581.....	318	31762.....	291
31157	298	31261	305	31409	313	31502.....	288	31582.....	288	31763	304
31158	298	31262	305	31410	314	31503.....	287	31582.....	319	31764	304
31159	298	31263	305	31411	313	31504.....	288	31589.....	287	31765	305
31160	298	31303.....	291	31412	314	31505.....	287	31589.....	318	31766	305
31161	298	31304.....	291	31413	313	31506.....	288	31590.....	288	31767	305
31162	298	31305.....	291	31414	314	31507.....	287	31590.....	319	31768	306
31163	298	31306.....	291	31415	313	31508.....	288	31601	303	31769	306
31164	298	31307.....	291	31416	314	31509.....	287	31603	303	31770.....	307
31165	298	31308.....	291	31417	313	31510.....	288	31605	303	31771.....	307
31166	298	31309.....	291	31418	314	31511.....	287	31607	303	31772.....	307
31167	298	31310.....	291	31419	313	31512.....	288	31609	303	31773.....	307
31168	298	31311.....	291	31420	314	31513.....	287	31611	303	31774.....	308
31169.....	298	31312.....	291	31421	313	31514.....	288	31613	303	31775.....	308
31169.....	319	31313.....	291	31422	314	31515.....	287	31615	304	31776.....	308
31170	313	31314.....	291	31423	313	31516.....	288	31617	304	31777.....	308
31171	313	31315.....	291	31424	314	31517.....	287	31619	305	31778.....	308
31172	313	31316.....	287	31425	313	31518.....	288	31621	305	31779.....	308
31173	313	31317.....	287	31426	314	31519.....	287	31623	305	31780	307
31174	313	31318.....	287	31427	313	31520.....	288	31625	305	31781	307

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
31873	304	31961	281	32211	294	32346	301	32446	302	32603	66	32718	150
31874	304	31962	281	32212	294	32347	301	32447	302	32604	66	32719	150
31875	305	31963	281	32213	294	32348	301	32448	302	32605	66	32720	150
31876	305	31964	282	32214	294	32349	301	32449	302	32606	65	32725	148
31877	305	31965	282	32215	294	32350	301	32450	302	32607	65	32726	148
31878	306	31966	282	32216	294	32351	301	32451	302	32608	65	32727	148
31879	306	31967	282	32217	294	32352	301	32452	302	32609	65	32728	148
31880	303	31968	283	32260	293	32353	301	32453	302	32610	65	32729	148
31881	303	31969	283	32261	293	32354	301	32454	302	32611	65	32730	148
31882	304	31970	283	32262	293	32355	301	32455	302	32612	65	32731	148
31883	304	31971	283	32263	293	32356	301	32456	302	32613	65	32732	148
31884	304	31972	284	32264	293	32357	301	32457	302	32614	65	32733	148
31885	305	31973	284	32265	293	32358	301	32458	302	32615	65	32734	148
31886	305	31974	284	32266	293	32359	301	32459	302	32616	65	32735	149
31887	305	31975	284	32267	293	32360	301	32460	302	32619	65	32736	149
31888	306	31976	284	32270	293	32361	301	32461	302	32620	65	32737	149
31889	306	31977	284	32271	293	32362	301	32462	302	32621	65	32738	149
31890	283	31978	283	32272	293	32363	301	32463	302	32625	65	32739	149
31891	283	31979	283	32273	293	32364	301	32464	302	32626	65	32740	149
31892	283	31980	283	32274	293	32370	301	32470	302	32627	65	32741	149
31893	283	31981	283	32275	293	32371	301	32471	302	32628	65	32742	150
31894	284	31982	284	32276	293	32372	301	32472	302	32632	66	32743	150
31895	284	31983	284	32277	293	32373	301	32473	302	32633	66	32744	150
31896	284	31984	284	32280	293	32374	301	32474	302	32655	65	32745	150
31897	284	31985	284	32281	293	32375	301	32475	302	32656	65	32751	148
31898	284	31986	284	32282	293	32376	301	32476	302	32657	65	32752	148
31899	284	31987	284	32283	293	32377	301	32477	302	32658	65	32753	148
31900	307	31988	283	32284	293	32378	301	32478	302	32659	65	32754	148
31902	307	31989	283	32285	293	32379	301	32479	302	32660	65	32755	148
31904	307	31990	283	32286	293	32380	301	32480	302	32661	65	32756	148
31906	307	31991	283	32287	293	32381	301	32481	302	32662	65	32757	148
31908	308	31992	284	32290	294	32382	301	32482	302	32663	66	32758	148
31910	308	31993	284	32291	294	32383	301	32483	302	32664	66	32759	148
31912	308	31994	284	32292	294	32384	301	32484	302	32665	66	32760	148
31914	308	31995	284	32293	294	32385	301	32485	302	32666	66	32761	145
31916	308	31996	284	32294	294	32386	301	32486	302	32667	66	32762	148
31917	308	31997	284	32295	294	32387	301	32487	302	32668	66	32763	148
31918	307	32033	173	32296	294	32388	301	32488	302	32669	66	32764	148
31919	307	32034	173	32297	294	32389	301	32489	302	32670	66	32765	148
31920	307	32035	173	32301	301	32402	302	32500	67	32671	66	32766	145
31921	307	32036	173	32302	301	32403	302	32501	67	32672	65	32767	148
31922	308	32037	173	32303	301	32404	302	32502	67	32673	65	32768	148
31923	308	32038	173	32304	301	32405	302	32503	67	32674	65	32769	148
31924	308	32039	173	32305	301	32406	302	32504	67	32675	65	32770	148
31925	308	32040	173	32306	301	32407	302	32505	67	32676	65	32771	149
31926	308	32041	173	32307	301	32408	302	32506	67	32677	65	32772	149
31927	308	32042	173	32308	301	32409	302	32569	65	32678	66	32773	149
31928	307	32043	173	32309	301	32410	302	32570	66	32679	66	32774	149
31929	307	32044	173	32310	301	32411	302	32571	66	32680	66	32775	149
31930	307	32045	173	32311	301	32412	302	32572	66	32681	66	32776	149
31931	307	32046	173	32312	301	32413	302	32573	65	32682	66	32777	149
31932	308	32047	173	32313	301	32414	302	32574	65	32683	66	32778	149
31933	308	32048	173	32314	301	32415	302	32575	66	32685	66	32779	149
31934	308	32049	173	32315	301	32416	302	32576	66	32686	66	32780	149
31935	308	32053	173	32316	301	32417	302	32577	66	32687	66	32781	149
31936	308	32054	173	32317	301	32418	302	32578	66	32688	66	32782	149
31937	308	32055	173	32318	301	32419	302	32579	66	32689	66	32783	149
31938	280	32056	173	32319	301	32420	302	32580	66	32691	148	32784	149
31939	280	32057	173	32320	301	32421	302	32581	66	32692	148	32785	149
31940	280	32058	173	32321	301	32422	302	32582	66	32697	149	32786	149
31941	281	32059	173	32322	301	32423	302	32583	66	32698	149	32787	149
31942	281	32060	173	32323	301	32424	302	32584	66	32699	150	32788	149
31943	281	32061	173	32324	301	32425	302	32585	66	32700	148	32789	149
31944	282	32062	173	32325	301	32426	302	32586	66	32701	148	32790	149
31945	282	32063	173	32326	301	32427	302	32587	66	32702	148	32791	149
31946	282	32064	173	32327	301	32428	302	32588	66	32703	148	32792	149
31947	282	32065	173	32328	301	32429	302	32589	66	32704	148	32793	149
31948	280	32066	173	32329	301	32430	302	32590	66	32705	148	32794	149
31949	280	32067	173	32330	301	32431	302	32591	65	32706	148	32795	149
31950	280	32068	173	32333	301	32434	302	32592	65	32707	148	32796	150
31951	281	32069	173	32334	301	32435	302	32593	65	32708	148	32797	150
31952	281	32200	294	32335	301	32436	302	32594	66	32709	148	32798	150
31953	281	32201	294	32336	301	32437	302	32595	66	32710	149	32799	150
31954	282	32202	294	32337	301	32438	302	32596	66	32711	149	32800	150
31955													

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
32807	150	33118	308	33396	154	33542	155	34309	154	34672	168	34765	147
32808	150	33121	303	33397	154	33543	155	34501	173	34673	168	34771	144
32809	150	33122	307	33398	154	33544	155	34502	173	34674	168	34772	144
32810	150	33123	304	33400	154	33547	155	34503	173	34675	168	34773	144
32815	148	33124	307	33401	154	33548	155	34504	173	34676	168	34774	144
32816	148	33125	304	33402	154	33551	155	34505	173	34677	168	34775	144
32817	148	33126	307	33403	154	33552	155	34506	173	34678	167	34776	144
32818	148	33127	304	33404	154	33553	155	34507	173	34679	167	34777	145
32819	148	33128	308	33406	154	33554	155	34508	173	34680	167	34778	145
32820	148	33129	305	33407	154	33555	155	34509	173	34681	167	34779	145
32821	148	33130	308	33408	154	33556	155	34510	173	34682	167	34780	145
32822	148	33131	305	33409	154	33557	155	34511	173	34683	167	34781	145
32823	148	33132	308	33410	154	33558	155	34512	173	34684	167	34782	146
32824	148	33133	305	33411	154	33559	155	34513	173	34685	167	34783	146
32825	145	33134	308	33412	154	33560	155	34514	173	34686	168	34784	146
32826	148	33135	306	33413	154	33561	155	34515	173	34687	168	34785	146
32827	148	33136	308	33415	154	33562	155	34516	173	34688	168	34786	147
32828	148	33137	306	33416	154	33563	155	34517	173	34689	168	34787	147
32829	148	33138	308	33417	154	33564	155	34518	173	34690	168	34789	147
32830	145	33141	303	33418	154	33565	155	34519	173	34691	168	34790	147
32831	148	33142	307	33419	154	34016	138	34520	173	34692	168	34791	147
32832	148	33143	303	33420	154	34017	138	34521	173	34693	168	34793	144
32833	148	33144	307	33421	154	34018	138	34522	173	34701	144	34794	144
32834	148	33301	280	33422	154	34019	138	34523	173	34702	144	34795	144
32835	149	33302	283	33423	154	34020	138	34524	173	34703	144	34796	144
32836	149	33303	280	33424	154	34021	138	34525	173	34704	144	34797	144
32837	149	33304	283	33450	154	34022	138	34526	173	34705	144	34798	144
32838	149	33305	281	33451	154	34023	138	34527	173	34706	144	34799	145
32839	149	33306	283	33452	154	34024	138	34528	173	34707	144	34800	145
32840	149	33307	281	33453	154	34025	138	34529	173	34708	144	34801	145
32841	149	33308	284	33454	154	34026	138	34530	173	34709	144	34802	145
32842	149	33309	281	33455	154	34027	138	34531	173	34710	144	34803	145
32843	149	33310	284	33456	154	34028	138	34532	173	34711	145	34804	146
32844	149	33311	281	33457	154	34029	138	34533	173	34712	145	34805	146
32845	149	33312	284	33458	154	34030	138	34534	173	34713	145	34806	146
32846	149	33313	282	33460	154	34031	138	34620	166	34714	146	34807	146
32847	149	33314	284	33461	154	34100	133	34621	166	34715	146	34808	147
32848	149	33315	282	33462	154	34101	133	34622	166	34716	146	34809	147
32849	149	33316	284	33463	154	34102	133	34623	166	34717	146	34811	147
32850	149	33317	282	33464	154	34103	133	34624	166	34718	146	34812	147
32851	149	33318	284	33466	154	34104	133	34625	166	34719	146	34813	147
32852	149	33321	280	33467	154	34105	133	34626	166	34720	146	34815	147
32853	149	33322	283	33468	154	34106	133	34627	166	34721	146	34816	147
32854	149	33323	280	33469	154	34107	133	34628	166	34722	147	34817	147
32855	149	33324	283	33470	154	34108	133	34630	168	34723	147	34818	147
32856	149	33325	281	33471	154	34109	133	34631	168	34724	147	34822	144
32857	149	33326	283	33472	154	34110	133	34632	168	34725	147	34823	144
32858	149	33327	281	33473	154	34111	133	34633	168	34726	147	34824	144
32859	149	33328	284	33475	154	34112	133	34634	168	34727	147	34825	144
32860	150	33329	281	33476	154	34113	133	34635	168	34728	144	34826	144
32861	150	33330	284	33477	154	34114	133	34636	168	34729	144	34827	145
32862	150	33331	282	33478	154	34115	133	34637	168	34730	144	34828	145
32863	150	33332	284	33479	154	34116	133	34638	168	34731	144	34830	145
32864	150	33333	282	33480	154	34117	133	34640	167	34732	144	34831	145
32865	150	33334	284	33481	154	34118	133	34641	167	34733	144	34832	146
32866	150	33335	282	33482	154	34119	133	34642	167	34734	144	34833	146
32867	150	33336	284	33483	154	34120	133	34643	167	34735	144	34834	146
32868	150	33337	282	33484	154	34121	133	34644	167	34736	144	34835	147
32869	150	33338	284	33500	155	34122	133	34645	167	34737	144	34857	144
32870	150	33341	280	33501	155	34123	133	34646	167	34738	145	34858	144
32871	150	33342	283	33502	155	34124	133	34647	167	34739	145	34859	144
32872	150	33343	280	33503	155	34125	133	34650	168	34740	145	34860	144
32873	150	33344	283	33504	155	34126	133	34651	168	34741	146	34861	144
32874	150	33345	103	33507	155	34127	133	34652	168	34742	146	34862	145
33101	303	33346	103	33508	155	34128	133	34653	168	34743	146	34863	145
33102	307	33347	103	33511	155	34129	133	34654	168	34744	146	34865	145
33103	304	33348	103	33513	155	34130	133	34655	168	34745	146	34866	145
33104	307	33349	103	33514	155	34131	133	34656	168	34746	146	34867	146
33105	304	33350	103	33515	155	34132	133	34657	168	34747	146	34868	146
33106	307	33351	103	33516	155	34133	133	34660	166	34748	146	34869	146
33107	304	33352	103	33517	155	34134	133	34661	166	34749	147	34870	147
33108	308	33353	103	33518	155	34135	133	34662	166	34750	147	34888	148
33109	305	33354	103	33519	155	34300	154	34663	166	34751	147	34889	148
33110	308	33360	122	33520	155	34301	154						

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
34921	152	35117	76	35303	292	35610	145	35700	145	36111	316	36353	53
34922	152	35118	76	35304	292	35611	145	35701	145	36112	316	36354	53
34923	152	35119	76	35305	292	35612	146	35702	146	36113	316	36355	53
34924	152	35120	76	35306	292	35613	146	35703	146	36114	316	36356	53
34925	152	35121	76	35307	292	35614	146	35704	146	36116	316	36357	53
34926	152	35122	76	35308	292	35615	146	35705	146	36117	316	36358	53
34927	152	35123	76	35309	292	35616	146	35706	146	36118	316	36359	53
34928	152	35124	76	35310	292	35617	146	35707	146	36120	316	36361	53
34929	152	35125	76	35311	292	35618	146	35708	146	36121	316	36370	41
34930	152	35126	76	35312	292	35619	146	35709	146	36122	316	36371	41
34931	152	35127	77	35313	292	35620	146	35710	146	36124	316	36372	41
34932	152	35128	77	35314	292	35621	146	35711	146	36125	316	36373	41
34933	152	35129	77	35315	292	35622	146	35712	146	36126	316	36374	42
34934	152	35130	77	35473	315	35623	146	35713	146	36128	316	36375	42
34941	153	35131	77	35475	315	35624	146	35714	146	36129	316	36376	42
34942	153	35132	77	35477	315	35625	146	35715	146	36130	316	36378	42
34943	153	35133	77	35478	315	35626	146	35716	146	36140	116	36380	42
34944	153	35134	77	35479	315	35627	146	35717	146	36141	116	36381	42
34945	153	35135	77	35480	315	35628	146	35718	146	36142	116	36383	43
34946	153	35136	77	35481	315	35629	146	35719	146	36143	116	36384	43
34947	153	35137	77	35482	315	35630	146	35720	146	36206	317	36385	43
34948	153	35138	77	35483	315	35631	146	35721	146	36207	317	36386	43
34949	153	35139	77	35485	315	35632	146	35722	146	36208	317	36387	43
34950	153	35140	77	35487	315	35633	147	35723	147	36209	317	36388	43
34951	153	35141	77	35489	315	35634	147	35724	147	36210	317	36389	43
34952	153	35150	76	35491	315	35635	147	35725	147	36211	317	36390	43
34954	153	35151	76	35493	315	35636	147	35726	147	36212	317	36391	43
34955	153	35152	76	35495	315	35637	147	35727	147	36213	317	36392	43
34956	153	35153	76	35497	315	35638	147	35728	147	36214	317	36393	43
34972	152	35154	76	35500	315	35639	147	35729	147	36216	317	36404	41
34973	152	35155	76	35501	315	35640	147	35730	147	36217	317	36406	41
34974	152	35156	76	35502	315	35641	147	35731	147	36218	317	36408	41
34975	152	35157	76	35503	315	35642	147	35732	147	36220	317	36410	41
34976	152	35158	76	35504	315	35643	147	35733	147	36221	317	36416	41
34977	152	35159	76	35505	315	35644	147	35734	147	36222	317	36418	41
34978	152	35160	76	35506	315	35645	147	35735	147	36224	317	36420	42
34979	152	35161	76	35507	315	35646	147	35736	147	36225	317	36422	42
34980	152	35180	77	35508	315	35647	147	35737	147	36226	317	36424	42
34981	152	35181	77	35509	315	35648	147	35738	147	36228	317	36426	42
34982	152	35182	77	35510	315	35649	147	35739	147	36229	317	36428	42
34983	152	35183	77	35511	315	35650	147	35740	147	36230	317	36430	42
34984	152	35184	77	35512	315	35651	147	35741	147	36235	148	36432	42
34985	152	35185	77	35513	315	35652	147	35742	147	36236	148	36436	42
34986	152	35186	77	35514	315	35653	147	35743	147	36237	151	36440	43
34987	152	35187	77	35515	315	35654	147	35744	147	36238	151	36442	43
34988	152	35188	77	35575	144	35655	144	35787	148	36239	148	36444	43
34989	152	35189	77	35576	144	35666	144	35788	148	36240	148	36447	44
34990	152	35190	77	35577	144	35667	144	35789	151	36241	151	36448	44
35005	153	35191	77	35578	144	35668	144	35790	151	36242	151	36449	44
35006	153	35220	78	35579	144	35669	144	35791	148	36243	148	36450	44
35007	153	35221	78	35580	144	35670	144	35792	148	36244	148	36452	44
35008	153	35222	78	35581	144	35671	144	35793	151	36245	151	36453	44
35009	153	35223	78	35582	144	35672	144	35794	151	36246	151	36454	44
35010	153	35224	78	35583	144	35673	144	35795	148	36247	151	36456	44
35011	153	35225	78	35584	144	35674	144	35796	148	36248	151	36457	44
35012	153	35226	78	35585	144	35675	144	35797	151	36249	151	36458	44
35013	153	35227	78	35586	144	35676	144	35798	151	36250	151	36460	44
35014	153	35228	78	35587	144	35677	144	35799	151	36251	149	36462	44
35015	153	35229	78	35588	144	35678	144	35800	151	36252	149	36463	44
35016	153	35230	78	35589	144	35679	144	35801	151	36253	151	36464	44
35018	153	35231	78	35590	145	35680	145	35802	151	36254	151	36466	44
35019	153	35273	292	35591	145	35681	145	35803	149	36257	150	36468	44
35020	153	35275	292	35592	145	35682	145	35804	149	36258	150	36469	44
35100	76	35277	292	35593	145	35683	145	35805	151	36259	150	36470	44
35101	76	35278	292	35594	145	35684	145	35806	151	36260	150	36472	44
35102	76	35279	292	35595	145	35685	145	35809	150	36261	151	36474	44
35103	76	35280	292	35596	145	35686	145	35810	150	36262	151	36475	44
35104	76	35281	292	35597	145	35687	145	35811	150	36263	151	36480	45
35105	76	35282	292	35598	145	35688	145	35812	150	36264	151	36482	45
35106	77	35283	292	35599	145	35689	145	35813	151	36265	151	36486	45
35107	77	35285	292	35600	145	35690	145	35814	151	36266	151	36500	45
35108	77	35287	292	35601	145	35691	145	35815	151	36344	53	36502	45
35109	77	35289	292	35602	145	35692	145	35816	151	36345	53	36504	45
35110	77	35291	292	35603	145	35693	145	35817	151	36346	53	36505	41
35111	77	35293	292	35604	145								

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
36515	42	36641	94	36856	42	37058	32	37139	34	37233	33	37353	32
36517	42	36701	42	36857	42	37059	32	37140	34	37234	33	37354	32
36519	43	36702	42	36858	42	37060	32	37141	34	37235	33	37355	32
36520	43	36704	42	36859	42	37061	32	37142	34	37236	34	37356	32
36530	42	36706	42	36860	43	37062	32	37143	34	37237	34	37357	32
36531	42	36707	42	36861	43	37063	32	37144	34	37260	32	37359	32
36532	42	36709	43	36862	43	37064	32	37145	34	37261	32	37360	32
36533	42	36710	43	36863	43	37065	32	37146	34	37262	32	37361	32
36534	42	36711	43	36864	42	37066	32	37147	34	37263	32	37362	32
36535	42	36712	43	36865	42	37067	32	37148	34	37264	32	37390	125
36536	43	36713	43	36866	42	37068	32	37149	34	37265	32	37391	125
36537	43	36714	43	36867	42	37069	32	37150	34	37266	32	38001	303
36538	43	36715	43	36868	43	37070	32	37151	34	37267	32	38002	303
36539	53	36716	43	36869	43	37071	32	37152	34	37268	33	38003	303
36540	53	36717	43	36870	43	37072	32	37153	34	37269	33	38004	303
36541	53	36718	43	36871	43	37073	32	37154	34	37270	33	38009	303
36542	53	36719	43	36872	41	37074	32	37155	34	37271	33	38010	303
36543	53	36722	41	36873	41	37075	33	37156	34	37272	33	38011	303
36544	53	36723	41	36874	41	37076	33	37157	34	37273	33	38012	303
36545	53	36724	42	36875	41	37077	33	37160	31	37274	33	38013	303
36546	53	36725	42	36876	41	37078	33	37161	31	37275	33	38014	303
36547	53	36727	42	36877	41	37079	33	37162	31	37276	33	38019	304
36555	59	36729	42	36878	41	37080	33	37163	31	37277	33	38020	304
36556	59	36731	42	37000	30	37081	32	37164	31	37278	33	38021	304
36557	59	36733	43	37001	30	37082	33	37165	31	37279	33	38022	304
36558	59	36736	42	37002	30	37083	33	37166	31	37280	33	38023	304
36559	59	36738	42	37003	30	37084	33	37167	31	37281	33	38024	304
36560	59	36740	42	37004	30	37085	33	37174	31	37282	33	38025	304
36561	59	36742	42	37005	30	37086	33	37180	30	37283	33	38026	304
36570	59	36744	43	37006	30	37087	33	37181	30	37284	33	38031	304
36571	59	36780	63	37007	30	37088	33	37182	30	37285	33	38032	304
36572	59	36781	63	37008	30	37089	33	37183	30	37286	33	38033	304
36573	59	36782	63	37009	30	37090	33	37184	30	37287	33	38034	304
36574	59	36783	63	37010	30	37091	33	37185	30	37288	34	38035	304
36575	59	36784	63	37011	30	37092	33	37186	30	37289	34	38036	304
36576	59	36785	63	37012	30	37093	33	37187	31	37290	34	38037	304
36577	59	36786	63	37013	30	37094	33	37188	31	37291	34	38038	304
36578	59	36787	63	37014	31	37095	33	37189	31	37292	34	38045	304
36590	53	36788	63	37015	31	37096	33	37190	32	37293	34	38046	304
36591	53	36789	63	37016	31	37097	33	37191	32	37294	34	38047	304
36592	53	36790	63	37017	31	37098	33	37192	32	37295	34	38048	304
36596	41	36791	63	37018	31	37099	33	37193	32	37296	34	38049	304
36597	42	36792	63	37019	31	37100	33	37194	32	37297	34	38050	304
36598	42	36793	63	37020	31	37101	33	37195	32	37298	34	38051	304
36599	41	36804	42	37021	31	37102	33	37196	32	37299	34	38052	304
36600	41	36805	42	37022	31	37103	33	37197	32	37300	34	38059	305
36601	41	36806	43	37023	31	37104	33	37198	32	37301	34	38060	305
36602	42	36807	43	37024	32	37105	33	37199	33	37302	34	38061	305
36603	42	36808	43	37025	32	37106	33	37200	33	37303	34	38062	305
36604	42	36809	43	37026	32	37107	33	37201	33	37304	34	38063	305
36605	42	36810	42	37027	32	37108	33	37202	32	37305	34	38064	305
36610	42	36811	42	37028	32	37109	33	37203	33	37306	34	38065	305
36611	42	36812	42	37029	32	37110	33	37204	33	37307	34	38066	305
36612	42	36813	42	37030	32	37111	33	37205	33	37308	34	38067	305
36613	42	36814	43	37031	32	37112	33	37206	33	37320	32	38068	305
36614	42	36815	43	37032	32	37113	33	37207	33	37321	32	38073	305
36615	42	36816	43	37033	32	37114	33	37208	33	37322	32	38074	305
36616	59	36817	43	37034	32	37115	33	37209	33	37323	32	38075	305
36617	59	36818	43	37035	32	37116	34	37210	33	37324	32	38076	305
36618	59	36819	43	37036	32	37117	34	37211	33	37325	32	38077	305
36620	94	36820	43	37037	32	37118	34	37212	33	37330	32	38078	305
36621	94	36821	43	37038	32	37119	34	37213	33	37331	32	38079	305
36622	94	36822	43	37039	32	37120	34	37214	34	37332	32	38080	305
36623	94	36823	43	37040	32	37121	34	37215	34	37333	32	38081	305
36624	94	36824	43	37041	32	37122	34	37216	34	37334	32	38082	305
36625	94	36825	43	37042	32	37123	34	37217	34	37335	32	38083	305
36626	94	36826	42	37043	32	37124	34	37218	34	37337	32	38084	305
36627	94	36827	42	37044	32	37125	34	37219	34	37338	32	38087	306
36628	94	36828	43	37045	32	37126	34	37220	34	37339	32	38088	306
36629	94	36829	43	37046	32	37127	34	37221	34	37340	32	38089	306
36630	94	36830	43	37047	32	37128	34	37222	33	37341	32	38090	306
36631	94	36846	53	37048	32	37129	34	37223	33	37342	32	38091	306
36632	94	36847	53	37049	32	37130	34	37224	33	37343	32	38092	306
36633	94	36848	53	37050	32	37131	34	37225	33	37344	32	38093	306
36634	94	36849	53	37051	32	37132	34	37226	33	37345	32	38094	306
36635	94	36850	53	37052	32	37133	34	37227	33	37346	32	38095	306
36636	94	36851	41	37053									

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
38101	306	38182	305	38295	282	38376	281	38555	33	38636	33	38826	32
38102	306	38183	305	38296	282	38377	281	38556	33	38637	33	38827	32
38103	306	38184	305	38297	282	38378	281	38557	33	38638	33	38828	32
38104	306	38185	306	38298	282	38379	282	38558	33	38639	33	38829	32
38105	306	38186	306	38299	282	38380	282	38559	33	38640	33	38830	32
38106	306	38187	306	38300	282	38381	282	38560	33	38641	33	38831	32
38107	306	38188	306	38301	282	38382	282	38561	33	38642	33	38832	32
38108	306	38189	306	38302	282	38383	282	38562	33	38643	33	38833	32
38109	306	38190	306	38303	282	38384	282	38563	34	38644	33	38834	32
38110	306	38191	306	38304	282	38385	282	38564	34	38645	33	38835	32
38111	306	38192	306	38305	282	38386	282	38565	34	38646	33	38836	32
38112	306	38193	306	38306	282	38387	282	38566	34	38647	34	38837	32
38113	306	38194	306	38307	282	38388	282	38567	34	38648	34	38838	32
38114	306	38195	306	38308	282	38389	282	38568	34	38649	34	38839	32
38115	303	38196	306	38309	282	38390	282	38569	34	38650	34	38840	32
38116	303	38197	306	38310	282	38391	282	38570	34	38651	34	38841	32
38117	303	38198	306	38311	282	38392	282	38571	34	38652	34	38842	32
38118	303	38201	280	38312	282	38393	282	38572	34	38653	34	38843	32
38119	303	38202	280	38313	282	38394	282	38573	34	38654	34	38844	32
38120	304	38203	280	38314	282	38395	282	38574	34	38655	34	38845	32
38121	304	38204	280	38315	280	38396	282	38575	34	38656	34	38846	32
38122	304	38209	280	38316	280	38397	282	38576	34	38657	34	38847	32
38123	304	38210	280	38317	280	38398	282	38577	34	38658	34	38848	32
38124	304	38211	280	38318	280	38490	45	38578	32	38659	34	38849	32
38125	304	38212	280	38319	280	38492	45	38579	32	38660	34	38850	33
38126	304	38213	280	38320	280	38496	45	38580	32	38661	34	38851	33
38127	304	38214	280	38321	280	38500	30	38581	32	38662	34	38852	33
38128	304	38219	280	38322	280	38501	30	38582	32	38663	34	38853	33
38129	304	38220	280	38323	280	38502	30	38583	32	38664	34	38854	33
38130	304	38221	280	38324	281	38503	31	38584	32	38770	30	38855	33
38131	304	38222	280	38325	281	38504	31	38585	32	38771	30	38856	33
38132	305	38223	280	38326	281	38505	31	38586	32	38772	30	38857	33
38133	305	38224	280	38327	281	38506	32	38587	32	38773	30	38858	33
38134	305	38225	280	38328	281	38507	32	38588	32	38774	30	38859	33
38135	305	38226	280	38329	281	38508	32	38589	32	38775	30	38860	33
38136	305	38231	281	38330	281	38509	33	38590	32	38776	30	38861	33
38137	305	38232	281	38331	281	38510	34	38591	32	38777	30	38862	33
38138	305	38233	281	38332	281	38511	34	38592	32	38778	30	38863	33
38139	305	38234	281	38333	281	38512	32	38593	32	38779	30	38864	33
38140	305	38235	281	38334	281	38513	32	38594	32	38780	30	38865	33
38141	305	38236	281	38335	281	38514	32	38595	32	38781	30	38866	33
38142	305	38237	281	38336	281	38515	33	38596	33	38782	30	38867	33
38143	306	38238	281	38337	282	38516	34	38597	33	38783	30	38868	34
38144	306	38245	281	38338	282	38517	34	38598	33	38784	30	38869	34
38145	306	38246	281	38339	282	38518	32	38599	33	38785	30	38870	34
38146	306	38247	281	38340	282	38519	32	38600	33	38786	30	38871	34
38147	306	38248	281	38341	282	38520	33	38601	33	38787	30	38872	34
38148	306	38249	281	38342	282	38521	33	38602	33	38788	30	38873	34
38149	306	38250	281	38343	282	38522	34	38603	33	38789	30	38874	34
38150	306	38251	281	38344	282	38523	34	38604	33	38792	30	38875	34
38151	306	38252	281	38345	282	38524	34	38605	33	38793	30	38876	34
38152	306	38259	281	38346	282	38525	30	38606	33	38794	30	38877	34
38153	306	38260	281	38347	282	38526	30	38607	33	38795	30	38878	34
38154	306	38261	281	38348	282	38527	30	38608	34	38798	31	38879	34
38155	306	38262	281	38349	282	38528	30	38609	34	38799	31	38880	34
38156	306	38263	281	38350	282	38529	31	38610	34	38800	31	38881	34
38157	303	38264	281	38351	282	38530	31	38611	34	38801	31	38882	34
38158	303	38265	281	38352	282	38531	31	38612	34	38802	31	38883	34
38159	303	38266	281	38353	282	38532	31	38613	34	38803	31	38884	34
38160	303	38267	281	38354	282	38533	32	38614	34	38804	31	38885	34
38161	303	38268	281	38355	282	38534	32	38615	34	38805	31	39001	303
38162	304	38273	282	38356	282	38535	32	38616	34	38806	31	39002	307
38163	304	38274	282	38357	280	38536	32	38617	34	38807	31	39003	303
38164	304	38275	282	38358	280	38537	32	38618	34	38808	31	39004	307
38165	304	38276	282	38359	280	38538	32	38619	34	38809	31	39005	303
38166	304	38277	282	38360	280	38539	32	38620	34	38810	31	39006	307
38167	304	38278	282	38361	280	38540	32	38621	34	38811	31	39007	303
38168	304	38279	282	38362	280	38541	32	38622	34	38812	31	39008	307
38169	304	38280	282	38363	280	38542	32	38623	32	38813	31	39009	303
38170	304	38281	282	38364	280	38543	32	38624	32	38814	31	39010	307
38171	304	38282	282	38365	280	38544	32	38625	32	38815	31	39011	303
38172	304	38283	282	38366	281	38545	32	38626	32	38816	31	39012	307
38173	304	38284	282	38367	281	38546	32	38627	32	38817	31	39013	303
38174	305	38287	282	38368	281	38547	32	38628	32	38818	31	39014	307
38175	305	38288	282	38369	281	38548	32	38629	33	38819	31	39015	303
38176	305												

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
39022	307	39121	303	39320	283	39519	280	39618	314	39721	297	40150	312
39023	303	39122	307	39321	280	39520	283	39619	313	39722	297	40153	310
39024	307	39123	303	39322	283	39521	280	39620	314	39725	297	40154	312
39025	303	39124	307	39323	280	39522	283	39621	313	39727	297	40157	310
39026	307	39125	303	39324	283	39523	280	39622	314	39729	297	40158	312
39027	303	39126	307	39325	280	39524	283	39623	313	39731	297	40161	310
39028	307	39127	303	39326	283	39525	280	39624	314	39733	297	40162	312
39029	303	39128	307	39327	280	39526	283	39625	313	39735	297	40165	310
39030	307	39129	303	39328	283	39527	280	39626	314	39737	297	40166	312
39031	303	39130	307	39329	280	39528	283	39627	313	39739	297	40169	310
39032	307	39131	303	39330	283	39529	280	39628	314	39741	297	40170	312
39033	304	39132	307	39331	280	39530	283	39629	313	39743	297	40173	310
39034	307	39133	304	39332	283	39531	280	39630	314	39745	297	40174	312
39035	304	39134	307	39333	280	39532	283	39631	313	39747	297	40177	311
39036	307	39135	304	39334	283	39533	280	39632	314	39749	297	40178	312
39037	304	39136	307	39335	280	39534	283	39633	313	39751	297	40181	311
39038	307	39137	304	39336	283	39535	280	39634	314	39753	297	40182	312
39039	304	39138	307	39337	281	39536	283	39635	313	39755	297	40185	311
39040	307	39139	304	39338	283	39537	281	39636	314	39757	297	40186	312
39041	304	39140	307	39339	281	39538	283	39637	313	39759	297	40305	285
39042	307	39141	304	39340	283	39539	281	39638	314	39761	297	40306	286
39043	304	39142	307	39341	281	39540	283	39639	313	39763	297	40309	285
39044	307	39143	304	39342	283	39541	281	39640	314	39765	297	40310	286
39045	304	39144	307	39343	281	39542	283	39641	313	39767	297	40313	285
39046	307	39145	304	39344	283	39543	281	39641	318	39769	297	40314	286
39047	304	39146	307	39345	281	39544	283	39642	314	39771	297	40317	285
39048	308	39147	304	39346	283	39545	281	39642	319	39773	297	40318	286
39049	304	39148	308	39347	281	39546	283	39651	287	39775	297	40321	285
39050	308	39149	304	39348	284	39547	281	39652	288	39777	297	40322	286
39051	304	39150	308	39349	281	39548	284	39653	287	39789	297	40325	285
39052	308	39151	304	39350	284	39549	281	39654	288	39789	318	40326	286
39053	304	39152	308	39351	281	39550	284	39655	287	40000	309	40329	285
39054	308	39153	304	39352	284	39551	281	39656	288	40001	309	40330	286
39055	305	39154	308	39353	281	39552	284	39657	287	40003	309	40333	285
39056	308	39155	305	39354	284	39553	281	39658	288	40004	309	40334	286
39057	305	39156	308	39355	281	39554	284	39659	287	40005	309	40337	285
39058	308	39157	305	39356	284	39555	281	39660	288	40007	309	40338	286
39059	305	39158	308	39357	281	39556	284	39661	287	40009	309	40341	285
39060	308	39159	305	39358	284	39557	281	39662	288	40010	309	40342	286
39061	305	39160	308	39359	281	39558	284	39663	287	40011	309	40345	285
39062	308	39161	305	39360	284	39559	281	39664	288	40012	310	40346	286
39063	305	39162	308	39361	281	39560	284	39665	287	40015	310	40349	285
39064	308	39163	305	39362	284	39561	281	39666	288	40016	310	40350	286
39065	305	39164	308	39363	281	39562	284	39667	287	40017	310	40353	285
39066	308	39165	305	39364	284	39563	281	39668	288	40019	310	40354	286
39067	305	39166	308	39365	282	39564	284	39669	287	40020	310	40357	285
39068	308	39167	305	39366	284	39565	282	39670	288	40021	310	40358	286
39069	305	39168	308	39367	282	39566	284	39671	287	40023	310	40361	285
39070	308	39169	305	39368	284	39567	282	39672	288	40024	310	40362	286
39071	305	39170	308	39369	282	39568	284	39673	287	40025	310	40365	285
39072	308	39171	305	39370	284	39569	282	39674	288	40028	310	40366	286
39073	306	39172	308	39371	282	39570	284	39675	287	40030	310	40369	285
39074	308	39173	306	39372	284	39571	282	39676	288	40031	310	40370	286
39075	306	39174	308	39373	282	39572	284	39677	287	40032	310	40373	285
39076	308	39175	306	39374	284	39573	282	39678	288	40035	310	40374	286
39077	303	39176	308	39375	282	39574	284	39679	287	40037	310	40377	285
39078	307	39177	303	39376	284	39575	282	39680	288	40038	311	40378	286
39089	306	39178	307	39377	280	39576	284	39681	287	40039	311	40381	285
39089	318	39189	306	39378	283	39577	280	39682	288	40105	309	40382	286
39090	308	39189	318	39389	282	39578	283	39683	287	40106	312	40385	285
39090	319	39190	308	39389	318	39589	282	39684	288	40109	309	40386	286
39101	303	39190	319	39390	284	39589	318	39685	287	40110	312	40505	299
39102	307	39301	280	39390	319	39590	284	39686	288	40113	309	40506	300
39103	303	39302	283	39501	280	39590	319	39687	287	40114	312	40509	299
39104	307	39303	280	39502	283	39601	313	39688	288	40117	309	40510	300
39105	303	39304	283	39503	280	39602	314	39689	287	40118	312	40513	299
39106	307	39305	280	39504	283	39603	313	39690	288	40121	309	40514	300
39107	303	39306	283	39505	280	39604	314	39691	287	40122	312	40517	299
39108	307	39307	280	39506	283	39605	313	39691	318	40125	309	40518	300
39109	303	39308	283	39507	280	39606	314	39692	288	40126	312	40521	299
39110	307	39309	280	39508	283	39607	313	39692	319	40129	309	40522	300
39111	303	39310	283	39509	280	39608	314	39701	297	40130	312	40525	299
39112	307	39311	280	39510	283	39609	313	39703	297	40133	309	40526	300
39113	303	39312	283	39511	280	39610	314						

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
40545	299	41558	290	42665	70	43115	310	43501	299	44303	164	44605	171
40546	300	41561	289	42666	70	43116	312	43502	300	44304	164	44606	171
40549	299	41562	290	42667	70	43125	310	43503	299	44305	164	44607	171
40550	300	41565	289	42668	70	43126	312	43504	300	44306	164	44608	171
40553	299	41566	290	42669	70	43135	310	43505	299	44307	164	44609	170
40554	300	41605	309	42670	70	43136	312	43506	300	44308	164	44610	170
40557	299	41609	309	42671	70	43145	310	43507	299	44309	164	44611	170
40558	300	41613	309	42672	70	43146	312	43508	300	44505	173	44612	170
40561	299	41617	309	42673	70	43155	310	43515	299	44506	173	44613	170
40562	300	41621	309	42674	70	43156	312	43516	300	44509	173	44614	170
40565	299	41625	309	42675	70	43165	311	43525	299	44510	173	44615	171
40566	300	41629	309	42676	70	43166	312	43526	300	44513	173	44616	171
40569	299	41633	309	42677	70	43175	311	43535	299	44514	173	44617	171
40570	300	41637	309	42678	70	43176	312	43536	300	44517	173	44618	171
40573	299	41641	309	42679	70	43185	311	43545	299	44518	173	44619	171
40574	300	41645	310	42680	70	43186	312	43546	300	44521	173	44620	171
40577	299	41649	310	42681	70	43195	311	43555	299	44522	173	44627	140
40578	300	41653	310	42682	70	43196	312	43556	300	44525	173	44628	140
40581	299	41657	310	42683	70	43301	285	43565	299	44526	173	44629	140
40582	300	41661	310	42684	70	43302	286	43566	300	44529	173	44630	140
40585	299	41665	310	42685	71	43303	285	43575	299	44530	173	44631	140
40586	300	41705	291	42686	71	43304	286	43576	300	44533	173	44634	140
41405	313	41709	291	42687	71	43305	285	43585	299	44534	173	44635	140
41406	314	41713	291	42688	71	43306	286	43586	300	44537	173	44636	140
41409	313	41717	291	42689	71	43307	285	43595	299	44538	173	44637	140
41410	314	41721	291	42690	71	43308	286	43596	300	44541	173	44638	140
41413	313	41725	291	42691	71	43315	285	43900	296	44542	173	44639	140
41414	314	41729	291	42692	71	43316	286	43901	296	44545	173	44641	140
41417	313	41733	291	42693	71	43325	285	43902	296	44546	173	44642	140
41418	314	41737	291	42694	71	43326	286	43903	296	44550	170	44643	140
41421	313	41741	291	42695	71	43335	285	43904	296	44551	170	44701	157
41422	314	41745	291	42696	71	43336	286	43905	296	44552	170	44702	157
41425	313	41749	291	42697	71	43345	285	43906	296	44553	170	44703	157
41426	314	41753	291	42698	71	43346	286	43907	296	44554	170	44705	157
41429	313	41757	291	42699	71	43355	285	43908	296	44555	170	44708	158
41430	314	41761	291	42700	71	43356	286	43909	296	44556	170	44711	158
41433	313	41765	291	42701	72	43365	285	43910	295	44557	170	44714	159
41434	314	42606	70	42702	72	43366	286	43911	295	44558	170	44715	157
41437	313	42607	70	42703	72	43375	285	43912	295	44559	170	44716	157
41438	314	42608	70	42704	72	43376	286	43913	295	44560	170	44717	157
41441	313	42609	70	42705	72	43385	285	43914	295	44561	170	44719	157
41442	314	42610	70	42706	160	43386	286	43915	295	44562	170	44722	158
41445	313	42611	70	42707	160	43395	285	43916	295	44563	170	44725	158
41446	314	42612	70	42708	160	43396	286	43917	295	44564	170	44728	159
41449	313	42613	70	42709	160	43445	106	43918	295	44565	170	44731	159
41450	314	42614	70	42710	161	43446	106	43919	295	44566	170	44732	157
41453	313	42615	70	42711	161	43447	106	43920	295	44570	171	44733	158
41454	314	42616	70	42712	61	43448	106	43921	295	44571	171	44734	158
41457	313	42617	71	42713	61	43449	106	43922	295	44572	171	44735	158
41458	314	42618	71	42714	61	43450	106	43923	295	44573	171	44736	158
41461	313	42619	71	42715	61	43451	106	43924	295	44574	171	44737	159
41462	314	42620	71	42716	61	43452	106	43925	295	44575	171	44738	160
41465	313	42621	72	42717	61	43453	106	43926	295	44576	171	44739	161
41466	314	42622	70	42718	49	43470	106	43927	295	44577	171	44740	161
41505	289	42623	70	42719	49	43471	106	43928	295	44578	171	44741	160
41506	290	42624	71	42721	49	43472	106	43929	295	44579	171	44745	140
41509	289	42625	71	42722	49	43473	106	43930	295	44580	171	44746	140
41510	290	42626	71	42723	49	43474	106	43931	295	44581	171	44747	140
41513	289	42627	71	42731	50	43475	106	43932	295	44582	171	44748	140
41514	290	42628	71	42732	50	43476	106	43933	295	44583	171	44749	140
41517	289	42630	71	42733	50	43477	106	43934	295	44584	171	44750	140
41518	290	42631	71	42734	50	43478	106	43935	295	44585	171	44751	140
41521	289	42632	71	42735	50	43479	106	43936	295	44586	171	44752	140
41522	290	42633	71	42736	50	43480	106	43937	295	44587	170	44753	140
41525	289	42648	71	42737	50	43481	106	43938	295	44588	170	44754	140
41526	290	42649	71	42738	50	43482	106	43939	295	44589	170	44755	140
41529	289	42650	71	42739	50	43483	106	43950	295	44590	170	44756	140
41530	290	42651	71	42750	73	43484	106	43951	295	44591	170	44757	140
41533	289	42652	71	42751	73	43485	106	43952	295	44592	170	44758	140
41534	290	42653	72	42752	73	43486	106	43953	295	44593	170	44759	140
41537	289	42654	72	42753	73	43487	106	43954	295	44594	170	44760	140
41538	290	42655	72	42754	73	43488	106	43955	295	44595	170	44761	140
41541	289	42656	71	42755	73	43489	106	43956	295	44596	170	44762	140
41542	290	42657	71	43101	309	43490	106	43957	295	44597	170	44763	140
41545	289												

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
44771	160	44858	157	44959	160	45116	81	45293	292	46130	316	46476	61
44772	160	44859	158	44960	160	45117	81	45295	292	46131	316	46477	61
44773	160	44860	158	44961	161	45118	81	45297	292	46132	316	46478	61
44774	160	44861	158	44962	161	45119	81	45299	292	46133	316	46479	61
44775	160	44862	158	44963	161	45120	81	45477	315	46140	116	46480	61
44776	160	44863	158	44964	161	45121	81	45478	315	46141	116	46481	61
44777	160	44864	158	44965	161	45122	81	45479	315	46142	116	46482	61
44778	160	44865	158	44966	161	45123	81	45480	315	46143	116	46483	61
44779	160	44866	158	44967	161	45124	81	45481	315	46145	116	46493	48
44780	160	44867	158	44968	161	45125	81	45482	315	46147	116	46494	49
44781	160	44868	158	44969	161	45126	81	45483	315	46206	317	46495	49
44782	160	44869	158	44970	161	45127	82	45484	315	46207	317	46497	49
44783	160	44870	158	44971	161	45128	82	45485	315	46208	317	46498	49
44784	160	44871	158	44972	161	45129	82	45486	315	46209	317	46506	49
44785	161	44872	158	44973	161	45130	82	45487	315	46210	317	46507	49
44786	161	44873	158	44974	161	45131	82	45488	315	46211	317	46508	49
44787	161	44874	158	44975	135	45132	82	45489	315	46212	317	46509	49
44788	161	44875	158	44976	135	45133	82	45490	315	46213	317	46510	49
44789	160	44876	158	44977	135	45134	82	45491	315	46214	317	46518	56
44790	160	44877	158	44978	135	45135	82	45492	315	46216	317	46519	56
44791	160	44878	159	44979	135	45136	82	45493	315	46217	317	46520	56
44792	160	44879	159	44980	135	45137	82	45494	315	46218	317	46521	56
44793	160	44880	159	44981	135	45138	82	45495	315	46220	317	46522	56
44794	160	44881	159	44982	135	45139	82	45496	315	46221	317	46560	63
44795	160	44882	159	44983	135	45140	82	45497	315	46222	317	46561	63
44796	160	44883	159	44984	135	45141	82	45498	315	46228	317	46562	63
44797	160	44884	159	44985	135	45150	81	45499	315	46229	317	46563	63
44798	160	44885	159	44986	135	45170	81	45500	315	46230	317	46564	63
44799	160	44886	159	44987	135	45171	81	45700	101	46231	317	46565	63
44800	160	44890	157	44990	135	45172	81	45701	101	46232	317	46566	63
44801	160	44891	157	44991	135	45173	81	45702	101	46233	317	46567	63
44802	160	44892	157	44992	135	45174	81	45703	101	46343	56	46568	63
44803	160	44893	157	44993	135	45175	81	45704	101	46344	56	46620	97
44804	160	44894	157	44994	135	45176	81	45705	101	46345	56	46621	97
44805	161	44895	157	44995	135	45177	81	45706	101	46346	56	46622	97
44806	161	44896	157	44996	135	45178	81	45707	101	46347	56	46623	97
44807	161	44897	158	44997	135	45179	81	45708	101	46348	56	46624	97
44808	161	44898	158	44998	135	45180	81	45709	101	46349	56	46625	97
44814	158	44899	161	44999	135	45181	81	45710	101	46350	56	46626	98
44815	158	44900	158	45000	135	45182	81	45711	101	46351	56	46627	97
44816	158	44901	159	45001	135	45183	81	45712	101	46354	56	46628	97
44817	158	44902	157	45002	135	45184	81	45713	101	46355	56	46629	97
44818	158	44916	162	45003	135	45185	81	45714	101	46356	56	46630	97
44819	158	44917	163	45004	135	45186	81	45715	101	46357	48	46631	97
44820	158	44918	163	45005	136	45187	82	45716	101	46358	48	46632	97
44821	158	44919	162	45006	136	45188	82	45717	101	46359	48	46633	97
44822	159	44920	163	45007	136	45189	82	45718	142	46360	48	46634	97
44823	159	44921	163	45008	136	45190	82	45719	142	46362	48	46635	97
44824	159	44922	162	45009	136	45191	82	45720	142	46364	48	46636	97
44826	158	44923	163	45010	136	45192	82	45721	142	46366	48	46637	97
44827	158	44924	163	45011	136	45193	82	45722	142	46368	49	46638	97
44828	158	44925	162	45012	136	45194	82	45723	142	46370	49	46639	97
44829	158	44926	163	45013	136	45195	82	45724	142	46372	49	46640	97
44830	159	44927	163	45014	136	45196	82	45725	142	46374	49	46641	97
44831	159	44928	162	45015	136	45197	82	45726	142	46376	49	46642	97
44832	160	44929	163	45016	136	45198	82	45727	142	46450	61	46643	97
44833	160	44930	163	45017	136	45199	82	45728	142	46451	61	46644	97
44834	160	44931	162	45018	136	45200	82	45729	142	46452	61	46645	97
44835	161	44932	163	45019	136	45201	82	45730	142	46453	61	46646	97
44836	161	44933	163	45020	135	45202	82	45731	142	46454	61	46647	97
44837	161	44934	162	45021	135	45203	82	45732	142	46455	61	46648	97
44838	161	44935	163	45022	135	45204	83	45733	142	46456	61	46649	97
44839	160	44936	163	45023	135	45205	83	45734	142	46457	61	46650	97
44840	161	44937	162	45024	135	45206	83	45735	142	46458	61	46651	97
44841	161	44938	163	45025	135	45207	83	46106	316	46459	61	46652	97
44842	157	44939	163	45100	81	45208	83	46107	316	46460	61	46653	98
44843	157	44940	162	45101	81	45209	83	46108	316	46461	61	46654	98
44844	157	44941	163	45102	81	45210	83	46109	316	46462	61	46655	98
44845	157	44942	163	45103	81	45211	83	46110	316	46463	61	46656	98
44846	157	44943	162	45104	81	45212	83	46111	316	46464	61	46657	98
44847	157	44944	163	45105	81	45213	83	46112	316	46465	61	46658	98
44848	157	44945	163	45106	82	45214	83	46113	316	46466	61	46659	98
44849	157	44950	160	45107	82	45215	83	46114	316	46467	61	46660	98
44850	157	44951	160	45108	82	45277	292	46116	316	46468	61	46821	50
44851	157	44952	160	45109	82	45279	292	46117	316	464			

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
46829	50	46935	50	47069	38	48009	37	48519	311	48602	312	48684	285
46830	50	46936	50	47070	38	48010	37	48520	311	48603	312	48685	285
46831	50	46937	50	47071	38	48011	37	48522	309	48604	312	48686	285
46832	50	46938	50	47072	38	48012	37	48523	309	48605	312	48687	285
46833	50	46939	50	47073	38	48013	37	48524	309	48606	312	48688	285
46834	50	46940	50	47074	38	48014	37	48525	309	48607	312	48689	285
46835	50	46941	50	47075	38	48015	37	48526	309	48608	312	48690	285
46836	50	46942	50	47076	38	48016	37	48527	309	48609	312	48691	285
46837	50	46943	50	47077	38	48017	37	48528	309	48610	312	48692	286
46838	50	46944	49	47078	38	48018	38	48529	309	48611	312	48693	286
46839	50	46945	49	47079	38	48019	38	48530	309	48612	312	48694	286
46840	50	46946	49	47080	38	48020	38	48531	309	48613	312	48695	286
46841	48	47000	37	47081	38	48021	38	48532	310	48614	312	48696	286
46849	48	47001	37	47082	38	48022	38	48533	310	48615	312	48697	286
46850	48	47002	37	47083	38	48023	38	48534	310	48616	312	48698	286
46851	48	47003	37	47084	38	48024	38	48535	310	48617	312	48699	286
46852	48	47004	37	47085	38	48025	38	48536	310	48618	312	48700	286
46853	48	47005	37	47086	38	48026	38	48537	310	48619	312	48701	286
46854	48	47006	37	47087	38	48027	38	48538	310	48620	312	48702	286
46855	48	47007	37	47088	38	48028	38	48539	310	48621	312	48703	286
46856	48	47008	37	47089	38	48029	37	48540	311	48622	312	48704	286
46857	48	47009	37	47090	38	48030	37	48541	311	48623	312	48705	286
46858	48	47010	37	47091	38	48031	37	48542	311	48624	312	48706	286
46859	48	47011	37	47092	38	48032	37	48543	309	48625	312	48707	286
46860	48	47012	37	47093	38	48033	37	48544	309	48626	312	48708	286
46861	48	47013	37	47094	38	48034	37	48545	309	48627	312	48709	286
46862	49	47014	37	47095	38	48035	37	48546	309	48628	285	48710	286
46863	49	47015	37	47096	38	48036	37	48547	309	48629	285	48711	286
46864	49	47016	37	47097	38	48037	38	48548	309	48630	285	48712	286
46865	49	47017	37	47120	37	48038	38	48549	309	48631	285	48714	286
46866	49	47018	37	47121	37	48039	38	48550	309	48632	285	48715	286
46867	49	47019	37	47122	37	48040	38	48551	309	48633	285	48716	286
46868	49	47020	37	47123	37	48041	38	48552	309	48634	285	48717	286
46869	49	47021	37	47124	37	48042	38	48553	310	48635	285	48718	286
46873	48	47022	37	47125	37	48043	38	48554	310	48636	285	48719	286
46874	48	47023	37	47126	37	48044	38	48555	310	48637	285	48720	286
46880	48	47024	37	47127	37	48045	38	48556	310	48638	285	48721	286
46881	48	47025	37	47128	37	48046	38	48557	310	48639	285	48722	286
46882	48	47026	37	47129	37	48047	38	48558	310	48640	285	48723	286
46884	48	47027	37	47130	37	48048	38	48559	310	48641	285	48724	286
46886	48	47028	37	47131	37	48049	38	48560	310	48642	285	48725	286
46887	48	47029	37	47132	38	48050	38	48561	311	48643	285	48726	286
46889	48	47030	37	47133	38	48051	38	48562	311	48644	285	48727	286
46890	48	47031	37	47134	37	48052	38	48563	311	48645	285	48728	286
46891	48	47032	37	47135	38	48053	38	48564	312	48646	285	48729	286
46893	48	47033	37	47136	38	48054	38	48565	312	48647	285	48730	286
46894	49	47034	37	47137	38	48055	38	48566	312	48648	285	48731	286
46895	49	47035	38	47138	38	48056	37	48567	312	48650	285	48732	286
46896	49	47036	38	47139	38	48057	37	48568	312	48651	285	48733	286
46898	49	47037	38	47140	38	48058	38	48569	312	48652	285	48734	286
46899	49	47038	38	47141	38	48059	38	48570	312	48653	285	48735	286
46900	49	47039	37	47142	38	48060	38	48571	312	48654	285	48736	286
46903	49	47040	37	47143	38	48061	38	48572	312	48655	285	48737	286
46904	49	47041	38	47144	38	48062	38	48573	312	48656	285	48738	286
46905	49	47042	38	47145	38	48063	38	48574	312	48657	285	48739	286
46909	48	47043	38	47146	38	48064	38	48575	312	48658	285	48740	286
46910	48	47044	38	47147	38	48065	38	48576	312	48659	285	48741	286
46911	48	47045	38	47148	38	48066	38	48577	312	48660	285	48742	286
46912	49	47046	37	47160	37	48067	38	48578	312	48661	285	48743	286
46913	49	47047	37	47161	37	48068	38	48579	312	48662	285	48744	286
46914	49	47048	37	47162	37	48070	37	48580	312	48663	285	48745	286
46915	49	47049	38	47163	37	48071	37	48581	312	48664	285	48746	286
46916	49	47050	38	47164	37	48500	309	48582	312	48665	285	48747	286
46917	49	47051	38	47165	37	48501	309	48583	312	48666	285	48748	286
46918	49	47052	38	47166	37	48502	309	48584	312	48667	285	48749	286
46919	49	47053	38	47167	37	48503	309	48586	312	48668	285	48750	286
46920	49	47054	38	47168	37	48504	309	48587	312	48669	285	48751	286
46921	49	47055	38	47169	37	48505	309	48588	312	48670	285	48752	286
46922	49	47056	38	47170	37	48506	309	48589	312	48671	285	48753	286
46923	49	47057	38	47171	37	48507	309	48590	312	48672	285	48754	286
46924	49	47058	38	47172	37	48508	309	48591	312	48673	285	48755	286
46925	49	47059	38	47173	37	48509	309	48592	312	48674	285	48756	299
46926	49	47060	38	48000	37	48510	310	48593	312	48675	285	48757	299
46927	49	47061	38	48001	37	48511	310	48594	312	48676	285	48758	299
46928	50	47062	38	48002	37	48512	310	48595	312	48677	285	48759	299
46929	50	47063	38										

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
48766.....	299	48849.....	300	48940.....	313	49046.....	289	49157.....	309	49389.....	309
48767.....	299	48850.....	300	48941.....	313	49052.....	289	49158.....	309	49390.....	310
48768.....	299	48851.....	300	48947.....	314	49053.....	289	49159.....	309	49391.....	309
48769.....	299	48852.....	300	48948.....	314	49054.....	289	49160.....	309	49392.....	310
48770.....	299	48853.....	300	48949.....	314	49055.....	289	49161.....	309	49393.....	310
48771.....	299	48854.....	300	48950.....	314	49056.....	289	49162.....	309	49394.....	310
48772.....	299	48855.....	300	48951.....	314	49057.....	289	49163.....	309	49395.....	310
48773.....	299	48856.....	300	48952.....	314	49058.....	289	49164.....	309	49396.....	310
48774.....	299	48857.....	300	48953.....	314	49059.....	289	49165.....	309	49397.....	311
48775.....	299	48858.....	300	48954.....	314	49060.....	289	49166.....	309	49398.....	311
48776.....	299	48859.....	300	48955.....	314	49061.....	289	49167.....	310	49399.....	311
48778.....	299	48860.....	300	48956.....	314	49062.....	289	49168.....	310	49400.....	311
48779.....	299	48861.....	300	48957.....	314	49063.....	289	49169.....	310	49401.....	309
48780.....	299	48862.....	300	48958.....	314	49064.....	289	49170.....	310	49402.....	309
48781.....	299	48863.....	300	48959.....	314	49065.....	289	49171.....	310	49403.....	310
48782.....	299	48864.....	300	48960.....	314	49066.....	289	49172.....	310	49404.....	309
48783.....	299	48865.....	300	48961.....	314	49067.....	289	49178.....	309	49405.....	310
48784.....	299	48866.....	300	48962.....	314	49073.....	290	49179.....	309	49406.....	310
48785.....	299	48867.....	300	48968.....	314	49074.....	290	49180.....	309	49407.....	310
48786.....	299	48868.....	300	48969.....	314	49075.....	290	49181.....	309	49408.....	310
48787.....	299	48869.....	300	48970.....	314	49076.....	290	49182.....	309	49409.....	310
48788.....	299	48870.....	300	48971.....	314	49077.....	290	49183.....	309	49410.....	311
48789.....	299	48871.....	300	48972.....	314	49078.....	290	49184.....	309	49411.....	311
48790.....	299	48872.....	300	48973.....	314	49079.....	290	49185.....	309	49412.....	311
48791.....	299	48873.....	300	48974.....	314	49080.....	290	49186.....	309	49413.....	311
48792.....	299	48874.....	300	48975.....	314	49081.....	290	49187.....	309	49414.....	309
48793.....	299	48875.....	300	48976.....	314	49082.....	290	49188.....	310	49415.....	309
48794.....	299	48876.....	300	48977.....	314	49083.....	290	49189.....	310	49416.....	310
48795.....	299	48877.....	300	48978.....	314	49084.....	290	49190.....	310	49417.....	309
48796.....	299	48878.....	300	48979.....	314	49085.....	290	49191.....	310	49418.....	310
48797.....	299	48879.....	300	48980.....	314	49086.....	290	49192.....	310	49419.....	310
48798.....	299	48880.....	300	48981.....	314	49087.....	290	49193.....	310	49420.....	310
48799.....	299	48881.....	300	48982.....	314	49088.....	290	49262.....	291	49421.....	310
48800.....	299	48882.....	300	48983.....	314	49094.....	290	49263.....	291	49422.....	31

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
49551.....	286	49631.....	296	50025.....	232	51074.....	336	51335.....	235	51545.....	249
49552.....	286	49632.....	296	50026.....	232	51075.....	336	51336.....	235	51580.....	244
49553.....	286	49633.....	296	50027.....	232	51076.....	336	51337.....	235	51581.....	244
49554.....	286	49634.....	296	50028.....	232	51077.....	336	51338.....	235	51582.....	245
49555.....	286	49635.....	296	50029.....	232	51078.....	336	51339.....	235	51583.....	245
49556.....	286	49636.....	296	50030.....	232	51079.....	336	51340.....	236	51584.....	245
49557.....	286	49637.....	296	50031.....	232	51080.....	336	51341.....	236	51585.....	245
49558.....	286	49638.....	296	51001.....	339	51101.....	336	51342.....	236	51586.....	245
49559.....	286	49639.....	296	51002.....	339	51102.....	336	51343.....	236	51587.....	245
49560.....	286	49640.....	296	51003.....	338	51103.....	336	51344.....	236	51588.....	245
49561.....	286	49641.....	296	51004.....	338	51104.....	336	51345.....	236	51589.....	245
49562.....	286	49642.....	296	51005.....	338	51105.....	337	51346.....	236	51590.....	246
49563.....	286	49643.....	296	51006.....	338	51106.....	337	51347.....	237	51591.....	246
49564.....	286	49644.....	296	51007.....	338	51107.....	337	51348.....	237	51592.....	249
49565.....	286	49645.....	296	51008.....	338	51108.....	337	51349.....	237	51593.....	249
49566.....	286	49646.....	296	51009.....	338	51109.....	337	51350.....	237	51594.....	249
49567.....	286	49647.....	296	51010.....	338	51110.....	338	51351.....	237	51595.....	249
49568.....	286	49648.....	296	51011.....	338	51111.....	338	51352.....	237	51596.....	249
49569.....	286	49649.....	296	51012.....	338	51112.....	338	51353.....	237	51601.....	236
49570.....	286	49650.....	296	51013.....	338	51113.....	338	51354.....	237	51602.....	236
49571.....	286	49651.....	296	51014.....	338	51114.....	338	51355.....	238	51603.....	236
49572.....	286	49663.....	173	51015.....	338	51115.....	339	51356.....	238	51604.....	236
49573.....	286	49664.....	173	51016.....	338	51116.....	339	51357.....	238	51606.....	236
49574.....	286	49665.....	173	51017.....	338	51117.....	339	51358.....	238	51607.....	236
49575.....	286	49666.....	173	51018.....	338	51118.....	339	51359.....	238	51608.....	237
49576.....	286	49667.....	173	51019.....	338	51119.....	339	51360.....	238	51609.....	237
49577.....	286	49668.....	173	51020.....	338	51120.....	339	51361.....	239	51610.....	237
49578.....	286	49669.....	173	51021.....	338	51121.....	339	51362.....	239	51611.....	237
49579.....	286	49670.....	173	51022.....	338	51122.....	340	51363.....	239	51612.....	237
49580.....	286	49671.....	173	51023.....	338	51123.....	340	51364.....	239	51613.....	237
49581.....	286	49672.....	173	51024.....	337	51124.....	340	51365.....	239	51614.....	237
49582.....	286	49673.....	173	51025.....	337	51125.....	340	51366.....	239	51615.....	237
49583.....	300	49674.....	173	51026.....	337	51126.....	340	51367.....	239	51616.....	237
49584.....	300	49675.....	173	51027.....	337	51127.....	340	51368.....	239	51617.....	23

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
53021	352	54609	224	54818	229	55187	221	56115	350	56243	348
53022	352	54610	224	54819	229	55188	221	56116	350	56244	348
53023	352	54611	224	54820	229	55189	221	56117	350	56245	348
53024	352	54612	224	54821	229	55190	221	56118	350	56246	348
53025	352	54613	224	54822	229	55191	221	56119	350	56247	348
53026	352	54614	224	54823	229	55192	221	56120	350	56248	348
53027	352	54615	224	54824	229	55193	221	56121	350	56249	348
53028	352	54616	224	54825	229	55194	221	56122	350	56250	348
53029	352	54617	225	54826	229	55195	221	56123	350	56251	348
53030	352	54618	225	54827	230	56001	349	56124	350	56252	348
53031	352	54619	225	54828	230	56002	349	56125	350	56253	348
53032	352	54620	225	54829	230	56003	349	56126	350	56254	348
53033	352	54621	225	54830	230	56004	349	56127	350	56255	348
53034	352	54622	225	54831	230	56005	349	56128	350	56256	348
53035	352	54623	225	54832	230	56006	349	56129	350	56257	348
53036	352	54624	225	54833	230	56007	349	56130	350	56258	348
53107	352	54625	225	54834	230	56008	349	56131	350	56259	348
53108	352	54626	226	54835	230	56009	349	56132	350	56260	348
53109	352	54627	226	55000	227	56010	349	56135	348	56261	348
53110	352	54628	226	55001	227	56011	349	56136	348	56262	348
53111	352	54629	226	55002	227	56012	349	56137	348	56263	348
53112	353	54630	226	55003	227	56013	349	56138	348	56264	348
53113	353	54631	226	55004	227	56014	349	56139	348	56265	348
53114	353	54632	226	55005	227	56015	349	56140	349	56266	348
53115	353	54633	226	55006	227	56016	349	56141	349	56267	348
53116	353	54634	226	55007	227	56017	349	56142	349	56268	348
53117	354	54635	226	55008	227	56018	349	56143	349	56269	348
53118	354	54700	223	55009	228	56019	349	56144	349	56400	188
53119	354	54701	223	55010	228	56020	349	56145	349	56401	188
53120	354	54702	223	55011	228	56021	349	56146	349	56402	188
53121	354	54703	223	55012	228	56022	349	56147	350	56403	188
53122	354	54704	223	55013	228	56023	349	56148	350	56404	188
53123	355	54705	223	55014	228	56024	349	56149	350	56405	188
53124	355	54706	223	55015	228	56025	349	56150	350	56406	188
53125	355	54707	223	55016	228	56026	349	56151	350	56407	188
53126	355	54708	223	55017	229	56027	349	56152	350	56408	188
53127	355	54709	224	55018	229	56028	349	56153	350	56409	188
53128	355	54710	224	55019	229	56029	349	56154	350	56410	189
53129	355	54711	224	55020	229	56030	349	56155	350	56411	189
53130	355	54712	224	55021	229	56031	349	56156	350	56412	189
53131	355	54713	224	55022	229	56032	349	56157	350	56413	189
53132	355	54714	224	55023	229	56033	349	56158	350	56414	189
53133	355	54715	224	55024	229	56034	348	56159	350	56415	189
53134	355	54716	224	55025	229	56035	348	56160	350	56416	189
53135	355	54717	225	55026	229	56036	348	56161	350	56417	189
53136	355	54718	225	55027	230	56037	348	56162	350	56418	189
53137	355	54719	225	55028	230	56038	348	56163	350	56419	189
53201	353	54720	225	55029	230	56039	348	56164	350	56420	189
53202	353	54721	225	55030	230	56040	348	56210	349	56421	189
53203	353	54722	225	55031	230	56041	348	56211	349	56422	189
53204	353	54723	225	55032	230	56042	348	56212	349	56423	189
53206	353	54724	225	55033	230	56043	348	56213	349	56424	190
53207	353	54725	225	55034	230	56044	348	56214	349	56425	190
53208	354	54726	226	55035	230	56045	348	56215	349	56426	190
53209	354	54727	226	55160	218	56046	348	56216	349	56427	190
53210	354	54728	226	55161	218	56047	348	56217	349	56428	190
53211	354	54729	226	55162	218	56048	348	56218	349	56429	190
53212	354	54730	226	55163	218	56049	348	56219	349	56430	190
53213	354	54731	226	55164	218	56050	348	56220	349	56431	190
53214	354	54732	226	55165	218	56051	348	56221	349	56432	190
53215	354	54733	226	55166	218	56052	348	56222	349	56433	190
53216	354	54734	226	55167	218	56053	348	56223	349	56434	190
53217	354	54735	226	55168	218	56054	348	56224	349	56435	190
53218	354	54800	227	55169	219	56055	348	56225	349	56436	191
53219	354	54801	227	55170	219	56056	348	56226	349	56437	191
53220	354	54802	227	55171	219	56057	348	56227	349	56438	191
53221	355	54803	227	55172	219	56058	348	56228	349	56439	191
53222	355	54804	227	55173	219	56059	348	56229	349	56440	191
53223	355	54805	227	55174	219	56060	348	56230	349	56441	191
53224	355	54806	227	55175	219	56103	348	56231	349	56442	191
53225	355	54807	227	55176	219	56104	348	56232	349	56443	191
53226	355	54808	227	55177	219	56105	348	56233	349	56444	191
54600	223	54809	228	55178	219	56106	348	56234	349	56445	191
54601	223	54810	228	55179	219	56107	348	56235	349	56446	192
54602	223	54811	228	55180	220	56108	349	56236	349	56447	192
54603	223	54812	228	55181	220	56109	349	56237	349	56448	192
54604	223	54813	228	55182	220	56110	349	56238	349	56449	192
54605	223	54814	228	55183	220	56111	349	56239	349	56450	192
54606	223	54815	228	55184	220	56112	349	56240	349	56451	192
54607	223	54816	228	55185	220	56113	349	56241	349	56452	192
54608	223	54817	229	55186	220	56114	349	56242	349	56453	192

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
56535	201	57005	358	57140	337	58018	352	58100	355	58803	254
56536	201	57006	358	57141	337	58019	352	58101	355	58804	254
56537	201	57007	358	57142	338	58020	352	58102	355	58805	254
56538	201	57008	358	57143	338	58021	352	58103	355	58806	254
56539	201	57009	358	57144	338	58022	352	58480	263	58807	254
56540	201	57010	358	57145	338	58023	352	58481	263	58808	254
56541	201	57011	358	57146	338	58024	352	58482	263	58809	254
56542	201	57012	358	57147	338	58025	352	58483	263	58810	254
56543	201	57015	358	57148	338	58026	352	58484	263	58811	254
56800	206	57016	358	57149	338	58027	352	58485	263	58812	254
56801	206	57017	358	57150	338	58028	352	58486	263	58813	254
56802	206	57018	358	57151	338	58029	352	58487	263	58814	254
56803	206	57019	358	57152	338	58030	352	58488	263	58815	254
56804	206	57020	358	57153	338	58031	352	58489	263	58816	254
56805	206	57021	358	57154	338	58032	352	58490	263	58817	255
56806	206	57022	358	57155	338	58033	352	58491	263	58818	255
56807	206	57075	358	57156	338	58034	352	58492	263	58819	255
56808	206	57076	336	57157	338	58035	352	58493	263	58820	255
56809	207	57077	336	57158	338	58036	353	58494	264	58821	255
56810	207	57078	336	57159	338	58037	353	58495	264	58822	255
56811	207	57079	336	57160	338	58038	353	58496	264	58823	255
56812	207	57080	336	57161	338	58039	353	58497	264	58824	255
56813	207	57081	336	57162	338	58040	353	58498	264	58825	255
56814	207	57082	336	57163	338	58041	353	58499	264	58826	255
56815	207	57083	336	57164	338	58042	353	58500	264	58827	255
56816	207	57084	336	57165	338	58043	353	58501	264	58828	255
56817	207	57085	336	57166	338	58044	353	58502	264	58829	255
56818	207	57086	336	57167	338	58045	353	58503	264	58830	256
56819	208	57087	336	57168	339	58046	353	58504	264	58831	256
56820	208	57088	336	57169	339	58047	353	58505	264	58832	256
56821	208	57089	336	57170	339	58048	353	58506	264	58833	256
56822	208	57090	336	57171	339	58049	353	58507	264	58834	256
56823	208	57091	336	57172	339	58050	353	58508	264	58835	256
56824	208	57092	336	57173	339	58051	353	58509	264	58836	256
56825	208	57093	336	57174	339	58052	353	58510	264	58837	256
56826	209	57094	336	57176	339	58053	353	58511	265	58838	256
56827	209	57095	336	57177	339	58054	353	58512	265	58839	256
56828	209	57096	336	57178	339	58055	353	58513	265	58840	257
56829	209	57097	336	57179	339	58056	353	58514	265	58841	257
56830	209	57098	336	57180	339	58057	353	58515	265	58842	257
56831	209	57099	336	57181	339	58058	353	58516	265	58843	257
56832	209	57100	336	57182	339	58059	353	58517	265	58844	257
56833	209	57101	336	57183	339	58061	353	58518	265	58845	257
56834	209	57102	336	57184	339	58062	353	58519	265	58846	257
56835	209	57103	336	57185	339	58063	353	58520	265	58847	257
56836	210	57104	336	57186	339	58064	354	58521	265	58848	257
56837	210	57105	336	57187	339	58065	354	58522	265	58849	257
56838	210	57106	336	57188	339	58066	354	58523	266	58850	257
56839	210	57107	336	57189	339	58067	354	58524	266	58851	257
56840	210	57108	336	57190	339	58068	354	58525	266	58852	257
56841	210	57109	337	57191	339	58069	354	58526	266	58853	257
56842	210	57110	337	57192	339	58070	354	58527	266	58854	257
56843	210	57111	337	57193	339	58071	354	58528	266	58855	257
56844	210	57112	337	57194	340	58072	354	58529	266	58856	257
56845	211	57113	337	57195	340	58073	354	58530	266	58857	257
56846	211	57114	337	57196	340	58074	354	58531	266	58858	257
56847	211	57115	337	57197	340	58075	354	58532	266	58859	258
56848	211	57116	337	57198	340	58076	354	58533	267	58860	258
56849	211	57117	337	57199	340	58077	354	58534	267	58861	258
56850	211	57118	337	57200	340	58078	354	58535	267	58862	258
56851	211	57119	337	57201	340	58079	354	58536	267	58863	258
56852	211	57120	337	57202	340	58080	354	58537	267	58864	258
56853	211	57121	337	57203	340	58081	354	58538	267	58865	258
56854	211	57122	337	57204	340	58082	354	58539	267	58866	259
56855	212	57123	337	57205	340	58083	355	58540	267	58867	259
56856	212	57124	337	57206	340	58084	355	58541	267	58868	259
56857	212	57125	337	57207	340	58085	355	58542	267	58869	259
56858	212	57126	337	57208	340	58086	355	58543	267	58870	259
56859	212	57127	337	57209	340	58087	355	58544	267	58871	259
56860	212	57128	337	57210	340	58088	355	58545	267	58872	259
56861	212	57129	337	57211	340	58089	355	58546	267	58873	259
56862	213	57130	337	57212	340	58090	355	58547	267	58874	259
56863	213	57131	337	57213	340	58091	355	58548	267	58875	259
56864	213	57132	337	57351	340	58092	355	58549	267	58876	259
56865	213	57133	337	58011	352	58093	355	58550	267	58877	259
56866	213	57134	337	58012	352	58094	355	58551	267	58878	259
56867	213	57135	337	58013	352	58095	355	58552	267	58879	259
56868	213	57136	337	58014	352	58096	355	58553	267	58880	259
56869	213	57137	337	58015	352	58097	355	58800	254	58881	259
56870	213	57138	337	58016	352	58098	355	58801	254	58882	259
56871	213	57139	337	58017	352	58099	355	58802	254	58883	259

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
61059	337	62029	341	62171	343	63080	354	63751	236	64137	246	64505	234
61060	337	62031	341	63000	352	63081	355	63752	236	64138	246	64506	234
61061	337	62033	341	63001	352	63082	355	63753	236	64139	246	64507	234
61062	337	62035	341	63002	352	63083	355	63754	236	64140	246	64508	234
61063	337	62037	341	63003	352	63084	355	63755	236	64141	246	64509	234
61064	337	62039	341	63004	352	63085	355	63756	236	64142	247	64510	234
61065	337	62041	341	63005	352	63086	355	63757	236	64143	247	64511	234
61066	337	62043	341	63006	353	63087	355	63758	236	64144	247	64512	234
61067	337	62045	341	63007	353	63088	355	63759	236	64145	247	64513	239
61068	337	62047	341	63008	353	63089	355	63760	237	64146	247	64514	239
61069	337	62049	341	63009	353	63090	355	63761	237	64147	247	64515	239
61070	337	62051	341	63010	353	63091	355	63762	237	64148	247	64520	244
61071	337	62053	341	63011	353	63155	234	63763	237	64149	247	64521	244
61072	337	62055	341	63012	353	63156	234	63764	237	64150	247	64522	244
61073	337	62057	341	63013	354	63157	234	63765	237	64151	247	64523	244
61074	337	62059	341	63014	354	63158	235	63766	237	64152	247	64524	244
61075	338	62061	341	63015	354	63159	235	63767	237	64153	247	64525	244
61076	338	62063	341	63016	354	63160	235	63768	237	64154	247	64526	244
61077	338	62065	341	63017	354	63161	235	63769	237	64155	247	64527	244
61078	338	62066	343	63018	354	63162	235	63770	237	64156	247	64528	244
61079	338	62067	341	63019	354	63163	235	63771	237	64157	247	64529	244
61080	338	62069	342	63020	354	63164	235	63772	237	64158	247	64530	244
61081	338	62071	342	63021	354	63165	235	63773	237	64159	247	64531	244
61082	338	62073	342	63022	354	63166	235	63774	237	64160	247	64532	244
61083	338	62075	342	63023	354	63167	235	63775	237	64161	247	64533	249
61084	338	62077	342	63024	355	63168	235	63776	237	64162	247	64534	249
61085	338	62079	342	63025	355	63169	236	63777	238	64163	247	64535	249
61086	338	62081	342	63026	355	63170	236	63778	238	64164	247	64600	223
61087	338	62083	342	63027	355	63171	236	63779	238	64165	247	64601	223
61088	338	62084	343	63028	355	63172	236	63780	238	64166	247	64602	223
61089	339	62085	342	63029	355	63173	236	63781	238	64167	247	64603	223
61090	339	62087	342	63030	355	63174	236	63782	238	64168	247	64604	223
61091	339	62089	342	63031	355	63175	236	63783	238	64169	247	64605	223
61092	339	62091	342	63032	355	63176	236	63784	238	64170	248	64606	223
61093	339	62093	342	63033	355	63177	237	63785	238	64171	248	64607	223
61094	339	62095	342	63034	355	63178	237	63786	238	64172	248	64608	223
61095	339	62097	342	63035	355	63179	237	63787	238	64173	248	64609	223
61096	339	62099	342	63036	355	63180	237	63788	238	64174	248	64610	223
61097	339	62101	342	63037	355	63181	237	63789	238	64175	248	64611	223
61098	339	62102	343	63038	355	63182	237	63790	238	64176	248	64612	223
61099	339	62103	342	63039	355	63183	237	63791	238	64177	248	64613	223
61100	339	62105	342	63040	355	63184	237	63792	238	64178	248	64614	223
61101	339	62107	342	63041	355	63185	237	63793	238	64179	248	64615	223
61102	339	62109	342	63042	355	63186	237	63794	238	64180	248	64616	223
61103	339	62111	342	63043	355	63187	237	64100	244	64181	248	64617	223
61104	339	62112	343	63044	352	63188	238	64101	244	64182	248	64618	223
61105	339	62113	342	63045	352	63189	238	64102	244	64183	248	64619	223
61106	339	62115	342	63046	352	63190	238	64103	244	64184	248	64620	223
61107	339	62116	343	63047	352	63191	238	64104	245	64185	248	64621	223
61108	339	62117	342	63048	352	63192	238	64105	245	64186	248	64622	223
61109	339	62119	342	63049	352	63193	238	64106	245	64187	248	64623	223
61110	339	62121	342	63050	352	63194	238	64107	245	64188	248	64624	223
61111	339	62123	342	63051	352	63195	239	64108	245	64189	248	64625	223
61112	340	62125	342	63052	352	63196	239	64109	245	64190	248	64626	223
61113	340	62127	342	63053	353	63197	239	64110	245	64191	248	64627	224
61114	340	62129	342	63054	353	63198	239	64111	245	64192	248	64628	224
61115	340	62131	342	63055	353	63199	239	64112	245	64193	248	64629	224
61116	340	62133	343	63056	353	63200	239	64113	245	64194	248	64630	224
61117	340	62135	343	63057	353	63201	239	64114	245	64195	249	64631	224
61118	340	62137	343	63058	353	63202	239	64115	245	64196	249	64632	224
61119	340	62139	343	63059	353	63203	239	64116	245	64197	249	64633	224
61120	340	62141	343	63060	353	63204	239	64117	245	64198	249	64634	224
61121	340	62142	343	63061	353	63205	239	64118	245	64199	249	64635	224
61122	340	62143	343	63062	353	63206	239	64119	245	64200	249	64636	224
61123	340	62145	343	63063	353	63207	239	64120	245	64201	249	64637	224
61124	340	62146	343	63064	353	63208	239	64121	245	64202	249	64638	224
61175	340	62147	343	63065	353	63209	239	64122	245	64203	249	64639	224
62001	341	62149	343	63066	353	63210	239	64123	246	64204	249	64640	224
62003	341	62151	343	63067	353	63211	239	64124	246	64205	249	64641	224
62005	341	62153	343	63068	353	63212	239	64125	246	64206	249	64642	224
62007	341	62154	343	63069	354	63213	236	64126	246	64207	249	64643	224
62009	341	62155	343	63070	354	63741	234	64127	246	64208	249	64644	224
62011	341	62156	343	63071	354	63742	235	64128	246	64209	249	64645	224
62013	341	62157	343	63072	354	63743	235	64129	246	64210	249	64646	224
62015	341	62158	343	63073	354	63744	235	64130	246	64211	249	64647	224
62017	341	62159	343	63074	354	63745	235	64131	246	64212	249	64648	224
62019	341	62164	343	63075	354	63746	235	64132	246	64500	234	64649	224
62021	341	62166	343	63076	354	63747	235	64133	246	64501	234	64650	224
62023	341	62167	343	63077	354	63748	235	64134	246	64502	234	64651	224
62025	341	62168	343	63078	354	63749	236	64135	246	64503	234	64652	224
62027	341	62170	343	63079	354	63750	236	64136	246	64504	234	64653	224

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
64654.....	224	64832.....	228	65010.....	227	65091.....	230	65229.....	220	66401.....	188
64655.....	225	64833.....	228	65011.....	227	65092.....	230	65230.....	220	66402.....	188
64656.....	225	64834.....	228	65012.....	227	65093.....	230	65231.....	220	66403.....	188
64657.....	225	64835.....	228	65013.....	227	65094.....	230	65232.....	220	66404.....	188
64658.....	225	64836.....	228	65014.....	227	65095.....	230	65233.....	220	66405.....	188
64659.....	225	64837.....	228	65015.....	227	65096.....	230	65234.....	220	66406.....	188
64660.....	225	64838.....	228	65016.....	227	65097.....	230	65235.....	220	66407.....	188
64661.....	225	64839.....	228	65017.....	227	65098.....	230	65236.....	220	66408.....	188
64662.....	225	64840.....	228	65018.....	227	65099.....	230	65237.....	220	66409.....	188
64663.....	225	64841.....	228	65019.....	227	65100.....	230	65238.....	220	66410.....	188
64664.....	225	64842.....	228	65020.....	227	65101.....	230	65239.....	220	66411.....	188
64665.....	225	64843.....	228	65021.....	227	65102.....	230	65240.....	220	66412.....	188
64666.....	225	64844.....	228	65022.....	227	65160.....	218	65241.....	220	66413.....	188
64667.....	225	64845.....	228	65023.....	227	65161.....	218	65242.....	220	66414.....	188
64668.....	225	64846.....	228	65024.....	227	65162.....	218	65243.....	220	66415.....	188
64669.....	225	64847.....	228	65025.....	227	65163.....	218	65244.....	220	66416.....	188
64670.....	225	64848.....	228	65026.....	227	65164.....	218	65245.....	220	66417.....	188
64671.....	225	64849.....	228	65027.....	228	65165.....	218	65246.....	220	66418.....	188
64672.....	225	64850.....	228	65028.....	228	65166.....	218	65247.....	220	66419.....	188
64673.....	225	64851.....	228	65029.....	228	65167.....	218	65248.....	220	66420.....	188
64674.....	225	64852.....	228	65030.....	228	65168.....	218	65249.....	220	66421.....	188
64675.....	225	64853.....	228	65031.....	228	65169.....	218	65250.....	220	66422.....	188
64676.....	225	64854.....	228	65032.....	228	65170.....	218	65251.....	221	66423.....	188
64677.....	225	64855.....	229	65033.....	228	65171.....	218	65252.....	221	66424.....	188
64678.....	225	64856.....	229	65034.....	228	65172.....	218	65253.....	221	66425.....	188
64679.....	225	64857.....	229	65035.....	228	65173.....	218	65254.....	221	66426.....	188
64680.....	225	64858.....	229	65036.....	228	65174.....	218	65255.....	221	66427.....	188
64681.....	225	64859.....	229	65037.....	228	65175.....	218	65256.....	221	66428.....	188
64682.....	225	64860.....	229	65038.....	228	65176.....	218	65257.....	221	66429.....	188
64683.....	225	64861.....	229	65039.....	228	65177.....	218	65258.....	221	66430.....	188
64684.....	225	64862.....	229	65040.....	228	65178.....	218	65259.....	221	66431.....	188
64685.....	225	64863.....	229	65041.....	228	65179.....	218	65260.....	221	66432.....	188
64686.....	225	64864.....	229	65042.....	228	65180.....	218	65261.....	221	66433.....	188
64687.....	225	64865.....	229	65043.....	228	65181.....	218	65262.....	221	66434.....	18

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE		
66563	192	66644	195	66725	198	66806	201	67117	265	67612	223	67693	226
66564	192	66645	195	66726	198	66807	201	67118	265	67613	223	67694	226
66565	192	66646	195	66727	198	66808	201	67119	265	67614	223	67695	226
66566	192	66647	195	66728	198	66809	201	67120	265	67615	223	67696	226
66567	192	66648	195	66729	198	66810	201	67121	265	67616	223	67697	226
66568	193	66649	195	66730	198	66811	201	67122	265	67617	223	67698	226
66569	193	66650	195	66731	198	67005	359	67123	265	67618	223	67699	226
66570	193	66651	195	66732	198	67007	359	67124	265	67619	223	67700	226
66571	193	66652	195	66733	198	67009	359	67125	265	67620	223	67701	226
66572	193	66653	195	66734	198	67011	359	67126	265	67621	223	67702	226
66573	193	66654	195	66735	199	67013	359	67127	265	67622	223	67705	254
66574	193	66655	195	66736	199	67015	359	67128	265	67623	223	67706	254
66575	193	66656	195	66737	199	67017	359	67129	265	67624	223	67707	254
66576	193	66657	195	66738	199	67019	359	67130	265	67625	223	67708	254
66577	193	66658	195	66739	199	67021	359	67131	265	67626	223	67709	254
66578	193	66659	195	66740	199	67023	359	67132	265	67627	224	67710	254
66579	193	66660	195	66741	199	67035	359	67133	265	67628	224	67711	254
66580	193	66661	195	66742	199	67037	359	67134	265	67629	224	67712	254
66581	193	66662	195	66743	199	67039	359	67135	265	67630	224	67713	254
66582	193	66663	195	66744	199	67041	359	67136	265	67631	224	67714	254
66583	193	66664	195	66745	199	67043	359	67137	265	67632	224	67715	254
66584	193	66665	195	66746	199	67045	359	67138	265	67633	224	67716	254
66585	193	66666	195	66747	199	67047	359	67139	265	67634	224	67717	254
66586	193	66667	196	66748	199	67049	359	67140	265	67635	224	67718	254
66587	193	66668	196	66749	199	67051	359	67141	266	67636	224	67719	254
66588	193	66669	196	66750	199	67053	359	67142	266	67637	224	67720	254
66589	193	66670	196	66751	199	67060	263	67143	266	67638	224	67721	254
66590	193	66671	196	66752	199	67061	263	67144	266	67639	224	67724	254
66591	193	66672	196	66753	199	67062	263	67145	266	67640	224	67725	254
66592	193	66673	196	66754	199	67063	263	67146	266	67641	224	67726	255
66593	193	66674	196	66755	199	67064	263	67147	266	67642	224	67727	255
66594	193	66675	196	66756	199	67065	263	67148	266	67643	224	67728	255
66595	193	66676	196	66757	199	67066	263	67149	266	67644	224	67729	255
66596	193	66677	196	66758	199	67067	263	67150	266	67645	224	67730	255
66597	193	66678	196	66759	199	67068	263	67151	266	67646	224	67731	255
66598	193	66679	196	66760	199	67069	263	67152	266	67647	224	67732	255
66599	193	66680	196	66761	199	67070	263	67153	266	67648	224	67733	255
66600	193	66681	196	66762	199	67071	263	67154	266	67649	224	67734	255
66601	193	66682	196	66763	199	67072	263	67155	266	67650	224	67735	255
66602	193	66683	196	66764	199	67073	263	67156	266	67651	224	67736	255
66603	193	66684	196	66765	199	67074	263	67157	266	67652	224	67737	255
66604	193	66685	196	66766	199	67075	263	67158	266	67653	224	67738	255
66605	193	66686	196	66767	200	67076	263	67159	266	67654	224	67739	255
66606	194	66687	196	66768	200	67077	263	67160	266	67655	225	67740	255
66607	194	66688	196	66769	200	67078	263	67161	266	67656	225	67741	255
66608	194	66689	196	66770	200	67079	263	67162	266	67657	225	67742	255
66609	194	66690	196	66771	200	67080	263	67163	266	67658	225	67743	255
66610	194	66691	196	66772	200	67081	263	67164	266	67659	225	67744	255
66611	194	66692	196	66773	200	67082	263	67165	266	67660	225	67745	255
66612	194	66693	196	66774	200	67083	263	67166	266	67661	225	67746	255
66613	194	66694	197	66775	200	67084	264	67167	266	67662	225	67747	255
66614	194	66695	197	66776	200	67085	264	67168	266	67663	225	67748	255
66615	194	66696	197	66777	200	67086	264	67169	267	67664	225	67749	255
66616	194	66697	197	66778	200	67087	264	67170	267	67665	225	67750	255
66617	194	66698	197	66779	200	67088	264	67171	267	67666	225	67751	255
66618	194	66699	197	66780	200	67089	264	67172	267	67667	225	67752	255
66619	194	66700	197	66781	200	67090	264	67173	267	67668	225	67753	255
66620	194	66701	197	66782	200	67091	264	67174	267	67669	225	67754	255
66621	194	66702	197	66783	200	67094	264	67175	267	67670	225	67755	255
66622	194	66703	197	66784	200	67095	264	67176	267	67671	225	67756	255
66623	194	66704	197	66785	200	67096	264	67177	267	67672	225	67757	255
66624	194	66705	197	66786	200	67097	264	67178	267	67673	225	67758	255
66625	194	66706	197	66787	200	67098	264	67179	267	67674	225	67759	256
66626	194	66707	197	66788	200	67099	264	67180	267	67675	225	67760	256
66627	194	66708	197	66789	200	67100	264	67181	267	67676	225	67761	256
66628	194	66709	198	66790	200	67101	264	67182	267	67677	225	67762	256
66629	194	66710	198	66791	200	67102	264	67183	267	67678	225	67763	256
66630	194	66711	198	66792	200	67103	264	67184	267	67679	225	67764	256
66631	194	66712	198	66793	201	67104	264	67185	267	67680	225	67765	256
66632	194	66713	198	66794	201	67105	264	67600	223	67681	225	67766	256
66633	195	66714	198	66795	201	67106	264	67601	223	67682	225	67767	256
66634	195	66715	198	66796	201	67107	265	67602	223	67683	225	67768	256
66635	195	66716	198	66797	201	67108	265	67603	223	67684	225	67769	256
66636	195	66717	198	66798	201	67109	265	67604	223	67685	225	67770	256
66637	195	66718	198	66799	201	67110	265	67605	223	67686	225	67771	256
66638	195	66719	198	66800	201	67111	265	67606	223	67687	225	67772	256
66639	195	66720	198	66801	201	67112	265	67607	223	67688	225	67773	256
66640	195	66721	198	66802	201	67113	265	67608	223	67689	225	67774	256
66641	195	66722	198	66803	201	67114	265	67609	223	67690	226	67775	256
66642	195	66723	198	66804	201	67115	265	67610	223	67691	226	67776	256
66643	195	66724	198	66805	201	67116	265	67611	223	67692	226	67777	256

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
67778	256	67862	260	68285	339	68603	343	68718	343	69033	355
67779	256	67863	260	68286	339	68604	343	68723	343	69034	355
67780	256	67864	260	68287	340	68606	343	68728	343	69035	355
67781	256	67865	260	68288	340	68607	343	68733	343	69036	355
67782	256	67866	260	68289	340	68608	343	68738	343	69037	355
67783	256	67867	260	68290	340	68609	343	68743	343	69038	355
67784	256	67868	260	68291	340	68611	343	68748	343	69039	355
67785	257	67869	260	68292	340	68612	343	68753	343	69040	355
67786	257	67870	260	68293	340	68613	343	68758	343	69041	355
67787	257	67871	260	68294	336	68614	343	68763	343	69042	355
67788	257	67872	261	68295	336	68616	343	68768	343	69043	355
67789	257	67873	261	68296	336	68643	341	68773	343	69044	355
67790	257	67874	261	68297	336	68644	341	68778	343	69045	355
67791	257	67875	261	68298	336	68645	341	68780	343	69046	355
67792	257	67876	261	68299	336	68646	341	68965	352	69047	355
67793	257	67877	261	68300	337	68647	341	68966	352	69048	355
67794	257	67878	261	68301	337	68648	341	68967	352	69049	355
67795	257	67879	261	68302	337	68649	341	68968	352	69050	355
67796	257	67880	261	68303	337	68650	341	68969	352	69051	355
67797	257	67881	261	68304	337	68651	341	68970	352	69052	355
67798	257	67882	261	68305	337	68652	341	68971	352	69053	355
67799	257	67883	261	68306	337	68653	341	68972	352	69054	355
67800	257	67884	261	68307	337	68654	341	68973	352	69055	355
67801	257	67885	261	68308	337	68655	341	68974	352	69056	355
67802	257	67886	261	68309	337	68656	341	68975	352	69120	206
67803	257	67887	261	68310	337	68657	341	68976	352	69121	206
67804	257	67888	261	68311	337	68658	341	68977	352	69122	206
67805	257	67889	261	68312	337	68659	341	68978	352	69123	206
67806	257	67890	261	68313	337	68660	341	68979	352	69124	206
67807	257	67891	261	68314	337	68661	341	68980	353	69125	206
67808	257	67892	261	68315	337	68662	341	68981	353	69126	206
67809	257	67893	261	68316	337	68663	341	68982	353	69127	206
67810	258	67894	261	68317	338	68664	341	68983	353	69128	206
67811	258	67895	261	68318	338	68665	341	68984	353	69129	206
67812	258	67896	261	68319	338	68666	341	68985	353	69130	206
67813	258	67897	261	68320	338	68667	341	68986	353	69131	206
67814	258	67898	261	68321	338	68668	341	68987	353	69132	206
67815	258	67899	261	68322	338	68669	341	68988	353	69133	206
67816	259	67900	261	68323	338	68670	341	68989	353	69134	206
67817	259	67901	261	68324	338	68671	341	68990	353	69135	206
67818	259	67902	261	68325	338	68672	341	68991	353	69136	206
67819	259	67903	261	68326	338	68673	341	68992	353	69137	206
67820	259	67904	261	68327	338	68674	341	68993	353	69138	206
67821	259	67905	261	68328	338	68675	341	68994	353	69139	206
67822	259	67906	261	68329	338	68676	341	68995	353	69140	206
67823	259	67907	261	68330	338	68677	342	68996	353	69141	206
67824	259	67908	262	68331	339	68678	342	68997	353	69142	206
67825	259	67909	262	68332	339	68679	342	68998	353	69143	206
67826	259	67910	262	68333	339	68680	342	68999	353	69144	206
67827	259	67911	262	68334	339	68681	342	69000	353	69145	206
67828	259	67912	262	68335	339	68682	342	69001	353	69146	206
67829	259	67913	262	68336	339	68683	342	69002	353	69147	207
67830	259	67914	262	68337	339	68684	342	69003	354	69148	207
67831	259	67915	262	68338	339	68685	342	69004	354	69149	207
67832	259	67916	262	68339	339	68686	342	69005	354	69150	207
67835	259	67917	262	68340	339	68687	342	69006	354	69151	207
67836	259	67918	262	68341	339	68688	342	69007	354	69152	207
67837	259	67919	262	68342	339	68689	342	69008	354	69153	207
67838	259	67920	262	68343	339	68690	342	69009	354	69154	207
67839	259	67921	262	68344	339	68691	342	69010	354	69155	207
67840	260	67922	262	68345	339	68692	342	69011	354	69156	207
67841	260	67923	262	68346	339	68693	342	69012	354	69157	207
67842	260	67924	262	68347	339	68694	342	69013	354	69158	207
67843	260	67925	262	68348	339	68695	342	69014	354	69159	207
67844	260	67926	262	68349	339	68696	342	69015	354	69160	207
67845	260	68268	336	68350	339	68697	342	69016	354	69161	207
67846	260	68269	336	68351	339	68698	342	69017	354	69162	207
67847	260	68270	336	68352	339	68699	342	69018	354	69163	207
67848	260	68271	336	68353	339	68700	342	69019	354	69164	207
67849	260	68272	336	68354	340	68701	342	69020	354	69165	207
67850	260	68273	337	68355	340	68702	342	69021	354	69166	207
67851	260	68274	337	68356	340	68703	342	69022	354	69167	207
67852	260	68275	337	68357	340	68704	342	69023	354	69168	207
67853	260	68276	337	68358	340	68705	342	69024	354	69169	207
67854	260	68277	338	68359	340	68706	342	69025	354	69170	207
67855	260	68278	338	68360	340	68707	342	69026	355	69171	207
67856	260	68279	338	68361	340	68708	342	69027	355	69172	207
67857	260	68280	338	68362	340	68709	343	69028	355	69173	207
67858	260	68281	339	68363	340	68710	343	69029	355	69174	207
67859	260	68282	339	68364	340	68711	343	69030	355	69175	207
67860	260	68283	339	68365	340	68712	343	69031	355	69176	207
67861	260	68284	339	68366	340	68713	343	69032	355	69177	207

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
69260	211	70019	374	72948	386	74101	364	74342	90	74428	90	74510	91
69261	211	70020	374	72949	386	74104	364	74343	90	74429	90	74511	91
69262	211	70021	374	72950	386	74107	364	74348	90	74430	90	74512	91
69263	211	70022	374	72951	386	74110	364	74349	90	74431	90	74513	91
69264	211	70023	374	72952	386	74113	364	74350	90	74432	90	74514	91
69265	211	70024	374	72953	386	74116	364	74351	90	74433	90	74515	91
69266	211	70025	374	72954	390	74119	364	74352	90	74434	90	74516	91
69267	211	70026	374	72955	390	74122	364	74353	90	74435	90	74517	91
69268	211	70027	374	72956	390	74125	367	74354	90	74436	90	74518	91
69269	211	70028	374	72957	390	74128	367	74355	90	74437	90	74519	91
69270	211	70029	374	72958	390	74131	367	74356	90	74438	90	74520	91
69271	211	70030	374	72959	390	74134	367	74357	90	74439	90	74521	91
69272	211	70031	374	72960	390	74137	367	74358	90	74440	90	74522	91
69273	211	70032	374	72961	390	74140	367	74359	90	74441	90	74523	91
69274	211	70441	110	72962	390	74143	367	74360	90	74442	90	74524	91
69275	211	70442	110	72963	390	74146	367	74361	90	74443	90	74525	91
69276	211	70444	110	72964	390	74149	370	74362	90	74444	90	74526	91
69277	211	70445	110	72965	390	74152	370	74363	90	74445	90	74527	91
69278	211	70447	110	72966	390	74155	370	74364	90	74446	90	74528	91
69279	211	70448	110	72967	390	74158	370	74365	90	74447	90	74529	91
69280	211	70450	110	72968	390	74161	370	74366	90	74448	90	74530	91
69281	211	70451	110	72969	390	74164	370	74367	90	74449	90	74531	91
69282	211	70453	110	72970	393	74167	370	74368	90	74450	90	74532	91
69283	211	70454	110	72971	393	74170	370	74369	90	74451	90	74533	91
69284	212	70456	110	72972	393	74201	364	74370	90	74452	90	74534	91
69285	212	70457	110	72973	393	74204	364	74371	90	74453	90	74535	91
69286	212	70459	110	72974	393	74207	364	74372	90	74454	90	74536	91
69287	212	70460	110	72975	393	74210	364	74373	90	74455	90	74537	91
69288	212	70462	110	72976	393	74213	364	74374	90	74456	90	74538	91
69289	212	70463	110	72977	393	74216	364	74375	90	74457	90	74539	91
69290	212	70465	110	72978	119	74219	364	74376	90	74458	90	74540	91
69291	212	70466	110	72979	119	74222	364	74377	90	74459	90	74541	91
69292	212	70468	110	72980	119	74225	367	74378	90	74460	90	74542	91
69293	212	70469	110	72981	119	74228	367	74379	90	74461	90	74543	91
69294	212	70470	109	72982	119	74231	367	74380	90	74462	90	74544	91
69295	212	70471	109	72983	119	74234	367	74381	90	74463	90	74545	91
69296	212	70472	109	72984	119	74237	367	74382	90	74464	90	74546	91
69297	212	70473	109	72985	119	74240	367	74383	90	74465	90	74547	91
69298	212	70474	109	73012	386	74243	367	74384	90	74466	90	74548	91
69299	212	70475	109	73013	386	74246	367	74385	90	74467	90	74549	91
69300	212	70476	109	73014	386	74249	370	74386	90	74468	90	74550	91
69301	212	70477	109	73026	386	74252	370	74387	90	74469	90	74551	91
69302	212	70478	109	73027	386	74255	370	74388	90	74470	90	74552	91
69303	212	70479	109	73028	386	74258	370	74389	90	74471	90	74553	91
69304	212	70480	109	73029	386	74261	370	74390	90	74472	91	74554	91
69305	212	70481	109	73041	386	74264	370	74391	90	74473	91	74555	91
69306	212	70482	109	73070	387	74267	370	74392	90	74474	91	74556	91
69307	212	70483	109	73071	387	74270	370	74393	90	74475	91	74557	91
69308	212	70484	109	73072	387	74300	90	74394	90	74476	91	74558	91
69309	212	70485	109	73073	387	74301	90	74395	90	74477	91	74559	91
69310	212	70486	109	73074	387	74302	90	74396	90	74478	91	74560	91
69311	212	70487	109	73075	387	74303	90	74397	90	74479	91	74561	91
69312	212	70488	109	73078	387	74304	90	74398	90	74480	91	74562	91
69313	213	70489	109	73079	387	74305	90	74399	90	74481	91	74563	91
69314	213	70527	112	73080	387	74306	90	74400	90	74482	91	74564	91
69315	213	70529	112	73081	387	74307	90	74401	90	74483	91	74565	91
69316	213	70531	112	73082	387	74308	90	74402	90	74484	91	74566	91
69317	213	70533	112	73083	387	74309	90	74403	90	74485	91	74567	91
69318	213	70535	112	74001	364	74310	90	74404	90	74486	91	74568	91
69319	213	70537	112	74004	364	74311	90	74405	90	74487	91	74569	91
69320	213	70539	112	74007	364	74316	90	74406	90	74488	91	74570	91
69321	213	70540	112	74010	364	74317	90	74407	90	74489	91	74571	91
69322	213	70542	112	74013	364	74318	90	74408	90	74490	91	74572	91
69323	213	70544	112	74016	364	74319	90	74409	90	74491	91	74573	91
69324	213	70546	112	74019	364	74320	90	74410	90	74492	91	74574	91
69325	213	70548	112	74022	364	74321	90	74411	90	74493	91	74575	91
70003	374	70550	112	74025	367	74322	90	74412	90	74494	91	74576	91
70004	374	70551	112	74028	367	74323	90	74413	90	74495	91	74577	91
70005	374	70552	112	74031	367	74324	90	74414	90	74496	91	74578	91
70006	374	70553	112	74034	367	74325	90	74415	90	74497	91	74579	91
70007	374	70554	112	74037	367	74326	90	74416	90	74498	91	74580	91
70008	374	70555	112	74040	367	74327	90	74417	90	74499	91	74581	91
70009	374	70556	112	74043	367	74332	90	74418	90	74500	91	74582	91
70010	374	70557	112	74046	367	74333	90	74419	90	74501	91	74583	91
70011	374	70558	112	74049	370	74334	90	74420	90	74502	91	74584	91
70012	374	70559	112	74052	370	74335	90	74421	90	74503	91	74585	91
70013	374	70560	112	74055	370	74336	90	74422	90	74504	91	74586	91
70014	374	70561	112	74058	370	74337	90	74423	90	74505	91	74587	91
70015	374	70562	112	74061	370	74338	90	74424	90	74506	91	74588	91
70016	374	70563	112	74064	370	74339	90	74425	90	74507	91	74589	91
70017	374	72930	386	74067	370	74340	90	74426	90	74508	91	74590	91
70018	374	72947	386	74070	370	74341	90	74427	90	74509	91	74591	91

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
74592	91	74667	91	77170	86	77245	87	77320	87	83041	386	91017	397
74593	91	74668	91	77171	86	77246	87	77321	87	83042	386	91021	397
74594	91	74669	91	77172	86	77247	87	77322	87	83043	386	91025	397
74595	91	74670	91	77173	86	77248	87	77323	87	83044	386	91029	397
74596	91	74671	91	77174	86	77249	87	77324	87	83056	119	91033	397
74597	91	77100	86	77175	86	77250	87	77325	87	83057	119	91037	397
74598	91	77101	86	77176	86	77251	87	77326	87	83058	119	91041	397
74599	91	77102	86	77177	86	77252	87	77327	87	83059	119	91045	397
74600	90	77103	86	77178	86	77253	87	77328	87	83060	119	91049	397
74601	90	77104	86	77179	86	77254	87	77329	87	83061	119	91053	397
74602	90	77105	86	77180	86	77255	87	77330	87	83062	119	91101	397
74603	90	77106	86	77181	86	77256	87	77331	87	83063	119	91107	397
74604	90	77107	86	77182	86	77257	87	77332	87	83064	119	91109	397
74605	90	77108	86	77183	86	77258	87	77333	87	83065	119	91113	397
74606	90	77109	86	77184	86	77259	87	77334	87	83070	386	91121	397
74607	90	77110	86	77185	86	77260	87	77335	87	83071	386	91129	397
74608	90	77111	86	77186	86	77261	87	77336	87	83072	386	91137	397
74609	90	77112	86	77187	86	77262	87	77337	87	83073	386	91235	176
74610	90	77113	86	77188	86	77263	87	77338	87	83100	386	91236	176
74611	90	77114	86	77189	86	77264	87	77339	87	83101	386	91237	176
74612	90	77115	86	77190	86	77265	87	81001	378	83102	386	91238	176
74613	90	77116	86	77191	86	77266	87	81003	378	83103	386	91239	176
74614	90	77117	86	77192	86	77267	87	81005	378	83104	386	91240	176
74615	90	77118	86	77193	86	77268	87	81007	378	83105	386	91241	176
74616	90	77119	86	77194	86	77269	87	81009	378	83106	386	91242	176
74617	90	77120	86	77195	86	77270	87	81011	378	83107	386	91243	176
74618	90	77121	86	77196	86	77271	87	81013	378	83108	386	91244	176
74619	90	77122	86	77197	86	77272	87	81015	378	83109	386	91245	176
74620	90	77123	86	77198	86	77273	87	81017	378	83110	386	91246	176
74621	90	77124	86	77199	86	77274	87	81019	378	83111	386	91247	176
74622	90	77125	86	77200	86	77275	87	81021	378	83200	390	91248	176
74623	90	77126	86	77201	86	77276	87	81023	378	83201	390	91250	176
74624	91	77127	86	77202	86	77277	87	81025	378	83202	390	91251	176
74625	91	77128	86	77203	86	77278	87	81027	378	83203	390	91252	176
74626	91	77129	86	77204	86	77279	87	81029	378	83204	390	91253	176
74627	91	77130	86	77205	86	77280	87	82930	386	83205	390	91254	176
74628	91	77131	86	77206	86	77281	87	82931	386	83206	390	91255	176
74629	91	77132	86	77207	86	77282	87	82932	386	83207	390	91256	176
74630	91	77133	86	77208	86	77283	87	82933	386	83220	387	91257	176
74631	91	77134	86	77209	86	77284	87	82966	386	83221	387	91258	176
74632	91	77135	86	77210	86	77285	87	82967	386	83222	387	91259	176
74633	91	77136	86	77211	86	77286	87	82968	386	83223	387	91260	176
74634	91	77137	86	77212	86	77287	87	82969	386	83224	387	91261	176
74635	91	77138	86	77213	86	77288	87	82970	386	83225	387	91262	176
74636	91	77139	86	77214	86	77289	87	82971	386	83230	387	91263	176
74637	91	77140	86	77215	86	77290	87	82972	386	83231	387	91349	114
74638	91	77141	86	77216	86	77291	87	82973	386	83232	387	91350	114
74639	91	77142	86	77217	86	77292	87	82974	390	83233	387	91351	114
74640	91	77143	86	77218	86	77293	87	82975	390	83234	387	91352	114
74641	91	77144	86	77219	86	77294	87	82976	390	83235	387	91353	114
74642	91	77145	86	77220	87	77295	87	82977	390	90001	396	91354	114
74643	91	77146	86	77221	87	77296	87	82978	390	90005	396	91355	114
74644	91	77147	86	77222	87	77297	87	82979	390	90009	396	91356	114
74645	91	77148	86	77223	87	77298	87	82980	390	90013	396	91357	114
74646	91	77149	86	77224	87	77299	87	82981	390	90017	396	91358	114
74647	91	77150	86	77225	87	77300	87	82982	390	90021	396	91359	114
74648	91	77151	86	77226	87	77301	87	82983	390	90025	396	91360	114
74649	91	77152	86	77227	87	77302	87	82984	390	90029	396	91361	114
74650	91	77153	86	77228	87	77303	87	82985	390	90033	396	93272	114
74651	91	77154	86	77229	87	77304	87	82986	390	90037	396	93273	114
74652	91	77155	86	77230	87	77305	87	82987	390	90041	396	93274	114
74653	91	77156	86	77231	87	77306	87	82988	390	90045	396	93275	114
74654	91	77157	86	77232	87	77307	87	82989	390	90049	396	93276	114
74655	91	77158	86	77233	87	77308	87	82990	393	90053	396	93277	114
74656	91	77159	86	77234	87	77309	87	82991	393	90101	396	93278	114
74657	91	77160	86	77235	87	77310	87	82992	393	90107	396	93279	114
74658	91	77161	86	77236	87	77311	87	82993	393	90109	396	93280	114
74659	91	77162	86	77237	87	77312	87	82994	393	90113	396	93281	114
74660	91	77163	86	77238	87	77313	87	82995	393	90121	396	93282	114
74661	91	77164	86	77239	87	77314	87	82996	393	90129	396		
74662	91	77165	86	77240	87	77315	87	82997	393	90137	396		
74663	91	77166	86	77241	87	77316	87	83026	386	91001	397		
74664	91	77167	86	77242	87	77317	87	83027	386	91005	397		
74665	91	77168	86	77243	87	77318	87	83028	386	91009	397		
74666	91	77169	86	77244	87	77319	87	83029	386	91013	397		

KSPT Reference Information

ISO h6 SPECIFICATIONS					
DIAMETER	+	-	DIAMETER	+	-
$\geq 1/8 - 3/16$	0.00000	-0.00032	≤ 3	0,000	0,006
$> 3/16 - 7/16$	0.00000	-0.00035	$> 3 - 6$	0,000	0,008
$> 7/16 - 5/8$	0.00000	-0.00043	$> 6 - 10$	0,000	0,009
$> 5/8 - 1$	0.00000	-0.00051	$> 10 - 18$	0,000	0,011
$> 1 - 1-1/4$	0.00000	-0.00063	$> 18 - 25$	0,000	0,013

MACHINING FORMULAS	
INCH FORMULAS	METRIC FORMULAS
sfm = rpm x .262 x cutting diameter	m/min = (3.14 x cutting diameter x rpm) / 1000
rpm = sfm x 3.82 / cutting diameter	rpm = (1000 x m / min) / (3.14 x cutting diameter)
feed (inches per tooth) = ipm / (number of teeth x rpm)	feed (mm per tooth) = millimeters per minute / (number of teeth x rpm)
feed (inches / minute) = inches per tooth x number of teeth x rpm	feed (mm/minute) = feed per tooth x number of teeth x rpm
feed (inches / minute) = ipr x rpm	feed (mm/minute) = mmr x rpm
feed (inches / revolution) = ipm / rpm	feed (mm per revolution) = mmr / rpm
cuspl height = (tool diameter / 2) - $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$	cuspl height = (tool diameter / 2) - $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$
pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$	pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$
mrr – milling – (in ³ /min) = width of cut x depth of cut x ipm	mrr – milling – (cm ³ /min) = (width of cut x depth of cut x mm/min) / 1000
cutting time – drilling – (minutes) = length / ipm	cutting time – drilling – (minutes) = length / mm/min

sfm	surface feet per minute
rpm	revolutions per minute
ipm	feed rate in inches per minutes
ipr	inches per revolution
mmr	millimeters per revolution
mm/min	feed rate in millimeters per minute
mrr	material removal rate
	on flat surface

GENERAL FORMULAS	
coolant pressure: 1 Bar = 14.5 Pounds per Square Inch (PSI)	
calculation of coolant pressure: Pounds Per Square Inch (PSI) = (Horsepower of Pump x 1.460) / Gallons per Minute (GPM)	
1 Liter = 0.254 Gallons	
inch = millimeters / 25.4	millimeters = inch x 25.4
inch tap drill sizes = major diameter – ((1.299 x % of thread) / threads per inch)	
metric tap drill sizes = major diameter – (1.082 x pitch x % of thread)	
inch thread forming drill size: maximum diameter = basic major diameter – (3/8 x number of threads per inch)	
inch thread forming drill size: minimum diameter = basic major diameter – (1/2 x number of threads per inch)	
metric thread forming drill size: maximum diameter = basic major diameter – (.375 x pitch)	
metric thread forming drill size: minimum diameter = basic major diameter – (.500 x pitch)	

Decimal Equivalents

Fraction • Number • Letter • Metric Sizes

INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT
—	0,10	0.0039	—	1,60	0.0630	9/64	3,57	0.1406	#1	5,79	0.2280	R	8,61	0.3390	—	13,00	0.5118
—	0,20	0.0079	#52	1,61	0.0635	—	3,60	0.1417	—	5,80	0.2283	—	8,70	0.3425	33/64	13,10	0.5156
—	0,25	0.0098	—	1,65	0.0650	#27	3,66	0.1440	—	5,90	0.2323	11/32	8,73	0.3438	17/32	13,49	0.5312
—	0,30	0.0118	#51	1,70	0.0669	—	3,70	0.1457	A	5,94	0.2340	—	8,75	0.3445	—	13,50	0.5315
#80	0,34	0.0135	—	1,75	0.0689	#26	3,73	0.1470	15/64	5,95	0.2344	—	8,80	0.3465	35/64	13,89	0.5469
—	0,35	0.0138	#50	1,78	0.0700	—	3,75	0.1476	—	6,00	0.2362	S	8,84	0.3480	—	14,00	0.5512
#79	0,37	0.0145	—	1,80	0.0709	#25	3,80	0.1495	B	6,05	0.2380	—	8,90	0.3504	9/16	14,29	0.5625
1/64	0,40	0.0156	#49	1,85	0.0728	—	3,80	0.1496	—	6,10	0.2402	—	9,00	0.3543	—	14,50	0.5709
#78	0,41	0.0160	—	1,90	0.0748	#24	3,86	0.1520	C	6,15	0.2420	T	9,09	0.3580	37/64	14,68	0.5781
—	0,45	0.0177	#48	1,93	0.0760	—	3,90	0.1535	—	6,20	0.2441	—	9,10	0.3583	—	15,00	0.5906
#77	0,46	0.0180	—	1,95	0.0768	#23	3,91	0.1540	D	6,25	0.2461	23/64	9,13	0.3594	19/32	15,08	0.5938
—	0,50	0.0197	5/64	1,98	0.0781	5/32	3,97	0.1562	—	6,30	0.2480	—	9,20	0.3622	39/64	15,48	0.6094
#76	0,51	0.0200	#47	1,99	0.0785	#22	3,99	0.1570	E	6,35	0.2500	—	9,25	0.3642	—	15,50	0.6102
#75	0,53	0.0210	—	2,00	0.0787	—	4,00	0.1575	1/4	6,35	0.2500	—	9,30	0.3661	5/8	15,88	0.6250
—	0,55	0.0217	—	2,05	0.0807	#21	4,04	0.1590	—	6,40	0.2520	U	9,35	0.3680	—	16,00	0.6299
#74	0,57	0.0225	#46	2,06	0.0810	#20	4,09	0.1610	—	6,50	0.2559	—	9,40	0.3701	41/64	16,27	0.6406
—	0,60	0.0236	#45	2,08	0.0820	—	4,10	0.1614	F	6,53	0.2570	—	9,50	0.3740	—	16,50	0.6496
#73	0,61	0.0240	—	2,10	0.0827	—	4,20	0.1654	—	6,60	0.2598	3/8	9,53	0.3750	21/32	16,67	0.6562
#72	0,64	0.0250	—	2,15	0.0846	#19	4,22	0.1660	G	6,63	0.2610	V	9,56	0.3770	—	17,00	0.6693
—	0,65	0.0256	#44	2,18	0.0860	—	4,25	0.1673	—	6,70	0.2638	—	9,60	0.3780	43/64	17,07	0.6719
#71	0,66	0.0260	—	2,20	0.0866	—	4,30	0.1693	17/64	6,75	0.2656	—	9,70	0.3819	11/16	17,46	0.6875
—	0,70	0.0276	—	2,25	0.0886	#18	4,31	0.1695	H	6,76	0.2660	—	9,75	0.3839	—	17,50	0.6890
#70	0,71	0.0280	#43	2,26	0.0890	11/64	4,37	0.1719	—	6,80	0.2677	W	9,80	0.3858	45/64	17,86	0.7031
#69	0,74	0.0292	—	2,30	0.0906	#17	4,39	0.1730	—	6,90	0.2717	—	9,90	0.3898	—	18,00	0.7087
—	0,75	0.0295	—	2,35	0.0925	—	4,40	0.1732	I	6,91	0.2720	25/64	9,92	0.3906	23/32	18,26	0.7188
#68	0,79	0.0310	#42	2,37	0.0935	#16	4,50	0.1770	—	7,00	0.2756	—	10,00	0.3937	—	18,50	0.7283
1/32	0,79	0.0313	3/32	2,38	0.0938	—	4,50	0.1772	J	7,04	0.2770	X	10,08	0.3970	47/64	18,65	0.7344
—	0,80	0.0315	—	2,40	0.0945	#15	4,57	0.1800	—	7,10	0.2795	—	10,10	0.3976	—	19,00	0.7480
#67	0,81	0.0320	#41	2,44	0.0960	—	4,60	0.1811	K	7,14	0.2810	—	10,20	0.4016	3/4	19,05	0.7500
#66	0,84	0.0330	—	2,45	0.0965	#14	4,62	0.1820	9/32	7,14	0.2812	Y	10,26	0.4040	49/64	19,45	0.7656
—	0,85	0.0335	#40	2,50	0.0984	#13	4,70	0.1850	—	7,20	0.2835	—	10,30	0.4055	—	19,50	0.7677
#65	0,89	0.0350	#39	2,53	0.0995	—	4,75	0.1870	—	7,25	0.2854	13/32	10,32	0.4062	25/32	19,84	0.7812
—	0,90	0.0354	#38	2,58	0.1015	3/16	4,76	0.1875	—	7,30	0.2874	—	10,40	0.4094	—	20,00	0.7874
#64	0,91	0.0360	—	2,60	0.1024	#12	4,80	0.1890	L	7,37	0.2900	Z	10,49	0.4130	51/64	20,24	0.7969
#63	0,94	0.0370	#37	2,64	0.1040	#11	4,85	0.1910	—	7,40	0.2913	—	10,50	0.4134	—	20,50	0.8071
—	0,95	0.0374	—	2,70	0.1063	—	4,90	0.1929	M	7,49	0.2950	—	10,60	0.4173	13/16	20,64	0.8125
#62	0,97	0.0380	#36	2,71	0.1065	#10	4,91	0.1935	—	7,50	0.2953	—	10,70	0.4213	—	21,00	0.8268
#61	0,99	0.0390	—	2,75	0.1083	#9	4,98	0.1960	19/64	7,54	0.2969	27/64	10,72	0.4219	53/64	21,03	0.8281
—	1,00	0.0394	7/64	2,78	0.1094	—	5,00	0.1969	—	7,60	0.2992	—	10,80	0.4252	27/32	21,43	0.8438
#60	1,02	0.0400	#35	2,79	0.1100	#8	5,05	0.1990	N	7,67	0.3020	—	10,90	0.4291	—	21,50	0.8465
#59	1,04	0.0410	—	2,80	0.1102	—	5,10	0.2008	—	7,70	0.3031	—	11,00	0.4331	55/64	21,84	0.8594
—	1,05	0.0413	#34	2,82	0.1110	#7	5,11	0.2010	—	7,75	0.3051	—	11,10	0.4370	—	22,00	0.8661
#58	1,07	0.0420	#33	2,87	0.1130	13/64	5,16	0.2031	—	7,80	0.3071	7/16	11,11	0.4375	7/8	22,23	0.8750
#57	1,09	0.0430	—	2,90	0.1142	#6	5,18	0.2040	—	7,90	0.3110	—	11,20	0.4409	—	22,50	0.8858
—	1,10	0.0433	#32	2,95	0.1160	—	5,20	0.2047	5/16	7,94	0.3125	—	11,30	0.4449	57/64	22,62	0.8906
—	1,15	0.0453	—	3,00	0.1181	#5	5,22	0.2055	—	8,00	0.3150	—	11,40	0.4488	—	23,00	0.9055
#56	1,18	0.0465	#31	3,05	0.1200	—	5,25	0.2067	O	8,03	0.3160	—	11,50	0.4528	29/32	23,02	0.9062
3/64	1,19	0.0469	—	3,10	0.1220	—	5,3	0.2087	—	8,10	0.3189	29/64	11,51	0.4531	59/64	23,42	0.9219
—	1,20	0.0472	1/8	3,18	0.1250	#4	5,31	0.2090	—	8,20	0.3228	—	11,60	0.4567	—	23,50	0.9252
—	1,25	0.0492	—	3,20	0.1260	—	5,40	0.2126	P	8,20	0.3230	—	11,70	0.4606	15/16	23,81	0.9375
—	1,30	0.0512	—	3,25	0.1280	#3	5,41	0.2130	—	8,25	0.3248	—	11,80	0.4646	—	24,00	0.9449
#55	1,32	0.0520	#30	3,26	0.1285	—	5,50	0.2165	—	8,30	0.3268	—	11,90	0.4685	61/64	24,21	0.9531
—	1,35	0.0531	—	3,30	0.1299	7/32	5,56	0.2188	21/64	8,33	0.3281	15/32	11,91	0.4688	—	24,50	0.9646
#54	1,40	0.0550	—	3,40	0.1339	—	5,60	0.2205	—	8,40	0.3307	—	12,00	0.4724	31/32	24,61	0.9688
#53	1,51	0.0595	#29	3,45	0.1360	#2	5,61	0.2210	Q	8,43	0.3320	31/64	12,30	0.4844	—	25,00	0.9843
—	1,55	0.0610	—	3,50	0.1378	—	5,70	0.2244	—	8,50	0.3346	—	12,50	0.4921	63/64	25,00	0.9844
1/16	1,59	0.0625	#28	3,57	0.1405	—	5,75	0.2264	—	8,60	0.3386	1/2	12,70	0.5000	1	25,40	1.0000

Hardness Conversion Chart

ROCKWELL HARDNESS (HRb)	ROCKWELL HARDNESS (HRC)	BRINELL HARDNESS (HB)	VICKERS HARDNESS (HV)	TENSILE STRENGTH (N/mm2)	PSI (1000lb/in2)
67	—	121	122	401	58
70	—	126	127	432	63
73	—	132	132	448	65
75	—	136	137	455	66
77	—	140	143	463	67
80	—	147	150	479	69
82	—	153	156	494	72
84	—	159	163	525	76
86	—	165	171	540	78
89	—	177	178	556	81
91	—	186	188	602	88
93	—	197	196	632	92
96	—	216	212	664	97
97	—	223	218	695	101
98	21	230	234	756	110
—	22	236	241	772	112
—	23	242	247	787	114
—	24	248	255	818	118
—	25	254	261	849	123
—	27	266	269	865	125
—	28	272	275	895	130
—	29	278	284	911	132
—	30	284	292	942	136
—	31	293	300	973	141
—	32	302	308	988	143
—	33	310	318	1019	147
—	34	319	327	1050	152
—	35	328	337	1096	159
—	37	345	349	1127	163
—	38	353	359	1158	168
—	39	362	370	1189	172
—	40	370	381	1235	179
—	41	381	395	1266	183
—	42	391	408	1312	190
—	44	411	422	1359	197
—	45	422	437	1420	206
—	46	433	452	1467	212
—	48	455	470	1513	219
—	50	479	497	1559	226
—	51	485	517	1621	235
—	52	497	532	1668	241
—	54	—	573	1729	250
—	56	—	609	1807	262
—	57	—	630	1884	273
—	59	—	670	1961	284
—	60	—	698	2039	295
—	61	—	725	—	—
—	62	—	740	—	—
—	63	—	780	—	—
—	64	—	812	—	—
—	65	—	847	—	—
—	66	—	885	—	—
—	67	—	926	—	—
—	68	—	971	—	—

Conversions from each scale are approximate

SOLUTIONS AROUND THE GLOBE

KYOCERA SGS Precision Tools is an ISO 9001:2015 Certified leader of round solid carbide cutting tool technology for the aerospace, metalworking, and automotive industries with manufacturing sites in the United States and United Kingdom. Our global network of Sales Representatives, Industrial Distributors, and Agents blanket the world selling into more than 60 countries.

LEADERS IN SOLID CARBIDE TOOL TECHNOLOGY

Brand names such as Z-Carb, S-Carb®, V-Carb, Hi-PerCarb®, Multi-Carb have become synonymous with high performance tooling in the machining and metalworking industry.

We're proud to have pioneered some of the world's most advanced cutting technology right here on our Northeast Ohio manufacturing campus. KSPT high performance end mills, drills and routers are increasing productivity and reducing cost around the world.

EXCEEDING CUSTOMER EXPECTATIONS

As the world's manufacturing needs change, so does KSPT. It's all about the science, starting with our lab inspected substrate materials to our tool designs and coatings. Our exceptional team of researchers, engineers, and machinists are dedicated to developing the absolute best and delivering the ultimate Value at the Spindle®.

- Incredible batch-to-batch consistency
- Metallurgical lab dedicated to testing and rigorous quality control
- ISO 9001:2015 Certified quality procedures
- Patented geometries that extend tool life, reduce chatter, cut cycle times, and improve part quality—even at extreme parameters
- Specialists in extreme and demanding product applications
- Comprehensive tooling services
- Experienced Field Sales Engineers who work to optimize a tool for your particular application
- Dedicated multi-lingual customer service representatives

SGS PRODUCTS ARE DISTRIBUTED BY:



www.kyocera-sgstool.com



UNITED STATES OF AMERICA

KYOCERA SGS Precision Tools
150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
orders: sales@kyocera-sgstool.com
web: www.kyocera-sgstool.com

VALUE AT THE SPINDLE®

UNITED KINGDOM

KYOCERA SGS Precision Tools Europe Ltd.
10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com
web: www.kyocera-sgstool.co.uk

JAPAN

KYOCERA Corporation
International Sales Dept.
6 Takeda Tobadono-cho,
Fushimi-ku, Kyoto 612-8501, Japan
phone: +81-75-604-3473
fax: +81-75-604-3472
web: global.kyocera.com/prdct/tool/index.html

COMMERCIAL OFFICES

EASTERN EUROPE

SINTCOM
Sintcom Tools
95 Arsenalski Blvd.
1421 Sofia, Bulgaria
phone: (359) 283-64421
fax: (359) 286-52493
e-mail: sintcom@sintcomtools.com

FRANCE

DOGA Usinage
8, Avenue Gutenberg CS 50510
78317 Maurepas Cedex - France
phone: +33 1 30 66 41 41
e-mail: usinage-outils@dogaf.fr

GERMANY

KADIGO Tool Systems GmbH
Walramster. 27
65510 Idstein, Germany
phone: +49 8376 9287238
fax: +49 8376 9287237
e-mail: info@kadigo-ts.com

INDIA

KYOCERA Asia Pacific India Pvt. Ltd
Plot No.51, Phase-I,
Udyog Vihar Gurgaon 122016,
Haryana, India
phone: +91-124-4025022
fax: +91-124-4025001

KOREA

KYOCERA Precision Tools Korea Co., Ltd.
2LT 69BL, Namdong Industrial Estate,
638-1, Kozan-Dong, Namdong Incheon,
Korea
phone: +82-32-821-8365
fax: +82-32-821-8369
web: www.kptk.co.kr/

POLAND

KYOCERA SGS Precision Tools
phone: +48 530 432 002
e-mail: SalesEU@kyocera-sgstool.com

SPAIN

KYOCERA SGS Precision Tools IBERICA
e-mail: SalesEU@kyocera-sgstool.com

THAILAND

KYOCERA Asia Pacific (Thailand) Co., Ltd.
1 Capital Work Place Building
7th Floor, Soi Chamchan, Sukhumvit
55 Road, Klongton Nua, Wattana,
Bangkok 10110, Thailand
phone: +66-2-030-6688
fax: +66-2-030-6600

SINGAPORE

KYOCERA Asia Pacific Pte. Ltd.
298 Tiong Bahru Road, #13-03/05 Central Plaza,
Singapore 168730
phone: +65-6373-6700
fax: +65-6271-0600
web: asia.kyocera.com/products/cuttingtools/index.html

CHINA

KYOCERA (China) Sales & Trading Corporation
Room 140, Building A3, Daning Central Square,
No. 700 Wanrong Road,
Zhabei District, Shanghai, 200072,
P.R. China
phone: +86-21-3660-7711
fax: +86-21-568-6200
web: www.kyocera.com.cn/prdct/cuttingtool

