

YU-VP20

BEST VALUE IN THE WORLD OF CUTTING TOOLS



FOR TOUGH STEEL, CAST IRON, STAINLESS STEEL AND EXOTIC MATERIALS:
NOTHING CUTS IT BETTER

V7 Plus^A

INDUSTRY-LEADING
HIGH-PERFORMANCE
CARBIDE END MILLS:

- 4 Flute & 6 Flute
- Square, Chamfer, Radius, Ball Nose
- Standard & Extended Length
- Plain & Weldon Flat Shanks
- Inch & Metric Sizes

NEW

6 Flute Chip Splitter
Size Expansion in 1/2" x 1/2" x 1-1/4" x 3"

**Over 1,500 Items
in Stock.**

When The Cut Calls For High-Performance Carbide, We Have More Options To Meet Your Needs.

NEW

6 Flute Chip Splitter

6 Flute for Trochoidal Milling

4 Flute

4 Flute Ball Nose



YG-1 is the undisputed world leader in carbide end mill offerings. And now, with our newly expanded V7 Plus A line, you have even more high-performance choices than ever before. Choose from a full array of 4 Flute and 6 Flute standard-stocked or custom-designed solutions. No matter what your machining challenge, we have a product for you.

How Our Innovative V7 Plus A Design Started a REVOLUTION in End Mill Technology

We didn't create the great cutting performance of our V7 Plus A end mills line by just doing what others have done. We engineered our line from the tip of flute to end of shank with performance-enhancing technology in mind. It's what makes the V7 Plus A line the top choice in end mill performance.

For excellent performance in stainless steels, mild steels, low/medium hardness materials and exotic materials to boot, the V7 Plus A's advanced geometry provides:

- ▶ Excellent material removal rates and surface finishes
- ▶ Unequal indexing for reduced chatter (harmonics) and improved stability
- ▶ Advanced coating for superior performance and tool life
- ▶ Improved flute geometry for impressive chip formation and evacuation
- ▶ Noticeably smooth operation in high-speed machining and peel-milling applications
- ▶ Superior slotting and profiling in most ferrous materials for more flexible use
- ▶ Excellent performance in high-speed trochoidal milling applications for improved accuracy, reduced vibration and better heat displacement
- ▶ Premium-grade carbide substrate for longer tool life

GUIDE TO ICONS

The tool is made of micrograin carbide



No. of Flutes



Cutting Conditions




Tolerance of Ball Radius



Helix Angle




Type of Shank




Weldon flat



Tool Ends



V7 Plus A 4 FLUTE END MILLS

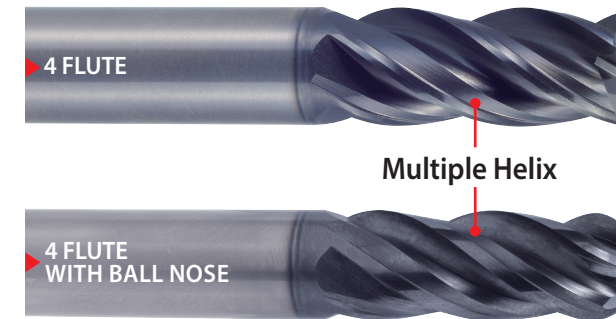

Setting a Higher Standard in 4 Flute Design

You asked for it. Now you can have state-of-the-art performance in an innovative 4 Flute design. First, you'll notice reduced vibration, optimal chip formation and excellent chip evacuation. And best of all, you'll get longer tool life in heavy cutting conditions. Available in ball nose, too.

NEW

V7 Plus A 6 FLUTE CHIP SPLITTER



Unequal Index

Exclusively Designed Unique Geometry applied to Reduce Vibration and also to achieve Excellent Surface Finish


Corner Geometries

YG-1's High Performance Corner Geometries Including Corner Radius, applied for Longer Tool Life with Higher Cutting Speed

Chip Splitters


Special Chip Splitter Design Shorter Chip Length at High Axial Machining, improving Chip Removal from both the Component and the Machine

V7 Plus A 6 FLUTE END MILLS

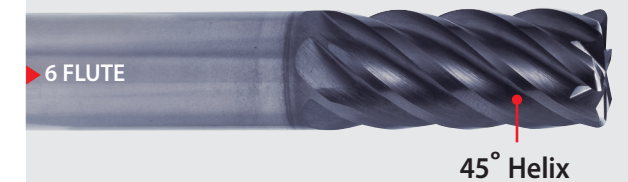

Better by Every Measure


From its higher stability for lower vibration to its improved performance in high-speed and trochoidal milling applications, the V7 Plus A 6 Flute solid carbide, 45-degree helix, was designed with longer tool life and higher productivity in mind.

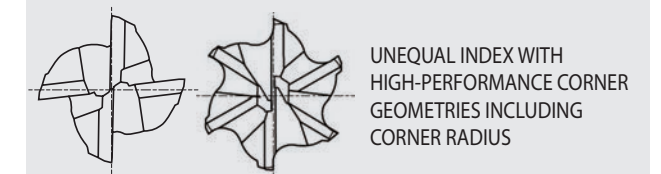

Trochoidal Milling

With our V7 Plus A 6 Flute's unique cutting geometry, we made it easier to apply a small radial width-of-cut along with higher cutting speeds and excellent feed per tooth. That's why we perform better in trochoidal milling application. Here's why:

- ▶ Smaller arc engagement provides lower cutting force and better heat displacement
- ▶ More flutes provide deeper depth of cut for more productivity and reduced wear
- ▶ Stability-inducing geometry reduces vibration for increased accuracy and longer tool life
- ▶ Aggressive feed-per-tooth provides excellent chip evacuation

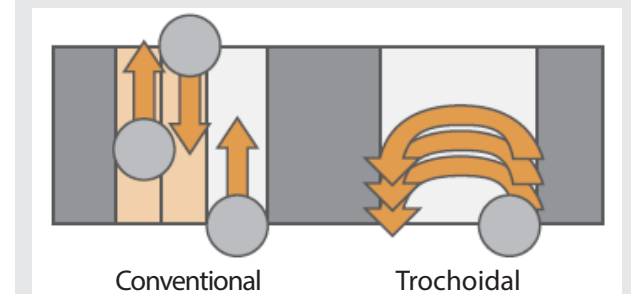

SERIES	GMF52 GMF56	GMF54 GMF58	GMG55	GMF53 GMF57	GMF55 GMF59	GMG56
FLUTE(Shank)	4 (Plain Shank)			4 (Flat Shank)		
HELIX ANGLE	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)
CUTTING EDGE SHAPE	CHAMFER	CORNER RADIUS	BALL NOSE	CHAMFER	CORNER RADIUS	BALL NOSE
SIZE MIN	3.0	3.0	3.0	3.0	3.0	3.0
SIZE MAX	25.0	25.0	25.0	25.0	25.0	25.0
PAGE	16			17		

SOLID CARBIDE V7 PLUS A END MILLS


High performance carbide end mills for Steels, Cast Iron and Stainless Steels

Please visit global.yg1.com/mat for material search
 ◎ : Excellent ○ : Good
 Recommended cutting conditions : P 36



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	GMF52	GMF54	GMG55	GMF53	GMF55	GMG56	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎	◎	◎	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎	◎	◎	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎	◎	◎	
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎	◎	◎	
	7		Quenched & Tempered	275	29	◎	◎	◎	◎	◎	◎	
	8		Quenched & Tempered	300	32	◎	◎	◎	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	◎	◎	◎	
	10	High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎	◎	◎	
	11		Quenched & Tempered	325	35	◎	◎	◎	◎	◎	◎	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	◎	◎	◎	◎	◎	
	13		Martensitic Quenched & Tempered	240	23	◎	◎	◎	◎	◎	◎	
	14		Austenitic	180	10	◎	◎	◎	◎	◎	◎	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)	260	26	◎	◎	◎	◎	◎	◎	
	17	Nodular cast iron	Ferritic	160	3	◎	◎	◎	◎	◎	◎	
	18		Pearlitic	250	25	◎	◎	◎	◎	◎	◎	
	19		Ferritic	130		◎	◎	◎	◎	◎	◎	
	20	Malleable cast iron	Pearlitic	230	21	◎	◎	◎	◎	◎	◎	
N	21	Aluminum-wrought alloy	Not Curable	60								
	22		Curable Hardened	100								
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75								
	24		≤ 12% Si, Curable Hardened	90								
	25		> 12% Si, Not Curable	130								
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110								
	27		Cu,Zn, CuSnZn (Brass)	90								
	28		CuSn, lead free copper and electrolytic copper	100								
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic									
	30		Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	○	○	○	○	○	
	32		Cured	280	30	○	○	○	○	○	○	
	33		Annealed	250	25	○	○	○	○	○	○	
	34		Ni or Co Based Cured	350	38	○	○	○	○	○	○	
	35	Cast	320	34	○	○	○	○	○	○		
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	○	○	○	
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	○	○	○	○	○	
H	38	Hardened steel	Hardened	550	55							
	39		Hardened	630	60							
	40	Chilled Cast Iron	Cast	400	42							
	41		Hardened	550	55							

GMF60	GMF62	GMF61	GMF63	GMG12 GMG14	GMG16 GMG18	GMG13 GMG15	GMG17 GMG19	GMH56	GMH58	GMH57	GMH59
4 (Plain Shank)		4 (Flat Shank)		6 (Plain Shank)		6 (Flat Shank)		6 (Plain Shank)		6 (Flat Shank)	
35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	45°	45°	45°	45°	45°	45°	45°	45°
CHAMFER	CORNER RADIUS	CHAMFER	CORNER RADIUS	SQUARE	CORNER RADIUS	SQUARE	CORNER RADIUS	SQUARE	CORNER RADIUS	SQUARE	CORNER RADIUS
3.0	3.0	3.0	3.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
20.0	20.0	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
18	18	19	19	26		27		26		27	
EXTENDED LENGTH		EXTENDED LENGTH		STANDARD LENGTH		STANDARD LENGTH		STANDARD LENGTH		STANDARD LENGTH	
Y-Coating		Y-Coating		Y-Coating		Y-Coating		Y-Coating		Y-Coating	

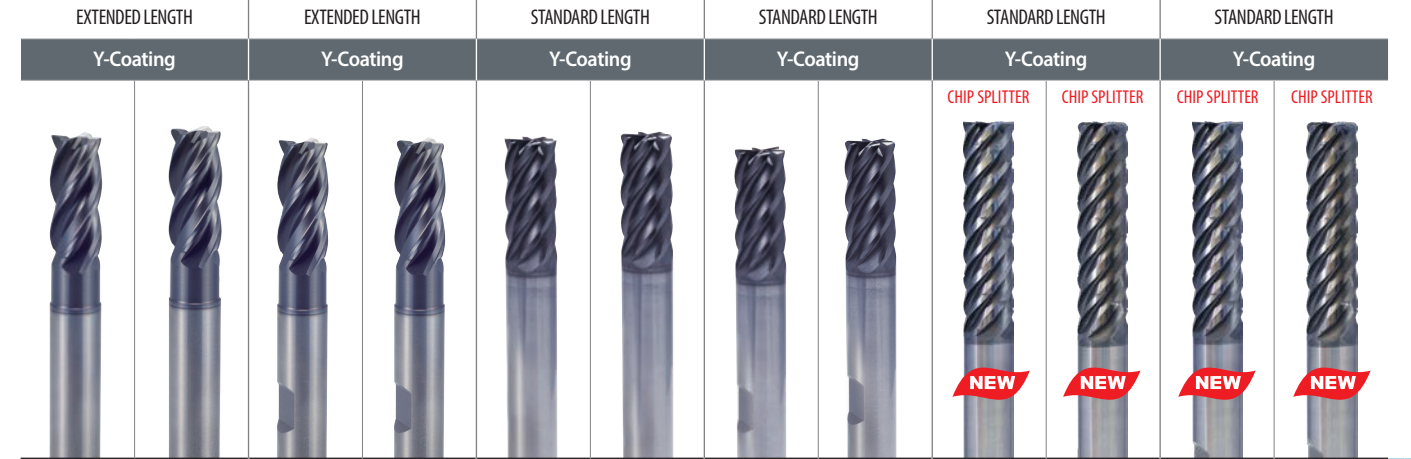

◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	1
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	2
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	3
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	4
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	5
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	6
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	7
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	9
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	11
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	12
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	13
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	14
◎	◎	◎	◎	○	○	○	○	○	○	○	○	15
◎	◎	◎	◎	○	○	○	○	○	○	○	○	16
◎	◎	◎	◎	○	○	○	○	○	○	○	○	17
◎	◎	◎	◎	○	○	○	○	○	○	○	○	18
◎	◎	◎	◎	○	○	○	○	○	○	○	○	19
◎	◎	◎	◎	○	○	○	○	○	○	○	○	20
												21
												22
												23
												24
												25
												26
												27
												28
												29
												30
○	○	○	○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	○	○	○	34
○	○	○	○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	○	○	○	37
												38
												39
												40
												41

4 FLUTE




Innovative cutting performance that's not just a chip off the old block.

Our highly engineered flute geometry with multiple-helix design eliminates vibration, and our premium substrate and coating ensures longer tool life. Did we mention better cutting performance, too?

HIGH-PERFORMANCE SOLID CARBIDE 4 FLUTE END MILLS

4 Flute vs Competitor

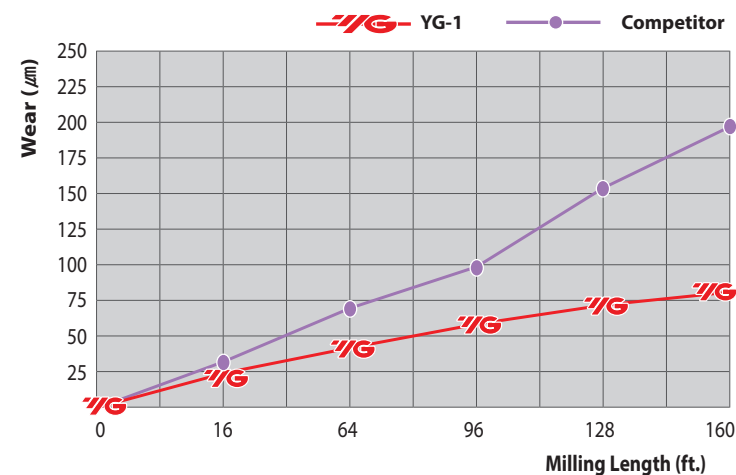


CASE STUDY

	V7 Plus A	Competitor
Wear (µm)	83.518	203.381
Milling Length (ft.)	160	160
Size (mm)	Ø10 x Ø10 x 22 x 72	
Work Material	- JIS : S45C(HRC30) - WR : 1.0503	- DIN : C45 - AISI: 1405
Cutting Speed	755 ft./min.	
RPM	7,324 rev./min.	
Feed	57.64 inch/min.	
Feed per tooth	.002 inch/tooth	
Milling Method	Down & Side Cutting	
Milling Depth	Axial : .394 inch, Radial : .118 inch	
Coolant	Wet Cut	
Overhang	1.339 inch	
Machine	Machining Center	

Y-Coated SOLID CARBIDE END MILLS 4 FLUTE STANDARD LENGTH (PLAIN SHANK)

Square	UGMF68	Chamfer	UGMF76
Corner Radius	UGMF70	Ball Nose	UGMG53

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

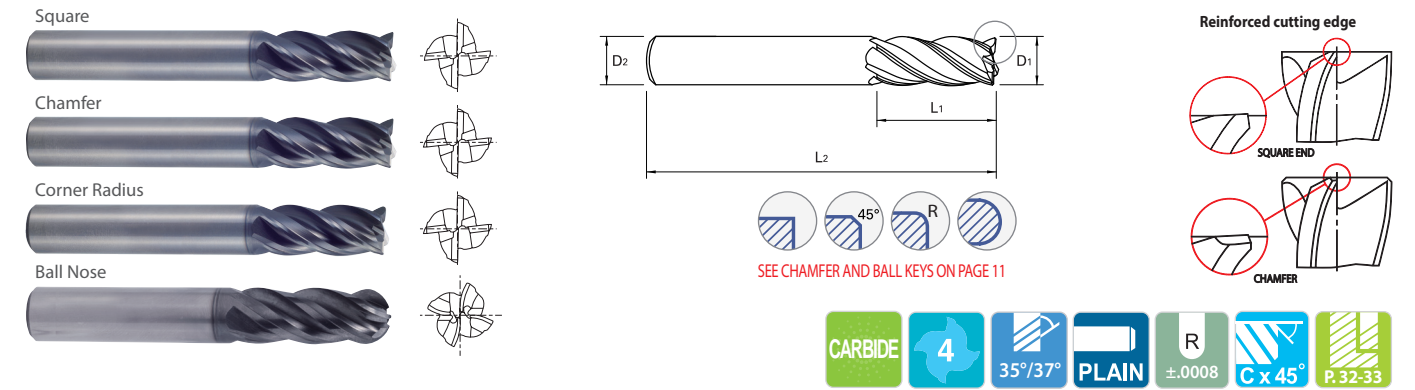

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square End EDP No.	Chamfer EDP No.	Corner Radius								Ball Nose EDP No.
						.010 EDP No.	.015 EDP No.	.030 EDP No.	.060 EDP No.	.090 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.	
1/8	1/8	1/8	1-1/2	UGMF68008		UGMF70008		UGMF70955						UGMG53901
		3/8	1-1/2	UGMF68901		UGMF70901		UGMF70902						UGMG53008
		1/2	2-1/2	UGMF68S915		UGMF70S956		UGMF70S957						UGMG53S902
5/32	3/16	3/16	2	UGMF68010		UGMF70010								UGMG53903
		7/16	2	UGMF68902		UGMF70958								UGMG53010
		3/16	2	UGMF68012		UGMF70012								UGMG53904
3/16	3/16	5/16	2	UGMF68916		UGMF70959		UGMF70960						UGMG53905
		7/16	2	UGMF68903		UGMF70903		UGMF70904						UGMG53012
		5/8	2-1/2	UGMF68S917		UGMF70S961		UGMF70S962						UGMG53S906
7/32	1/4	1/4	2	UGMF68014		UGMF70014								UGMG53907
		7/16	2-1/2	UGMF68904		UGMF70963								UGMG53014
1/4	1/4	3/8	2	UGMF68016	UGMF76016	UGMF70016		UGMF70905	UGMF70906					UGMG53908
		1/2	2-1/2	UGMF68918			UGMF70964	UGMF70965	UGMF70966					UGMG53016
		3/4	2-1/2	UGMF68905	UGMF76902	UGMF70907	UGMF70908	UGMF70909	UGMF70967					UGMG53909
9/32	5/16	1	3	UGMF68S919			UGMF70S968	UGMF70S969	UGMF70S970					UGMG53S910
		5/8	2-1/2	UGMF68018			UGMF70018	UGMF70971	UGMF70972					UGMG53018
		1	3	UGMF68S920			UGMF70S973	UGMF70S974						UGMG53S911
5/16	5/16	7/16	2	UGMF68020				UGMF70020						UGMG53912
		13/16	2-1/2	UGMF68906	UGMF76020	UGMF70910		UGMF70911	UGMF70912					UGMG53020
		1-1/4	3	UGMF68S921			UGMF70S975	UGMF70S976	UGMF70S977					UGMG53S913
11/32	3/8	1/2	2-1/2	UGMF68022				UGMF70022						UGMG53914
		13/16	2-1/2	UGMF68922				UGMF70978						UGMG53022

▶ Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%

NEXT PAGE ▶

ISO Material Description	P										M				K								
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			


ISO Material Description	N						S						H								
	Aluminum-wrought alloy			Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	○	○	○

NEW SIZES

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE STANDARD LENGTH (PLAIN SHANK)

Square **UGMF68** Chamfer **UGMF76** SERIES
Corner Radius **UGMF70** Ball Nose **UGMG53**

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- Advanced coating for superior performance and tool life

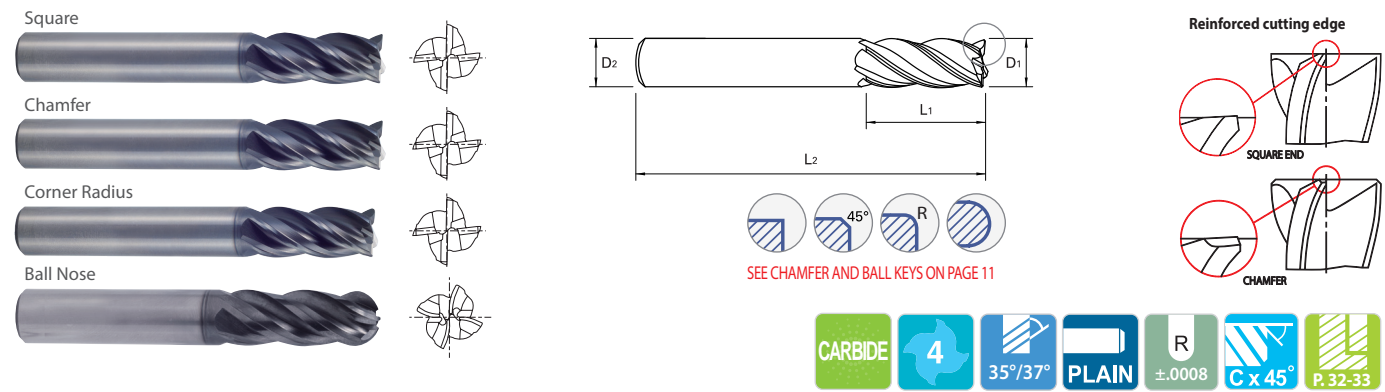

Unit : INCH * (NEW SIZES)

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square End EDP No.	Chamfer EDP No.	Corner Radius							Ball Nose EDP No.	
						.010	.015	.030	.060	.090	.125	.190		.250
3/8	3/8	1/2	2-1/2	UGME68024	UGME76903	UGME70024		UGME70913	UGME70914	UGME70979				UGMG53915
		7/8	2-1/2	UGME68907	UGME76024	UGME70915		UGME70916	UGME70917	UGME70980				UGMG53024
		1	3	UGME68923		UGME70981		UGME70982	UGME70983	UGME70984				UGMG53916
13/32	7/16	1-1/4	3	UGME685924		UGME705985		UGME705986	UGME705987	UGME705988				UGMG53917
		1/2	2-3/4	UGME68026				UGME70026						UGMG53026
7/16	7/16	5/8	2-1/2	UGME68028			UGME70028	UGME70918	UGME70990	UGME70991				UGMG53919
		7/8	2-3/4	UGME68926	UGME76028		UGME70992	UGME70993	UGME70994	UGME70995				UGMG53920
15/32	1/2	1	2-3/4	UGME68908		UGME70919		UGME70920	UGME70921					UGMG53028
		5/8	2-1/2	UGME68030				UGME70030						UGMG53030
1/2	1/2	1	3	UGME68927				UGME70996						UGMG53921
		1-1/4	3-1/2	UGME68928				UGME70997						UGMG53922
1/2	1/2	5/8	2-1/2	UGME68032	UGME76032	UGME70032	UGME70922	UGME70923	UGME70924	UGME70998	UGME70999			UGMG53923
		1	3	UGME68909	UGME76904	UGME70925	UGME70801	UGME70926	UGME70927	UGME70802	UGME70928			UGMG53032
1/2	1/2	1 1/4	3	*UGME68941	*UGME76913	*UGME70899	*UGME70701	*UGME70702	*UGME70703	*UGME70704	*UGME70705			*UGMG53941
		1-1/4	3-1/2	UGME68910	UGME76901	UGME70929	UGME70930	UGME70931	UGME70932	UGME70803	UGME70933			UGMG53924
1/2	1/2	1-5/8	4	UGME685929	UGME765905		UGME705804	UGME705805	UGME705806	UGME705807	UGME705808			UGMG53925
		2	4	UGME685939			UGME705889	UGME705890	UGME705891	UGME705892	UGME705893			UGMG53939
1/2	1/2	2-1/2	4-1/2	UGME685940	UGME765906		UGME705894	UGME705895	UGME705896	UGME705897	UGME705898			UGMG53940

► Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%

Mill Dia. Tolerance (inch)	Shank Dia. Tolerance
0 ~ -.0012	h5 (≥ Ø1/2" : h6)

NEXT PAGE ►

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc						15	30	25	38	34								55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE STANDARD LENGTH (PLAIN SHANK)

Square **UGMF68** Chamfer **UGMF76** SERIES
Corner Radius **UGMF70** Ball Nose **UGMG53**

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- Advanced coating for superior performance and tool life

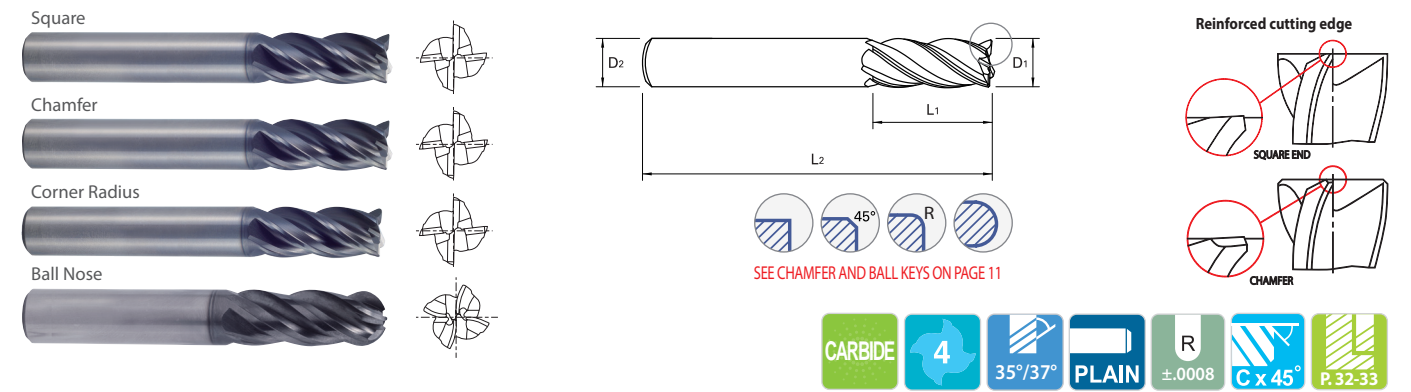

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square End EDP No.	Chamfer EDP No.	Corner Radius							Ball Nose EDP No.	
						.010	.015	.030	.060	.090	.125	.190		.250
5/8	5/8	3/4	3	UGME68040		UGME70040	UGME70809	UGME70934	UGME70935	UGME70810	UGME70811			UGMG53926
		1-1/4	3-1/2	UGME68911	UGME76040	UGME70936	UGME70937	UGME70938	UGME70939	UGME70812	UGME70940			UGMG53040
		1-5/8	4	UGME68930	UGME76907		UGME70813	UGME70814	UGME70815	UGME70816	UGME70817			UGMG53927
13/32	7/16	3-1/4	6	UGME685932			UGME705818	UGME705819	UGME705820	UGME705821	UGME705822			UGMG53928
		1/2	2-3/4	UGME68048	UGME76908		UGME70828	UGME70048	UGME70941	UGME70829	UGME70830	UGME70831	UGME70832	UGMG53930
7/16	7/16	1-1/2	4	UGME68912	UGME76048		UGME70942	UGME70943	UGME70944	UGME70833	UGME70945	UGME70834	UGME70835	UGMG53048
		1-7/8	4	UGME68933			UGME70836	UGME70837	UGME70838	UGME70839	UGME70840	UGME70841	UGME70842	UGMG53931
15/32	1/2	2-1/4	5	UGME68934	UGME76909		UGME70843	UGME70844	UGME70845	UGME70846	UGME70847	UGME70848	UGME70849	UGMG53932
		3-1/4	6	UGME685935			UGME705850	UGME705851	UGME705852	UGME705853	UGME705854	UGME705855	UGME705856	UGMG53933
1/2	1/2	1	4	UGME68064	UGME76910		UGME70064	UGME70946	UGME70947	UGME70857	UGME70858	UGME70859	UGME70860	UGMG53934
		1-1/2	4	UGME68913	UGME76064		UGME70948	UGME70949	UGME70950	UGME70861	UGME70951	UGME70862	UGME70863	UGMG53064
1/2	1/2	2	5	UGME68914	UGME76911		UGME70952	UGME70953	UGME70954	UGME70864	UGME70865	UGME70866	UGME70867	UGMG53935
		2-5/8	5	UGME68916	UGME76912		UGME70872	UGME70869	UGME70870	UGME70871	UGME70872	UGME70873	UGME70874	UGMG53936
1/2	1/2	3	6	UGME68937			UGME70875	UGME70876	UGME70877	UGME70878	UGME70879	UGME70880	UGME70881	UGMG53937
		4-1/4	7	UGME685938			UGME705882	UGME705883	UGME705884	UGME705885	UGME705886	UGME705887	UGME705888	UGMG53938

► Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%

Mill Dia. Tolerance (inch)	Shank Dia. Tolerance
0 ~ -.0012	h5 (≥ Ø1/2" : h6)

CHAMFER KEY		BALL NOSE KEY			
Mill Diameter	Chamfer Size	Mill Diameter	Radius of Ball	Mill Diameter	Radius of Ball
1/4	.007	1/8	1/16	11/32	11/64
5/16	.007	5/32	5/64	3/8	3/16
3/8	.011	3/16	3/32	7/16	7/32
7/16	.013	7/32	7/64	1/2	1/4
1/2	.013	1/4	1/8	5/8	5/16
5/8	.015	9/32	9/64	3/4	3/8
3/4	.019	5/16	5/32	1	1/2
1	.019				

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc						15	30	25	38	34								55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

NEW SIZES

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE STANDARD LENGTH (FLAT SHANK)

Square **UGMF69** Chamfer **UGMF77**
Corner Radius **UGMF71** Ball Nose **UGMG54**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

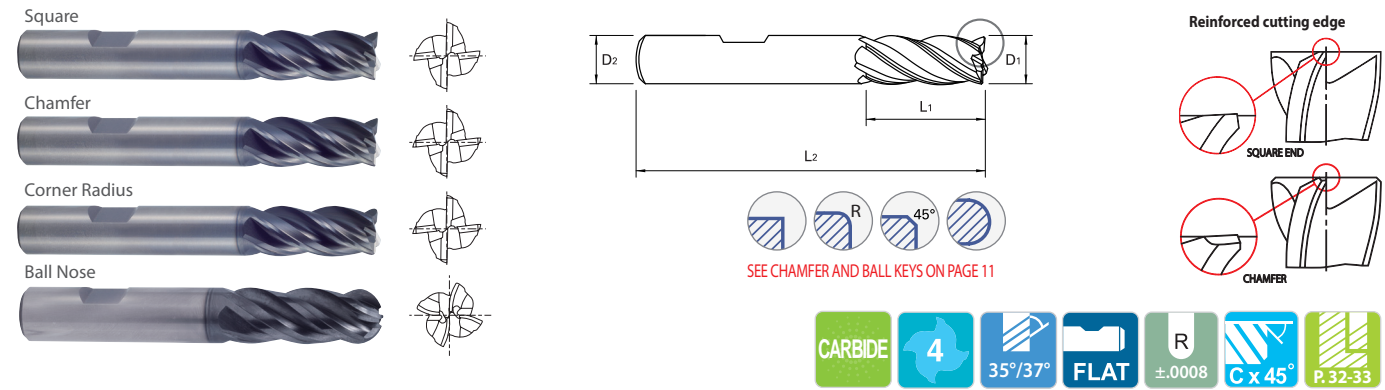

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square End EDP No.	Chamfer EDP No.	Corner Radius						Ball Nose EDP No.	
						.010	.015	.030	.060	.090	.125		
						EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.		
11/32	3/8	1/2	2-1/2	UGMF69022									
		13/16	2-1/2										UGMG54022
3/8	3/8	1/2	2-1/2	UGMF69024	UGMF77902	UGMF71024		UGMF71913	UGMF71914				
		7/8	2-1/2	UGMF69907	UGMF77024	UGMF71915		UGMF71916	UGMF71917				UGMG54024
7/16	7/16	5/8	2-1/2	UGMF69028			UGMF71028	UGMF71918					
		1	2-3/4	UGMF69908		UGMF71919		UGMF71920	UGMF71921				UGMG54028
1/2	1/2	5/8	2-1/2	UGMF69032	UGMF77032	UGMF71032	UGMF71922	UGMF71923	UGMF71924				
		1	3	UGMF69909	UGMF77903	UGMF71925		UGMF71926	UGMF70927		UGMF71928	UGMG54032	
		1 1/4	3	*UGMF69917	*UGMF77908	*UGMF71985	*UGMF71986	*UGMF71987	*UGMF71988	*UGMF71989	*UGMF71990	*UGMG54903	
		1-1/4	3-1/2	UGMF69910	UGMF77901	UGMF71929	UGMF71930	UGMF71931	UGMF71932		UGMF71933		
		2	4	UGMF69915			UGMF71935	UGMF71936	UGMF71937	UGMF71938	UGMF71939		
		2-1/2	4-1/2	UGMF69916			UGMF71940	UGMF71941	UGMF71942	UGMF71943	UGMF71944	UGMF71945	UGMG54048
5/8	5/8	3/4	3	UGMF69040	UGMF77904	UGMF71040		UGMF71934	UGMF71935				
		1-1/4	3-1/2	UGMF69911	UGMF77040	UGMF71936	UGMF71937	UGMF71938	UGMF71939		UGMF71940	UGMG54040	
3/4	3/4	3/4	3	UGMF69048	UGMF77905			UGMF71048	UGMF71941				
		1-1/2	4	UGMF69912	UGMF77048		UGMF71942	UGMF71943	UGMF71944		UGMF71945	UGMG54048	
1	1	1	4	UGMF69064	UGMF77906		UGMF71064	UGMF71946	UGMF71947				
		1-1/2	4	UGMF69913	UGMF77064		UGMF71948	UGMF71949	UGMF71950		UGMF71951	UGMG54064	
		2	5	UGMF69914	UGMF77907		UGMF71952	UGMF71953	UGMF71954				

▶ Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%


Mill Dia. Tolerance (inch)	Shank Dia. Tolerance
0 ~ -.0012	h5 (≥ Ø1/2" : h6)

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE EXTENDED LENGTH (PLAIN SHANK)

Square **UGMF72**
Corner Radius **UGMF74**
Ball Nose **UGMH10**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

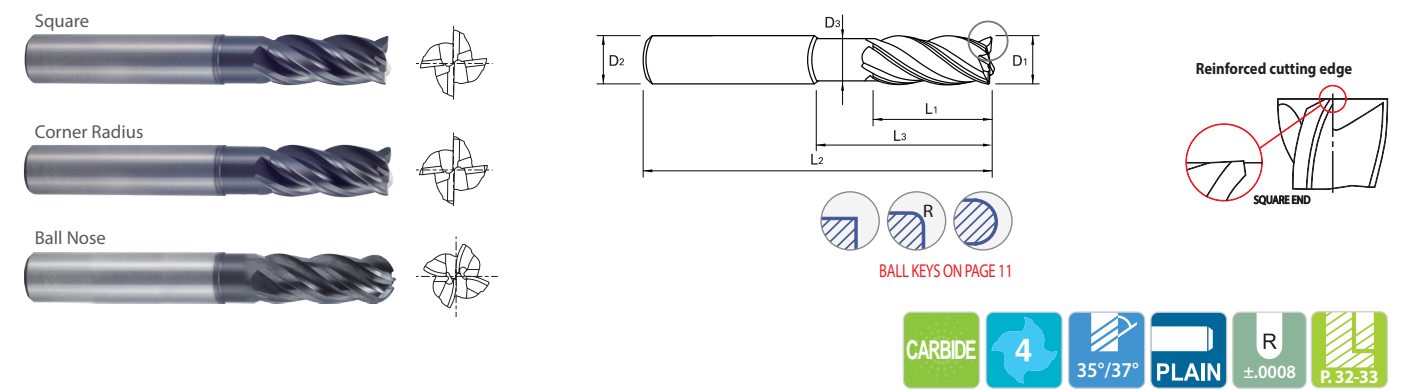

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Square End EDP No.	Corner Radius								Ball Nose Mill EDP No.	
							.010	.015	.030	.060	.090	.125	.190	.250		
							EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.		
1/8	1/8	5/32	3/8	3	.113	UGMF72008	UGMF74008			UGMF74913						UGMH10008
		5/32	1/2	3	.113	UGMF72913	UGMF74914			UGMF74915						UGMH10901
3/16	3/16	7/32	1/2	3	.176	UGMF72914	UGMF74916			UGMF74917						UGMH10902
		7/32	3/4	3	.176	UGMF72012	UGMF74012			UGMF74918						UGMH10012
1/4	1/4	7/32	1	3	.176	UGMF72915	UGMF74919			UGMF74920						UGMH10903
		7/32	3/4	3	.176	UGMF72916	UGMF74921			UGMF74922						UGMH10904
3/8	3/8	3/8	3/4	4	.230	UGMF72016		UGMF74016	UGMF74923	UGMF74924						UGMH10016
		3/8	1-1/8	4	.230	UGMF72901		UGMF74901	UGMF74925	UGMF74926						UGMH10905
1/2	1/2	3/8	2-1/8	4	.230	UGMF72902		UGMF74902	UGMF74927	UGMF74928						UGMH10906
		1/2	1-1/8	4	.344	UGMF72024		UGMF74929	UGMF74024	UGMF74930	UGMF74931					UGMH10024
3/8	3/8	1/2	2-1/8	4	.344	UGMF72903		UGMF74932	UGMF74903	UGMF74933	UGMF74934					UGMH10907
		1/2	3-1/8	5	.344	UGMF72922		UGMF74815	UGMF74816	UGMF74817	UGMF74818					UGMH10922
1/2	1/2	1/2	3-1/8	6	.344	UGMF72904		UGMF74935	UGMF74904	UGMF74936	UGMF74937					UGMH10908
		1/2	4-1/8	6	.344	UGMF72917		UGMF74938	UGMF74939	UGMF74940	UGMF74941					UGMH10909
1/2	1/2	5/8	1-1/2	4	.461	UGMF72032		UGMF74942	UGMF74032	UGMF74943	UGMF74944	UGMF74945				UGMH10032
		5/8	2-1/4	4	.461	UGMF72905		UGMF74946	UGMF74905	UGMF74947	UGMF74948	UGMF74949				UGMH10910
		5/8	3-3/8	5	.461	UGMF72923		UGMF74819	UGMF74820	UGMF74821	UGMF74822	UGMF74823				UGMH10923
		5/8	3-3/8	6	.461	UGMF72906		UGMF74950	UGMF74906	UGMF74951	UGMF74952	UGMF74953				UGMH10911
		5/8	4-1/8	6	.461	UGMF72918		UGMF74954	UGMF74955	UGMF74956	UGMF74957	UGMF74958				UGMH10912

▶ Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%


Mill Dia. Tolerance (inch)	Shank Dia. Tolerance
0 ~ -.0012	h5 (≥ Ø1/2" : h6)

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE EXTENDED LENGTH (PLAIN SHANK)

SERIES
Square **UGMF72**
Corner Radius **UGMF74**
Ball Nose **UGMH10**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

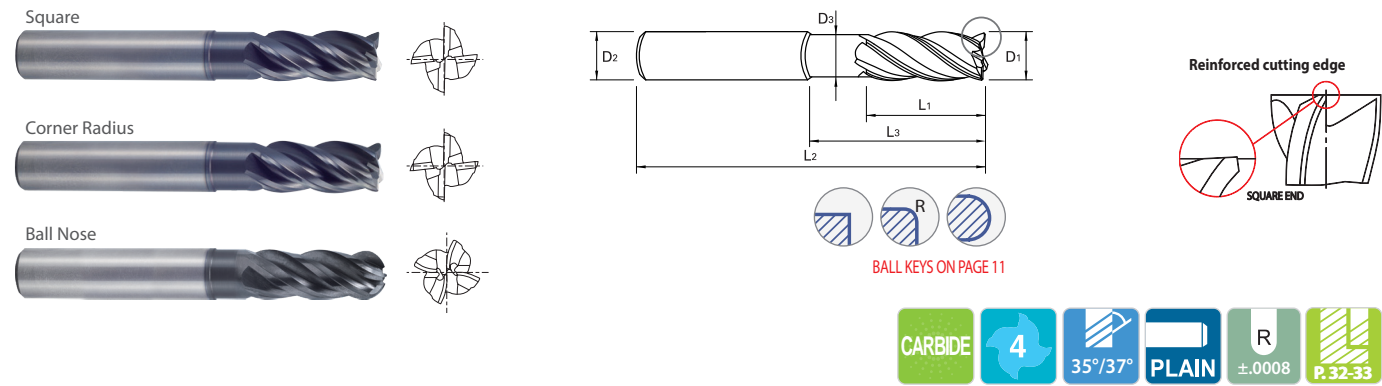

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Square End EDP No.	Corner Radius								Ball Nose Mill EDP No.
							.010 EDP No.	.015 EDP No.	.030 EDP No.	.060 EDP No.	.090 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.	
5/8	5/8	3/4	1-5/8	4	.586	UGMF72040			UGMF74040	UGMF74959	UGMF74960	UGMF74961			UGMH10040
		3/4	2-3/8	5	.586	UGMF72924			UGMF74824	UGMF74825	UGMF74826	UGMF74827			UGMH10924
		3/4	3-3/8	5	.586	UGMF72925			UGMF74828	UGMF74829	UGMF74830	UGMF74831			UGMH10925
		3/4	2-3/8	6	.586	UGMF72907			UGMF74907	UGMF74963	UGMF74964	UGMF74965			UGMH10913
		3/4	3-3/8	6	.586	UGMF72908			UGMF74908	UGMF74965	UGMF74966	UGMF74967			UGMH10914
		3/4	4-1/8	6	.586	UGMF72919			UGMF74968	UGMF74969	UGMF74970	UGMF74971			UGMH10915
3/4	3/4	1	2	4	.711	UGMF72048			UGMF74048	UGMF74972	UGMF74973	UGMF74974	UGMF74975	UGMF74976	UGMH10048
		1	3	5	.711	UGMF72926			UGMF74832	UGMF74833	UGMF74834	UGMF74835	UGMF74836	UGMF74837	UGMH10926
		1	2-1/2	6	.711	UGMF72920			UGMF74977	UGMF74978	UGMF74979	UGMF74980	UGMF74981	UGMF74982	UGMH10916
		1	3	6	.711	UGMF72909			UGMF74909	UGMF74983	UGMF74984	UGMF74985	UGMF74986	UGMF74987	UGMH10917
		1	4	6	.711	UGMF72910			UGMF74910	UGMF74988	UGMF74989	UGMF74990	UGMF74991	UGMF74992	UGMH10918
1	1	1-1/8	2	4	.961	UGMF72064			UGMF74064	UGMF74993	UGMF74994	UGMF74995	UGMF74996	UGMF74997	UGMH10064
		1-1/8	2-5/8	5	.961	UGMF72927			UGMF74838	UGMF74839	UGMF74840	UGMF74841	UGMF74842	UGMF74843	UGMH10927
		1-1/8	3	5	.961	UGMF72928			UGMF74844	UGMF74845	UGMF74846	UGMF74847	UGMF74848	UGMF74849	UGMH10928
		1-1/8	2-5/8	6	.961	UGMF72921			UGMF74988	UGMF74999	UGMF74801	UGMF74802	UGMF74803	UGMF74804	UGMH10919
		1-1/8	3	6	.961	UGMF72911			UGMF74911	UGMF74805	UGMF74806	UGMF74807	UGMF74808	UGMF74809	UGMH10920
		1-1/8	4	6	.961	UGMF72912			UGMF74912	UGMF74810	UGMF74811	UGMF74812	UGMF74813	UGMF74814	UGMH10921

▶ Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%

Mill Dia. Tolerance (inch)	Shank Dia. Tolerance
0 ~ -.0012	h5 (≥ Ø1/2" : h6)

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE EXTENDED LENGTH (FLAT SHANK)

SERIES
Square **UGMF73**
Corner Radius **UGMF75**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

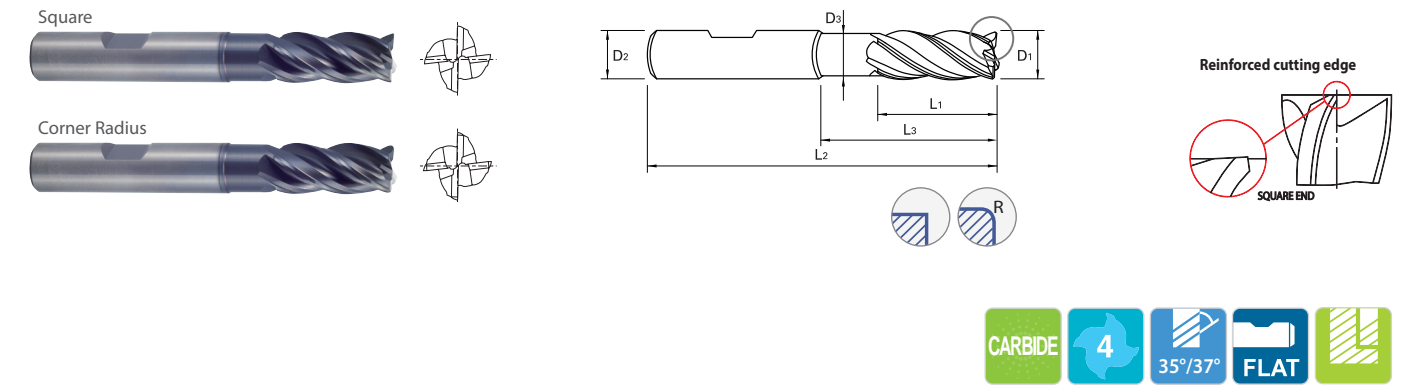

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Square End EDP No.	Corner Radius	
							.030 EDP No.	.030 EDP No.
3/8	3/8	1/2	1-1/8	4	.344	UGMF73024		UGMF75024
		1/2	2-1/8	4	.344	UGMF73903		UGMF75903
		1/2	3-1/8	5	.344	UGMF73913		UGMF75913
		1/2	3-1/8	6	.344	UGMF73904		UGMF75904
1/2	1/2	5/8	1-1/2	4	.461	UGMF73032		UGMF75032
		5/8	2-1/4	4	.461	UGMF73905		UGMF75905
		5/8	3-3/8	5	.461	UGMF73914		UGMF75914
5/8	5/8	3/4	1-5/8	4	.586	UGMF73040		UGMF75040
		3/4	2-3/8	5	.586	UGMF73915		UGMF75915
		3/4	3-3/8	5	.586	UGMF73916		UGMF75916
3/4	3/4	3/4	2-3/8	6	.586	UGMF73907		UGMF75907
		3/4	3-3/8	6	.586	UGMF73908		UGMF75908
		1	2	4	.711	UGMF73048		UGMF75048
1	1	1	3	5	.711	UGMF73917		UGMF75917
		1	3	6	.711	UGMF73909		UGMF75909
		1	4	6	.711	UGMF73910		UGMF75910
		1-1/8	2	4	.961	UGMF73064		UGMF75064
1	1	1-1/8	2-5/8	5	.961	UGMF73918		UGMF75918
		1-1/8	3	5	.961	UGMF73919		UGMF75919
		1-1/8	3	6	.961	UGMF73911		UGMF75911
		1-1/8	4	6	.961	UGMF73912		UGMF75912

▶ Length of cut in excess of 3xD on 37° single-helix requires feed reduction of approximately 50%

Mill Dia. Tolerance (inch)	Shank Dia. Tolerance
0 ~ -.0012	h5 (≥ Ø1/2" : h6)

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE EXTENDED LENGTH (PLAIN SHANK)

SERIES
Chamfer **GMF60**
Corner Radius **GMF62**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

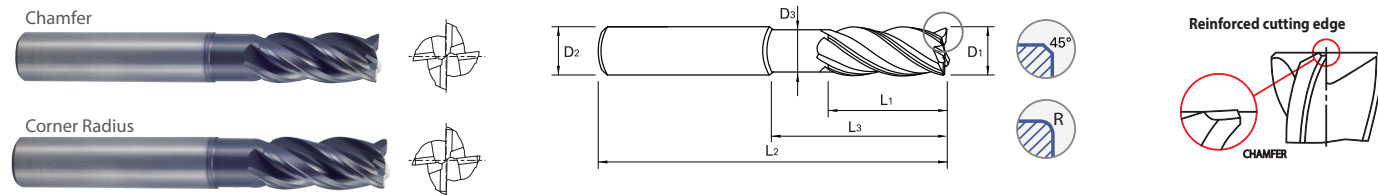

Unit: METRIC

Metric	Inch	OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Chamfer EDP No.	Corner Radius					
									0.30 EDP No.	0.50 EDP No.	1.00 EDP No.	2.00 EDP No.	3.00 EDP No.	
3.0	.1181	6	7	12	54	2.7	GMF60030	GMF62030	GMF62901					
		6	7	17	57	2.7	GMF60901	GMF62902	GMF62903					
		6	8	14	57	2.7	GMF60902							
4.0	.1575	6	8	15	57	3.7	GMF60040	GMF62040	GMF62904					
		6	8	22	63	3.7	GMF60903	GMF62905	GMF62906					
		6	11	16	57	3.7	GMF60904							
5.0	.1969	6	10	17	57	4.7	GMF60050	GMF62050	GMF62907					
		6	10	27	67	4.7	GMF60905	GMF62908	GMF62909					
		6	13	18	57	4.7	GMF60906							
6.0	.2362	6	10	15	57	5.5	GMF60060	GMF62060	GMF62910	GMF62911				
		6	10	20	62	5.5	GMF60907	GMF62912	GMF62913	GMF62914				
		6	10	32	74	5.5	GMF60908	GMF62915	GMF62916	GMF62917				
8.0	.3150	8	12	20	63	7.5	GMF60080		GMF62080	GMF62918				
		8	12	30	73	7.5	GMF60910		GMF62919	GMF62920				
		8	12	46	90	7.5	GMF60911		GMF62921	GMF62922				
10.0	.3937	10	14	25	72	9.2	GMF60100		GMF62100	GMF62923				
		10	14	35	82	9.2	GMF60913		GMF62924	GMF62925				
		10	14	55	102	9.2	GMF60914		GMF62926	GMF62927				
12.0	.4724	12	16	30	83	11.0	GMF60120		GMF62120	GMF62928	GMF62929			
		12	16	40	93	11.0	GMF60916		GMF62930	GMF62931	GMF62932			
		12	16	64	117	11.0	GMF60917		GMF62933	GMF62934	GMF62935			
16.0	.6299	16	22	38	92	15.0	GMF60160			GMF62160	GMF62936	GMF62937		
		16	22	55	109	15.0	GMF60919			GMF62938	GMF62939	GMF62940		
		16	22	87	141	15.0	GMF60920			GMF62941	GMF62942	GMF62943		
20.0	.7874	20	26	50	104	19.0	GMF60200			GMF62200	GMF62944	GMF62945		
		20	26	70	124	19.0	GMF60922			GMF62946	GMF62947	GMF62948		
		20	26	110	164	19.0	GMF60923			GMF62949	GMF62950	GMF62951		

CHAMFER KEY		
Mill Diameter	Chamfer Size	
Metric	Inch	(mm)
3.0	.1181	0.10
4.0	.1575	0.15
5.0	.1969	0.15
6.0	.2362	0.20
8.0	.3150	0.20
10.0	.3937	0.30
12.0	.4724	0.35
16.0	.6299	0.40
20.0	.7874	0.50

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12 0 ~ -0.02	h5
Over Ø12 0 ~ -0.03	(≥ Ø12 : h6)


◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Y-Coated SOLID CARBIDE END MILLS
4 FLUTE EXTENDED LENGTH (FLAT SHANK)

SERIES
Chamfer **GMF61**
Corner Radius **GMF63**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for stainless steels, mild steels, cast iron, low/medium hardness materials and all exotic materials up to HRC40
- ▶ Advanced coating for superior performance and tool life

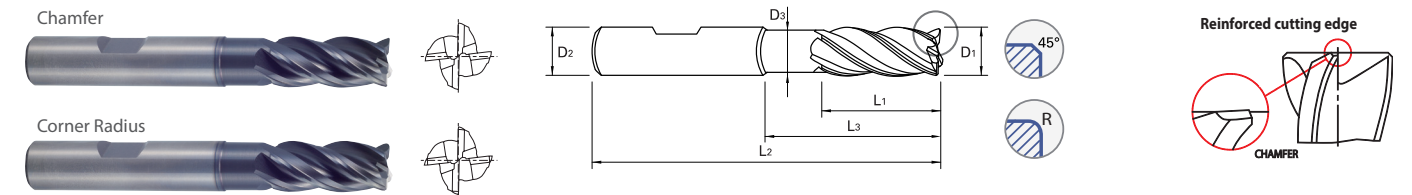

Unit: METRIC

Metric	Inch	OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Chamfer EDP No.	Corner Radius					
									0.10 EDP No.	0.30 EDP No.	0.50 EDP No.	1.00 EDP No.	2.00 EDP No.	3.00 EDP No.
3.0	.1181	6	7	12	54	2.7	GMF61030	GMF63030	GMF63901					
		6	7	17	57	2.7	GMF61901	GMF63902	GMF63903					
		6	8	14	57	2.7	GMF61902							
4.0	.1575	6	8	15	57	3.7	GMF61040	GMF63040	GMF63904					
		6	8	22	63	3.7	GMF61903	GMF63905	GMF63906					
		6	11	16	57	3.7	GMF61904							
5.0	.1969	6	10	17	57	4.7	GMF61050	GMF63050	GMF63907					
		6	10	27	67	4.7	GMF61905	GMF63908	GMF63909					
		6	13	18	57	4.7	GMF61906							
6.0	.2362	6	10	15	57	5.5	GMF61060	GMF63060	GMF63910	GMF63911				
		6	10	20	62	5.5	GMF61907	GMF63912	GMF63913	GMF63914				
		6	10	32	74	5.5	GMF61908	GMF63915	GMF63916	GMF63917				
8.0	.3150	8	12	20	63	7.5	GMF61080		GMF63080	GMF63918				
		8	12	30	73	7.5	GMF61910		GMF63919	GMF63920				
		8	12	46	90	7.5	GMF61911		GMF63921	GMF63922				
10.0	.3937	10	14	25	72	9.2	GMF61100		GMF63100	GMF63923				
		10	14	35	82	9.2	GMF61913		GMF63924	GMF63925				
		10	14	55	102	9.2	GMF61914		GMF63926	GMF63927				
12.0	.4724	12	16	30	83	11.0	GMF61120		GMF63120	GMF63928	GMF63929			
		12	16	40	93	11.0	GMF61916		GMF63930	GMF63931	GMF63932			
		12	16	64	117	11.0	GMF61917		GMF63933	GMF63934	GMF63935			
16.0	.6299	16	22	38	92	15.0	GMF61160			GMF63160	GMF63936	GMF63937		
		16	22	55	109	15.0	GMF61919			GMF63938	GMF63939	GMF63940		
		16	22	87	141	15.0	GMF61920			GMF63941	GMF63942	GMF63943		
20.0	.7874	20	26	50	104	19.0	GMF61200			GMF63200	GMF63944	GMF63945		
		20	26	70	124	19.0	GMF61922			GMF63946	GMF63947	GMF63948		
		20	26	110	164	19.0	GMF61923			GMF63949	GMF63950	GMF63951		

CHAMFER KEY		
Mill Diameter	Chamfer Size	
Metric	Inch	(mm)
3.0	.1181	0.10
4.0	.1575	0.15
5.0	.1969	0.15
6.0	.2362	0.20
8.0	.3150	0.20
10.0	.3937	0.30
12.0	.4724	0.35
16.0	.6299	0.40
20.0	.7874	0.50

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12 0 ~ -0.02	h5
Over Ø12 0 ~ -0.03	(≥ Ø12 : h6)

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

6 FLUTE




Say goodbye to milling tool fatigue and hello to the innovative V7 Plus A 6 Flute tool.

Wake up to better 6 Flute performance. V7 Plus A's revolutionary 6 Flute design lets you handle tougher trochoidal milling at higher speeds with better feed per tooth. The unique V7 PLUS A geometry reduces vibration, increases accuracy, and provides better heat dissipation for enhanced tool life.

HIGH-PERFORMANCE SOLID CARBIDE 6 FLUTE END MILLS

CASE STUDY

6 Flute vs. Competitor

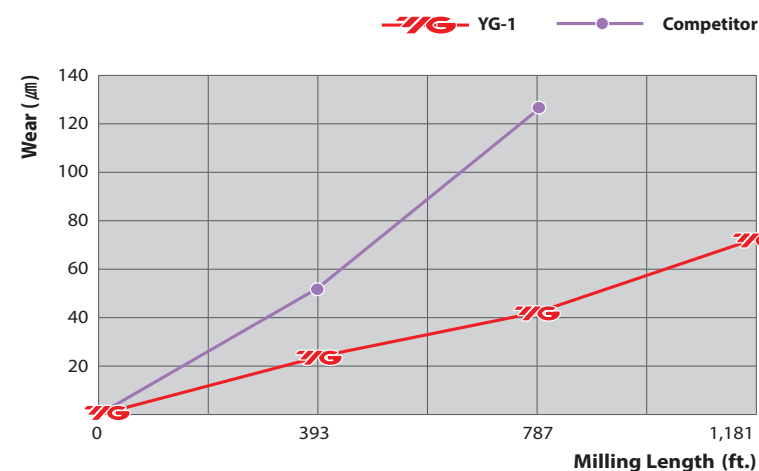


	V7 Plus A	Competitor
Wear (µm)	70.855	123.776
Milling Length (ft.)	1,181	787
Size (mm)	Ø12(R1) x Ø12 x 26 x 83	
Work Material	- JIS : S45C(HRc30) - DIN : C45	- WR : 1.0503 - AISI: 1405
Cutting Speed/RPM	914 ft./min. / 7,392 rev./min.	
Feed/Feed per tooth	295.08 in./min. / .007 in./tooth	
Milling Method	Trochoidal Cutting	
Milling Depth	Axial: .945 in., Radial: .024 in.	
Coolant	Wet Cut	
Overhang	1.417 in.	
Machine	Machining Center	

NEW SIZES

Y-Coated SOLID CARBIDE END MILLS 6 FLUTE STANDARD LENGTH (PLAIN SHANK)

SERIES Square UGMG20 Corner Radius UGMG22

- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

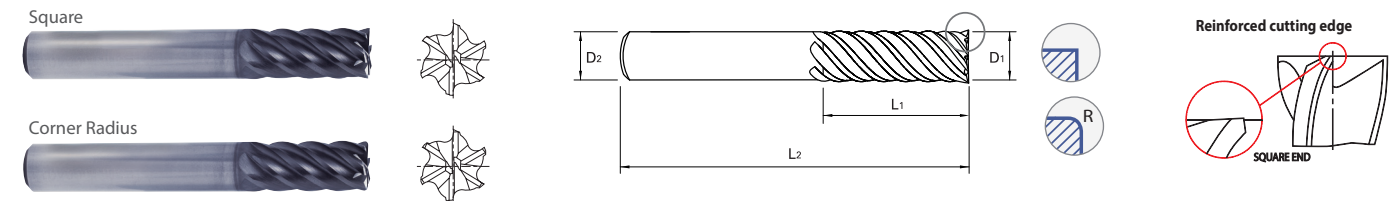

Unit : INCH

* NEW SIZES

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square End EDP No.	Corner Radius								
					.015 EDP No.	.030 EDP No.	.060 EDP No.	.090 EDP No.	.120 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.	
1/4	1/4	1/2	2-1/2	UGMG20914	UGMG22956	UGMG22957	UGMG22958						
		3/4	2-1/2	UGMG20016	UGMG22016	UGMG22959	UGMG22960						
		1-1/8	3	UGMG20901	UGMG22901	UGMG22902	UGMG22961						
		1-1/2	4	UGMG20902	UGMG22903	UGMG22904	UGMG22962						
5/16	5/16	3/4	2-1/2	UGMG20020	UGMG22020								
		1-1/4	3	UGMG20903	UGMG22905	UGMG22906							
		1-5/8	4	UGMG20904	UGMG22907	UGMG22908							
3/8	3/8	5/8	2-1/2	UGMG20915	UGMG22963	UGMG22964	UGMG22965	UGMG22966					
		1	3	UGMG20024	UGMG22024	UGMG22909	UGMG22910	UGMG22967					
		1-1/2	4	UGMG20905	UGMG22911	UGMG22912	UGMG22913	UGMG22968					
		2	4	UGMG20906	UGMG22914	UGMG22915	UGMG22916	UGMG22969					
1/2	1/2	5/8	3	UGMG20916	UGMG22970	UGMG22971	UGMG22972	UGMG22973		UGMG22974			
		1	3	UGMG20917	UGMG22032	UGMG22917	UGMG22918	UGMG22975		UGMG22976			
		1	3-1/4	UGMG20032									
		1-1/4	3	*UGMG20930	*UGMG22880	*UGMG22881	*UGMG22882	*UGMG22883	*UGMG22884	*UGMG22885			
		1-1/4	3-1/2	UGMG20907	UGMG22977	UGMG22919	UGMG22920	UGMG22921	UGMG22922	UGMG22978			
		1-5/8	4	UGMG20918	UGMG22979	UGMG22980	UGMG22981	UGMG22982		UGMG22983			
		2	4	UGMG20908	UGMG22984	UGMG22923	UGMG22924	UGMG22925	UGMG22926	UGMG22985			
		2-5/8	5	UGMG20919	UGMG22986	UGMG22987	UGMG22988	UGMG22989		UGMG22990			
		3	5	UGMG20909	UGMG22991	UGMG22927	UGMG22928	UGMG22929	UGMG22930	UGMG22992			

NEXT PAGE ►

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-.0012	h5 (≥ Ø12 : h6)



ISO Material Description	P									M				K						
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	○	○	○

Y-Coated SOLID CARBIDE END MILLS
6 FLUTE EXTENDED LENGTH (PLAIN SHANK)

SERIES
Square **UGMH08**
Corner Radius **UGMH09**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

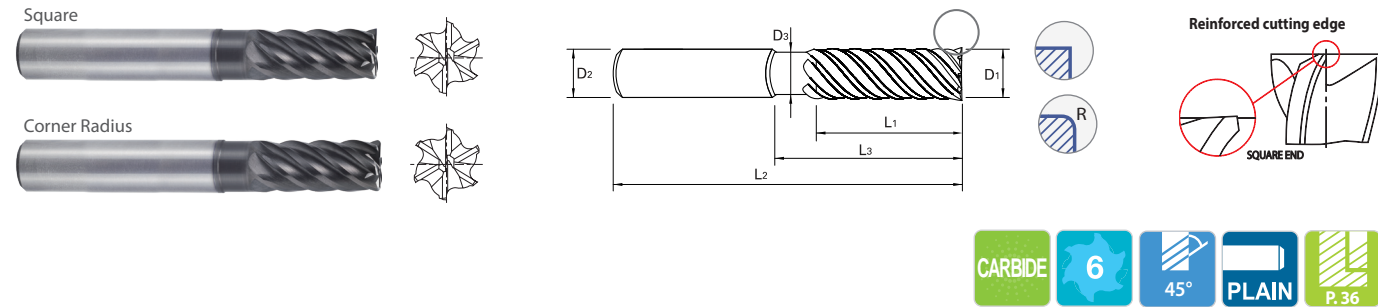

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Square End EDP No.	Corner Radius					
							.030 EDP No.	.060 EDP No.	.090 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.
1/4	1/4	3/8	3/4	4	.230	UGMH08016	UGMH09016	UGMH09901				
		3/8	1-1/8	4	.230	UGMH08901	UGMH09902	UGMH09903				
		3/8	2-1/8	4	.230	UGMH08902	UGMH09904	UGMH09905				
3/8	3/8	1/2	1-1/8	4	.344	UGMH08024	UGMH09024	UGMH09906	UGMH09907			
		1/2	2-1/8	4	.344	UGMH08903	UGMH09908	UGMH09909	UGMH09910			
		1/2	3-1/8	5	.344	UGMH08919	UGMH09999	UGMH09801	UGMH09802			
		1/2	3-1/8	6	.344	UGMH08904	UGMH09911	UGMH09912	UGMH09913			
1/2	1/2	5/8	1-1/2	4	.461	UGMH08032	UGMH09032	UGMH09917	UGMH09918	UGMH09919		
		5/8	2-1/4	4	.461	UGMH08906	UGMH09920	UGMH09921	UGMH09922	UGMH09923		
		5/8	3-3/8	5	.461	UGMH08920	UGMH09803	UGMH09804	UGMH09805	UGMH09806		
		5/8	3-3/8	6	.461	UGMH08907	UGMH09924	UGMH09925	UGMH09926	UGMH09927		
5/8	5/8	3/4	1-5/8	4	.586	UGMH08040	UGMH09040	UGMH09932	UGMH09933	UGMH09934		
		3/4	2-3/8	5	.586	UGMH08921	UGMH09807	UGMH09808	UGMH09809	UGMH09810		
		3/4	3-3/8	5	.586	UGMH08922	UGMH09811	UGMH09812	UGMH09813	UGMH09814		
		3/4	2-3/8	6	.586	UGMH08909	UGMH09935	UGMH09936	UGMH09937	UGMH09938		
5/8	5/8	3/4	3-3/8	6	.586	UGMH08910	UGMH09939	UGMH09940	UGMH09941	UGMH09942		
		3/4	4-1/8	6	.586	UGMH08911	UGMH09943	UGMH09944	UGMH09945	UGMH09946		

NEXT PAGE ▶

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.012	h5 (≥ Ø12 : h6)

◎ : Excellent ○ : Good


ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○					

Y-Coated SOLID CARBIDE END MILLS
6 FLUTE EXTENDED LENGTH (PLAIN SHANK)

SERIES
Square **UGMH08**
Corner Radius **UGMH09**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

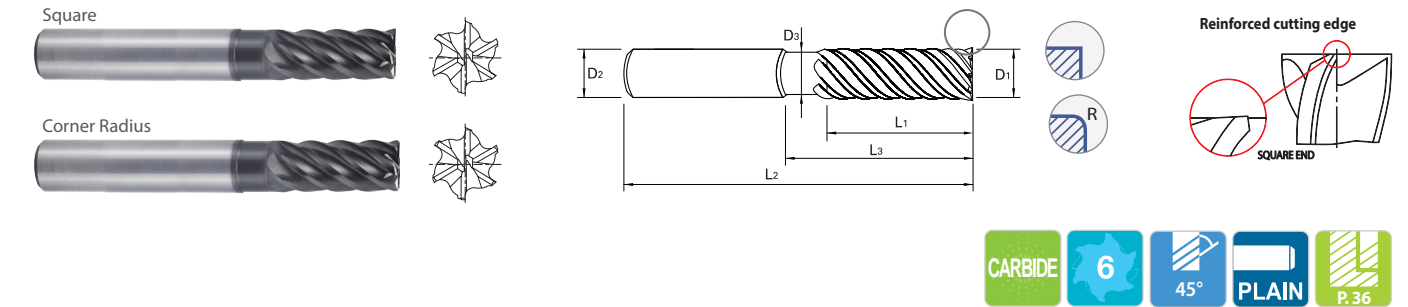

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Square End EDP No.	Corner Radius					
							.030 EDP No.	.060 EDP No.	.090 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.
3/4	3/4	1-1/8	2	4	.711	UGMH08048	UGMH09048	UGMH09947	UGMH09948	UGMH09949	UGMH09950	UGMH09951
		1-1/8	2-5/8	5	.711	UGMH08912	UGMH09952	UGMH09953	UGMH09954	UGMH09955	UGMH09956	UGMH09957
		1-1/8	3-1/4	6	.711	UGMH08913	UGMH09958	UGMH09959	UGMH09960	UGMH09961	UGMH09962	UGMH09963
		1-1/8	4-1/4	7	.711	UGMH08914	UGMH09964	UGMH09965	UGMH09966	UGMH09967	UGMH09968	UGMH09969
1	1	1-1/4	2-1/4	4	.961	UGMH08064	UGMH09064	UGMH09970	UGMH09971	UGMH09972	UGMH09973	UGMH09974
		1-1/4	2-5/8	5	.961	UGMH08915	UGMH09975	UGMH09976	UGMH09977	UGMH09978	UGMH09979	UGMH09980
		1-1/4	3-1/4	6	.961	UGMH08916	UGMH09981	UGMH09982	UGMH09983	UGMH09984	UGMH09985	UGMH09986
		1-1/4	4-1/4	7	.961	UGMH08917	UGMH09987	UGMH09988	UGMH09989	UGMH09990	UGMH09991	UGMH09992
		1-1/4	5-1/4	8	.961	UGMH08918	UGMH09993	UGMH09994	UGMH09995	UGMH09996	UGMH09997	UGMH09998

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.012	h5 (≥ Ø12 : h6)

◎ : Excellent ○ : Good


ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○					

Y-Coated SOLID CARBIDE END MILLS
6 FLUTE STANDARD LENGTH (PLAIN SHANK)

SERIES
Square **GMG12, GMG14**
Corner Radius **GMG16, GMG18**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

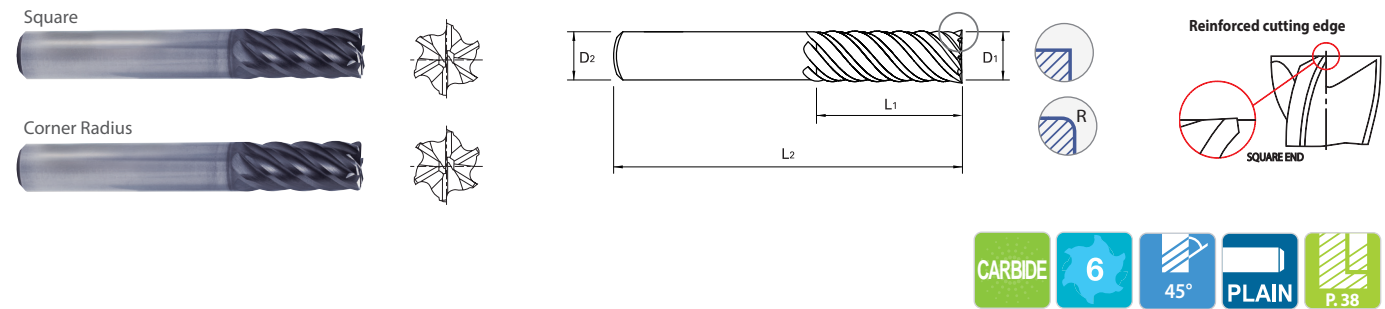

Unit : METRIC

Metric	Inch	OD (D ₁)	SD (D ₂)	LOC (L ₁)	OAL (L ₂)	Square End EDP No.	Corner Radius								
							0.50 EDP No.	1.00 EDP No.	1.50 EDP No.	2.00 EDP No.	3.00 EDP No.	4.00 EDP No.	5.00 EDP No.		
6.0	0.2362	6.0	6	13	57	GMG12060	GMG16060	GMG16901							
			6	24	75	GMG14060	GMG18060	GMG18901							
8.0	0.3150	8.0	8	19	63	GMG12080	GMG16080	GMG16902							
			8	32	75	GMG14080	GMG18080	GMG18902			GMG18903				
10.0	0.3937	10.0	10	22	72	GMG12100	GMG16100	GMG16903	GMG16904	GMG16905					
			10	40	100	GMG14100	GMG18100	GMG18904	GMG18905	GMG18906					
12.0	0.4724	12.0	12	26	83	GMG12120	GMG16120	GMG16906	GMG16907	GMG16908	GMG16909				
			12	48	120	GMG14120	GMG18120	GMG18907	GMG18908	GMG18909	GMG18910				
16.0	0.6299	16.0	16	32	92	GMG12160		GMG16160	GMG16910	GMG16911	GMG16912				
			16	64	140	GMG14160		GMG18160	GMG18911	GMG18912	GMG18913				
20.0	0.7874	20.0	20	38	104	GMG12200		GMG16200	GMG16913	GMG16914	GMG16915				
			20	80	150	GMG14200		GMG18200	GMG18914	GMG18915	GMG18916	GMG18917	GMG18918		
25.0	0.9843	25.0	25	44	104	GMG12250		GMG16250	GMG16916	GMG16917	GMG16918				
			25	100	170	GMG14250		GMG18250	GMG18919	GMG18920	GMG18921	GMG18922	GMG18923		

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance	
Up to 3xD		Over 3xD	
Up to Ø12	0 ~ -0.02	0 ~ -0.03	h5 (≥ Ø12 : h6)
Over Ø12	0 ~ -0.03		

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

Y-Coated SOLID CARBIDE END MILLS
6 FLUTE STANDARD LENGTH (FLAT SHANK)

SERIES
Square **GMG13, GMG15**
Corner Radius **GMG17, GMG19**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

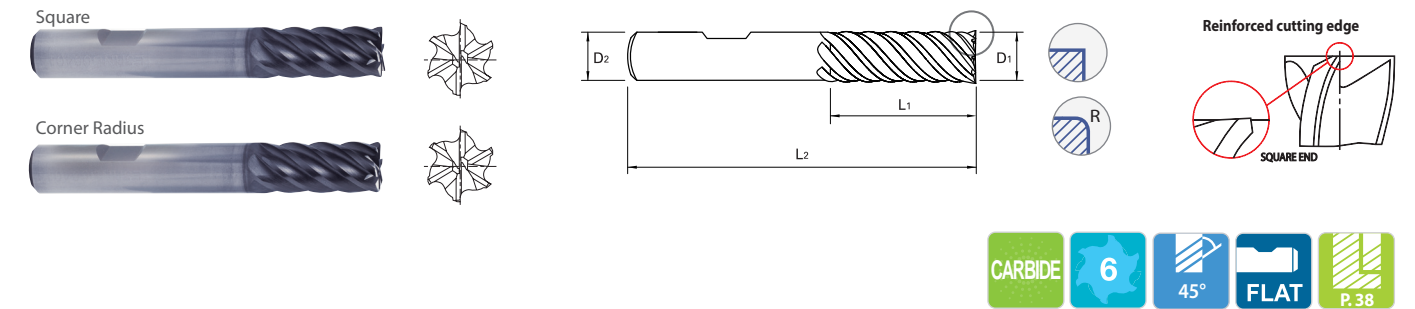

Unit : METRIC

Metric	Inch	OD (D ₁)	SD (D ₂)	LOC (L ₁)	OAL (L ₂)	Square End EDP No.	Corner Radius								
							0.50 EDP No.	1.00 EDP No.	1.50 EDP No.	2.00 EDP No.	3.00 EDP No.	4.00 EDP No.	5.00 EDP No.		
6.0	0.2362	6.0	6	13	57	GMG13060	GMG17060	GMG17901							
			6	24	75	GMG15060	GMG19060	GMG19901							
8.0	0.3150	8.0	8	19	63	GMG13080	GMG17080	GMG17902							
			8	32	75	GMG15080	GMG19080	GMG19902			GMG19903				
10.0	0.3937	10.0	10	22	72	GMG13100	GMG17100	GMG17903	GMG17904	GMG17905					
			10	40	100	GMG15100	GMG19100	GMG19904	GMG19905	GMG19906					
12.0	0.4724	12.0	12	26	83	GMG13120	GMG17120	GMG17906	GMG17907	GMG17908	GMG17909				
			12	48	120	GMG15120	GMG19120	GMG19907	GMG19908	GMG19909	GMG19910				
16.0	0.6299	16.0	16	32	92	GMG13160		GMG17160	GMG17910	GMG17911	GMG17912				
			16	64	140	GMG15160		GMG19160	GMG19911	GMG19912	GMG19913				
20.0	0.7874	20.0	20	38	104	GMG13200		GMG17200	GMG17913	GMG17914	GMG17915				
			20	80	150	GMG15200		GMG19200	GMG19914	GMG19915	GMG19916	GMG19917	GMG19918		
25.0	0.9843	25.0	25	44	104	GMG13250		GMG17250	GMG17916	GMG17917	GMG17918				
			25	100	170	GMG15250		GMG19250	GMG19919	GMG19920	GMG19921	GMG19922	GMG19923		

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance	
Up to 3xD		Over 3xD	
Up to Ø12	0 ~ -0.02	0 ~ -0.03	h5 (≥ Ø12 : h6)
Over Ø12	0 ~ -0.03		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				




6 FLUTE CHIP SPLITTER



Do Chips a Complete Makeover

The New V7 Plus Chip Splitter reduces vibrations and realizes outstanding machining performance and surface finish by applying unequal index design which is the strength of V7 Plus.

Furthermore, the optimized chip splitter design shortens the length of the chips into approximately 1/3 than other End Mills that leads to excellent chip evacuation, as well. As the V7 Plus Chip Splitter shows a superior performance in high-speed machining and trochoidal milling.





Special Chip Splitter Design
Shorter Chip Length at High Axial Machining, improving Chip Removal from both the Component and the Machine

HIGH-PERFORMANCE SOLID CARBIDE 6 FLUTE CHIP SPLITTER

CASE STUDY

6 Flute Chip Splitter vs Competitor

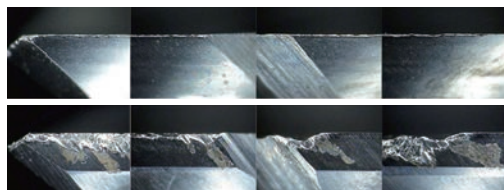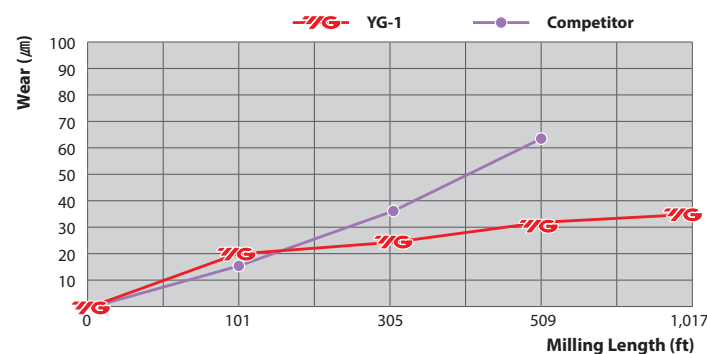

	V7 Plus A	Competitor
Wear (µm)	32.49	88.26
Milling Length (ft.)	1,017	509
Size (mm)	Ø12 x Ø12 x 48 x 120 with chip Splitter	
Work Material	- JIS : S45C(HRc30) - DIN : C45	- WR : 1.0503 - AISI: 1405
Cutting Speed/RPM	722 ft/min. / 5,836 rev./min.	
FEED	124 in./min.	
Milling Method	Trochoidal Cutting	
Milling Depth	Axial: 1.417 in., Radial: .024 in	
Coolant	Wet Cut	
Overhang	2.204 in.	
Machine	Machining Center	


NEW

Y-Coated SOLID CARBIDE END MILLS 6 FLUTE CHIP SPLITTER (PLAIN SHANK)

SERIES Corner Radius **GMH72**

- Special chip splitter design for better chip removal shortened chip length at high axial machining
- High Performance for Steels, Stainless Steels and Cast Iron

Corner Radius

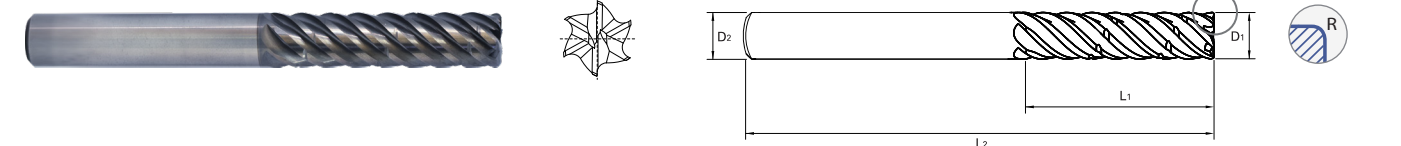

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Corner Radius			
				.015 EDP No.	.030 EDP No.	.060 EDP No.	.125 EDP No.
3/8	3/8	5/8	2_1/2	◇ GMH72901	GMH72902		
3/8	3/8	1"	2_1/2	◇ GMH72903			
3/8	3/8	1_1/8	3"	GMH72024	GMH72904		
1/2	1/2	1_1/4	3"		◇ GMH72905	◇ GMH72906	
1/2	1/2	1_1/2	3_1/2		◇ GMH72907	◇ GMH72908	
1/2	1/2	1_5/8	4"	GMH72032	GMH72909	GMH72910	
1/2	1/2	2"	4"		GMH72911	GMH72912	
5/8	5/8	1_1/4	3_1/2		◇ GMH72913	◇ GMH72914	
5/8	5/8	1_7/8	4"		◇ GMH72915	◇ GMH72916	
5/8	5/8	2"	4"	GMH72040	GMH72917	GMH72918	◇ GMH72919
5/8	5/8	2_3/16	4_1/2		◇ GMH72920	◇ GMH72921	
5/8	5/8	2_5/8	5"		GMH72922	GMH72923	
3/4	3/4	1_1/2	4"		◇ GMH72924	◇ GMH72925	◇ GMH72926
3/4	3/4	1_7/8	4_1/2		GMH72927	GMH72928	
3/4	3/4	2_1/4	5"	GMH72048	GMH72929	GMH72930	GMH72931
3/4	3/4	2_3/4	5"		◇ GMH72932	GMH72933	◇ GMH72934
3/4	3/4	3"	6"		GMH72935	◇ GMH72936	
1"	1"	2"	5"		◇ GMH72937	◇ GMH72938	◇ GMH72939
1"	1"	2_1/2	5_1/2		◇ GMH72942	◇ GMH72943	
1"	1"	3_1/4	6"	GMH72064	GMH72944	GMH72945	GMH72946
1"	1"	3_1/2	6_1/2		◇ GMH72940	◇ GMH72941	
1"	1"	4"	7"			◇ GMH72947	

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.012	h5 (≥ Ø12 : h6)

◇ : Call for Availability

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○


ISO Material Description	N										S										H								
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41								
HRc											15	30	25	38	34			55	60	42	55								
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550								
Recommend											○	○	○	○	○	○	○	○	○	○	○								

◎ : Excellent ○ : Good

NEW
Y-Coated SOLID CARBIDE END MILLS
6 FLUTE CHIP SPLITTER (PLAIN SHANK)

SERIES
Square **GMH56**
Corner Radius **GMH58**

- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶ High Performance for Steels, Stainless Steels and Cast Iron

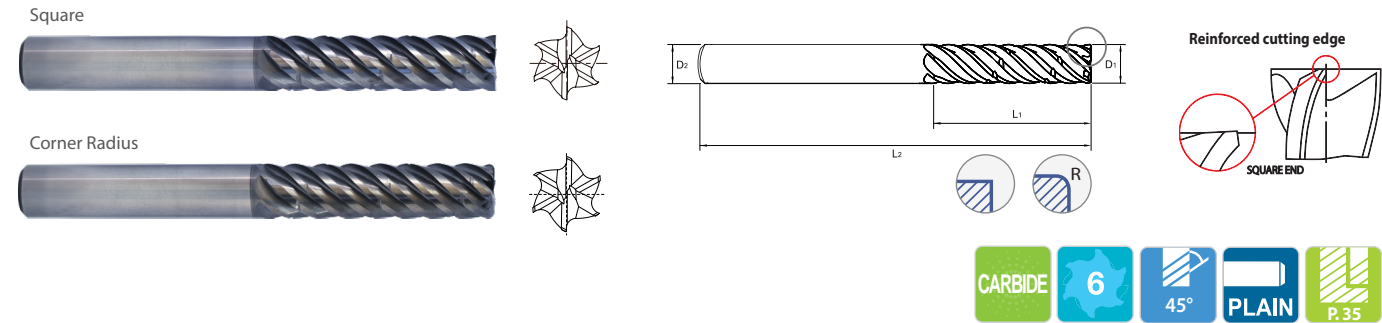

Unit : METRIC


OD (D ₁)		SD (D ₂)	LOC (L ₁)	OAL (L ₂)	Square End	Corner Radius						
Metric	Inch					0.50	1.00	1.50	2.00	3.00	4.00	5.00
				EDP No.		EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
6.0	.2363	6	24	75	GMH56060	GMH58060	GMH58901					
8.0	.3150	8	32	75	GMH56080	GMH58080	GMH58902		GMH58903			
10.0	.3937	10	40	100	GMH56100	GMH58100	GMH58904	GMH58905	GMH58906			
12.0	.4724	12	48	120	GMH56120	GMH58120	GMH58907	GMH58908	GMH58909	GMH58910		
16.0	.6299	16	64	140	GMH56160		GMH58160	GMH58911	GMH58912	GMH58913		
20.0	.7874	20	80	150	GMH56200		GMH58200	GMH58914	GMH58915	GMH58916	GMH58917	GMH58918
25.0	.9843	25	100	170	GMH56250		GMH58250	GMH58919	GMH58920	GMH58921	GMH58922	GMH58923

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5 (≥ Ø12 : h6)

NEW
Y-Coated SOLID CARBIDE END MILLS
6 FLUTE CHIP SPLITTER (FLAT SHANK)

SERIES
Square **GMH57**
Corner Radius **GMH59**

- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶ High Performance for Steels, Stainless Steels and Cast Iron

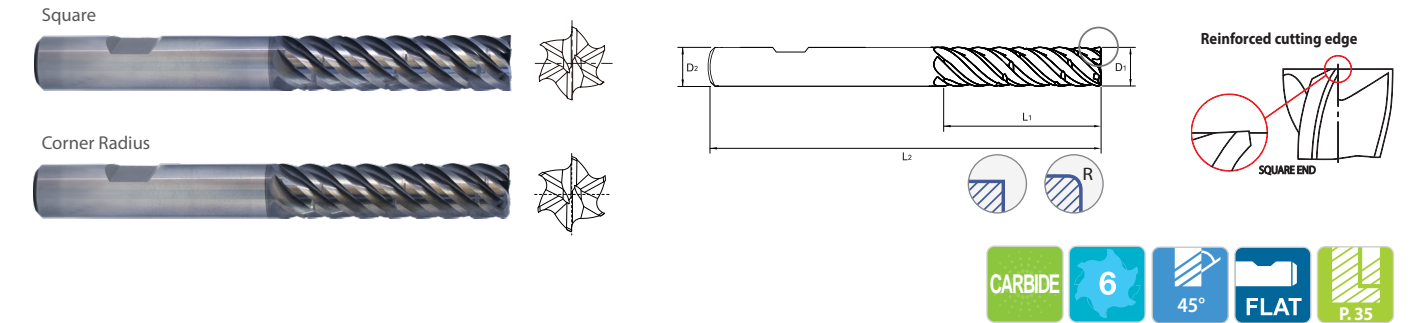

Unit : METRIC

OD (D ₁)		SD (D ₂)	LOC (L ₁)	OAL (L ₂)	Square End	Corner Radius						
Metric	Inch					0.50	1.00	1.50	2.00	3.00	4.00	5.00
				EDP No.		EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
6.0	.2363	6	24	75	GMH57060	GMH59060	GMH59901					
8.0	.3150	8	32	75	GMH57080	GMH59080	GMH59902		GMH59903			
10.0	.3937	10	40	100	GMH57100	GMH59100	GMH59904	GMH59905	GMH59906			
12.0	.4724	12	48	120	GMH57120	GMH59120	GMH59907	GMH59908	GMH59909	GMH59910		
16.0	.6299	16	64	140	GMH57160		GMH59160	GMH59911	GMH59912	GMH59913		
20.0	.7874	20	80	150	GMH57200		GMH59200	GMH59914	GMH59915	GMH59916	GMH59917	GMH59918
25.0	.9843	25	100	170	GMH57250		GMH59250	GMH59919	GMH59920	GMH59921	GMH59922	GMH59923

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5 (≥ Ø12 : h6)

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

**UGMF68, UGMF69, UGMF70, UGMF71, UGMF72
UGMF73, UGMF74, UGMF75, UGMF76, UGMF77 SERIES**



4 FLUTE - SIDE & SLOTTING



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae		Ap		Parameter	Diameter (Ø)																					
			Side	Slotting	Side	Slotting		1/8	5/32	3/16	7/32	1/4	9/32	5/16	11/32	3/8	7/16	1/2	5/8	3/4	1								
P	1-4	Non-alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	500	500	500	500	500	500	500	525	550	550	550	550	550	550	550	550	550	550				
							fz	.0002	.0003	.0004	.0005	.0006	.0008	.0011	.0013	.0015	.0017	.0019	.0021	.0026	.0025								
							RPM	15249	12200	10166	8714	7625	6778	6100	5834	5616	4811	4210	3368	2806	2105								
	5	Low alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	350	350	350	350	350	350	370	385	385	385	385	385	385	385	385	385	385	385				
							fz	.0002	.0003	.0004	.0005	.0006	.0008	.0011	.0013	.0015	.0017	.0018	.0021	.0026	.0025								
							RPM	10727	8581	7151	6129	5363	4767	4291	4089	3912	3353	2934	2347	1956	1467								
	6-7	High alloyed steel, and tool steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	500	500	500	500	500	500	525	550	550	550	550	550	550	550	550	550	550	550				
							fz	.0002	.0003	.0004	.0005	.0006	.0008	.0011	.0013	.0015	.0017	.0019	.0021	.0026	.0025								
							RPM	15249	12200	10166	8714	7625	6778	6100	5834	5616	4811	4210	3368	2806	2105								
	8-9	Stainless steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	350	350	350	350	350	350	370	385	385	385	385	385	385	385	385	385	385	385	385			
							fz	.0002	.0003	.0004	.0005	.0006	.0008	.0011	.0013	.0015	.0017	.0018	.0021	.0026	.0025								
							RPM	10727	8581	7151	6129	5363	4767	4291	4089	3912	3353	2934	2347	1956	1467								
10-11.1	Grey cast iron	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	210	210	210	210	210	210	220	230	230	230	230	230	230	230	230	230	230	230					
						fz	.0001	.0002	.0003	.0004	.0004	.0006	.0007	.0009	.0011	.0012	.0013	.0015	.0018	.0018									
						RPM	6418	5134	4278	3667	3209	2852	2567	2445	2343	2008	1757	1406	1171	879									
M	12-13	Heat Resistant Super Alloys	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	485	485	485	485	485	485	485	485	485	485	485	485	485	485	485	485	485					
							fz	.0002	.0002	.0004	.0004	.0005	.0007	.0009	.0011	.0013	.0014	.0015	.0018	.0022	.0022								
							RPM	14852	11882	9901	8487	7426	6601	5941	5401	4951	4243	3713	2970	2475	1857								
	14.1	Titanium Alloys	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350				
							fz	.0002	.0003	.0005	.0006	.0007	.0009	.0011	.0015	.0019	.0020	.0022	.0024	.0030	.0030								
							RPM	10635	8508	7090	6077	5317	4727	4254	3867	3545	3039	2659	2127	1772	1329								
	14.2	Heat Resistant Super Alloys	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310				
							fz	.0002	.0003	.0005	.0006	.0007	.0009	.0011	.0015	.0019	.0020	.0022	.0024	.0030	.0030								
							RPM	9535	7628	6356	5448	4767	4238	3814	3467	3178	2724	2384	1907	1589	1192								
	K	15-20	Titanium Alloys	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	365	365	365	365	365	365	385	405	405	405	405	405	405	405	405	405	405				
								fz	.0002	.0004	.0006	.0007	.0008	.0011	.0013	.0016	.0019	.0021	.0023	.0026	.0032	.0031							
								RPM	11216	8972	7477	6409	5608	4985	4486	4290	4115	3527	3087	2469	2058	1543							
31-35		Grey cast iron	0.25D	1.0D	1.0D	0.5D	SFM(Vc)	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85				
							fz	.0002	.0003	.0003	.0004	.0005	.0006	.0007	.0010	.0013	.0014	.0015	.0017	.0021	.0020								
							RPM	2598	2078	1732	1484	1299	1154	1039	945	866	742	649	520	433	325								
36-37		Heat Resistant Super Alloys	0.35D	1.0D	1.0D	0.5D	SFM(Vc)	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190				
							fz	.0002	.0003	.0004	.0005	.0006	.0008	.0010	.0013	.0017	.0018	.0020	.0022	.0027	.0027								
							RPM	5806	4645	3871	3318	2903	2581	2323	2111	1935	1659	1452	1161	968	726								

(*) : Short length & Neck type



- NOTES:**
- ▶ Feed to be reduced by approximately 50% if L.O.C. (Length Of Cut) is over 3xD
 - ▶ The above recommendations are based on ideal conditions; for smaller taper machining centers or less rigid conditions please adjust parameters accordingly on diameters greater than 1/2"
 - ▶ In profile operations, engaging more than 2xD, reduce the radial depth of cut by 50%-60%
 - ▶ Finish cuts typically require reduced cutting feeds and speeds; also, it is recommended the radial width of cut (AE) should not exceed 2%xD1

UGMG53 UGMG54 UGMH10 SERIES

4 FLUTE BALL NOSE



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)																			
						1/8	5/32	3/16	7/32	11/32	3/8	7/16	1/2	5/8	3/4	1									
P	1-4	Non-alloy steel	0.5D	1.0D	SFM(Vc)	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530		
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0030	.0032	.0035	.0039									
					RPM	16227	10818	9986	8114	6491	5409	4057	3245	2950	2705	2028									
	5	Low alloy steel	0.5D	1.0D	SFM(Vc)	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370		
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0029	.0031	.0035	.0039									
					RPM	11338	7559	6977	5669	4535	3779	2834	2262	2061	1890	1417									
	6-7	High alloyed steel, and tool steel	0.5D	1.0D	SFM(Vc)	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530		
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0030	.0032	.0035	.0039									
					RPM	16227	10818	9986	8114	6491	5409	4057	3245	2950	2705	2028									
	8-9	Stainless steel	0.5D	1.0D	SFM(Vc)	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370		
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0029	.0031	.0035	.0039									
					RPM	11338	7559	6977	5669	4535	3779	2834	2262	2061	1890	1417									
10-11.1	Grey cast iron	0.5D	1.0D	SFM(Vc)	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225			
				fz	.0007	.0007	.0008	.0011	.0017	.0018	.0019	.0020	.0022	.0025	.0028										
				RPM	6815	4543	4194	3407	2726	2272	1704	1363	1239	1136	852										
M	12-13	Heat Resistant Super Alloys	0.5D	1.0D	SFM(Vc)	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255			
					fz	.0006	.0006	.0010	.0012	.0016	.0018	.0020	.0021	.0023	.0023	.0023									
					RPM	7732	5154	4758	3866	3093	2577	1933	1546	1406	1289	966									
	14.1	Titanium Alloys	0.5D	1.0D	SFM(Vc)	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280			
					fz	.0008	.0008	.0010	.0016	.0018	.0020	.0022	.0024	.0025	.0026	.0027									
					RPM	8526	5684	5247	4263	3410	2842	2132	1705	1550	1421	1066									
	14.2	Heat Resistant Super Alloys	0.5D	1.0D	SFM(Vc)	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255			
					fz	.0008	.0008	.0010	.0016	.0018	.0020	.0022	.0024	.0025	.0026	.0027									
					RPM	7732	5154	4758	3866	3093	2577	1933	1546	1406	1289	966									
	K	15-20	Titanium Alloys	0.5D	1.0D	SFM(Vc)	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390		
						fz	.0012	.0013	.0015	.0020	.0029														

UGMG20, UGMG21, UGMG22
UGMG23, UGMH08, UGMH09 SERIES


6 FLUTE - SIDE CUTTING



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						1/4	5/16	3/8	1/2	5/8	3/4	1
P	1-4	Non-alloy steel	0.05D	2.0D	SFM(Vc)	985	985	985	985	985	985	985
					fz	.0027	.0046	.0057	.0068	.0080	.0089	.0091
					RPM	15036	12028	10024	7518	6014	5012	3759
					FEED	241.52	329.60	340.96	307.22	286.98	266.38	206.00
	5	0.05D	2.0D	SFM(Vc)	665	665	665	665	665	665	665	
				fz	.0020	.0033	.0042	.0050	.0059	.0066	.0069	
				RPM	10176	8141	6784	5088	4071	3392	2544	
				FEED	120.19	163.46	169.88	153.85	143.27	133.82	104.57	
	6-7	Low alloy steel	0.05D	2.0D	Vc	985	985	985	985	985	985	985
					fz	.0027	.0046	.0057	.0068	.0080	.0089	.0091
					RPM	15036	12028	10024	7518	6014	5012	3759
					FEED	241.52	329.60	340.96	307.22	286.98	266.38	206.00
8-9	0.05D	2.0D	SFM(Vc)	665	665	665	665	665	665	665		
			fz	.0020	.0033	.0042	.0050	.0059	.0066	.0069		
			RPM	10176	8141	6784	5088	4071	3392	2544		
			FEED	120.19	163.46	169.88	153.85	143.27	133.82	104.57		
10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	SFM(Vc)	330	330	330	330	330	330	330	
				fz	.0016	.0028	.0035	.0041	.0048	.0054	.0057	
				RPM	5012	4009	3341	2506	2005	1671	1253	
				FEED	48.54	67.25	69.46	62.15	58.25	54.06	42.62	
M	12-13	0.05D	2.0D	SFM(Vc)	700	700	700	700	700	700	700	
				fz	.0019	.0033	.0041	.0049	.0057	.0064	.0066	
				RPM	10681	8545	7120	5340	4272	3560	2670	
				FEED	123.63	169.55	174.93	157.69	147.34	136.24	105.97	
	14.1	Stainless steel	0.05D	2.0D	SFM(Vc)	480	480	480	480	480	480	480
					fz	.0016	.0028	.0035	.0041	.0048	.0054	.0056
					RPM	7365	5892	4910	3682	2946	2455	1841
					FEED	71.33	98.82	102.07	91.34	85.6	79.45	62.2
	14.2	0.05D	2.0D	SFM(Vc)	440	440	440	440	440	440	440	
				fz	.0016	.0028	.0035	.0041	.0048	.0054	.0056	
				RPM	6723	5379	4482	3362	2689	2241	1681	
				FEED	65.11	90.21	93.17	83.38	78.14	72.53	56.38	
S	31-35	Heat Resistant Super Alloys	0.05D	2.0D	SFM(Vc)	110	110	110	110	110	110	110
					fz	.0013	.0022	.0028	.0032	.0038	.0044	.0045
					RPM	1650	1320	1100	825	660	550	413
					FEED	12.86	17.15	18.19	15.98	15.13	14.55	11.21
	36-37	Titanium Alloys	0.05D	2.0D	SFM(Vc)	380	380	380	380	380	380	380
					fz	.0013	.0022	.0028	.0033	.0038	.0044	.0046
					RPM	5822	4657	3881	2911	2329	1941	1455
					FEED	45.38	60.51	64.18	57.07	53.36	51.80	40.22

(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied L.O.C x 90%




GMH72 SERIES

6 FLUTE CHIP SPLITTER - SIDE CUTTING



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)				
						3/8	1/2	5/8	3/4	1
P	1-4	Non-alloy steel	0.05D	2.0D	SFM(Vc)	885	885	885	885	885
					fz	.0028	.0034	.0040	.0044	.0046
					RPM	9022	6766	5413	4511	3383
					FEED	153.43	138.25	129.14	119.87	92.70
	5	0.05D	2.0D	SFM(Vc)	600	600	600	600	600	
				fz	.0021	.0025	.0029	.0033	.0034	
				RPM	6106	4579	3664	3053	2290	
				FEED	76.45	69.23	64.47	60.22	47.06	
	6-7	Low alloy steel	0.05D	2.0D	SFM(Vc)	885	885	885	885	885
					fz	.0028	.0034	.0040	.0044	.0046
					RPM	9022	6766	5413	4511	3383
					FEED	153.43	138.25	129.14	119.87	92.70
8-9	0.05D	2.0D	SFM(Vc)	600	600	600	600	600		
			fz	.0021	.0025	.0029	.0033	.0034		
			RPM	6106	4579	3664	3053	2290		
			FEED	76.45	69.23	64.47	60.22	47.06		
10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	SFM(Vc)	295	295	295	295	295	
				fz	.0017	.0021	.0024	.0027	.0028	
				RPM	3007	2255	1805	1504	1128	
				FEED	31.26	27.97	26.21	24.33	19.18	
M	12-13	0.05D	2.0D	SFM(Vc)	630	630	630	630	630	
				fz	.0020	.0025	.0029	.0032	.0033	
				RPM	6408	4806	3845	3204	2403	
				FEED	78.7185	70.9605	66.303	61.308	47.6865	
	14.1	Stainless steel	0.05D	2.0D	SFM(Vc)	435	435	435	435	435
					fz	.0017	.0021	.0024	.0027	.0028
					RPM	4419	3313.8	2651.4	2209.5	1656.9
					FEED	45.9315	41.103	38.52	35.7525	27.99
	14.2	0.05D	2.0D	SFM(Vc)	395	395	395	395	395	
				fz	.0017	.0021	.0024	.0027	.0028	
				RPM	4034	3026	2420	2017	1513	
				FEED	41.93	37.52	35.16	32.64	25.37	
S	31-35	Heat Resistant Super Alloys	0.05D	2.0D	SFM(Vc)	95	95	95	95	95
					fz	.0014	.0016	.0019	.0022	.0023
					RPM	990	742.5	594	495	371.7
					FEED	8.1855	7.191	6.8085	6.5475	5.0445
	36-37	Titanium Alloys	0.05D	2.0D	SFM(Vc)	345	345	345	345	345
					fz	.0014	.0016	.0019	.0022	.0023
					RPM	3493	2620	2096	1747	1310
					FEED	28.88	25.68	24.01	23.31	18.10





**GMF52, GMF53, GMF54, GMF55, GMF56, GMF57
GMF58, GMF59, GMF60, GMF61, GMF62, GMF63 SERIES**


4 FLUTE - SIDE & SLOTTING



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae		Ap		Parameter	Diameter (Ø)																			
			Side	Slotting	Side	Slotting		1/8	5/32	3/16	7/32	1/4	9/32	5/16	7/16	1/2	5/8	3/4	1								
P	1-4	Non-alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	500	500	500	500	500	550	550	550	550	550	550	550	550	550	550	550				
							fz	.0002	.0003	.0004	.0006	.0011	.0015	.0019	.0019	.0021	.0023	.0026	.0025								
							RPM	16128	12096	9677	8064	6048	5348	4456	3820	3342	2971	2674	2139								
	5	Low alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	350	350	350	350	350	385	385	385	385	385	385	385	385	385	385	385	385			
							fz	.0002	.0003	.0004	.0006	.0011	.0015	.0018	.0019	.0021	.0023	.0026	.0025								
							RPM	11353	8515	6812	5677	4257	3724	3104	2660	2328	2069	1862	1490								
	6-7	High alloyed steel, and tool steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	500	500	500	500	500	550	550	550	550	550	550	550	550	550	550	550	550			
							fz	.0002	.0003	.0004	.0006	.0011	.0015	.0018	.0019	.0021	.0023	.0026	.0025								
							RPM	16128	12096	9677	8064	6048	5348	4456	3820	3342	2971	2674	2139								
	8-9	High alloyed steel, and tool steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	350	350	350	350	350	385	385	385	385	385	385	385	385	385	385	385	385	385		
							fz	.0002	.0003	.0004	.0006	.0011	.0015	.0018	.0019	.0021	.0023	.0026	.0025								
							RPM	11353	8515	6812	5677	4257	3724	3104	2660	2328	2069	1862	1490								
10-11.1	High alloyed steel, and tool steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	210	210	210	210	210	230	230	230	230	230	230	230	230	230	230	230	230	230			
						fz	.0001	.0002	.0003	.0004	.0008	.0011	.0013	.0013	.0015	.0016	.0018	.0018									
						RPM	6791	5093	4074	3395	2546	2228	1857	1592	1393	1238	1114	891									
12-13	Stainless steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	485	485	485	485	485	485	485	485	485	485	485	485	485	485	485	485	485				
						fz	.0002	.0002	.0004	.0005	.0009	.0013	.0015	.0017	.0018	.0020	.0022	.0022									
						RPM	15703	11777	9422	7852	5889	4711	3926	3365	2944	2617	2355	1884									
14.1	Stainless steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350	350			
						fz	.0002	.0003	.0005	.0007	.0011	.0019	.0022	.0023	.0024	.0028	.0030	.0030									
						RPM	11247	8435	6748	5623	4218	3374	2812	2410	2109	1874	1687	1350									
14.2	Stainless steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310			
						fz	.0002	.0003	.0005	.0007	.0011	.0019	.0022	.0023	.0024	.0027	.0030	.0030									
						RPM	10080	7560	6048	5040	3780	3024	2520	2160	1890	1680	1512	1210									
15-20	Grey cast iron	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	SFM(Vc)	365	365	365	365	365	405	405	405	405	405	405	405	405	405	405	405	405	405			
						fz	.0002	.0004	.0006	.0008	.0013	.0019	.0023	.0024	.0026	.0029	.0032	.0031									
						RPM	11884	8913	7130	5942	4456	3915	3263	2797	2447	2175	1958	1566									
31-35	Heat Resistant Super Alloys	0.25D	1.0D	1.0D	0.5D	SFM(Vc)	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85			
						fz	.0002	.0003	.0003	.0005	.0008	.0013	.0015	.0016	.0017	.0019	.0021	.0021									
						RPM	2759	2069	1655	1379	1035	828	690	591	517	460	414	331									
36-37	Titanium Alloys	0.35D	1.0D	1.0D	0.5D	SFM(Vc)	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190			
						fz	.0002	.0003	.0004	.0006	.0010	.0017	.0020	.0021	.0022	.0024	.0027	.0027									
						RPM	6154	4615	3692	3077	2308	1846	1538	1319	1154	1026	923	738									

(*) : Short length & Neck type

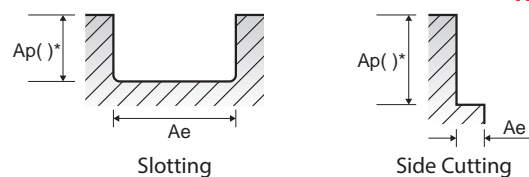

- NOTES:**
- ▶ The above recommendations are based on ideal conditions; for smaller taper machining centers or less rigid conditions please adjust parameters accordingly on diameters greater than 1/2"
 - ▶ In profile operations, engaging more than 2xD, reduce the radial depth of cut by 50%-60%
 - ▶ Finish cuts typically require reduced cutting feeds and speeds; also, it is recommended the radial width of cut (AE) should not exceed 2%xD1



GMG55, GMG56 SERIES

4 FLUTE BALL NOSE



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)																		
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	18.0	20.0	25.0								
P	1-4	Non-alloy steel	0.5D	1.0D	SFM(Vc)	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530			
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0030	.0032	.0035	.0039								
					RPM	17189	12892	10313	8594	6446	5157	4297	3223	2865	2578	2063								
	5	Low alloy steel	0.5D	1.0D	SFM(Vc)	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0029	.0031	.0035	.0039								
					RPM	11990	8992	7194	5995	4496	3597	2997	2248	1998	1798	1439								
	6-7	High alloyed steel, and tool steel	0.5D	1.0D	SFM(Vc)	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	530	
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0030	.0032	.0035	.0039								
					RPM	17189	12892	10313	8594	6446	5157	4297	3223	2865	2578	2063								
	8-9	High alloyed steel, and tool steel	0.5D	1.0D	SFM(Vc)	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	370	
					fz	.0010	.0011	.0012	.0016	.0024	.0026	.0028	.0029	.0031	.0035	.0039								
					RPM	11990	8992	7194	5995	4496	3597	2997	2248	1998	1798	1439								
10-11.1	High alloyed steel, and tool steel	0.5D	1.0D	SFM(Vc)	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225		
				fz	.0007	.0007	.0008	.0011	.0017	.0018	.0019	.0020	.0022	.0025	.0028	.0028								
				RPM	7215	5411	4329	3608	2706	2165	1804	1353	1203	1082	866									
12-13	Stainless steel	0.5D	1.0D	SFM(Vc)	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255		
				fz	.0006	.0006	.0010	.0012	.0016	.0018	.0020	.0021	.0023	.0023	.0023									
				RPM	8170	6127	4902	4085	3064	2451	2042	1532	1362	1225	980									
14.1	Stainless steel	0.5D	1.0D	SFM(Vc)	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280	280		
				fz	.0008	.0008	.0010	.0016	.0018	.0020	.0022	.0024	.0025	.0026	.0027									
				RPM	9019	6764	5411	4509	3382	2706	2255	1691	1503	1353	1082									
14.2	Stainless steel	0.5D	1.0D	SFM(Vc)	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255		
				fz	.0008	.0008	.0010	.0016	.0018	.0020	.0022	.0024	.0025	.0026	.0027									
				RPM	8170	6127	4902	4085	3064	2451	2042	1532	1362	1225	980									
15-20	Grey cast iron	0.5D	1.0D	SFM(Vc)	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390		
				fz	.0012	.0013	.0015	.0020	.0029	.0032	.0034	.0037	.0039	.0044	.0049									
				RPM	12626	9470	7576	6313	4735	3788	3157	2367	2104	1894	1515									
31-35	Heat Resistant Super Alloys	0.2D	0.3D	SFM(Vc)	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70		
				fz	.0006	.0006	.0007	.0011	.0012	.0014	.0015	.												

**GMG12, GMG13, GMG14, GMG15
GMG16, GMG17, GMG18, GMG19 SERIES**


6 FLUTE - SIDE CUTTING



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	2.0D	SFM(Vc)	985	985	985	985	985	985	985
					fz	.0027	.0046	.0057	.0068	.0080	.0089	.0091
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	255.67	327.09	324.84	325.20	284.80	253.78	209.33
	5	0.05D	2.0D	SFM(Vc)	665	665	665	665	665	665	665	
				fz	.0020	.0033	.0042	.0050	.0059	.0066	.0068	
				RPM	10769	8077	6462	5385	4039	3231	2585	
				FEED	127.20	162.17	161.81	162.80	142.13	127.44	106.22	
	6-7	Low alloy steel	0.05D	2.0D	Vc	985	985	985	985	985	985	985
					fz	.0027	.0046	.0057	.0068	.0080	.0089	.0091
					RPM	15036	12028	10024	7518	6014	5012	3759
					FEED	241.52	329.60	340.96	307.22	286.98	266.38	206.00
8-9	0.05D	2.0D	SFM(Vc)	665	665	665	665	665	665	665		
			fz	.0020	.0033	.0042	.0050	.0059	.0066	.0068		
			RPM	10769	8077	6462	5385	4039	3231	2585		
			FEED	127.20	162.17	161.81	162.80	142.13	127.44	106.22		
10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	SFM(Vc)	330	330	330	330	330	330	330	
				fz	.0016	.0028	.0035	.0041	.0048	.0054	.0057	
				RPM	5305	3979	3183	2653	1989	1592	1273	
				FEED	51.38	66.73	66.18	65.79	57.80	51.50	43.31	
M	12-13	0.05D	2.0D	SFM(Vc)	700	700	700	700	700	700	700	
				fz	.0019	.0033	.0041	.0049	.0057	.0064	.0066	
				RPM	11300	8475	6780	5650	4238	3390	2712	
				FEED	130.79	168.15	166.57	166.85	146.14	129.72	107.64	
	14.1	Stainless steel	0.05D	2.0D	SFM(Vc)	480	480	480	480	480	480	480
					fz	.0016	.0028	.0035	.0041	.0048	.0054	.0056
					RPM	7799	5849	4679	3899	2924	2340	1872
					FEED	75.51	98.11	97.28	96.73	84.96	75.71	63.23
	14.2	0.05D	2.0D	SFM(Vc)	440	440	440	440	440	440	440	
				fz	.0016	.0028	.0035	.0041	.0048	.0054	.0056	
				RPM	7109	5332	4265	3554	2666	2133	1706	
				FEED	68.86	89.41	88.66	88.15	77.44	69.02	57.24	
31-35	Heat Resistant Super Alloys	0.05D	2.0D	SFM(Vc)	110	110	110	110	110	110	110	
				fz	.0013	.0022	.0028	.0032	.0038	.0044	.0045	
				RPM	1751	1313	1050	875	657	525	420	
				FEED	13.66	17.05	17.36	16.97	15.04	13.9	11.42	
36-37	Titanium Alloys	0.05D	2.0D	SFM(Vc)	380	380	380	380	380	380	380	
				fz	.0013	.0022	.0028	.0033	.0038	.0045	.0046	
				RPM	6154	4615	3692	3077	2308	1846	1477	
				FEED	47.95	59.96	61.06	60.31	52.87	49.29	40.83	

(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied L.O.C x 90%




GMH56, GMH58, GMH57, GMH59 SERIES

6 FLUTE CHIP SPLITTER - SIDE CUTTING



SFM = ft./min. fz = in./tooth
RPM = rev./min. FEED = in./min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	3.0D	SFM(Vc)	885	885	885	885	885	885	885
					fz	.0013	.0023	.0028	.0034	.0040	.0044	.0046
					RPM	14324	10743	8594	7162	5371	4297	3438
					FEED	115.04	147.19	146.17	146.34	128.15	114.20	94.20
	5	0.05D	3.0D	SFM(Vc)	600	600	600	600	600	600	600	
				fz	.0010	.0017	.0021	.0025	.0029	.0033	.0034	
				RPM	9693	7269	5816	4846	3635	2908	2326	
				FEED	57.24	72.98	72.81	73.27	63.97	57.35	47.81	
	6-7	Low alloy steel	0.05D	3.0D	SFM(Vc)	885	885	885	885	885	885	885
					fz	.0013	.0023	.0028	.0034	.0040	.0044	.0046
					RPM	14324	10743	8594	7162	5371	4297	3438
					FEED	115.04	147.19	146.17	146.34	128.15	114.20	94.20
8-9	0.05D	3.0D	SFM(Vc)	600	600	600	600	600	600	600		
			fz	.0010	.0017	.0021	.0025	.0029	.0033	.0034		
			RPM	9693	7269	5816	4846	3635	2908	2326		
			FEED	57.24	72.98	72.81	73.27	63.97	57.35	47.81		
10-11.1	High alloyed steel, and tool steel	0.05D	3.0D	SFM(Vc)	295	295	295	295	295	295	295	
				fz	.0008	.0014	.0017	.0021	.0024	.0027	.0028	
				RPM	4775	3581	2865	2387	1790	1432	1146	
				FEED	23.12	30.03	29.78	29.61	26.01	23.18	19.49	
M	12-13	0.05D	3.0D	SFM(Vc)	630	630	630	630	630	630	630	
				fz	.0010	.0017	.0020	.0025	.0029	.0032	.0033	
				RPM	10170	7628	6102	5085	3814	3051	2441	
				FEED	58.86	75.67	74.95	75.07	65.76	58.38	48.43	
	14.1	Stainless steel	0.05D	3.0D	SFM(Vc)	435	435	435	435	435	435	435
					fz	.0008	.0014	.0017	.0021	.0024	.0027	.0028
					RPM	7019	5264	4211	3509	2632	2106	1684
					FEED	33.99	44.14	43.77	43.52	38.24	34.07	28.45
	14.2	0.05D	3.0D	SFM(Vc)	395	395	395	395	395	395	395	
				fz	.0008	.0014	.0017	.0021	.0024	.0027	.0028	
				RPM	6398	4799	3839	3199	2399	1919	1536	
				FEED	30.98	40.24	39.90	39.67	34.86	31.06	25.75	
31-35	Heat Resistant Super Alloys	0.05D	3.0D	SFM(Vc)	95	95	95	95	95	95	95	
				fz	.0006	.0011	.0014	.0016	.0019	.0022	.0023	
				RPM	1576	1182	945	788	591	473	378	
				FEED	6.14	7.68	7.82	7.63	6.77	6.25	5.14	
36-37	Titanium Alloys	0.05D	3.0D	SFM(Vc)	345	345	345	345	345	345	345	
				fz	.0006	.0011	.0014	.0016	.0019	.0022	.0023	
				RPM	5539	4154	3323	2769	2077	1662	1329	
				FEED	21.59	26.98	27.47	27.15	23.80	22.18	18.37	





NEW! QuickTurn Specials

>>> Get exactly the **HIGH PERFORMANCE END MILL** you need for your specific application shipped in days not weeks!



Customized End Mills!



Now the best value in the world of cutting tools goes one better with the **YG-1 QuickTurn Special End Mill Program**.

Get customized solid carbide end mills for your specific application plus, quick response specials – LOC, radius and LBS, all with YG-1's advanced technology and the high-performance cutting-edge features of **V7 PLUS A** and **TitaNox** end mills.

And since your order goes to our state-of-the-art Tech Center in Charlotte, NC right here in the USA, it goes into production the same day.

We're known for bringing you the widest standard end mill offering in the industry. With our new QuickTurn program, the possibilities are almost unlimited!

YG QuickTurn Program

- ▶ Easy selection and design starts with pre-fluted blanks in the most widely used sizes with predefined OD, SD, LOC, OAL(inch dimensions only).
- ▶ Specify your special dimension for: Cutting Diameter (OD), Length of Cut (LOC), Length Below Shank (LBS), Corner Radius, and Overall Length (OAL) using our simple quote request form (available on YG-1 USA Website).
- ▶ QuickTurn delivery ships in 8 business days or less for coated tools, and 3 business days or less for uncoated tools. In many cases, faster shipping for coated tools is available, please consult with our Tech Center team for more information.
- ▶ Minimum order quantity for this program is 3 end mills.
- ▶ For easy custom quote and ordering visit yg1usa.com/quickturn.asp

**Get it customized.
Get it quick.
Get it done.**




CHOOSE FROM:

V7 PLUS A **4-FLUTE** END MILLS





V7 PLUS A **6-FLUTE** END MILLS

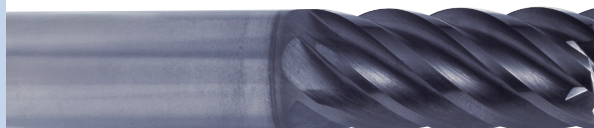


TitaNox Power **4-FLUTE** END MILLS




TitaNox Power **5-FLUTE** END MILLS

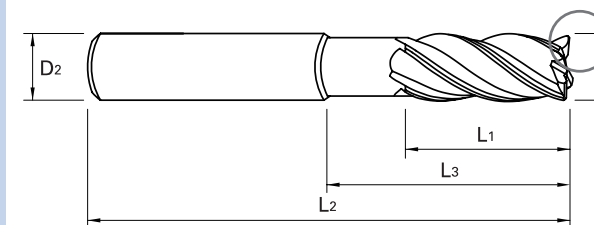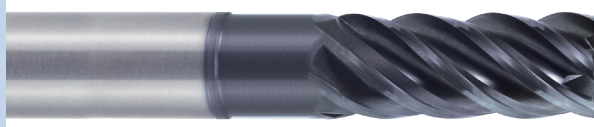


V7 PLUS A
VARIABLE INDEX END MILLS



TitaNox Power
VARIABLE INDEX END MILLS




UNEQUAL INDEX WITH
HIGH-PERFORMANCE
CORNER GEOMETRIES
INCLUDING CORNER RADIUS



Corner Radius

D ₁	D ₂	L ₁	L ₂	L ₃
OD	SD	LOC	LBS	OAL



CUSTOM OPTIONS

- ▶ Square, radius, chamfer, ball nose, and corner radius styles
- ▶ Regular, extended lengths, and neck-down tools available
- ▶ Specify OD, LOC, OAL, and LBS dimensions made for your needs

Total Tooling Solutions.
YG-1 and Done.



yg1usa.com

BEST VALUE IN THE
WORLD OF CUTTING TOOLS

800-765-8665

CHARLOTTE TECHNICAL CENTER

DESIGN, SIMULATE, PRODUCE and TEST.
Turnkey custom-engineered tooling solutions.

Bring us your special orders. The YG-1 Technical Center is your one-stop center for all your tool-making needs. With state-of-the-art manufacturing assets including a full assortment of top-of-the-line CNC stations, multiple high-performance grinding and milling machines, plus flexible programming testing modules, the YG-1 Tech Center gives you a turnkey solution to tool design, testing and manufacturing.



Design

- ▶ Advanced CAD/CAM-assisted application simulation to ensure precise design integrity
- ▶ On-site R&D specialists for advanced high-production solutions
- ▶ Expertise in aerospace, automotive, power generation and general engineering

Simulate


- ▶ Computer-aided simulation to ensure cost-effective manufacturing
- ▶ Solution application for high-strength alloy and CRFP required for aerospace industry
- ▶ Three-dimensional simulation provides predictable performance data consistency

Produce

- ▶ Multiple CNC stations and high-performance grinding and milling machines
- ▶ World-class microfine carbide blanks to ensure increased tool life
- ▶ Latest-generation coatings PVD and CVD for pressure-resistant performance


Test

- ▶ Threshold testing in extreme applications for reliable performance
- ▶ Laser-assisted measuring for high-tolerance reliability
- ▶ Prototype testing in actual conditions to ensure best cost per piece

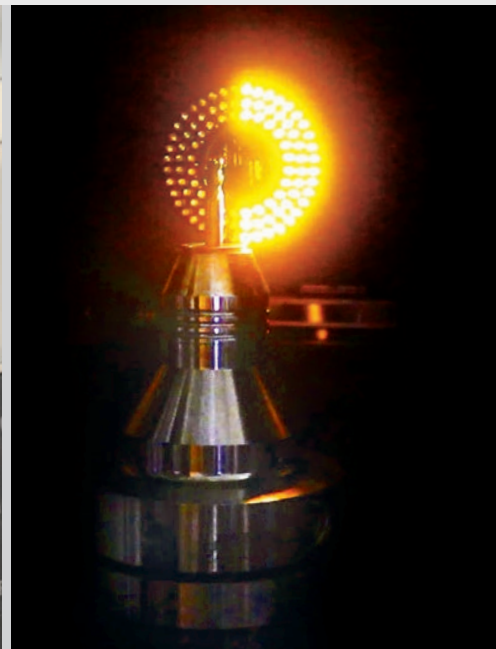

"I really like seeing the tools demonstrated and actually cutting. It's very helpful to see how the tools perform in actual conditions in a wide variety of different materials and styles."

- Tier 1 automotive manufacturer

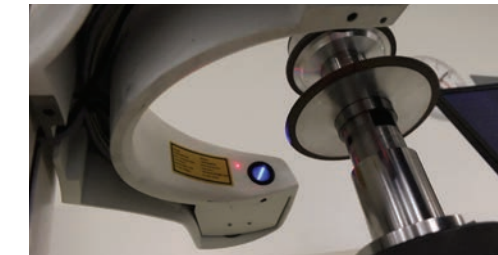

Collaboration Is Key

From your first design concepts to prototyping to final tooling, YG-1 will work with you at every turn. It's this partnership that keeps our customers on the cutting edge with the most cost-effective tooling solutions in the industry. For group training, collaboration with our designers and engineers, the Tech Center features an expansive training room with a live demonstration area.

Call us or contact your distributor partners to discuss your machining solution needs.



Can't find what you're looking for?

Specialty products are not a problem. With over 30 years of tooling experience for some of the world's most successful companies, YG-1 can handle your most demanding design, testing and manufacturing needs. And now with our state-of-the-art Charlotte Technical Center, you have a place that can do it all (see more about our Technical Center on pages 38 and 39). When you're looking for the best solution at the most efficient cost, come to YG-1. **Call us at 800-765-8665 or contact our distributor partners** to discuss your machining solution needs.



Need something you don't see?

Bring us your special orders. The YG-1 Technical Center is your one-stop center for all your tool-making needs. With state-of-the-art manufacturing assets, including a full assortment of top-of-the-line CNC stations, multiple high-performance grinding and milling machines, plus flexible programming testing modules, the YG-1 Tech Center gives you a turnkey solution to tool design, testing and manufacturing. **Call us at 800-765-8665 or contact our distributor partners** to discuss your machining solution needs.



Every custom job starts with a blank.

Give us your specifications and **we will build the tools you need** – on time and guaranteed to meet your needs. It's how YG-1 has built a reputation for reliable service for the most demanding applications – and customers. So next time you need a special order, **Call us at 800-765-8665 or contact our distributor partners.** We're here to meet all your tooling needs.



Designed to accommodate your needs.

- ▶ Capabilities for small batch production
- ▶ Ready access to world-class engineering
- ▶ Fast turnaround for one-of-a-kind tools and solutions


Our promise:
The best solution in less time with less expense.



MEMO



A large grid area for taking notes, with a header bar containing the word 'MEMO' and a decorative graphic.



HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TURKEY
CZECH REPUBLIC	GERMANY	NORWAY	RUSSIA	SWEDEN	UNITED KINGDOM
DENMARK	HUNGARY	POLAND	SERBIA	SWITZERLAND	

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SINGAPORE	UNITED ARAB EMIRATES
CHINA	ISRAEL	PAKISTAN	SOUTH KOREA	VIETNAM
HONG KONG	JAPAN	PHILIPPINES	TAIWAN	
INDIA	KINGDOM OF SAUDI ARABIA	THAILAND		

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

YG-1 CO., LTD.

* For the more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE


211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea
Phone : +82-32-526-0909
E-mail : yg1@yg1.kr
www.yg1.kr

YG-1 USA

730 Corporate Woods Parkway, Vernon Hills, IL 60061 U.S.A.
Phone : 800-765-8665
Technical Assistance : 888-868-5988
www.yg1usa.com

V7 Plus A

NOTHING CUTS IT BETTER

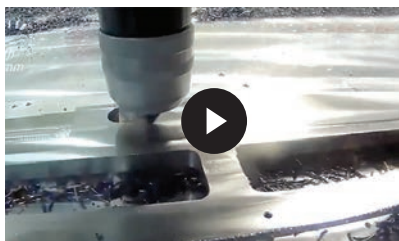

Scan this QR code to see our V7 Plus A tools at work.



Scan this QR code to see our V7 Plus A Chip Splitter tools at work.

YG-1 CO., LTD.

YG-1 USA

730 Corporate Woods Parkway
Vernon Hills, IL 60061 U.S.A.

Phone: 800-765-8665

Technical Assistance: 888-868-5988

yg1usa.com

YG-1 CANADA INC.

3375 North Service Road, Unit A8
Burlington, Ontario, CANADA L7N 3G2

Phone: +1 905-335-2500

FAX: +1 905-335-4003

Customer Service: orders@yg1.ca

yg1.ca



GLOBAL HEADQUARTERS

211, Sewolcheon-ro, Bupyeong-gu
Incheon, Korea

Phone: +82-32-526-0909

yg1.kr

E-mail: yg1@yg1.kr

Note The information is Provided for reference only. Tool specifications are subject to change without prior notice. Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application. YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets



YG1YUVP200529004