

Carbide Turning Inserts



Geometry Tolerances

The physical characteristics of an insert that differentiates one shape from the next.
The allowed deviation of all insert dimensions.

Substrate

The alloy carbide's properties, grain size, and cobalt content.

Coating

Thin layer of titanium nitrate on the surface of the insert that allows for greater cutting speeds, wear resistance and longer insert life.

Grade

A combination of substrate and coating that determines the hardness and toughness of the insert for the specific material application.

Rake Angle

The angle formed on the insert from the top surface area and the bottom of the insert chip flow area when parallel to the floor.

Geometry

The physical characteristics of an insert that differentiates one shape from the next.

Chipbreaker

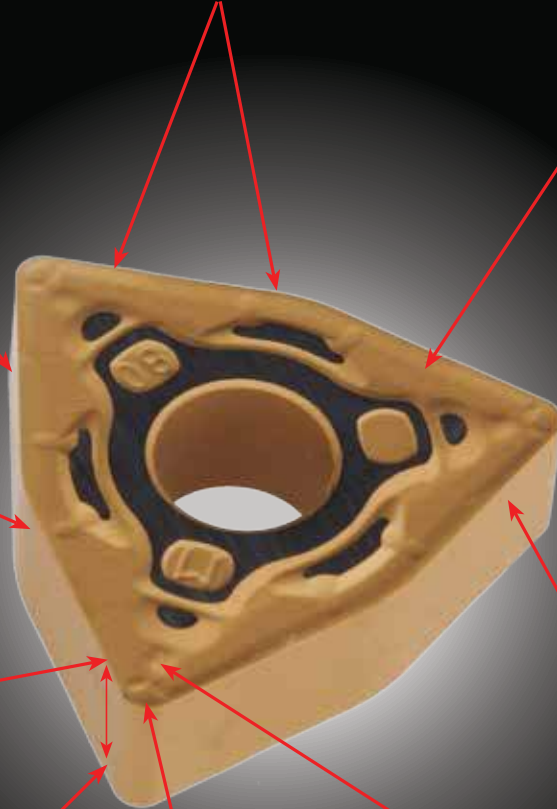
The formed groove or recess along the cutting edge of the insert that breaks chips into small manageable lengths.

Relief Angle

The angle measured from the vertical line perpendicular to the cutting edge of the insert and the cutting face of the insert.

Edge Preparation

The process used to prepare the insert's edge cutting condition for specific application and material. Achieved by honing, chamfering, "T" land or any combination thereof.



Negative Turning Insert

Double Sided Cutting Edge with a Negative Relief Angle.



The First Choice for high metal removal and high precision applications. Available molded or precision ground with a wide range of geometries, chipbreakers and grades.

Positive Turning Insert

Single Sided Cutting Edge with a Positive Relief Angle.



The First Choice for light roughing to precision finishing applications. Available in multiple varieties of relief angles, geometries and chipbreakers in both ANSI and ISO styles, precision grounded or molded.

Carbide, also called **Hard metal** or **Widia**, is a hard metal used in machining Ferrous and non Ferrous Materials. **Carbide Turning Inserts** will withstand higher cutting temperatures (higher than standard high speed steel tools), allow faster machining with better finishes, closer tolerances on the part and longer tool life.

The initial development of cemented and sintered carbide occurred in Germany in the 1920s to replace diamonds as a material for machining metal. The carbide insert found its way onto the German market under the name **WIDIA** (acronym for **Wie DIAMant meaning like diamond**) and reached the United States market in 1928.

Today, most Carbide Turning Inserts are made from a combination of Tungsten Carbide (WC), Titanium Carbide (TiC), and Cobalt (Co); the bonding metal. Tungsten and Titanium carbide hard particles provide the insert with the hardness, while the Cobalt makes the insert tougher and impact resistant.

Insert Application Guide

Finishing

- Hard and Wear resistant
- PVD and CVD Coating
- Small Nose radius
- Light Honed Edge
- Small Chipbreaker

Cutting Data

- Small Depth of cut (a_p)
- Small Feed per Revolution (f_n)
- High Surface Cutting Speed (V_c)
- Use Coolant if Insert Allows

Universal

- Wear Resistant and Tough
- PVD and CVD Coating
- Medium Nose Radius
- Medium Honed Cutting Edge
- Medium Chipbreaker

Cutting Data

- Medium Depth of cut (a_p)
- Medium Feed per Revolution (f_n)
- Medium Surface Cutting Speed (V_c)
- Use Coolant if Insert Allows

Roughing

- Tough and Impact Resistant
- PVD and CVD Coating
- Large Nose Radius
- Heavy Honed Cutting Edge
- Large Chip Breaker

Cutting Data

- Large Depth of cut (a_p)
- High Feed per Revolution (f_n)
- Low Surface Cutting Speed (V_c)
- Use Coolant if Insert Allows

For Insert Best Performance

Starting:

Follow the recommended use and cutting parameters of the insert according to material and application.

Application:

For Roughing, use a tough coated insert grade with a large nose radius, heavy honed cutting edge and large chipbreaker. Cut at a low SFM with a large Depth of Cut (a_p) and high Feed Rate per Rev. (f_n).
For Universal, use a hard, tough & wear resistant coated insert grade with a medium nose radius, honed cutting edge and medium chipbreaker. Cut at a medium SFM with a medium Depth of Cut (a_p) and medium Feed Rate per Rev. (f_n).
For Finishing, use a hard & wear resistant coated insert grade with a small nose radius, sharp to light honed cutting edge and small chipbreaker. Cut at a high SFM with a medium Depth of Cut (a_p) and medium Feed Rate per Rev. (f_n)

Optimum:

Insert Wear, decrease Spindle Speed (n) and/or increase Feed (f_n) or change to a harder insert grade.
Insert Chipping, increase Spindle Speed (n), decrease Feed (f_n), and/or change to a heavier honed edge or change to a tougher insert grade.

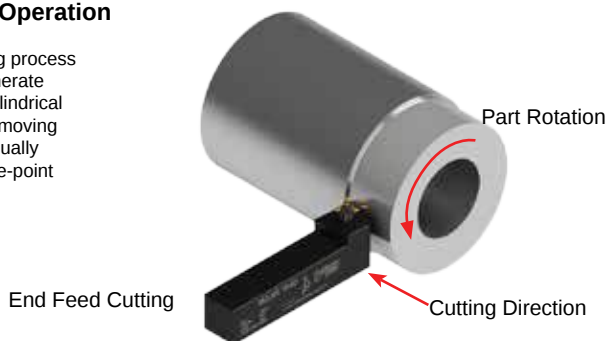
Coolant:

Use Coolant, if the insert grade allows, and always use high pressure coolant to remove the hot chips and heat from the insert to reduce thermal shock.
For Ultimate Performance
 Use Dorian Inserts with Dorian Jet-Stream™ Thru Coolant System. The insert will operate at a constant low temperature, with a clean and undamaged cutting edge, Increasing Insert Life Up to 200%.

Turning and Boring Operations


Turning Operation

A machining process used to generate external, cylindrical forms by removing material, usually with a single-point cutting tool.




O.D. Profile

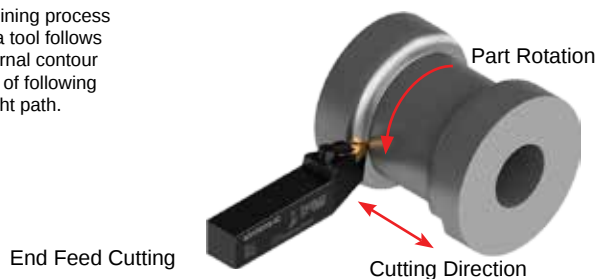A machining process where a tool follows an external contour instead of following a straight path.




Facing Operation

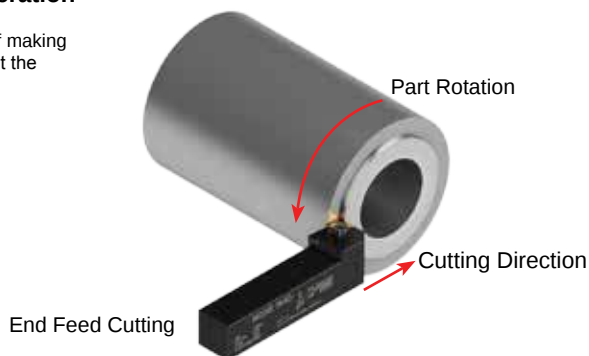The process of making a flat surface at the end of a part.




I.D. Profile

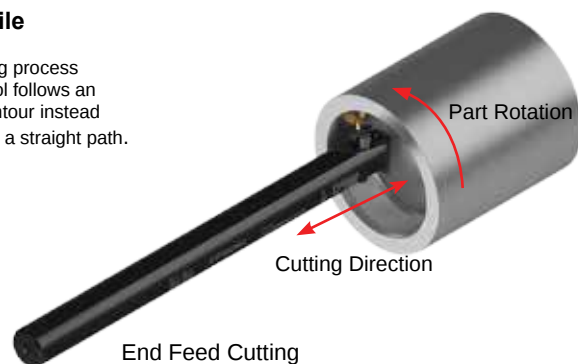A machining process where a tool follows an internal contour instead of following a straight path.




Boring Operation

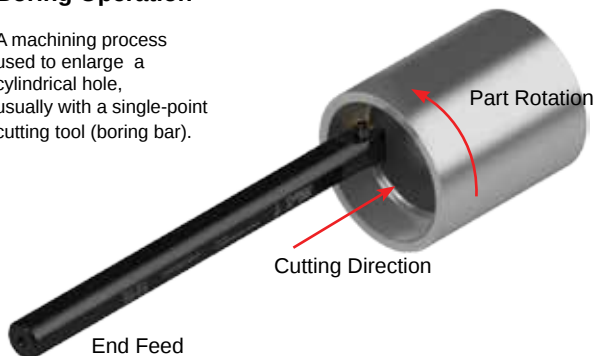A machining process used to enlarge a cylindrical hole, usually with a single-point cutting tool (boring bar).




Between Centers Work

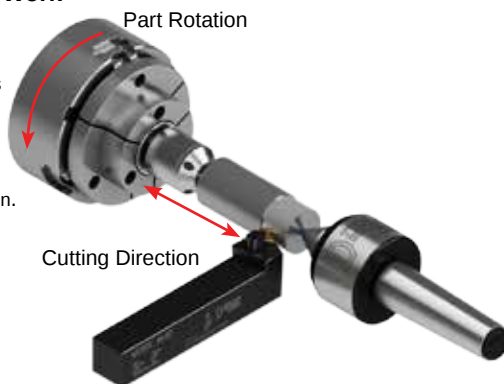A machining process where a work piece is held by using centers on each end. It allows the entire length of the outside diameter of the part to be machined in one continuous operation.




Chamfering Operation

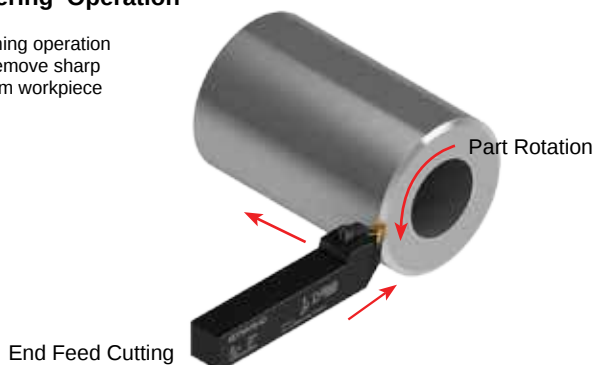Metal turning operation used to remove sharp edges from workpiece diameter.



Chuck Work

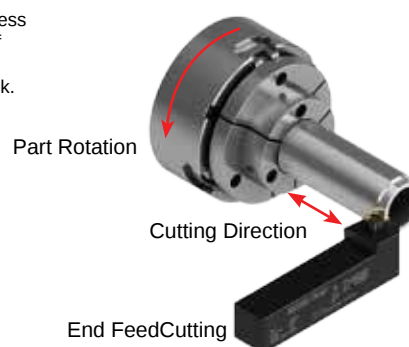
A machining process where any type of workpiece has to be held by a chuck.




Turning and Boring Operation Selection and Application Form

When selecting an indexable cutting tool & Insert you must check the appropriate box ☐ for each area 1-10 below and fax to 979-282-2951.

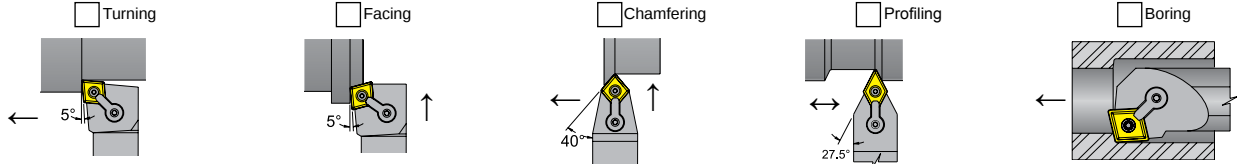
1. Operations



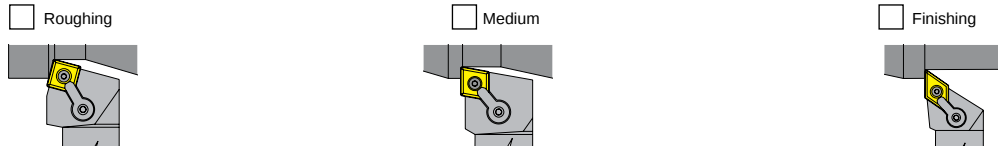2. Application




3. Material




4. Material Form




5. Tool Size



6 A. Turning Direction




6 B. Cutting Direction

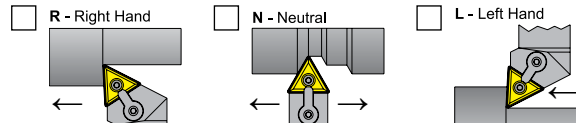

Square Shank

Boring Bar



7. Machine Type




8. Insert Geometry


Finishing - Light Roughing





Multi-application




Roughing



9. Insert Size



10. Insert Tip Radius



Turning Application Data Sheet

Please complete and email to sales@doriantool.com or fax to 888-508-7055

**FREE
INSERTS**
Complete Form
For Test Inserts!

Custome Name:	Person Filling Out the Form:
Contact Name:	Name:
Adress:	Adress:
Phone:	Phone:
Fax:	Fax:
Email:	Email:

Application Data:

Operation Type: ☐ Turning ☐ Boring

Material Type:

Material Hardness:

Material Form: ☐ Bar Stock ☐ Tubing ☐ Casting ☐ Forging

Machine Type: ☐ Manual ☐ CNC ☐ Swiss

Coolant: ☐ High Pressure ☐ Flood ☐ None

SFM:

Depth of Cut:

Feed Rate:




Interrupted Cuts?:


Competitor Insert Info:

Use this space for any additional information you would like to include


NOTES:


Turning and Boring Operation Selection and Application Form





















M-Style		Machining Application			Negative Turning Insert Shape			
External	Best	Good	Average	Roughing	Medium		Finishing	
Internal	Roughing	Medium	Finishing					
					 Round	 80° Diamond	 Triangle	 55° Diamond
					 Square	 80° Trigon	 35° Diamond	

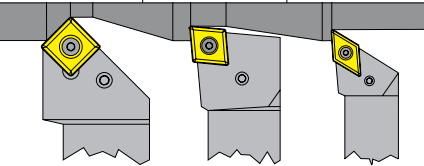P-Style		Machining Application			Negative Turning Insert Shape		
External		Good	Best	Good	Roughing	Medium	Finishing
		Roughing	Medium	Finishing			
Internal					 Square	 80° Diamond	 55° Diamond

W-Style		Machining Application			Negative Turning Insert Shape		
External		Good	Best	Average	Roughing	Medium	Finishing
		Roughing	Medium	Finishing			
Internal							

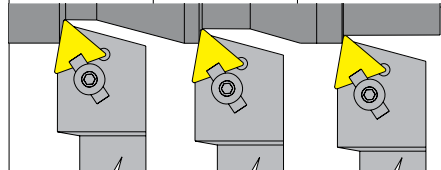C-Style		Machining Application			11° Positive Turning InsertShape		
External 	NOT Recommended	Best	Average	Roughing	Medium	Finishing	
	Roughing	Medium	Finishing				
Internal 				 Square			
				 Triangle			

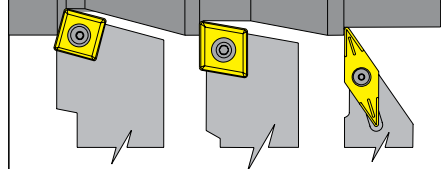S-Style		Machining Application			7°/ 11°/ 15° Positive Turning Insert Shape			
External 	NOT Recommended	Average	Best	Roughing	Medium		Finishing	
	Roughing	Medium	Finishing					
Internal 				 Round	 80° Diamond	 Triangle	 55° Diamond	
				 Square	 80° Trigon		 35° Diamond	

Insert Geometry and Application Selection					
Stronger Roughing Low SFM  Weaker Finishing High SFM	Insert Geometry	Application	O.D. Turning	I.D. Turning	Max. Depth of Cut
	Round 	• Heavy Duty Roughing • Facing • Turning		N/A	 $l_a = 0.400 \times d$
	Square 	• Heavy Duty Roughing • Facing • Turning • Chamfering • I.D. Turning			 $l_a = 0.667 \times l$
	80° Diamond 	• Roughing • Finishing • Turning • Facing • Chamfering • I.D. Turning			 $l_a = 0.667 \times l$
	80° Trigon 	• Roughing • Finishing • Turning • Facing • I.D. Turning			 $l_a = 0.250 \times l$
	Triangle 	• Light Roughing • Finishing • Turning • Facing • Chamfering • I.D. Turning			 $l_a = 0.500 \times l$
	55° Diamond 	• Light Roughing • Finishing • Turning • O.D. Profiling • I.D. Profiling			 $l_a = 0.500 \times l$
	35° Diamond 	• Very Light Roughing • Finishing • O.D. Profiling • I.D. Profiling			 $l_a = 0.125 \times l$

The Indexable Carbide Insert: A cutting bit that has multiple cutting edges and fits in a Toolholder or Boring Bar. Once the insert cutting edge wears a machinist can re-index to a new cutting edge or replace the insert.

Factors For Determining Effective Cutting Edge Length

Shape - As the insert cutting angle becomes smaller, the strength of the insert declines. An 80° triangle insert will be stronger than a 55° diamond insert.

Type - Insert type must be taken into consideration in addition to shape. Some cutting geometries are designed for roughing and some for finishing.

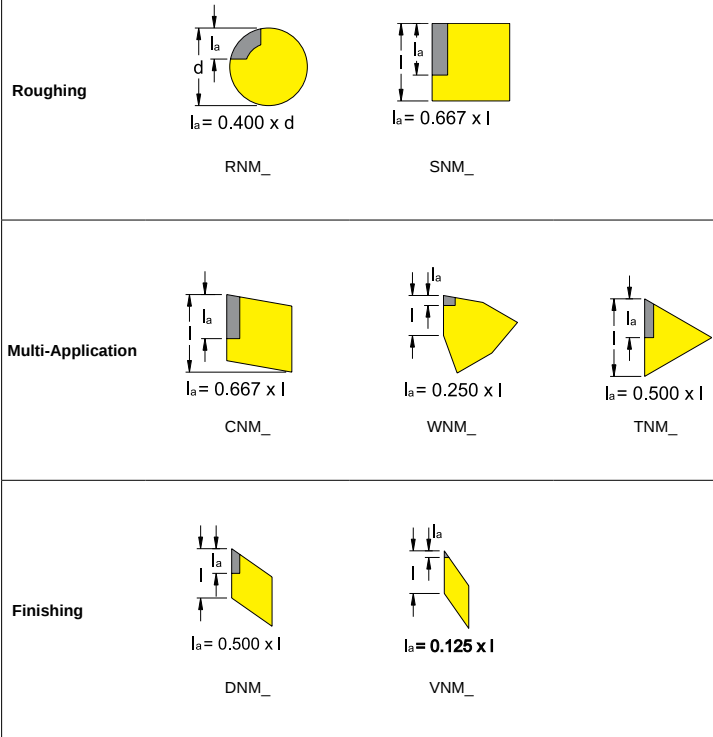
Toolholder lead angle - As the toolholder lead angle increases, the length of the effective cutting edge required for a cut also increases.

If the depth of cut- Is greater than the effective cutting edge, either a smaller depth of cut or a larger size insert should be selected.

Variables- For Determining Effective Cutting Edge:

- a_p = Depth of Cut
- l = Total Insert Cutting Edge
- l_a = Effective Cutting Edge
- M_e = Tracing Angle
- Ψ_r = Toolholder Lead Angle
- $\Psi_{re} = \Psi_r - M_e$ = Effective Lead Angle








Effective Insert Cutting Edge by Insert Shape



Effective Insert Cutting Edge Length for Selected Lead Angles


		Effective Insert Cutting Edge Length for Selected Lead Angles															
Cutting Depth (a_p)		Lead Angle Ψ_r															
		0°		3°		5°		15°		30°		45°		60°		75°	
		Effective Insert Cutting Edge Length (l_a) of the Insert															
Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
0.010	0,25	0.010	0,25	0.010	0,25	0.012	0,30	0.014	0,35	0.020	0,50	0.036	0,90				
0.020	0,50	0.020	0,50	0.021	0,53	0.023	0,58	0.028	0,70	0.039	0,98	0.072	1,80				
0.040	1,00	0.040	1,00	0.041	1,03	0.046	1,15	0.056	1,40	0.078	1,95	0.145	3,63				
0.080	2,00	0.080	2,00	0.083	2,08	0.092	2,30	0.113	2,83	0.156	3,90	0.290	7,25				
0.120	3,00	0.120	3,00	0.124	3,10	0.138	3,45	0.169	4,23	0.234	5,85	0.434	10,85				
0.160	4,00	0.160	4,00	0.166	4,15	0.184	4,60	0.226	5,65	0.312	7,80	0.579	14,48				
0.200	5,00	0.200	5,00	0.207	5,18	0.230	5,75	0.282	7,05	0.390	9,75	0.724	18,10				
0.240	6,00	0.240	6,00	0.248	6,20	0.276	6,90	0.338	8,45	0.468	11,70	0.869	21,73				
0.280	7,00	0.280	7,00	0.290	7,25	0.322	8,05	0.395	9,88	0.546	13,65	1.014	25,35				
0.315	7,88	0.315	7,88	0.326	8,15	0.362	9,05	0.444	11,10	0.614	15,35	1.140	28,50				
0.350	8,75	0.350	8,75	0.362	9,05	0.403	10,08	0.494	12,35	0.683	17,05	1.267	31,68				
0.400	10,00	0.400	10,00	0.414	10,35	0.460	11,50	0.564	14,10	0.780	19,50	1.448	36,20				
0.600	15,00	0.600	15,00	0.621	15,53	0.690	17,25	0.846	21,15	1.170	29,25	2.172	54,30				

Insert Geometry Application						
						
VNM_	DNM_	TNM_	WNM_	CNM_	SNM_	RNM_
Finishing The smaller insert angles of the 55° diamond and 35° diamond inserts are the best choice. These inserts allow for a finer finish.		Multi-Application When turning, facing, chamfering, profiling, or light roughing, use the 80° diamond, 80° trigon, or triangle for best results. Though these inserts combine some of the best features of both the roughing and finishing inserts, they should not be The First Choice for either heavy roughing or extreme finishing.			Roughing Round or square inserts are the best choice because of their superior strength due to large insert angles.	
		Insert Properties				
Minimum	←	Cutting Edge Strength			→	Maximum
Weaker	←	Insert Attitude			→	Stronger
Finishing	←	Turning Application			→	Roughing
Multi	←	Turning Operation			→	Single
Smooth	←	Surface Finishing			→	Vibration
Low	←	Cutting Force			→	High
High	←	Revolution Per Minute			→	Low
Low	←	Feed Per Revolution			→	High

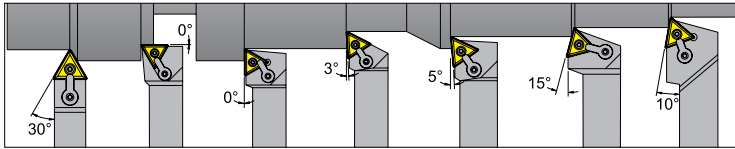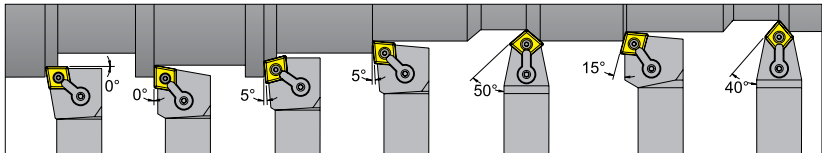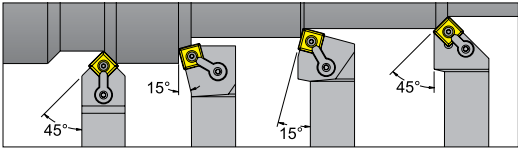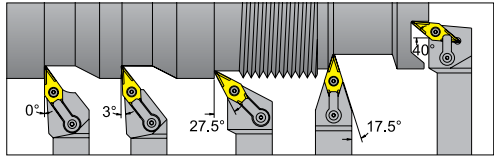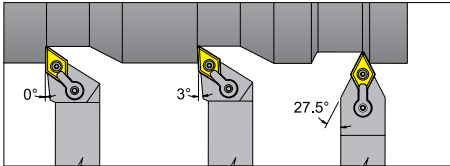Insert Versatility	
Triangle 	
80° Diamond 	
Square 	35° Diamond 
Round 	55° Diamond 
	80° Trigon 

R _{max} Conversion Chart							
R _{max} μinch	R _{max} μm	R _a =CL _A =AA		RMS		Roughness Grade No.	Triangle Symbol
		μinch	μm	μinch	μm		
60	1,6	12.0	0,30	13.3	0,34	N5	
70	1,8	14.0	0,36	15.5	0,39		
80	2,0	16.0	0,41	17.8	0,45		
90	2,2	18.0	0,46	20.0	0,51	N6	
100	2,4	20.0	0,51	22.2	0,56		
110	2,8	22.2	0,56	24.4	0,62		
120	3,0	24.0	0,61	26.6	0,68		
140	3,5	28.0	0,71	31.1	0,79		
160	4,0	32.0	0,81	35.5	0,90		
180	4,5	36.0	0,91	40.0	1,0	N7	
200	5,0	40.0	1,0	44.4	1,1		
240	6,0	48.0	1,2	53.3	1,4		
280	7,0	56.0	1,4	62.2	1,6		
320	8,0	64.0	1,6	71.0	1,8		
360	9,0	72.0	2,8	79.9	2,0	N8	
400	10,0	82.0	2,1	90.7	2,3		
600	15,0	127.0	3,2	141.0	3,6		
800	20,0	177.0	4,5	196.0	5,0	N9	
1000	25,0	230.0	5,8	255.0	6,5		
1050	27,0	242.0	6,1	268.0	6,8		
1200	30,0	288.0	7,3	320.0	8,1	N10	
1400	44,5	352.0	8,9	390.0	9,9		
1600	53,5	421.0	10,7	467.0	11,9		
1800	63,0	497.0	12,6	552.0	14,0		
2000	74,0	582.0	14,8	646.0	16,4		

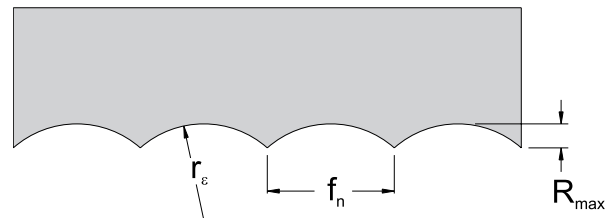Finding R_{max}



R_{max} = profile depth in μinch/μmeter
 r_n = nose radius in inch/millimeter
 f_n = feed in inch/millimeter per revolution

$$R_{max} = \frac{f_n^2 \times 10^6}{8r_n}$$

Theoretical Surface Finish

$$f_n = \sqrt{\frac{R_{max} \times 8r_n}{10^6}}$$

Feed Rate


$$r_n = \frac{f_n^2 \times 10^6}{8 \times R_{max}}$$

Radius


Nose Radius and Feed

Insert Nose Radius


Insert Radius (re)		Maximum Feed FPR (fn)		Minimum Depth of Cut	Minimum Rate	Insert nose radius plays a major role in surface finish. In general, for a given feed rate, the larger the nose radius, the smoother the finish. To help ensure an acceptable finish, the chart at left gives the recommended maximum feed rates for selected insert nose radii. Roughing Application • Use the largest possible radius of the insert nose to allow for greater feed rates. This will result in better stability and lengthen the insert life. • If vibration is a problem, use a smaller radius. • The maximum feed rate (fn) should never exceed 1/2 of the insert nose radius. Finishing Application • Nose radius and feed along with workpiece stability and chucking rigidity are the major factors in surface finish and tolerance. • To improve surface finish, use higher cutting speeds. • Use a small radius insert in order to limit vibration. If vibration is still a problem, use a smaller radius. • Choosing the correct insert grade is essential for a quality finish. Depth of Cut The minimum Depth of Cut should not be less than a half insert.
inch	mm	inch	mm			
0.004	0,10	0.002	0,05			
0.008	0,20	0.004	0,10			
0.016	0,40	0.008	0,20			
0.032	0,80	0.016	0,40			
0.047	1,20	0.023	0,60			
0.062	1,6	0.031	0,80			
0.093	2,4	0.046	1,2			



Insert Radius Selection Chart




Theoretical Surface Finish AA

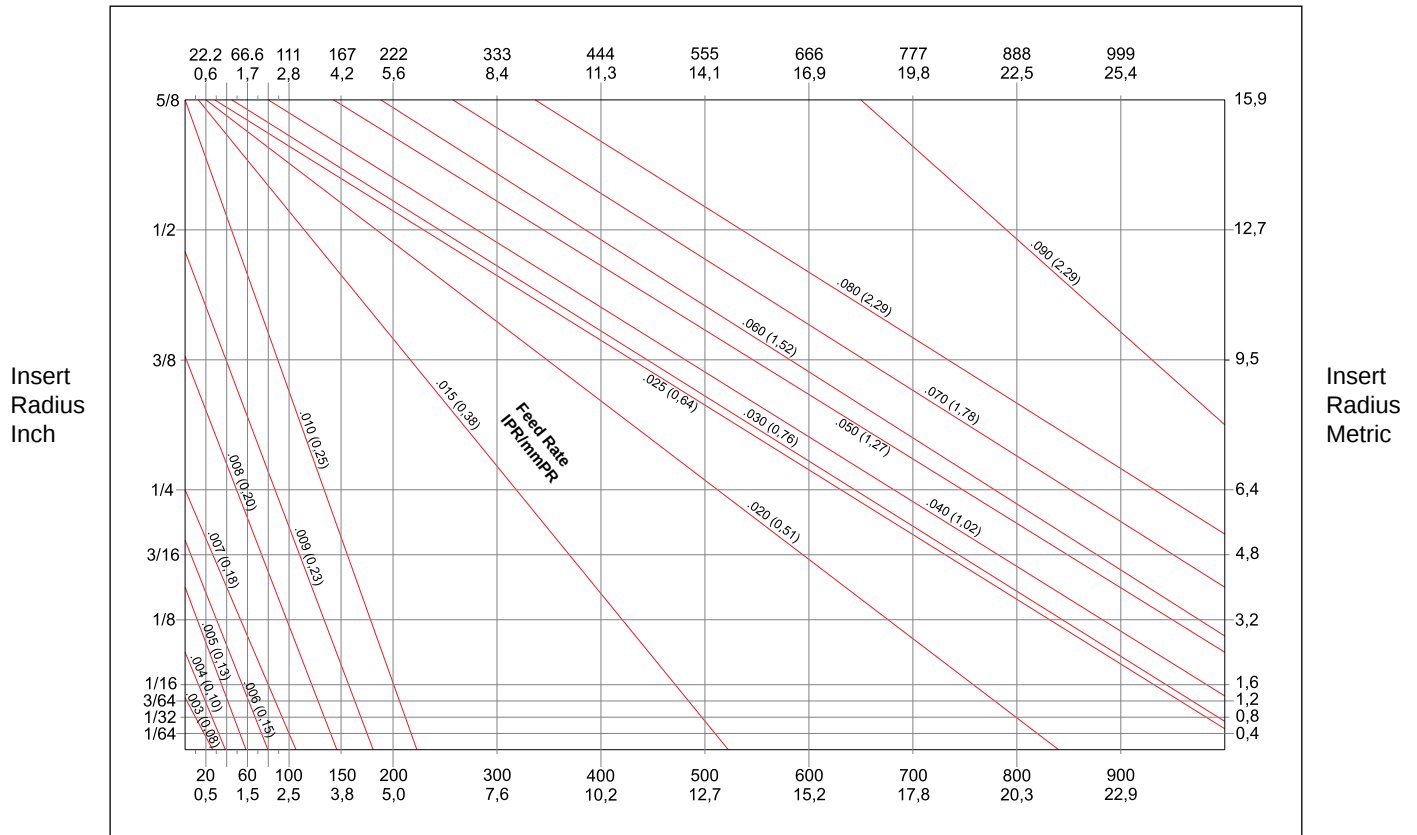

Theoretical Surface Finish RMS

Sample Radius Selection

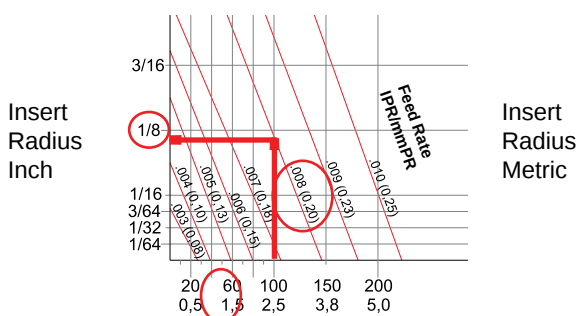Theoretical Surface Finish AA



Theoretical Surface Finish RMS

Using the Insert Radius Selection Chart

1. Select the desired surface finish, AA or RMS
(Example to the left uses a surface finish of 100 RMS).
2. Draw a vertical line from the desired surface finish to the desired feed rate
(In the Example, .008 IPR).
3. Draw a horizontal line from the intersection of the surface finish and feed rate to find the recommended insert radius. If this line falls between two radii, choose the larger (1/8 in the example). If the recommended radius is larger than desired, choose a smaller feed rate and repeat step 3.

This chart may also be used to find a theoretical surface finish by simply using a known insert radius and feed rate.

Note: Information provided in this chart is to be used as a starting point only and may need to be adjusted to accommodate actual working conditions.

Guidelines for Utilizing The Boring Bar for Internal Work

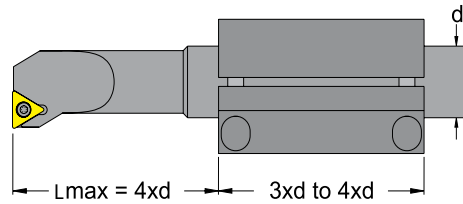
- When choosing a boring bar, always try to select the largest shank diameter that the application will allow.
- As a rule of thumb, never allow a boring bar to extend more than four times its diameter from the end of its clamping surface.
- Using boring bars with coolant through the shank can greatly enhance the removal of chips and improve surface finish on deep bores or blind holes.
- Be sure to use a stable, properly sized clamping method to secure a boring bar. Use the following information as a guide:

Clamping Length: 3-4 x bar diameter

Hole Tolerance: H8





Surface Finish: 32μ in R_a

Hardness: 45 HRC minimum





Note: This rule is for steel boring bars only. Carbide boring bars are effective with an overhang of up to seven times the bar diameter.

Boring Bar Clamping Selection

Best Collar Lock System	Better Screw Lock System	Good	Not Recommended
			
Integral bar or flange mounting. Most rigid, but not adjustable.	Split block holder. Provides maximum surface area for clamping.	Cylindrical holder with screws. Provides quick center line reference.	V-groove with screws. See cylindrical holder with screws.

Minimizing Vibration

Less Vibration  More Vibration	Insert Radius	Cutting Rake
	Use a smaller radius to limit vibration. 	Use as positive cutting rake to limit vibration. 

Material Application	Best
Titanium Alloys, Inconel, Hastelloy, Waspaloy	●
Carbon-Graphite-Phenolic	●
Brass , Bronze, Copper	●
Aluminum	○
Carbon & Alloy Steel	●
Stainless Steel	●
Cast Iron	●

Insert Grade Technology

DNU25GT

First Choice: For general turning applications at a medium SFM (V_C).
Uncoated, hard micro-grained substrate with a hard and tough cutting edge for light interrupted cuts. Best for Aluminum, Super Alloys, Plastic and all non Ferrous metals and materials.

DUP25GT

First Choice: For Universal turning applications at high SFM (V_C).
Hard, tough, wear and abrasive resistant substrate the PVD TiN/TiAlN coating improves cutting performance and insert life.
For Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

DUP35RT

First Choice: For all around and unstable turning applications at a medium SFM (V_C). Tough, hard and impact resistant substrate, the PVD TiAlN/WC/C Coating improves cutting performance and insert life. (Light Interrupted Cuts)
Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

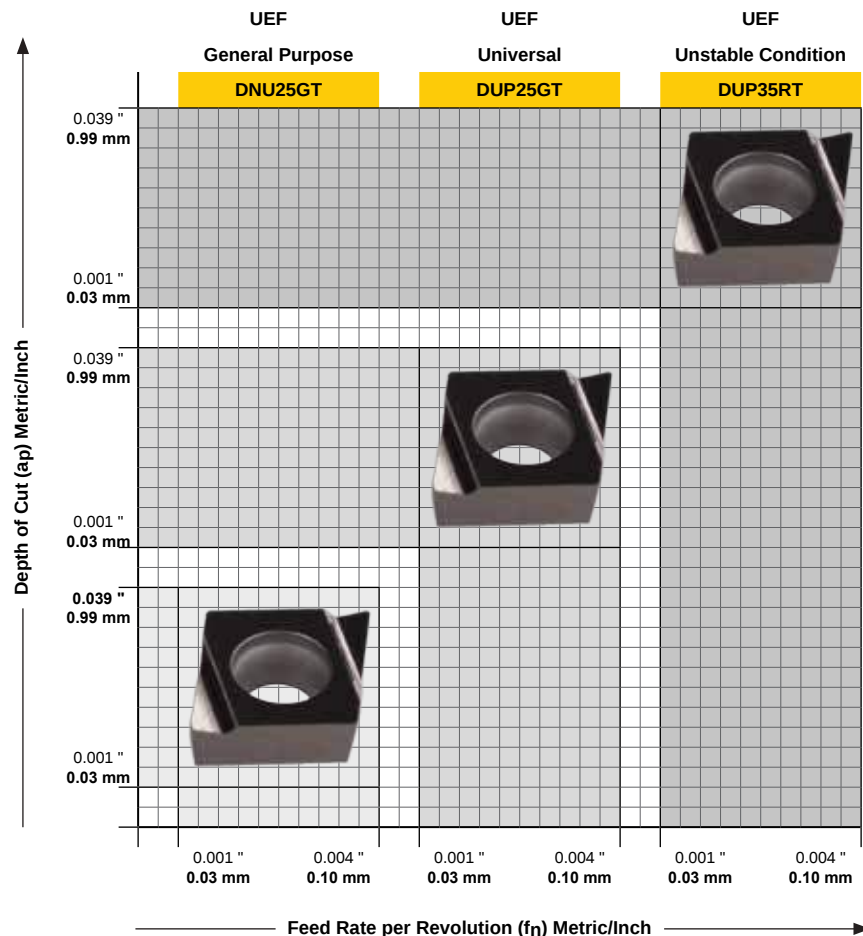
Insert Application
High Precision Turning & Small Boring Application

7° Positive
Precision ground insert Precision ground Chip Breaker Light Honed Cutting Edge Uncoated & Coated Multi geometry High Precision Insert Indexing Repeatability

Insert Grade
DNU25GT General Purpose Turning & Boring on smooth surface. Low V_C , No interrupted cuts.
DUP25GT Universal Turning & Boring, on smooth surface. High V_C , No interrupted cuts.
DUP35RT Unstable Turning & Boring working condition light uneven surface, Medium V_C , Light Interrupted cuts.

Insert Chip Breaker
UEF High performance The Precision Ground Chip Breaker, controls the length of the chips. Best for precise turning and boring application small holes with precise tolerances and high surface finish.

Insert Attitude
Cutting Condition: Wet SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Positive Turning Insert Grade & Cutting Data

Material Application	Best
Titanium Alloys, Inconel, Hastelloy, Waspaloy	●
Carbon & Alloy Steel	●
Stainless Steel	●
Malleable, Modular, and Gray Cast Iron	●
Brass , Bronze, Copper	●
Carbon-Graphite-Phenolic	●
Hardened Alloy Steel	●

7° Positive

Precision pressed insert
Ground Top, no Chip Breaker
Light Honed Cutting Edge
Coated
Multi geometry
High Precision Insert Indexing Repeatability

Insert Grade

DKU10HT

High performance Turning & Boring
High V_c , Light interrupted cuts.

DUP15VT

Universal Turning & Boring,
Medium V_c , for interrupted cuts

DUP35RT

General Turning & Boring,
Medium/High V_c , for interrupted cuts.

Insert Chip Breaker

KEU High performance

The precision ground periphery and top of the insert creates a sharp and precise cutting edge, best for small depth of cut, close working tolerances and high surface finish for turning and boring application.

Insert Attitude

Cutting Condition: Wet

SFM (V_c)

Value are given in wet cutting condition.
Reduced V_c 20% when cutting in dry condition

SFM (V_c)

Value are given at minimum Feed Rate,
Reduced V_c from 10% to 50% when increase Feed Rate.

Insert Grade Technology

DKU10HT

First Choice: For general turning applications at Low to medium SFM (V_c).
Wear and abrasive resistant uncoated substrate. (No Interrupted Cuts).
Best for all non Ferrous materials including Gray Iron and Ductile Iron.
Aluminum, Stainless Steel and Hardened Steel.

DUP15VT

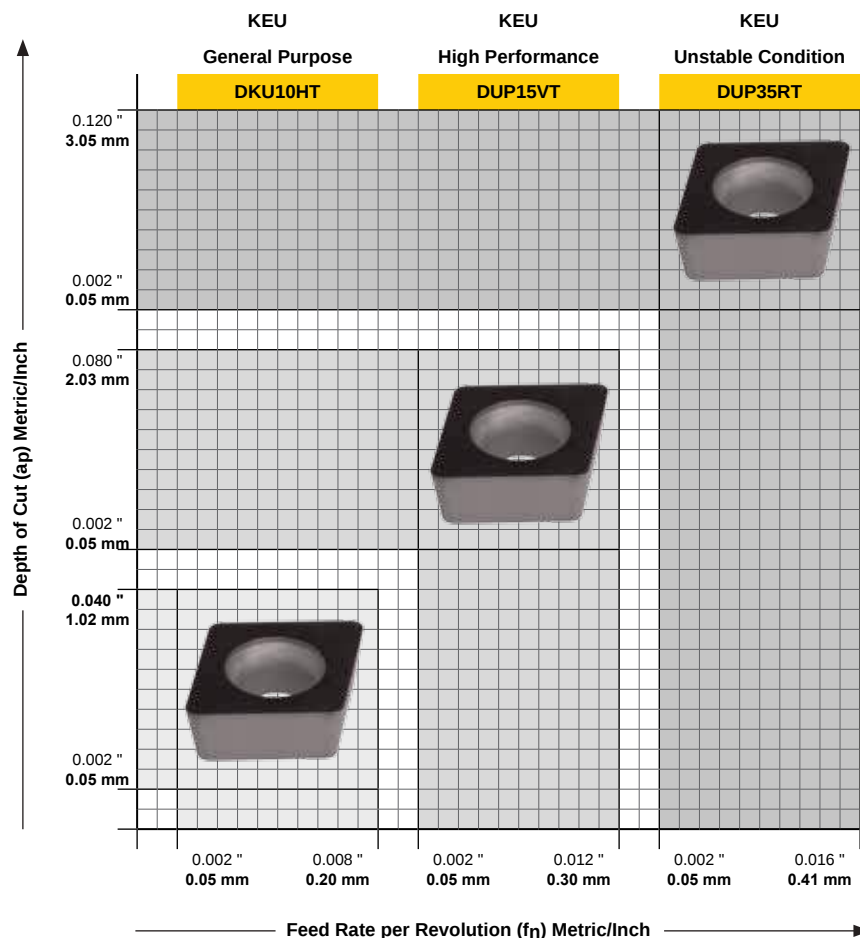
First Choice: For High Performance in turning applications at a very high SFM (V_c). Very hard and wear resistant substrate, the PVD AlCrN hard coating minimize the cutting friction, with a better surface finish and a longer insert life. (No Interrupted cuts).
Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

DUP35RT

First Choice: For all around and unstable turning applications at a medium SFM (V_c). Tough, hard and impact resistant substrate, the PVD TiAlN/WC/C Coating improves cutting performance and insert life. (Light Interrupted Cuts).
Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

Insert Application

High
Precision
Turning & Boring
Application



Material Application	Best
Titanium Alloys, Inconel, Hastelloy, Waspaloy	●
Carbon-Graphite-Phenolic	●
Brass , Bronze, Copper	●
Aluminum	○
Carbon & Alloy Steel	●
Stainless Steel	●
Cast Iron	●

7° Positive
Precision ground insert Positive pressed Chip Breaker Light honed Cutting Edge Coated Multi geometry High Precision Insert Indexing Repeatability

Insert Grade
DUP15VT High Performance Turning & Boring on smooth surface. High V_C , No interrupted cuts.
DUP25GT Universal Turning & Boring on smooth surface. High V_C , No interrupted cuts
DUP35RT Unstable Turning & Boring working condition light uneven surface, Medium V_C , Light Interrupted cuts.

Insert Chip Breaker
UEU High performance The precision ground periphery and pressed chip breaker of the insert, creates a sharp and precise cutting edge, best for small to medium depth of cut, close working tolerances and high surface finish for general turning and boring application.

Insert Attitude
Cutting Condition: Wet SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Insert Grade Technology

DUP15VT

First Choice: For High Performance in turning applications at a very high SFM (V_C). Very hard and wear resistant substrate, the PVD AlCrN hard coating minimize the cutting friction, with a better surface finish and a longer insert life. (No Interrupted Cuts).
Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

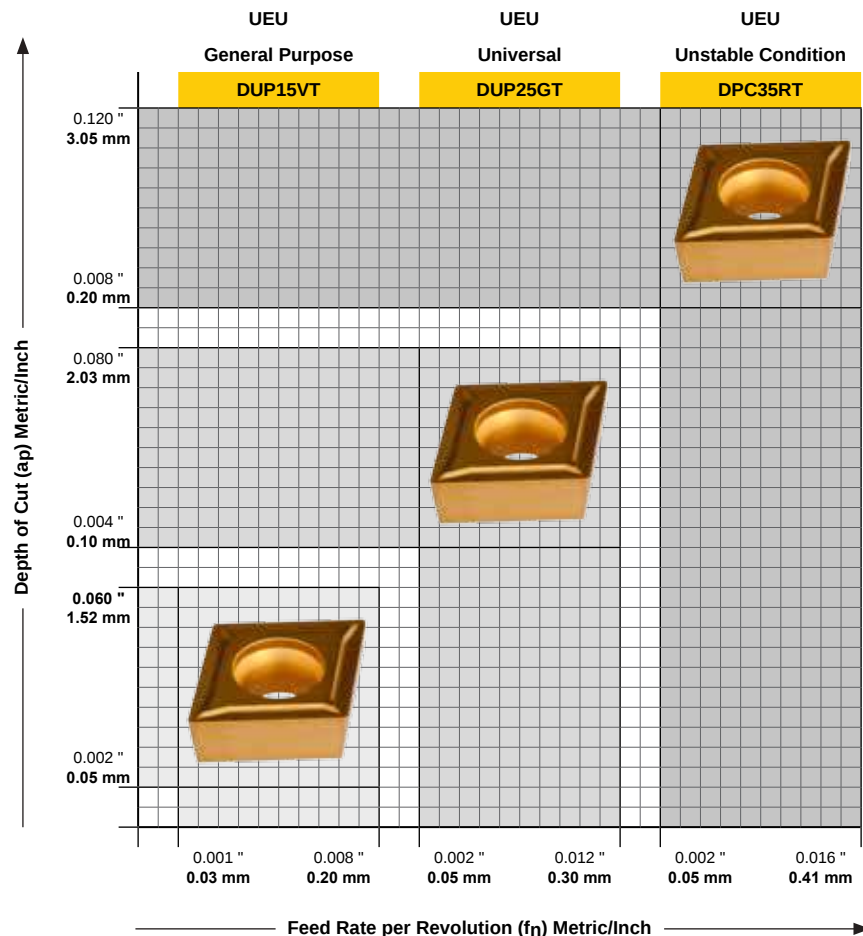
DUP25GT

First Choice: For Universal turning applications at high SFM (V_C). Hard, tough, wear and abrasive resistant substrate the PVD TiN/TiAlN coating improves cutting performance and insert life. (No Interrupted Cuts)
Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

DPC35RT

First Choice: For all around and unstable turning applications at a medium SFM (V_C). Tough, hard and impact resistant substrate, the PVD TiAlN/WC/C Coating improves cutting performance and insert life. (Light Interrupted Cuts)
Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.

Insert Application
High Precision Turning & Boring Application



Positive Turning Insert Grade & Cutting Data

Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	●
Gray Cast Iron	●

7° Positive

Precision pressed insert
Positive chip breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade

DPC15HT

Hard & Wear Resistant, from Roughing to Finishing on smooth surface.
High V_C , no interrupted cut.

DPC25UT

Hard & Tough, from Roughing to Finishing on uneven surface.
Medium V_C , Light interrupted cut.

DPC35RT

Tough & Impact Resistant, from Roughing to Finishing on rough surface.
Low V_C , interrupted cut.

Insert Chip Breaker

PEF Finishing

The sharp cutting edge (light honed) and the small Chip Beaker, will machine small Depth of Cut at low Feed Rate, with precise machining repeatability, good surface finish, and breaking the chips in short length.

PEM Light Roughing to Finishing

The medium honed cutting edge and the medium Chip Beaker, will allow to machine with a wide range of cutting depths, Feed Rates and a good chip control.

PEU Multi Application

The honed cutting edge and the medium Chip Beaker, allows a multi turning and boring application, with good machining tolerances, surface finish and chip control.

Insert Attitude

Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Insert Grade Technology

DPC15HT

First Choice: From finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

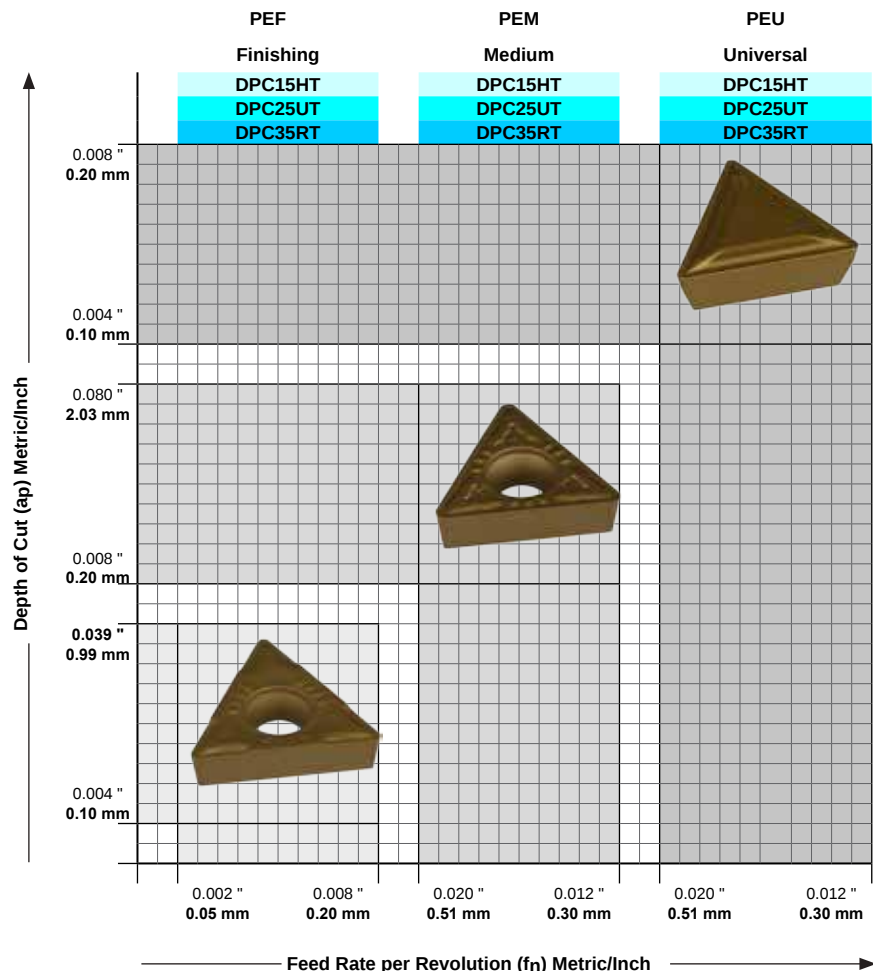
First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating, (medium interrupted cut) for cutting Carbon and Alloy Steel, good for Stainless Steel.

DPC35RT

First Choice: For casting, forging and uneven surface turning applications at a low SFM (V_C). Tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating, (for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

Insert Application

General Turning
& Boring Application



Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	●
Gray Cast Iron	●

7° Positive Insert

Precision ground insert
High Positive pressed Chip Breaker
Light honed Cutting Edge
Uncoated & Coated
Multi geometry
High Precision Insert Indexing Repeatability

Insert Grade

DPC15HT

Hard and Wear Resistant, from Roughing to Finishing on smooth surface, High V_C no interrupted cut.

DPC25UT

Hard and tough, from Roughing to Finishing on uneven surface, Medium V_C , Light interrupted cut.

DPC35RT

Tough and Impact Resistant, from Roughing to Finishing on rough surface, Low V_C , interrupted cut.

DMC30UT

Universal Turning & Boring, Medium V_C , for interrupted cuts.

Insert Chip Breaker

UEX High performance

The High Positive and large Chip Breaker allows large material removal and free Chip Evacuation in multi Depth of Cut. The precise ground periphery of the insert and the sharp cutting edge, makes the best insert for turning and boring thin wall tubing and deep boring applications.

Insert Attitude

Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Insert Grade Technology

DPC15HT

From finishing to roughing turning applications at a high SFM (V_C). Hard wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

First Choice: For Universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating. (medium interrupted cut). Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

DPC35RT

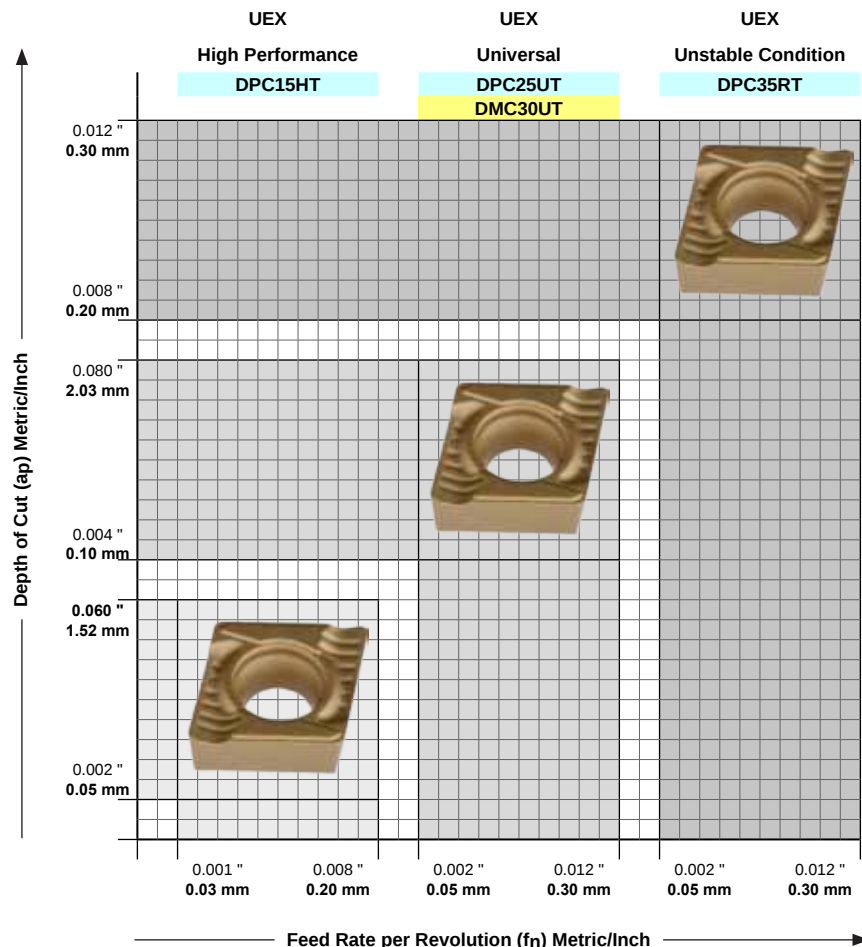
First Choice: For casting, forging and uneven surface turning applications at a low SFM (V_C). Tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating. (for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

DMC30UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough, impact and thermal shock resistant substrate with a CVD TiCN/TiN coating. Best for 300, 400, and PH series Austenitic Stainless Steel.

Insert Application

Thin Wall Tubing
& Deep
Boring Application



Positive Turning Insert Grade & Cutting Data

Material Application	Best
300 Series Stainless Steel	●
430 Series Stainless Steel	●
17-4 PH Series Stainless Steel	●
Austenitic-Ferritic Duplex	●

Insert Grade Technology

DMC20HT

First Choice: For High Performance in turning applications at a very high SFM (V_C). Heat Resistant, High stability against plastic deformation, CVD TiCN/TiN coating to improves cutting performance and insert life.
Best for 300, 400 and PH series Austenitic Stainless Steel.

DMC30UT

First Choice: For universal turning applications at a medium SMF (V_C). Hard, tough, impact and thermal shock resistant substrate. CVD TiCN/TiN coating to improves cutting performance and insert life.
Best for 300, 400 and PH series Austenitic Stainless Steel.

Insert Application
High Performance Turning & Boring Application

Positive Insert

Precision pressed insert
Positive pressed Chip Breaker
High Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade

DMC20HT

High Performance Turning & Boring,
High V_C , Light interrupted cuts.

DMC30UT

Universal Turning & Boring,
Medium V_C , for interrupted cuts.

Insert Chip Breaker

MEH High Performance

Stainless steel chip breaker, engineered specifically for turning and boring all types of stainless steel and operation, with a variable depth of cut (a_p) and feed rate (f_n).

MEM For General Application

Medium Chip Breaker, positive rake angle and honed cutting edge, for chip control and free evacuation in medium Depth of Cut and feed cutting speed.

Insert Attitude

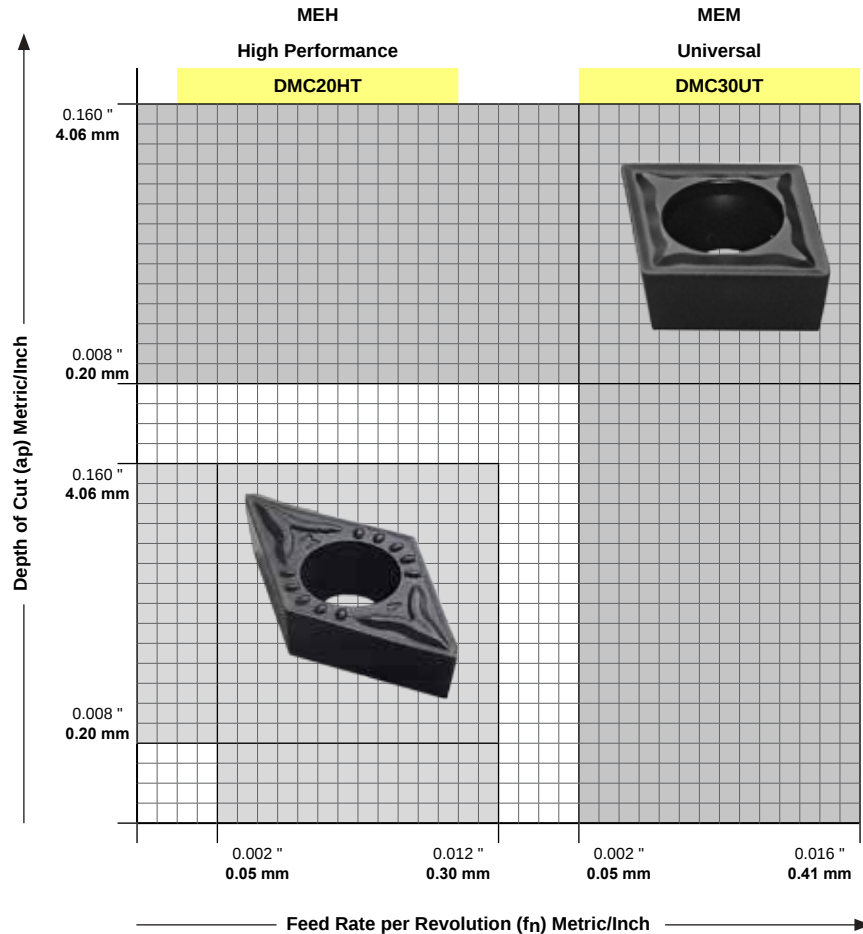
Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Material Application	Best
Gray Cast Iron	●
Modular Cast Iron	●
Malleable Cast Iron	●
Hardened Alloy Steel	●

Insert Grade Technology

DKC15RT

First Choice: For roughing and finishing uneven surface and interrupted cuts applications at medium SFM (V_c). Wear and impact resistant substrate and cutting edge. CVD TiN/Al₂O₃/TiCN coating improve performance and insert life. Best for turning Modular Cast Iron, Ductile Iron

Insert Application

**High Performance
Turning & Boring**

7° Positive

Precision pressed insert
Positive Chip Breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade

DKC15RT

Tough & Impact Resistant, from Roughing to Finishing on rough surface and castings Low V_c , interrupted cuts.

Insert Chip Breaker

KEM Medium

Ground Surface, no Chip Breaker, Negative Rake Angle, and Medium Honed Cutting Edge, medium depth of cut and feed rate.

Insert Attitude

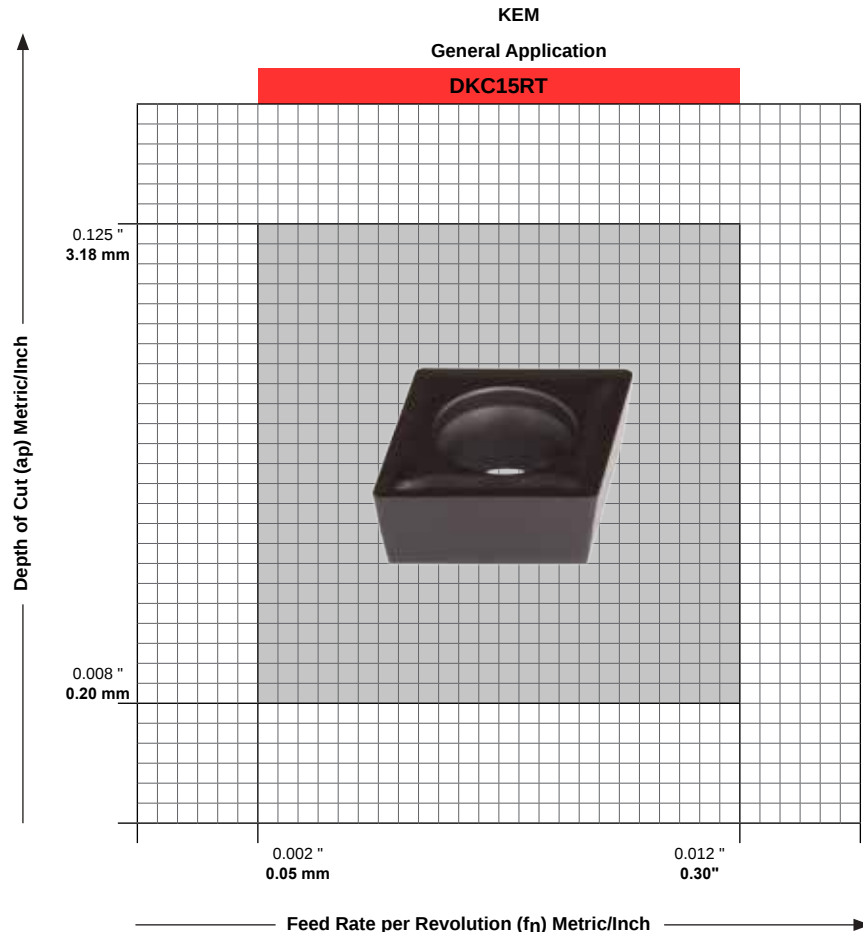
Cutting Condition: Wet

SFM (V_c)

Value are given in wet cutting condition. Reduced V_c 20% when cutting in dry condition.

SFM (V_c)

Value are given at minimum Feed Rate. Reduced V_c from 10% to 50% when increase Feed Rate.



Positive Turning Insert Grade & Cutting Data

Material Application	Best
Aluminum	●
Magnesium - Zinc	●
Brass , Bronze, Copper	●
Super Alloy	●
Carbon-Graphite-Phenolics	●
Carbon & Alloy Steel	●
Stainless Steel	●

Insert Grade Technology

DNU10GT

First Choice: For general turning and boring applications at a high SFM (V_C). Hard, abrasive and wear resistant micro-grained uncoated substrate, for a hard and sharp cutting edge, (not for interrupted cuts). Best for Aluminum, Supper Alloys, Plastic and all non Ferrous metals and materials.

DNX10UT

First Choice: For universal turning at a very high SFM (V_C). Hard, abrasive and high resistant substrate with a microplus® plasma TiAlN coating to improve cutting edge hardness, wear and heat resistant, and better chip flow. Best for Aluminum, Plastic, Super Alloys and low Silicone Aerospace Aluminum.

Insert Application

For High Performance and Precision Turning & Boring Application

7° Positive

Precision Ground insert
High Positive Chip Breaker
High Polished Chip Breaker
Sharp Cutting Edge
Multi geometry
High Precision Insert Indexing Repeatability

Insert Grade

DNU10GT

For general Turning & Boring applications at a SMF V_C , no interrupted cuts.

DNX10UT

For Universal Turning & Boring application at a very High SFM V_C , no interrupted cuts.

Insert Chip Breaker

NFU High Performance

The High Positive, large and polished Chip Breaker allows large depth of cut, high rate of material removal and free chip evacuation with little cutting pressure.
The precise ground periphery of the insert and the sharp cutting edge, makes the best for small depth of cut, close working tolerances and high surface finish.

Insert Attitude

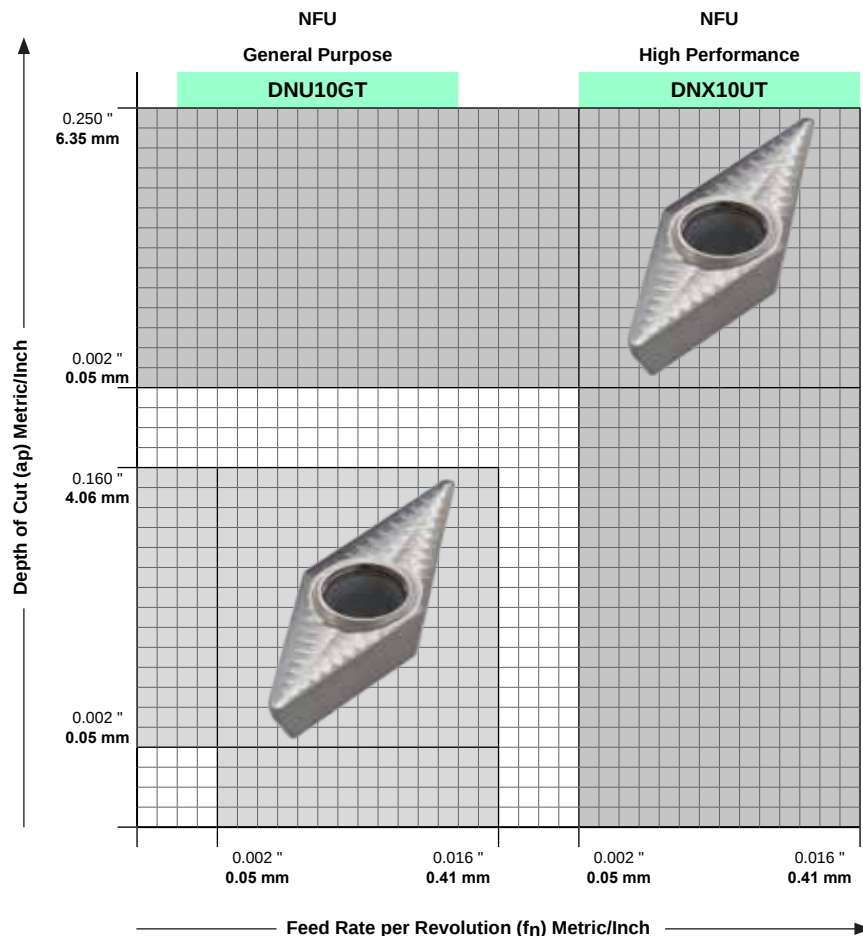
Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	○
Gray Cast Iron	○

Insert Grade Technology

DPC15HT

From finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating, (medium interrupted cut) for cutting Carbon and Alloy Steel, good for Stainless Steel.

DPC35RT

First Choice: For casting, forging and uneven surface turning applications at a low SFM (V_C). Tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating, (for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

Insert Application

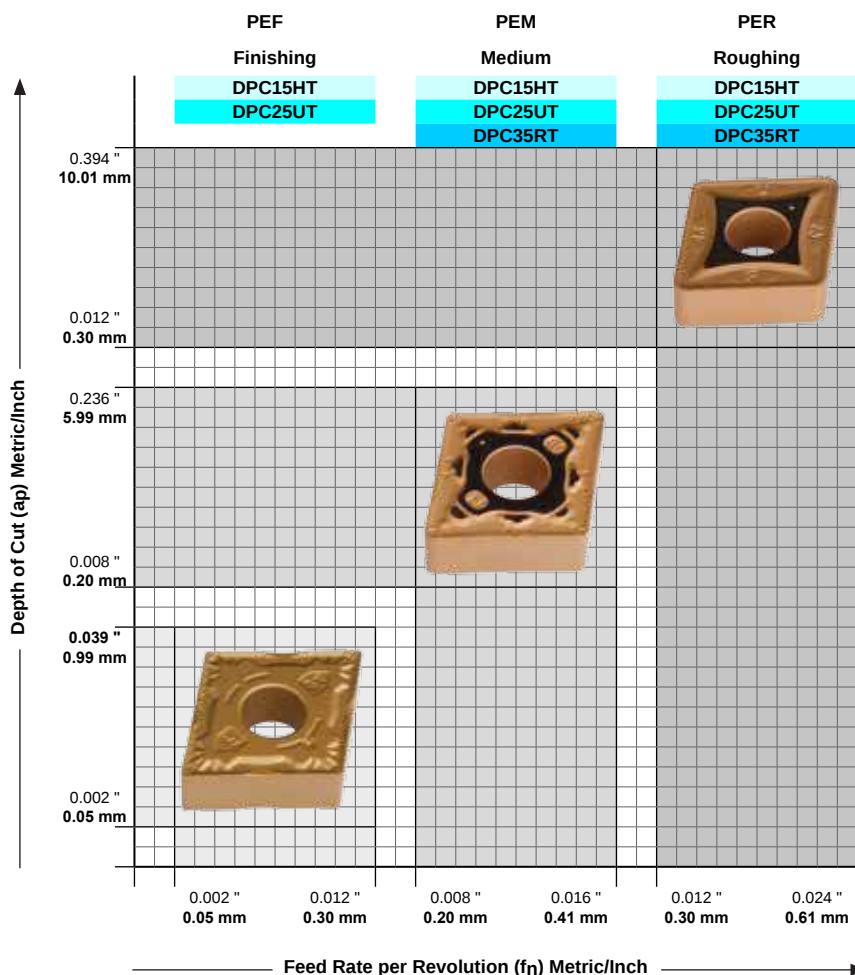
High Performance
Turning &
Boring Application

Negative Insert
Precision pressed insert
Positive Chip Breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade
DPC15HT Hard & Wear Resistant, from Roughing to Finishing on smooth surface. High V_C , no interrupted cut.
DPC25UT Hard & Tough, from Roughing to Finishing on uneven surface. Medium V_C , Light interrupted cut.
DPC35RT Tough & Impact Resistant, from Roughing to Finishing on rough surface. Low V_C , interrupted cut.

Insert Chip Breaker
PEF Finishing The sharp cutting edge (light honed) and the small Chip Breaker, will machine small Depth of Cut at low Feed Rate, with precise machining repeatability, good surface finish, and breaking the chips in short length.
PEM Light Roughing to Finishing The medium honed cutting edge and the medium Chip Breaker, will allow to machine with a wide range of cutting depths, Feed Rates and a good chip control.
PER Roughing Large Chip Breaker, positive rake angle and large honed cutting edge for better Chip control and evacuation in large Depth of Cut and high material removal.


Insert Attitude
Cutting Condition: Wet
SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.




PEX Style Chipbreaker Technology

Wiper Insert Technology for High Performance Turning Applications

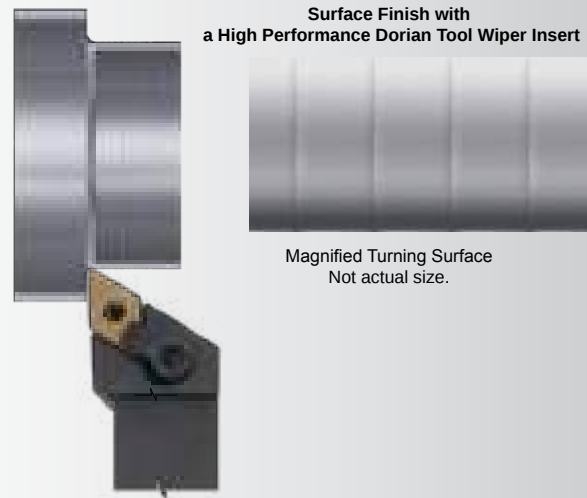- High Material Removal
- High Surface Finish
- Close Cutting Tolerance
($\pm .0002"$, $\pm .005\text{mm}$)



Turning with Conventional Inserts

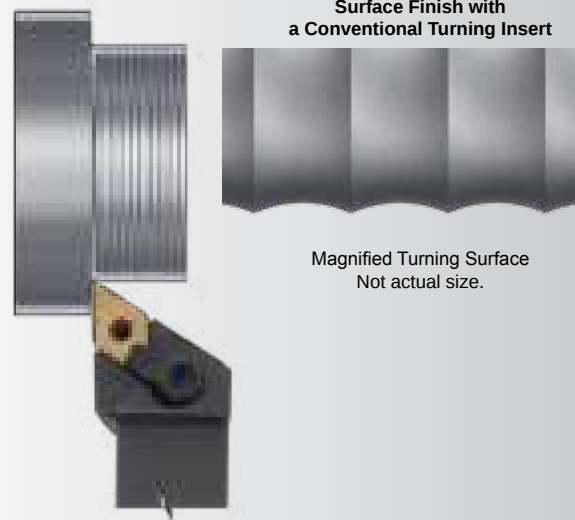

Wiper Insert Technology

Double Leading Angle

To maximize insert cutting edge strength

Triple Nose Radius

To minimize cutting friction

Wiper Angle

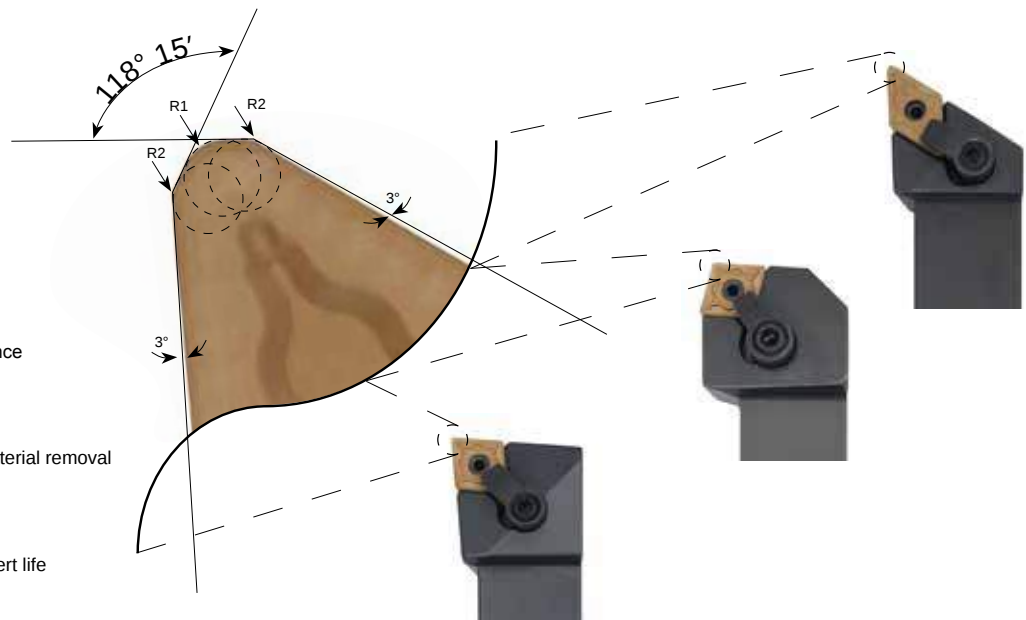
For high surface finish and close turning tolerance

Rake Angle

For chip control evacuation and high rate of material removal

Cutting Edge Preparation

To minimize cutting pressure and maximize insert life



Negative Turning Wiper Insert Grade & Cutting Data

Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	○
Gray Cast Iron	○

Insert Grade Technology

DPC15HT

From finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating, (medium interrupted cut) for cutting Carbon and Alloy Steel, good for Stainless Steel.

Insert Application

High Surface Finish in Turning & Boring Application

Negative Insert

Precision pressed insert
Positive chip breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade

DPC15HT

Hard & Wear Resistant, from Roughing to Finishing on smooth surface.
High V_C , no interrupted cut.

DPC25UT

Hard & Tough, from Roughing to Finishing on uneven surface.
Medium V_C , Light interrupted cut.

Insert Chip Breaker

PEX High Surface Finish and Close Tolerance
Wiper nose Technology, the double leading angle, the Positive Chip Breaker and rake angle, with the Honed Cutting Edge, for high surface Finish and Close working Tolerance in Turning and Boring Application. at Medium Depth of Cut (a_p) and High Feed Rate

Insert Attitude

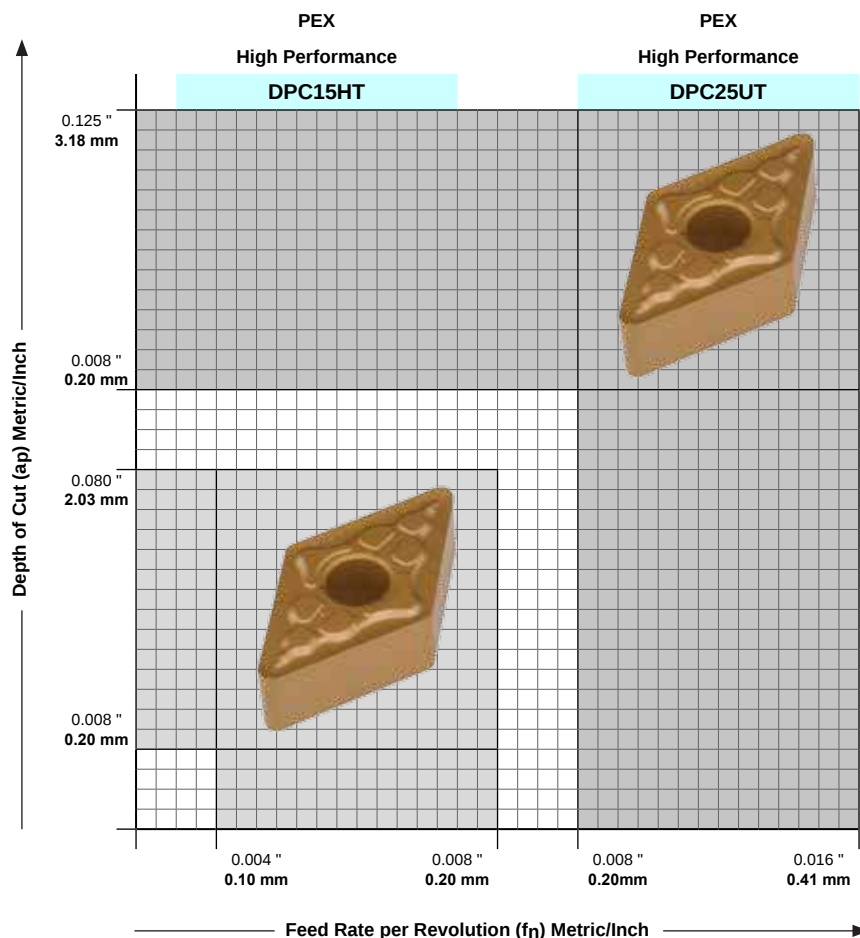
Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Negative Turning Insert Grade & Cutting Data

Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	○
Gray Cast Iron	○

Insert Grade Technology

DPC15HT

First Choice: From finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating, (medium interrupted cut) Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

DPC35RT

First Choice: For casting, forging and uneven surface turning application at a low SFM (V_C). Tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3/TiCN$ coating, (for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

Insert Application
Light Roughing and Precision Finishing Turning & Boring Operation

Negative Insert

Precision pressed insert
Positive Chip Breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade

DPC15HT

Hard & Wear Resistant, from Roughing to Finishing on smooth surface, High V_C , no interrupted cut.

DPC25UT

Hard & Tough, from Roughing to Finishing on uneven surface, Medium V_C , Light interrupted cut.

DPC35RT

Tough & Impact Resistant, from Roughing to Finishing on rough surface, Low V_C , interrupted cut.

Insert Chip Breaker

UEM Precision Finishing to Light Roughing

Medium pressed Chip Breaker, positive rake angle and small honed cutting edge, to control the length of chips in small Depth of Cut and free flow over the cutting edge.
Light Roughing to Precision Turning and Boring Application. Low cutting pressure for turning and boring thin wall tubing and deep hole boring.

Insert Attitude

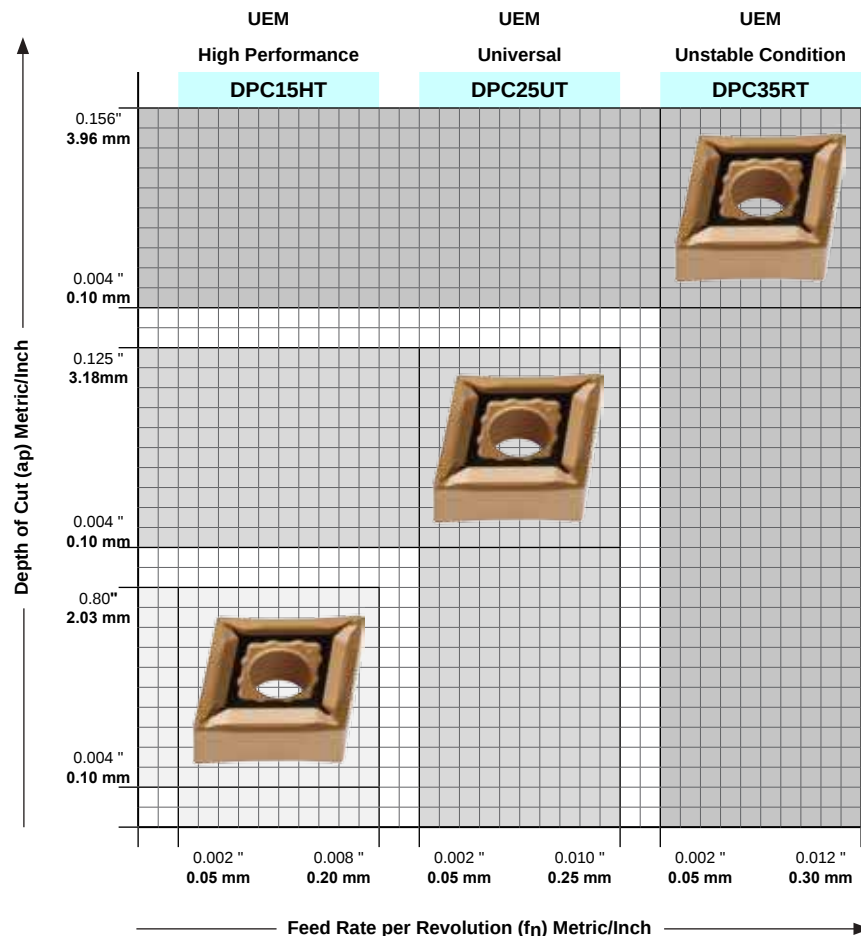
Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	○
Gray Cast Iron	○

Negative Insert
Precision ground insert High Positive pressed Chip Breaker Light Honed Cutting Edge Coated & Uncoated Multi geometry High Precision Insert Indexing Repeatability

Insert Grade
DPC15HT Hard & Wear Resistant, from Roughing to Finishing on smooth surface, High V_C, no interrupted cut. DPC25UT Hard & Tough, from Roughing to Finishing on uneven surface, Medium V_C, Light interrupted cut. DPC35RT Tough & Impact Resistant, from Roughing to Finishing on rough surface, Low V_C, interrupted cut. DMC30UT Universal Turning & Boring Medium V_C for interrupted cuts.

Insert Chip Breaker
UEX High Performance The High Positive and large Chip Breaker allows large material removal and free chip evacuation in multi depth of cut and low cutting pressure. The precise periphery of the insert, and the sharp cutting edge, makes the best insert for turning and boring thin wall tubing and deep boring applications.
Insert Attitude
Cutting Condition: Wet SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition. SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Insert Grade Technology

DPC15HT

From finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating, (medium interrupted cut, for cutting Carbon and Alloy Steel, good for Stainless Steel.

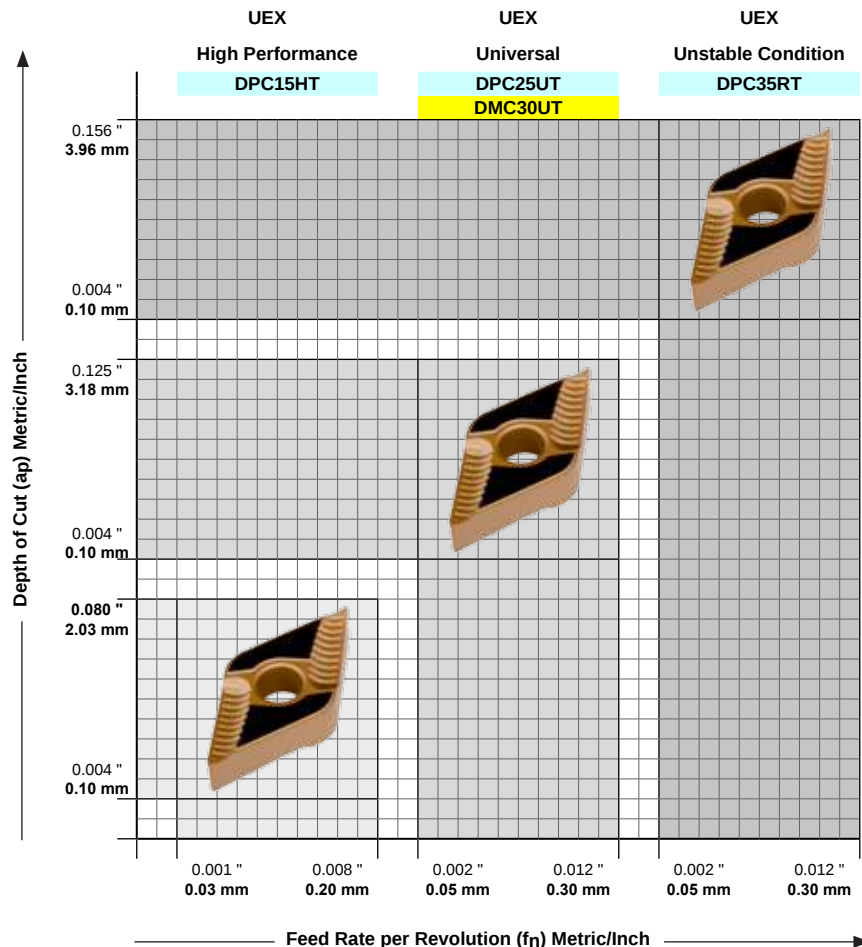
DPC35RT

For casting, forging and uneven surface turning applications at a Low SFM (V_C). Tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ /TiCN coating, (for interrupted cut) Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

DMC30UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough, impact and thermal shock resistant substrate with a CVD TiCN/TiN coating. Best for 300, 400 and PH series Austenitic Stainless Steel.

Insert Application
For Thin Wall Tubing & Deep Boring Application



Negative Turning Insert Grade & Cutting Data

Material Application	Best
Carbon Steel Annealed	●
Alloy Steel Annealed	●
Alloy Steel Heat Treated	●
Stainless Steel	○
Gray Cast Iron	○

Negative Insert
Precision pressed insert
Positive Chip Breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade
DPC15HT Hard & Wear Resistant, from Roughing to Finishing on smooth surface, High V_C , no interrupted cut.
DPC25UT Hard & Tough, from Roughing to Finishing on uneven surface, Medium V_C , Light interrupted cut.
DPC35RT Tough & Impact Resistant, from Roughing to Finishing on rough surface, Low V_C , interrupted cut.

Insert Chip Breaker
PSH Roughing Large single sided pressed Chip Breaker, positive rake angle, negative land and Honed Cutting Edge, for roughing, large Depth of Cuts, high rate of material removal in turning and boring straight and interrupted cuts.
PSS Heavy Roughing Large single sided pressed Chip Breaker, positive rake angle, negative land and heavy Honed Cutting Edge. For heavy duty roughing, large Depth of Cuts, high rate of material in turning and boring Bar Stock, Castings and Forgings.
PST X-Heavy Roughing Large Single Sided Pressed Chip Breaker insert, Positive Rake Angle, Negative Land and Heavy Honed Cutting Edge. Engineered for X heavy duty roughing large, depth of cuts, high rate of material in turning and boring Bar Stock, Castings and Forgings

Insert Attitude
Cutting Condition: Wet SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Insert Grade Technology

DPC15HT

First Choice: From finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ coating (not for interrupted cuts).
 Best for cutting Carbon and Alloy Steel, good for Stainless Steel and Cast Iron.

DPC25UT

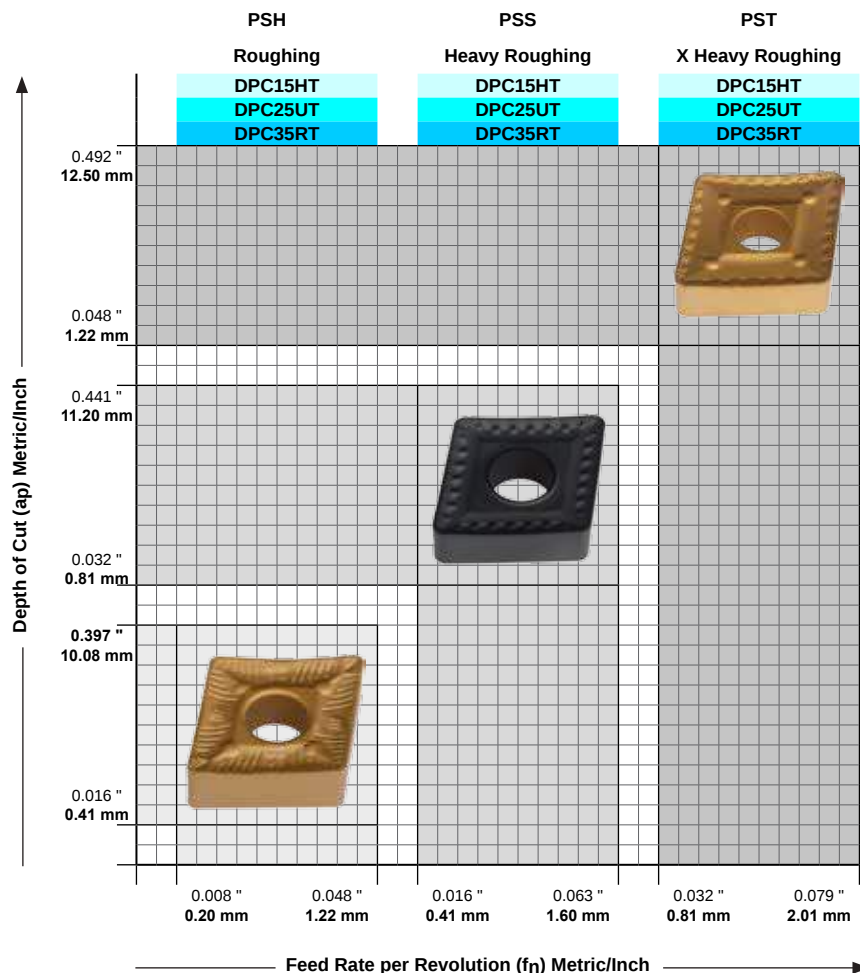
First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ coating, (medium interrupted cut)
 Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

DPC35RT

First Choice: For casting, forging and uneven surface turning applications at a low SFM (V_C). Tough and impact resistant substrate with a CVD $Al_2O_3/TiCN/Al_2O_3$ coating, (for interrupted cuts).
 Best for cutting Carbon and Alloy Steel, good for Stainless Steel.

Insert Application

For Heavy Roughing Application of Bar Stock, Forging & Casting.



Negative Turning Wiper Insert Grade & Cutting Data

Material Application	Best
300 Series Stainless Steel	●
Alloy Steel Annealed	●
17-4 PH Series Stainless Steel	●
Austenitic-Ferritic Duplex	●

Insert Grade Technology
DMC20HT First Choice: For High Performance turning applications at a very high SFM (V_c). Heat resistant, high stability against deformation CVD TiCN/TiN coating to improves cutting performance and insert life. Best for 300, 400 and PH series Austenitic Stainless Steel.

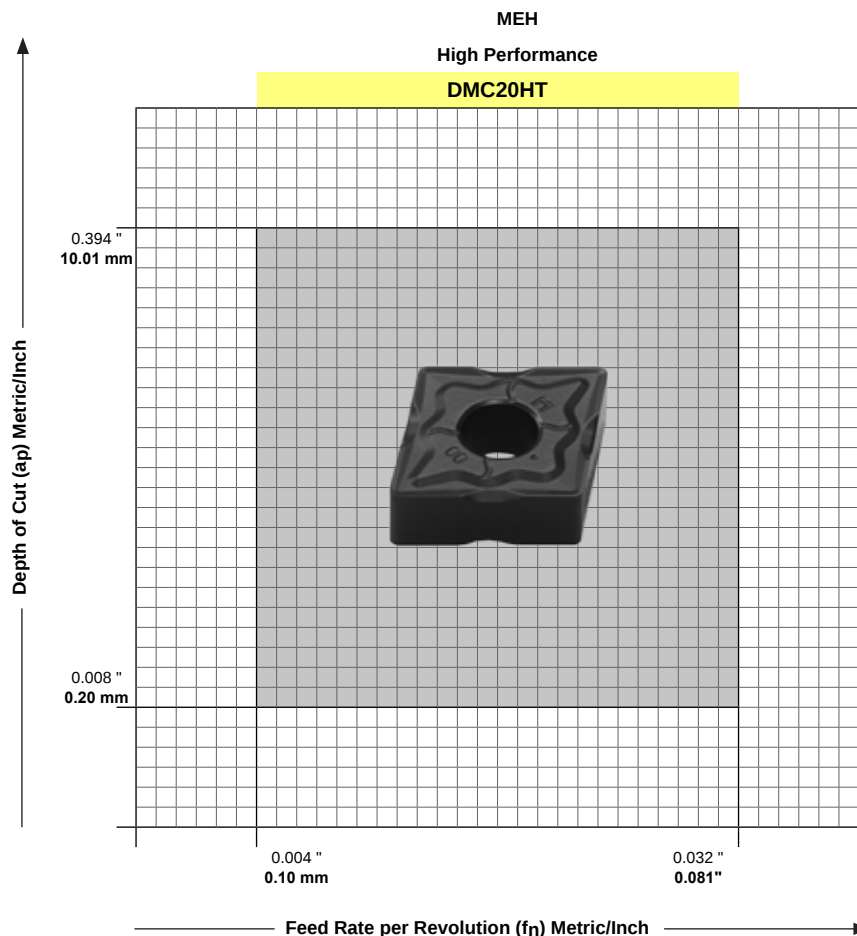
Insert Application
High Performance Turning & Boring Application

Negative Insert
Precision pressed insert Positive preseed Chip Breaker Light Honed Cutting Edge Coated Multi geometry Precise Insert Indexing Repeatability

Insert Grade
DMC20HT High Performance Turning & Boring Application High V_c , High interrupted cuts.

Insert Chip Breaker
MEH High Performance Stainless steel chip breaker, engineered specifically for turning and boring all types of stainless steel and operation, with a variable depth of cut (a_p) and feed rate (f_n).

Insert Attitude
Cutting Condition: Wet SFM (V_c) Value are given in wet cutting condition. Reduced V_c 20% when cutting in dry condition. SFM (V_c) Value are given at minimum Feed Rate. Reduced V_c from 10% to 50% when increase Feed Rate.



Negative Turning Insert Grade & Cutting Data

Material Application	Best
300 Series Stainless Steel	●
Alloy Steel Annealed	●
17-4 PH Series Stainless Steel	●
Austenitic-Ferritic Duplex	●

Insert Grade Technology

DMC30UT

First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough, impact and thermal shock resistant substrate. CVD TiCN/TiN coating to improves cutting performance and insert life. Best for 300, 400 and PH series Austenitic Stainless Steel.

Insert Application
General Universal Turning & Boring Application

Negative Insert

Precision pressed insert
Positive pressed Chip Breaker
Honed Cutting Edge
Coated
Multi geometry
Precise Insert Indexing Repeatability

Insert Grade

DMC30UT

Universal Turning & Boring,
Medium V_C , for interrupted cuts.

Insert Chip Breaker

MEF Finishing

Small pressed Chip Breaker with positive rake angle and small Honed Cutting Edge, for chip control in a small depth of cut. For Finishing Turning Application.

MEM Medium

Medium pressed Chip Breaker, positive rake angle and medium Honed Cutting Edge, for chip control and free evacuation in medium Depth of Cut and feed.

MER Roughing

Large pressed Chip Breaker, positive rake angle and heavy Honed Cutting Edge, for better chip control in large Depth of Cut and high feed rate.

Insert Attitude

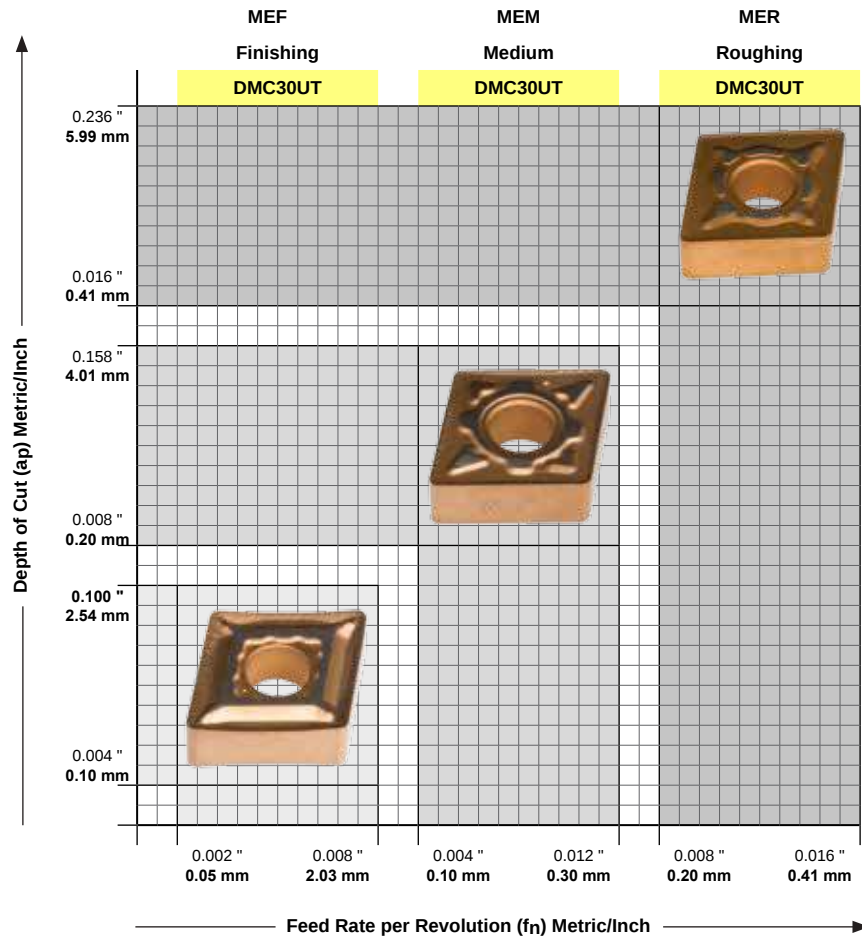
Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Material Application	Best
Gray Cast Iron	●
Modular Cast Iron	●
Malleable Cast Iron	●
Hardened Alloy Steel	●

Negative Insert
Precision pressed insert Positive Chip Breaker Honed Cutting Edge Coated Multi geometry Precise Insert Indexing Repeatability

Insert Grade
DKC10UT Hard & Tough, from Roughing to Finishing on uneven surface, Medium V_C , Light interrupted cut.
DKC15RT Tough and Impact Resistant, from Roughing to Finishing on rough surface, Low V_C , for interrupted cuts.

Insert Chip Breaker
KEF Finishing Small pressed Chip Breaker with positive rake angle and small Honed Cutting Edge, to control the length of chips in small depth of cut.
KEU Medium Ground surface, no Chip Breaker, negative rake angle, and medium Honed Cutting Edge, medium Depth of Cut and feed rate
KER Roughing Large pressed Chip breaker geometry, positive rake angle and large Honed Cutting Edge, for large Depth of Cut and feed rate.

Insert Attitude
Cutting
SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition
SFM (V_C) Value are given at minimum Feed Rate, Reduced V_C from 10% to 50% when increase Feed Rate.


Insert Grade Technology	Insert Application
-------------------------	--------------------

DKC10UT

First Choice: For general turning applications at a medium to High SFM (V_C). High thermal deformative wear resistant substrate and cutting edge. CVD TiN/Al₂O₃/TiCN coating improve performance and insert life. Best for Modular Cast Iron, Ductile Iron. For light interrupted cuts.

DKC15RT

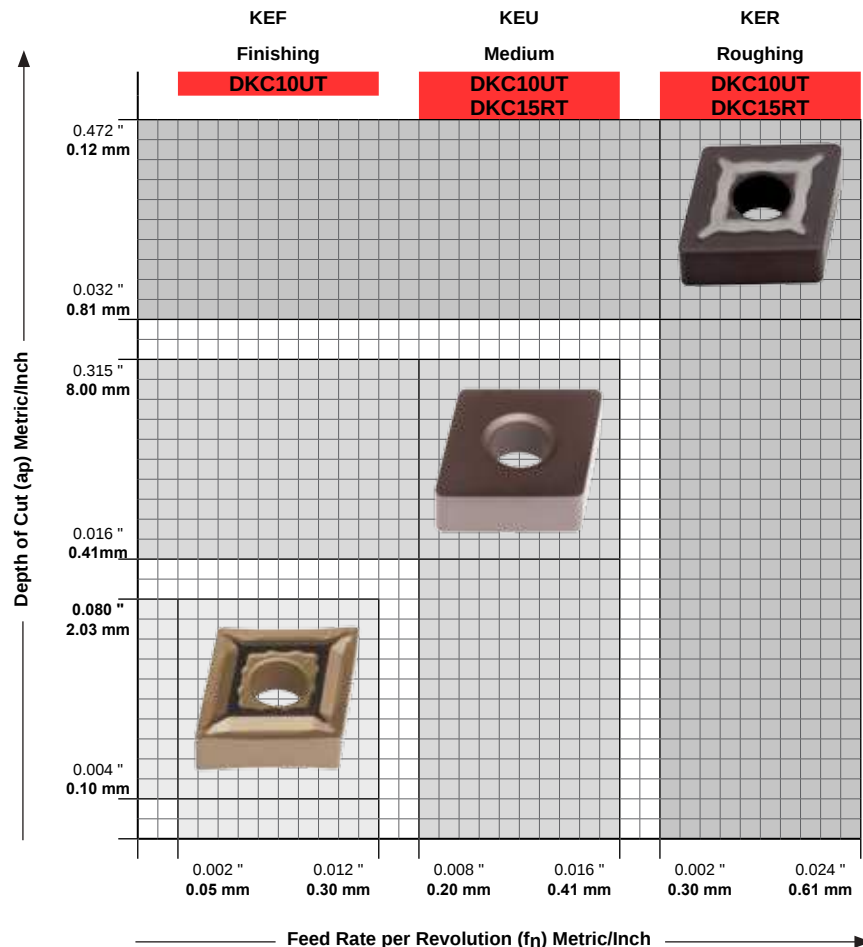First Choice: For Roughing and Finishing uneven surface and interrupted cuts applications at medium SMF (V_C). Wear and impact resistant substrate and cutting edge. CVD TiN/Al₂O₃/TiCN coating improve performance and insert life. Best for turning Modular Cast Iron, Ductile Iron.



Negative Turning Insert Grade & Cutting Data

Material Application	Best
Titanium Alloys	●
Inconel, Hastelloy, Waspaloy	●

Insert Grade Technology
DSP10HT First Choice: For finishing, medium and light roughing turning and boring applications at high SFM (V_C). Hard and abrasive micro-grain substrate. Heat and plastic deformation resistant TiBN CVD Plasma coating. Best for turning and boring application for all the Titanium Alloys, non Ferrous Material
DSP20HT First Choice: For finishing, medium and light roughing turning and boring applications at medium SFM (V_C). Hard, abrasive and impact resistant micro-grain substrate. TiAlN PVD coating to minimize friction and maximize chip flow. Best for turning all the Super Alloys; Inconel, Incoloy, Astralloy, Hastelloy, Inconel and non Ferrous Material.

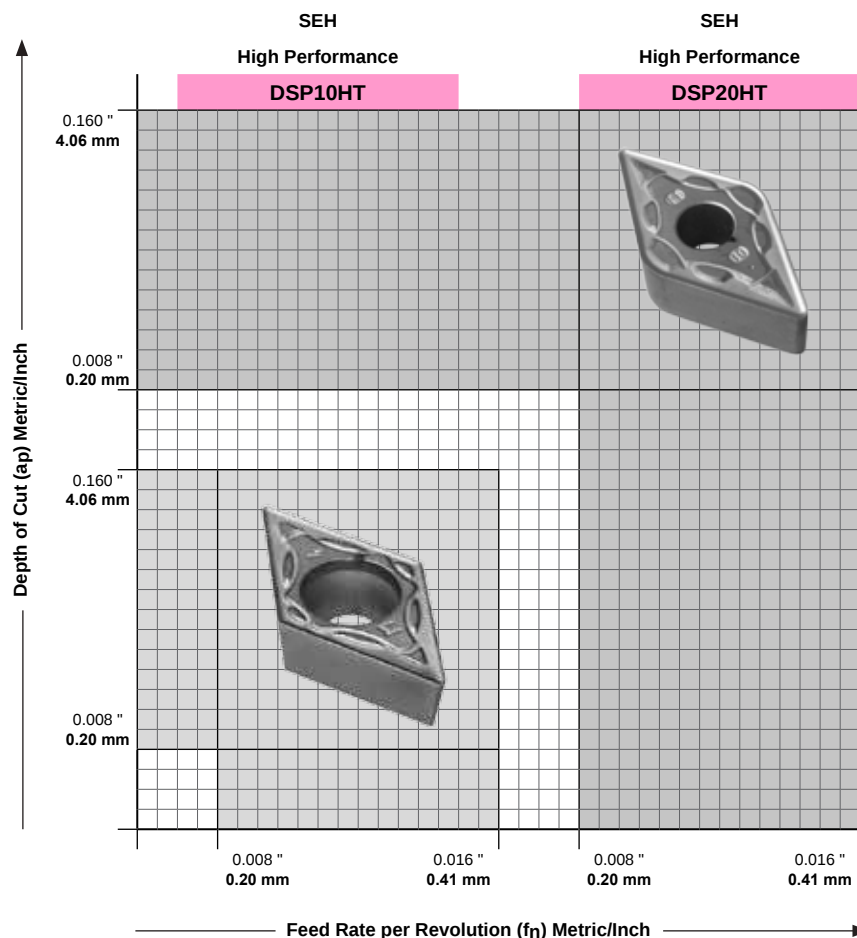
Insert Application
High Performance Turning & Boring Application

Negative Insert
Precision pressed insert Positive pressed Chip Breaker High Honed Cutting Edge Coated Multi geometry

Insert Grade
DSP10HT Universal for Tutanium Alloys High Performance Grade for finishing, medium and light roughing turning and boring applications at high SFM (V_C).
DSP20HT Universal for Super Alloys Astralloy, Discaloy, Hastelloy, Incoloy, Inconel.
High Performance grade for finishing, medium and light roughing turning and boring applications at medium SFM (V_C).

Insert Chip Breaker
SEH High Performance Super Alloy chip breaker, scientific engineered and developed for turning and boring all types of Super Alloys materials and operation, from Roughing to Finishing with variable Depth of Cut (a_p) and feed rate (f_n).

Insert Attitude
Cutting Condition: Wet SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.



Material Application	Best
Titanium Alloys, Inconel, Hastelloy, Waspaloy	●
Carbon-Graphite-Phenolic	●
Brass , Bronze, Copper	●
Aluminum	○
Carbon & Alloy Steel	●
Stainless Steel	●
Cast Iron	●


Negative Insert
Precision ground insert Precision ground Chip Breaker Light Honed Cutting Edge Uncoated & Coated Multi geometry High Precision Insert Indexing Repeatability

Insert Grade
DPS15HT Unstable Turning & Boring working condition, light uneven surface. Medium V_C , Light interrupted cuts.

Insert Chip Breaker
SEF Finishing The precision ground periphery of the Insert with a small pressed positive and polished Chip Breaker and a small Honed Cutting Edge, controls and evacuates the chip precisely and freely in small Depth (ap) of Cut and Feed Rate.
SEM Finishing to Light Roughing The precision ground periphery of the Insert with a Medium pressed positive and polished Chip Breaker and a small Honed Cutting Edge, controls and evacuates the chip precisely and freely in small to Medium Depth (ap) of Cut and Feed Rate.
SER Roughing Large pressed positive Chip Breaker, with positive rake angle and Medium Honed Cutting Edge, for precise chips control and free evacuation at larger Depth (ap) of Cut and Feed Rate.

Insert Attitude
Cutting Condition: Wet
SFM (V_C) Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
SFM (V_C) Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Insert Grade Technology	Insert Application
DPS15HT First Choice: For all around and unstable turning applications at a medium SFM (V_C). Tough, hard and impact resistant substrate, the PVD TiAlN/WC/C Coating improves cutting performance and insert life. (Light Interrupted Cuts) Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.	High Performance Turning & Boring Application

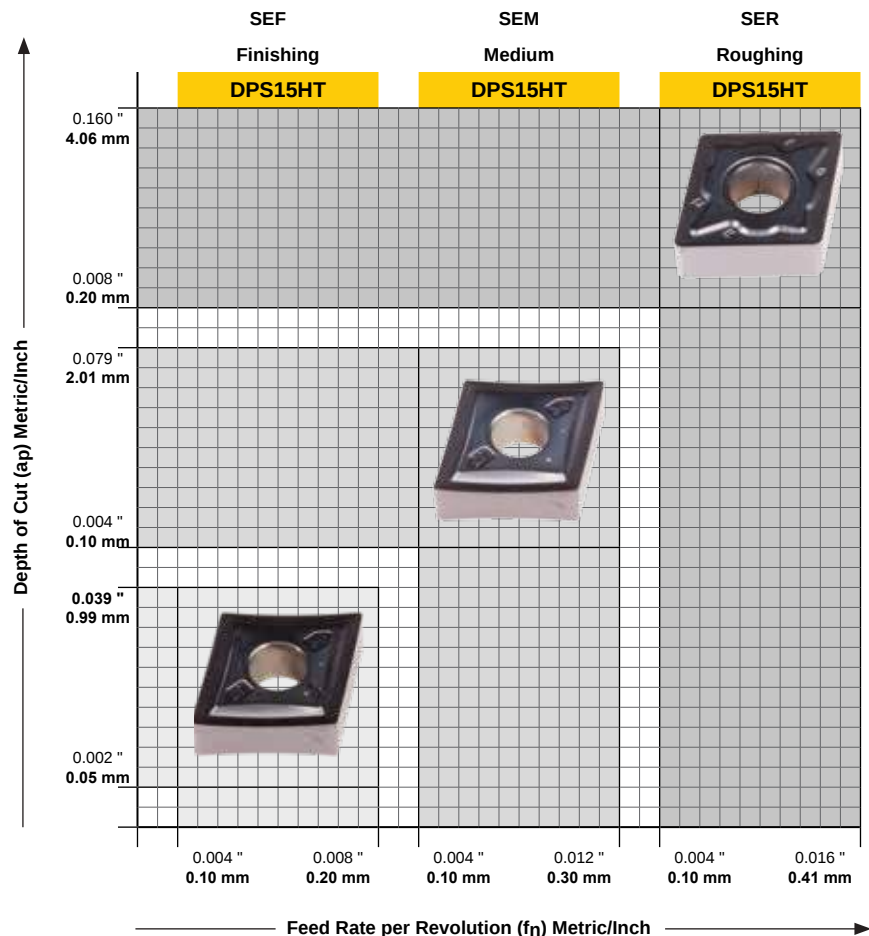


NOTES:

At Dorian Tool we constantly search new methods to improve performance and reduce insert failure.

The type of insert wear will suggest the problem how it directly relates to a correcting procedure to improve tool life and cutting performance. Listed below are the types of insert failure modes we have tested along with a cause and solution.

Type of Failure	Cause	Solution
 Edge Wear	• Cutting speed too high • Insufficient wear resistance	• Increase feed • Reduce speed • Use insert with a more wear resistance grade • Apply coolant at a constant rate
 Thermal Cracking	• Temperature Change • Intermittent machining • Varying coolant supply	• Constant Temperature • Reduce speed and feed • Apply coolant at a constant rate
 Chipping	• Sharp cutting edge • Excessive load • Cutting speed too high • Insufficient wear resistance	• Change edge preparation • Check rigidity of the insert • Reduce speed • Use insert with a more wear resistance grade • Apply coolant at a constant rate
 Edge Build Up	• Poor lubricity • Cutting temperature too low • Low cutting speed • Negative cutting geometry	• Increase feed • Increase speed • Apply coolant at a constant rate • PVD coated insert
 Depth of Cut Notching	• Hard surface material • Excessive load • Cutting speed too high • Insufficient wear resistance • Cutting feed too high	• Change lead angle • Use different grade • Adjust feed rate • Apply coolant at a constant rate
 Heat Deformation	• Cutting temperature too high • Pressure too high	• Reduce speed and feed • Apply coolant at a constant rate • Reduce depth of cut
 Crater	• Interrupted cut • Cutting temperatures on the insert rake face too high	• Reduce speed and feed • Apply coolant at a constant rate
 Insert Breakage	• Grade too brittle • Excessive load • Weak insert geometry • Insert too small • Low cutting speed	• Reduce depth of cut • Increase speed • Reduce cutting feed • Apply coolant at a constant rate • Check rigidity of the insert • Use stronger insert geometry

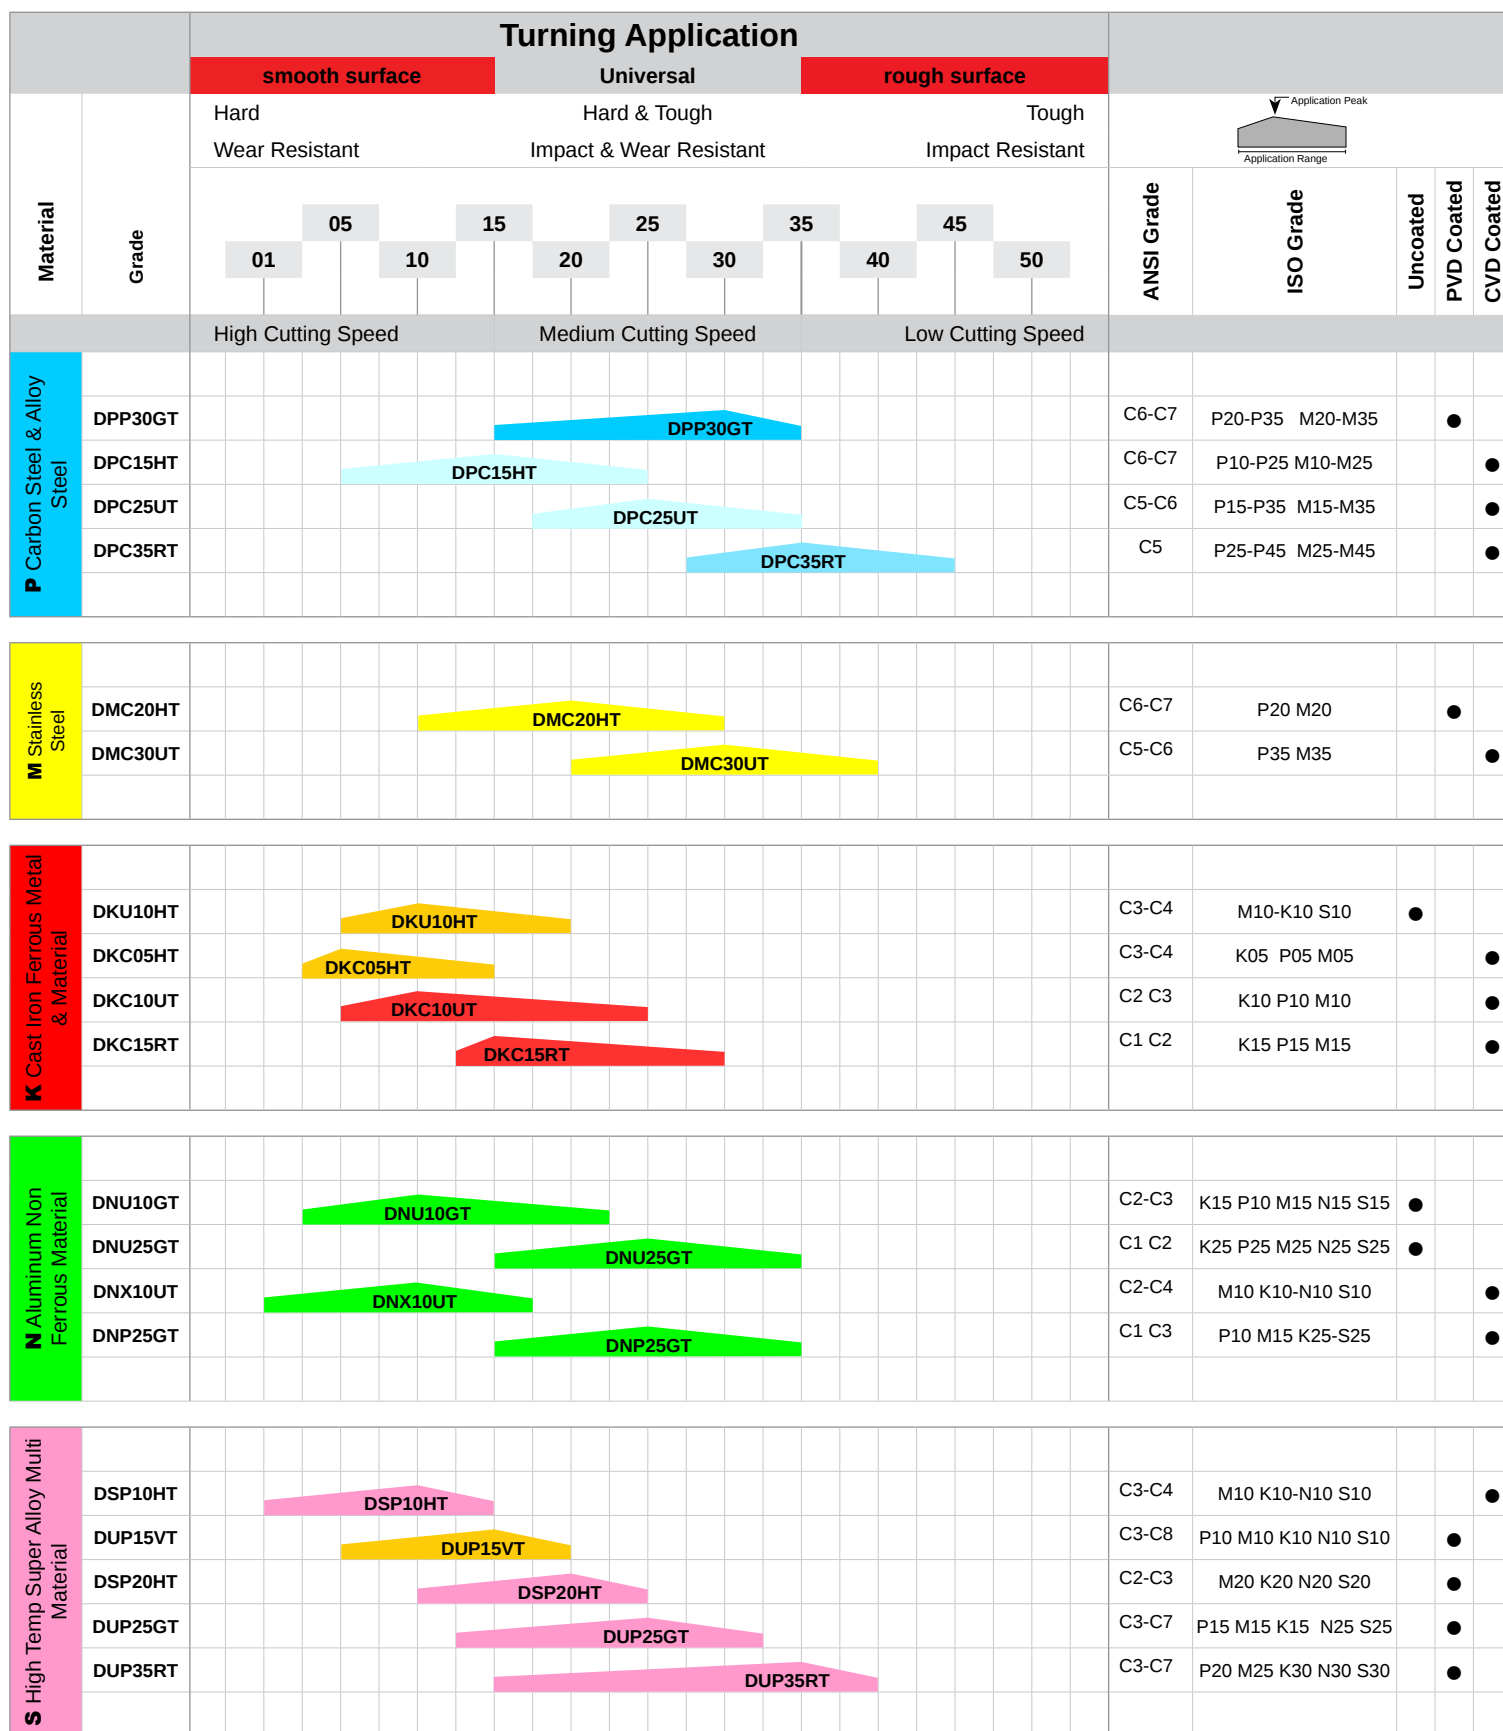Insert Grade Chart



nomenclature

Insert Best Performance

- 1 If inserts wear, reduce Spindle Speed RPM (n) increase Feed (fn) or change to a harder insert grade.
- 2 If inserts chip, increase Spindle Speed (n), decrease Feed (fn), and or heavier honed edge, or change to tougher insert grade.
- 3 For smooth surface and hard material, use hard and wear resistant insert with larger nose radius (not for interrupted cuts).
- 4 For forgings, castings and interrupted cuts, use tough and impact resistant insert with large nose radius.

DPP30GT	First Choice: For general turning applications at a medium SFM (V_C). Use inserts to cut Alloy Steel and Stainless Steel. Inserts have a thermal deformative and abrasive resistant substrate with a single layer PVD TiN coating.	DNU10GT	First Choice: For general turning applications at a high SFM (V_C). Hard, abrasive and wear resistant micro-grained uncoated substrate, for a hard and sharp cutting edge (not for interrupted cuts). Best for Aluminum, Super Alloys, Plastic and all Non Ferrous metals and materials.
DPC15HT	For finishing to roughing turning applications at a high SFM (V_C). Hard, wear and abrasive resistant substrate with a CVD Al_2O_3 /TiCN/ Al_2O_3 /TiCN coating (not for interrupted cuts). Best for cutting Carbon and Alloy Steel, Good for Stainless Steel and Cast Iron.	DNU25GT	First Choice: For general turning applications at a medium SFM (V_C). Uncoated, hard micro-grained substrate with a hard and tough cutting edge for light interrupted cuts. Best for Aluminum, Super Alloys, Plastic and all Non Ferrous metals and materials.
DPC25UT	First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough and impact resistant substrate with a CVD Al_2O_3 /TiCN/ Al_2O_3 /TiCN coating. (medium interrupted cut). For cutting Carbon and Alloy Steel. Good for Stainless Steel.	DNX10UT	First Choice: For universal turning at a very high SFM (V_C). Hard, abrasive and high resistant substrate with a microplus® plasma TiAlN coating to improve cutting edge hardness, wear and heat resistant, and better chip flow. Best for Aluminum, Plastic, Super Alloys and low Silicone Aerospace Aluminum.
DPC35RT	First Choice: For casting, forging and uneven surface turning applications at a Low SFM (V_C). Tough and impact resistant substrate with a CVD Al_2O_3 /TiCN/ Al_2O_3 /TiCN coating. (for interrupted cuts). Best for cutting Carbon and Alloy Steel. Good for Stainless Steel.	DNP25GT	First Choice: For general turning applications at a high SFM (V_C). Hard, tough and shock resistant micro-grained substrate. PVD TiN coated, with a hard and tough cutting edge for light interrupted cuts. Best for Aluminum, Super Alloys, Plastic and all Non Ferrous metals and materials.
DMC20HT	First Choice: For high performance turning applications at a high SFM (V_C). Heat Resistant, High stability against plastic deformation, CVD TiCN/TiN coating to improve cutting performance and insert life. Best for 300, 400 and PH series Austenitic Stainless Steel.	DSP10HT	First Choice: For finishing, medium and light roughing turning and boring applications at a high SFM (V_C). Hard and abrasive micro-grained substrate. Heat and plastic deformation resistant TiBN CVD Plasma coating. Best for turning and boring application for all the Titanium Alloys, Non Ferrous material.
DMC30UT	First Choice: For universal turning applications at a medium SFM (V_C). Hard, tough impact, and thermal shock resistant substrate. CVD TiCN/TiN coating to improve cutting performance and insert life. Best for turning 300, 400 and PH series Austenitic Stainless Steel.	DSP20HT	First Choice: For finishing medium and light roughing turning and boring applications at a medium SFM (V_C). Hard, abrasive and impact resistant micro-grained substrate. TiAlN PVD coating to minimize friction and maximize chip flow. Best for turning all the Super Alloys; Dicalloy, Incoloy, Hastelloy, Inconel and Non Ferrous materials.
DKU10HT	First Choice: For general turning applications at Low to medium SFM (V_C). Wear and abrasive resistant uncoated substrate. (Not for interrupted Cuts). Best for all Non Ferrous materials including Gray Iron and Ductile Iron. Aluminum, Stainless Steel and Hardened Steel.	DUP15VT	First Choice: For high performance in turning applications at a very high SMF (V_C). Very hard and wear resistant substrate, the PVD Al-CrN hard coating minimize the cutting friction, with a better surface finish and a longer insert life. (No interrupted Cuts). Best for Super Alloys, Aluminum, Ferrous and non Ferrous Materials.
DKC10UT	First Choice: For general turning applications at a medium to high SFM (V_C). High thermal deformative wear resistant substrate and cutting edge. CVD TiN/ Al_2O_3 /TiCN coating improve performance and insert life. Best for Modular Cast Iron, Ductile Iron. For light interrupted cuts.	DUP25GT	First Choice: For universal turning applications at a high SMF (V_C). Tough, hard and impact resistant substrate, the PVD TiAlN/WC/C Coating improves cutting performance and insert life. (Life Interrupted Cuts) Best for Super Alloys, Aluminum, Ferrous and Non Ferrous materials.
DKC15RT	First Choice: For roughing and finishing uneven surface and interrupted cuts applications at medium SFM (V_C). Wear and impact resistant substrate and cutting edge. CVD TiN/ Al_2O_3 /TiCN coating improve performance and insert life. Best for turning Modular Cast Iron, Ductile Iron.	DUP35RT	First Choice: For all around and unstable turning applications at a medium SMF (V_C). Tough, hard and impact resistant substrate, the PVD TiAlN/WC/C coating improves cutting performance and insert life. (Life Interrupted Cuts) Best for Super Alloys, Aluminum, Ferrous and Non Ferrous materials.

Insert Cutting Formula - Inch

a_p	= Depth of cut (DOC)	Inch	k_c	= Specific cutting force	Lb/Inch ²
D_m	= Diameter of part (DIA)	Inch	n	= Spindle speed (RPM)	Rev/Min
f_n	= Feed per revolution (FEED)	Inch/Rev	v_c	= Cutting speed (SFM)	Feet/Min
l_m	= Machined length (LEN)	Inch	T_c	= Cutting time (TIM)	Min
Q	= Metal removal rate (MMR)	Inch ³ /Min	R_{max}	= Profile depth	μInch
P_c	= Power requirements (POW)	Hp	r_e	= Insert nose radius	inch

Cutting Speed
Surface Feet per Minute

$$v_c = \frac{\pi \times D_m \times n}{12}$$

Example: Determine the cutting speed (v_c) required for turning a 2-1/2" diameter part with a spindle speed of 600 RPM.

$$v_c = \frac{\pi \times 2.5 \times 600}{12} = 392.70 \text{ Feet/Min}$$

Spindle Speed
Revolution Per Minute

$$n = \frac{v_c \times 12}{\pi \times D_m}$$

Example: Determine the spindle speed (n) required for turning a 2-1/2" diameter part with a cutting speed of 400 SFM.

$$n = \frac{400 \times 12}{\pi \times 2.5} = 611.15 \text{ Rev/Min}$$

Metal Removal Rate
Inch³/Min

$$Q = v_c \times a_p \times f_n \times 12$$

Example: Determine the metal removal rate (Q) required for cutting with a depth of .062 with a cutting speed of 400 SFM and feed rate of .015 IPR.

$$Q = 400 \times .062 \times .015 \times 12 = 4.464 \text{ inch}^3/\text{min}$$

Power Requirement
Horsepower

$$P_c = \frac{v_c \times a_p \times f_n \times k_c}{33,000}$$

Example: Determine the power requirement (P_c) for turning a material with a cutting force of 181,750, a depth of .062, a cutting speed of 400 SFM, and feed rate of .015 IPR.

$$P_c = \frac{400 \times .062 \times .015 \times 181,750}{33,000} = 2.05 \text{ HP}$$

Cutting Time
Minute

$$T_c = \frac{l_m}{f_n \times n}$$

Example: Determine the amount of time required to machine a 6" long part with a spindle speed of 600 RPM and feed rate of .015 IPR.

$$T_c = \frac{6}{.015 \times 600} = .67 \text{ Min (40 Sec)}$$

Profile Depth
(μinch)

$$R_{max} = \frac{f_n^2 \times 10^6}{8r_e}$$

Example: Determine the profile depth (R_{max}) of a surface machined using an insert with a nose radius of .032 and a feed rate of .015 IPR.

$$R_{max} = \frac{.015^2 \times 10^6}{8 \times .032} = 879 \text{ μinch}$$

Insert Cutting Formula - Metric

a_p	= Depth of cut	mm	k_c	= Specific cutting force	Nm
D_m	= Diameter of part	mm	n	= Spindle speed	Rev/Min
f_n	= Feed per revolution	mm/Rev	v_c	= Cutting speed	m/Min
l_m	= Machined length	mm	T_c	= Cutting time	Min
Q	= Metal removal rate	mm ³ /Min	R_{max}	= Profile depth	μm
P_c	= Power requirements	kW	r_e	= Insert nose radius	mm

Cutting Speed
Surface Meters per Minute

$$v_c = \frac{\pi \times D_m \times n}{1000}$$

Example: Determine the cutting speed (v_c) required for turning a 50mm diameter part with a spindle speed of 600 RPM.

$$v_c = \frac{\pi \times 50 \times 600}{1000} = 94,25 \text{ m/Min}$$

Spindle Speed
Revolution Per Minute

$$n = \frac{v_c \times 1000}{\pi \times D_m}$$

Example: Determine the spindle speed (n) required for turning a 32mm diameter part with a cutting speed of 100 m/Min.

$$n = \frac{100 \times 1000}{\pi \times 32} = 994,72 \text{ Rev/Min}$$

Metal Removal Rate
mm³/Min

$$Q = v_c \times a_p \times f_n \times 1000$$

Example: Determine the metal removal rate (Q) required for cutting with a depth of 1,5 with a cutting speed of 200 m/Min and feed rate of 0,4 mmPR.

$$Q = 200 \times 1,5 \times 0,4 \times 1000 = 120.000 \text{ mm}^3/\text{min}$$

Power Requirement
Kilowatts

$$P_c = \frac{v_c \times a_p \times f_n \times k_c}{1.460.000}$$

Example: Determine the power requirement (P_c) for turning a material with a specific cutting force of 20.500, a depth of 1,5, a cutting speed of 200 m/Min, and feed rate of 0,4 mmPR.

$$P_c = \frac{200 \times 1,5 \times 0,4 \times 20.500}{1.460.000} = 1,68 \text{ kW}$$

Cutting Time
Minute

$$T_c = \frac{l_m}{f_n \times n}$$

Example: Determine the amount of time required to machine a 200mm long part with a spindle speed of 600 RPM and feed rate of 0,4 mmPR.

$$T_c = \frac{200}{0,4 \times 600} = ,83 \text{ Min (50 Sec)}$$

Profile Depth
(μinch)

$$R_{max} = \frac{f_n^2 \times 10^6}{8r_e}$$

Example: Determine the profile depth (R_{max}) of a surface machined using an insert with a nose radius of 0,8 and a feed rate of 0,4 mmPR.

$$R_{max} = \frac{0,4^2 \times 10^6}{8 \times 0,8} = 25 \text{ μm}$$

Material Characteristics for Turning and Boring

Material	Material Characteristics	
Low Carbon Steel: Under 0.03% Carbon Alloy Steel, AISI: 1008, 1010, 1018, 1020, 1026, 10L18, 10L45, 10L50, 1108, 1117, 1141, 11L44, 1214, 12L14	Low Carbon • Soft and gummy • Difficult chip control • Rough finish • Burrs and sharp edge • Poor surface finish • Poor tolerance • Difficult to machine close tolerance	Free Machining • Easy to machine • High speed machining • High depth of cut • Poor surface finish • Good tolerance • Semi-difficult chip control

Material	Material Characteristics	
Carbon Steel, Alloy Steel, and Tool Steel Under 36 HRC: Medium and High Carbon Steel, AISI: 1035, 1040, 1045, 1050, 1080, Alloy Steel, AISI Series: 1300, 200, 3000, 4000, 5000, 6000, 7000, 8000, 9000 Tool Steel and High Speed Steel, SAE Classes: A, D, M, O, T, and S High and Low Carbon Alloy: W1, W2, L2, P1, P6, and P20	• Higher carbon content • Higher chrome, nickel, and moly content • Tough material to machine • Low machining speed • Difficult to break and control the chip flow • The material surface will harden when machined at high speed • Good surface finish	

Material	Material Characteristics	
Carbon Steel, Alloy Steel and Tool Steel 36-48 HRC: Alloy Steel, AISI Series: 1335, 4130, 4135, 4140, 4150, 4330, 4340, 5046, 5140, 5210, 8625, 8640 Tool Steel and High Speed Steel, SAE Classes: A, D, M, O, T, and S High and Low Carbon Alloy: W1, W2, L2, P1, P6, and P20	• Higher carbon content • Higher chrome, nickel, and moly content • Tough material to machine • Abrasive • Difficult to break and control the chip flow • The material surface will harden when machined at high speed • Good surface finish	

NEGATIVE - Best Turning and Boring Performance of Carbon and Alloy Steel

Material Shape	Roughing			Universal			Finish		
	Grade	Chip Breaker	Radius	Grade	Chip Breaker	Radius	Grade	Chip Breaker	Radius
Casting or Forging	DPC35RT	PER-PSH-PSS-PST	Large	DPC35RT	PEM	Large	DPC25UT DPC35RT	PEF	Large
Interrupted Cut	DPC35RT	PER-PSH-PSS-PST	Large	DPC25UT DPC35RT	PEM	Large	DPC25UT	PEF	Large
Light Interrupted Cut	DPC25UT	PER-PSH-PSS-PST	Large	DPC25UT	PEM	Large	DPC25UT	PEF	Large
Smooth Surface	DPC15UT	PER-PSH-PSS-PST	Large	DPC15HT	PEM-UEM	Large	DPC15HT DUP35RT	PEF-SEF	Large

Note: For better insert performance and surface finish, use a large radius insert if the workpiece is solid material, and the cutting conditions are stable and rigid.
 Use a small insert radius if cutting thin wall tubing or with unstable working conditions (like poor holding rigidity of the workpiece or undersize toolholder or boring bar).

Material	Material Characteristics
Austenitic Stainless Steel: 200 series , ANSI: 200, 209, 219 300 series , ANSI: 302, 303, 304, 304L, 310, 316, 316L, 312, 329, 347, 384 Duplex, AS TM : XM-1, XM5, XM7, XM21, C F -8M	• Becomes gummy under machining operations due to nickel content • Very difficult to machine in soft conditions • Very difficult to machine at a small depth of cut • Develops a tough string of chips that are difficult to control. Forms a build-up on the insert tip • Low thermal conductivity results in excess heat at the insert tip • Material surface will harden due to high chromium content

Material	Material Characteristics
Ferritic, Martensitic, and PH Stainless Steel under 48 HRC: 400 series AISI: 410, 416, 416Se, 420F, 440, 440C 500 series AISI: 502, 504 PH series (precipitation hardening): 17-4PH, PH 13-8 Mo, 15-5 PH	• Brittle • Stringy chips • High cutting force • The material will harden when machined at high speed.

Material	Material Characteristics
Ductile and Malleable Cast Iron: Ductile Cast Iron, Ferritic-Pearlitic ASTM: 60-40-18, 65-45-12, 80-55-06, 100-70-03 SAE J 434: D4018, D4512, D5506, D7003 Malleable Cast Iron, Pearlitic-Martensitic ASTM A47: 32510, 35018 SAE J 148: M3210, M4504, M5003	• Very difficult to machine • Small depth of cut • Spherical form graphite makes machining difficult • The carbide concentration creates hard spots • The material structure is not uniform • The crater wear and flank of the insert makes machining difficult • The insert tool life is less than gray cast iron

Material	Material Characteristics
Gray Cast Iron: AS TM A48: Class 20B , 25B , 30B , 35B , 40B , 45B , 50B , 56B SAE J 431: G1800, G3000, G3500, G4000	• Flake form of graphite makes machining easy • Contains scale, inclusions and sand in the surface • The material will break easily on the end of the cut • Tendency to chatter and vibrate on thin wall section • Chucking and rigidity of the workpiece is extremely important to minimize distortion, to achieve a good finish and close tolerance

Material	Material Characteristics	
Aluminum: Free Machining Aluminum: AA; 2024-T4, 2014-T6, 2001-T3, 6061-t6 Low-Silicon Aluminum Alloy <12.2% Si High-Silicon Aluminum Alloy >12.2% Si	Low-Silicon Aluminum Alloy <12.2% Si • Easy to machine at high surface speed • Soft and gummy with a low melting temperature; tendency to stick to cutting tool • Edge build up will cause surface finish problems • Develops a string of chips that are difficult to control. Forms a build-up on the insert tip • Low coefficient of elasticity, high ductility • Greater tendency to yield under pressure of the cutting tool	High-Silicon Aluminum Alloy >12.2% Si • The high silicon content makes it difficult to machine at a high surface speed • The high silicon content makes the material very abrasive and hard on the insert causing rapid tool wear • High cutting forces are generated to overcome the abrasiveness resulting from the high silicon content.

Material	Material Characteristics	
Non Ferrous Copper	• Mildly abrasive and gummy alloy • Easy to machine • Develops a string of chips that are difficult to control especially in internal boring operations. • Use a high Positive Turning Insert with a honed edge for roughing and a sharp edge for finishing. Choose a hard grade like DUP15VT, DUP25GT or DUP35RT.	
Non Ferrous Brass , Bronze Lead Alloys, Zinc	• Abrasive and tougher alloys than copper • Easy to machine and good chip control. • Use a high Positive Turning Insert with a honed edge for finishing, using a hard grade like DUP15VT, DUP25GT or DUP35RT. For roughing castings , use SER chipbreaker.	
Non Ferrous Magnesium	• Tougher material than aluminum • Fire hazard present when machined at high speeds • Use oil base coolant with good ventilation • High depth of cut is possible with a high feed rate and good chip control • Use a high Positive Turning Insert with a honed edge for roughing, and sharp edge for finishing. Choose a hard grade like DUP15VT, DUP25GT or DUP35RT .	
Non Ferrous Nylon, Plastic , Rubber	• Mildly abrasive • Extremely soft and gummy materials with a very low melting temperature • Easy to machine at high surface speeds • Develops a long and soft string of chips • Difficult to achieve high surface-finish and maintain close tolerances • Use a high Positive Turning Insert with a honed edge for roughing, and sharp edge for finishing. Choose a hard grade like DNU10GT or DKU10HT.	
Non Ferrous Carbon and Graphite Phenolics , Resins	• Very abrasive, soft and porous materials • Difficult to machine • Material will break easy on the end of the cut, and chips will develop in the form of dust • Machining this material is very hard on the inserts • Use a high Positive Turning Insert with a honed edge for roughing, and a sharp edge for finishing. Choose a hard grade like DUP15VT, DUP25GT or DUP35RT.	

Material Characteristics for Turning and Boring

Material	Material Characteristics
Iron-Base, High Temp Super Alloys Under 34 HRC: Wrought: A-286, Incoloy, Incoloy 801, N-155, 16-25-6, 19-9 DL Cast: AS TM: A297, A351, A608, A567	• Very difficult to machine small depth of cut • Insert tool life is relatively poor • Material surface will harden rapidly • Material is abrasive • Cast material is more difficult to machine than wrought • Develops tough, stringy chips that are difficult to control and form a build-up on the insert tip

Material	Material Characteristics
Nickel-Base, High Temp Super Alloys Under 48 HRC: Astroloy, Hastelloy, B /C /C -276/X, Inconel: 601, 617, 625, 700, 706, 718 IN100, Incoloy 901, Mar-M200, Nimonic, Rene 41, Udimet, Waspaloy, Monel Cobalt-Base, High Temper Alloys Under 45 HRC Wrought: AiResist 213, Haynes 25 (L605), Haynes 188, J -1570, Stellite Cast: AiResist 13, Haynes 21, Mar-M302, Mar-M509, Nasa CO-W-R E , Wi-52	• Very difficult to machine a small depth of cut • Insert tool life is relatively poor • Material surface will harden rapidly • Material is abrasive • Cast material is more difficult to machine than wrought • High cutting force • Excessive heat at the insert tip • Insert failure by plastic deformation tends to result at high speeds

Material	Material Characteristics
Titanium and Titanium Alloys Under 48 HRC: Alloyed: TiAl2.5Sn, Ti-6Al-4V, Ti6AlSn-4Zr-2Mo, Ti3Al-8V-6Cr-4Mo-4Zr, Ti10V-2Fe-3Al, Ti-13V-11Cr-3Al	• Insert tool life is relatively poor • Produces abrasive, tough, and stringy chips • Low thermal conductivity results in excess heat at the insert tip • Low coefficient of elasticity • Material surface will harden rapidly • High chemical reactivity causes chips to gall and weld to the cutting edge

Problem	Cause	Solution
Poor surface finish	Material machinability	Use the correct grade for the proper material
	Depth of cut	Reduce depth of cut
	Feed rate	Increase feed rate
	RPM	Increase RPM
	Insert nose radius	Use insert with a larger nose radius
Surface Glazing	RPM	Decrease RPM
	Cutting parameter	Decrease VC (SFM)
	Depth of cut	Depth of cut to be .005 under the hard surface
	Insert chipbreaker	Change to a free cutting chipbreaker
	Insert nose radius	Use insert with a smaller nose radius
	Insert edge prep	Change to a sharper insert cutting edge
	Insert grade	Change to a harder and a wear resistant grade
Sharp edge burrs	RPM	Increase RPM
	Feed rate	Decrease feed rate
	Insert chipbreaker	Change to a free cutting chipbreaker
	Insert wearing	Change to a new insert
Chips don't break	Insert chipbreaker	Use insert with a small chipbreaker
	Feed rate	Increase feed rate
	Depth of cut	Increase depth of cut
	Nose radius	Use insert with a smaller nose radius
	Coolant pressure	Increase coolant pressure
Interrupted Cut	Rigidity of the workpiece	Workpiece must be held rigid
	Rigidity of the tool holder	Tool holder must to be rigid
	Feed rate	Decrease Feed rate
	RPM	Increase RPM
	Insert grade	Change a tougher and impact resistant grade
	Insert radius	Use insert with a larger nose radius
	Insert edge prep	Use a heavier honed cutting edge
Insert edge wear	RPM	Reduce RPM
	Feed rate	Increase feed rate
	Depth of cut	Increase depth of cut
	Coolant	Increase coolant pressure
	Insert Grade	Change to a harder and a wear resistant grade
Insert Chipping	Rigidity of the workpiece	Workpiece must be held rigid
	Rigidity of the tool holder	Tool holder must to be rigid
	Interrupt cut	If permissible cut under an even surface
	RPM	Increase RPM
	Feed rate	Decrease feed rate
	Insert grade	Change to a tougher and impact resistant grade
	Insert radius	Change to an insert with a larger nose radius
	Insert edge prep	Change to a heavier honed cutting edge
Insert Built-up edge	Dull cutting edge	Replace with a new insert
	Insert edge prep	Change to a sharper insert cutting edge
	Insert Coating	Use a PVD insert coating
	Coolant	Increase coolant pressure
Depth of Cut Notch	Feed rate	Increase feed rate
	Depth of cut	Depth of cut to be .005 under the hard surface
	Insert geometry	Change to a stronger permissible insert geometry
	Insert grade	Change to a harder and a wear resistant grade

Turning Cutting Speed Recommendation

Materials			Negative and Positive Inserts Cutting Speed Recommendation																	
Best	Dorian Insert Grade	Insert Coating	DPP30GT				DPC15VT				DPC25UT				DPC35RT					
			PVD Coated				CVD Coated				CVD Coated				CVD Coated					
			Wear Resistant				Wear Resistant				Medium				Impact Resistant					
			Inch		Metric		Inch		Metric		Inch		Metric		Inch		Metric			
			Depth of Cut a_p		Feed per Rev. f_n		Surface Feed per Min. (V_c)		Surface Feed per Min. (V_c)		Surface Feed per Min. (V_c)		Surface Feed per Min. (V_c)							
P-Steel Alloy Steel	●																			
M-Stainless Steel		○																		
K- Cast Iron		○																		
			Brinell	HRC	Inch		Metric		Inch		Metric		Inch		Metric		Inch		Metric	
Unalloyed Carbon Steel			90%				0%				85%				50%					
C=0.1-0-0.25%	Annealed	125	1069	416	324	126	1188	462	360	140	1010	393	306	119	594	231	180	70		
C=0.25-0.55%	Annealed	150	950	327	288	99	1056	363	320	110	898	309	272	94	528	182	160	55		
C=0.55-0.80%	Annealed	170	891	297	270	90	990	330	300	100	842	281	255	85	495	165	150	50		
Low Alloy Steel ≤ 5%																				
Annealed		180	10	891	297	270	90	990	330	300	100	842	281	255	85	495	165	150	50	
Ball Bearing Steel		210	17	624	297	189	90	693	330	210	100	589	281	179	85	347	165	105	50	
Hardened & Tempered		275	28	594	297	180	90	660	330	200	100	561	281	170	85	330	165	100	50	
Hardened & Tempered		350	38	535	297	162	90	594	330	180	100	505	281	153	85	297	165	90	50	
High Alloy Steel >5%																				
Annealed		200	15	505	297	153	90	561	330	170	100	477	281	145	85	281	165	85	50	
Hardened Tool Steel		325	35	475	238	144	72	528	264	160	80	449	224	136	68	264	132	80	40	
Steel Castings																				
Unalloyed Carbon Steel		180	10	594	356	180	108	660	396	200	120	561	337	170	102	330	198	100	60	
Low Alloy Steel ≤ 5%		200	15	535	327	162	99	594	363	180	110	505	309	153	94	297	182	90	55	
High Alloy Steel > 5%		225	20	416	267	126	81	462	297	140	90	393	252	119	77	231	149	70	45	
Stainless Steel																				
Austenitic 200 & 300 Series		180	10	772	297	234	90	858	330	260	100	729	281	221	85	429	165	130	50	
Stainless Steel																				
Ferritic/Martensitic 400 Series		200	15	624	297	189	90	693	330	210	100	589	281	179	85	347	165	105	50	
Gray Cast Iron																				
Low Tensile Strength		180	10	950	297	288	90	1056	330	320	100									
High Tensile Strength		220	20	535	267	162	81	594	297	180	90									
Modular Graphite Cast Iron																				
Ferritic		160	6	624	297	189	90	693	330	210	100									
Pearlitic		250	24	535	267	162	81	594	297	180	90									
Martensitic		360	39	505	238	153	72	561	264	170	80									
Malleable Cast Iron																				
Ferritic (Short Chips)		130		624	267	189	81	693	297	210	90									
Pearlitic (Long Chips)		230	20	535	267	162	81	594	297	180	90									

Insert Attitude

Cutting Condition: Wet

SFM (V_C)

Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C)

Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Materials			Negative and Positive Inserts Cutting Speed Recommendation									
M-Stainless Steel	Best	Dorian Insert Grade	DMC20HT				DMC30UT					
			CVD Coated				CVD Coated					
			Wear Resistant				Impact & Wear Resistant					
			Inch		Metric		Inch		Metric			
			Depth of Cut a_p		0.012 - 0.394		0.30 - 10.00		0.008 - 0.236		0.20 - 6.00	
			Feed per Rev. f_n		0.004 - 0.031		0.10 - 0.80		0.002 - 0.024		0.05 - 0.60	
		Surface Feed per Min. (Vc)				Surface Feed per Min. (Vc)						
		Brinell	HRC	Inch		Metric		Inch		Metric		
Stainless Steel Austenitic Bars 200 & 300 Series			130%				0%					
Bars & Forged Austenitic 303		180	10	759	429	230	130	594	330	180	100	
Bars & Forged Austenitic 302-304-316		200	15	759	309	230	94	594	330	180	100	
Bars & Forged Austenitic PH-Hardened		330	35	759	309	230	94	594	330	180	100	
Stainless Steel Austenitic Cast 200 & 300 Series												
Casting Austenitic 303		180	10	759	429	230	130	594	211	180	64	
Casting Austenitic 302-304-316		200	15	759	262	230	79	594	201	180	61	
Casting Austenitic PH-Hardened		330	35	759	4	230	1	594	3	180	1	
Stainless Steel Ferritic/Martensitic Bars, 400 Series, 17-4 PH												
Bars & Forged Ferritic/Martensitic 400 Series		180	10	759	429	230	130	528	211	160	64	
Bars & Forged Ferritic/Martensitic 400 Series		330	15	759	262	230	79	528	201	160	61	
Bars & Forged Martensitic PH-Hardened		330	35	759	4	230	1	528	3	160	1	
Stainless Steel Ferritic/Martensitic Cast, 400 Series, 17-4 PH												
Casting Ferritic/Martensitic 400 Series		180	10	759	429	230	130	528	211	160	64	
Casting Ferritic/Martensitic 400 Series		200	15	759	262	230	79	528	201	160	61	
Casting Martensitic PH-Hardened		330	35	759	262	230	79	528	201	160	61	
Stainless Steel Austenitic-Ferritic Duplex												
Stainless Steel Austenitic-Ferritic Duplex 2304				759	429	230	130	528	201	160	61	
Stainless Steel Austenitic-Ferritic Duplex 2305				759	245	230	74	528	188	160	57	
Stainless Steel Austenitic-Ferritic Duplex 2307				759	232	230	70	528	178	160	54	

Insert Attitude

Cutting Condition: Wet

SFM (V_c)

Value are given in wet cutting condition. Reduced V_c 20% when cutting in dry condition.

SFM (V_c)

Value are given at minimum Feed Rate. Reduced V_c from 10% to 50% when increase Feed Rate.

Turning Cutting Speed Recommendation

Materials			Negative and Positive Inserts Cutting Speed Recommendation											
Dorian Insert Grade Insert Coating Best K - Cast Iron H - Hardened Material			DKU10H				DKC10U				DKC15R			
			Uncoated				CVD Coated				CVD Coated			
			C2-C3				TiN/Al ₂ O ₃ /TiCN				TiN/Al ₂ O ₃ /TiCN			
			C2-C3				C2-C3				C1-C2			
			Wear Resistant				Medium				Impact Resistant			
Depth of Cut ap Feed per Rev. fn Brinell HRC			Inch		Metric		Inch		Metric		Inch		Metric	
			0.008 - 0.157		0.20 - 4.00		0.008 0.157		0.20 - 4.00		0.016 - 0.236		0.40 - 6.00	
			0.004 - 0.016		0.10 - 0.40		0.004 0.024		0.10 - 0.60		0.008 - 0.031		0.20 - 0.80	
			Surface Feed per Min. (Vc)				Surface Feed per Min. (Vc)				Surface Feed per Min. (Vc)			
			Inch		Metric		Inch		Metric		Inch		Metric	
Cast Iron			50%				50%				~70%			
Gray Cast Iron														
Low Tensile Strength			180 10		637 382 193 116		891 446 270 135		743 371 225 113					
High Tensile Strength			220 20		414 248 125 75		752 376 228 114		627 314 190 95					
Modular Graphite Cast Iron														
Low Tensile Strength			160 6		594 330 180 100		851 426 258 129		710 355 215 108					
Low Tensile Strength			250 24		396 231 120 70		772 386 234 117		644 322 195 98					
Low Tensile Strength			360 39		342 205 104 62		594 297 180 90		495 248 150 75					
Malleable Cast Iron														
Hardened and Tempered			130		515 309 156 94		792 396 240 120		660 330 200 100					
Pearlitic (Long Chips)			230 20		433 260 131 79		752 376 228 114		627 314 190 95					
Hardened Materials														
Hardened and Tempered Allow Steel			45 HRC		74 44 22 13		129 77 39 23		99 69 30 21					
			50 HRC		69 41 21 13		120 72 36 22		92 65 28 20					
			55 HRC		62 37 19 11		107 64 33 20		83 58 25 18					
			60 HRC		57 34 17 10		99 59 30 18		76 53 23 16					
			65 HRC		47 28 14 9		82 49 25 15		63 44 19 13					

Cutting Condition: Wet
 SFM (V_C): Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.
 SFM (V_C): Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Turning Cutting Speed Recommendation

Materials				Negative and Positive Inserts Cutting Speed Recommendation															
Dorian Insert Grade Insert Coating Best P - Alloy Steel ● M - Stainless Steel ● K - Cast Iron ● N - Aluminum Alloys ● U - Multi Materials ● Depth of Cut a_p Feed per Rev. f_n Brinell HRC				DKU10HT				DKU25GT				DKP10HT				DUC25UT			
				Uncoated				Uncoated				PVD Coated				CVD Coated			
				C2-C3				TiN/Al2O3/TiCN				TiN/Al2O3/TiCN				TiN/Al2O3/TiCN			
				C3-C4				C2-C3				C2-C3				C1-C2			
				Wear Resistant				Impact Resistant				Wear Resistant				Impact & Wear Resistant			
				Inch		Metric		Inch		Metric		Inch		Metric		Inch		Metric	
				0.004 - 0.118		0.10 - 3.00		0.004 - 0.118		0.10 - 3.00		0.004 - 0.118		0.10 - 3.00		0.020 - 0.118		0.50 - 3.00	
				0.002 - 0.031		0.05 - 0.80		0.002 - 0.031		0.05 - 0.80		0.002 - 0.031		0.05 - 0.80		0.002 - 0.031		0.05 - 0.80	
				Medium SFM (Vc)				High SFM (Vc)				High SFM (Vc)				High SFM (Vc)			
				Inch		Metric		Inch		Metric		Inch		Metric		Inch		Metric	
Free Machining Low Carbon Steel																			
C=0.1-0.25% Annealed 125												1122 528 340 160				1010 403 306 122			
Alloy Steel > 5%												495 248 150 75				446 178 135 54			
Hardened & Tempered Heat -treated 275 28												396 198 120 60				356 143 108 43			
Hardened & Tempered Heat -treated 350 38																			
Stainless Steel																			
Austenitic 200 & 300 Series 180 10				495 248 150 75				396 198 120 60				644 322 195 98				644 257 195 78			
Ferretic/Martensitic 400 Series 200 15				545 272 165 83				436 218 132 66				708 354 215 107				762 381 231 116			
Gray Cast Iron																			
Low Tensile Strength 180 10				594 330 180 100				475 238 144 72				832 429 252 130				713 356 216 108			
High Tensile Strength 220 20				396 231 120 70				317 158 96 48				554 300 168 91				475 238 144 72			
Aluminum Alloys																			
Forged Annealed 50 70				3135 1568 950 475				2195 878 665 266											
Forged Hardened 90 100				2244 1122 680 340				1571 628 476 190											
Cast Annealed 70 80				1782 891 540 270				1247 499 378 151											
Cast Hardened 80 100				1353 677 410 205				947 379 287 115											
Copper & Copper Alloys																			
Free cutting Copper Alloy 90 110				1145 573 347 174				802 401 243 121				1489 744 451 226				1260 630 382 191			
Unleaded Copper 90 110				743 371 225 113				520 260 158 79				965 483 293 146				817 408 248 124			
Electrolytic Copper 90 110				693 347 210 105				485 243 147 74				901 450 273 137				762 381 231 116			
Brass and Bronze 80 100				825 413 250 125				578 289 175 88				1073 536 325 163				908 454 275 138			
Brass 80 100				858 429 260 130				601 300 182 91				1115 558 338 169				944 472 286 143			
Unleaded Bronze 90 110				891 446 270 135				624 312 189 95				1158 579 351 176				980 490 297 149			
Magnesium-Zinc Annealed 80 100				2261 1130 685 343				1582 791 480 240				2939 1469 891 445							
Nylon- Plastic & Rubber				2244 1122 680 340				1571 785 476 238				2917 1459 884 442							
Carbon-Graphite-Phenolics				228 139 69 42				159 80 48 24				296 180 90 55							

Cutting Condition: Wet

SFM (V_C): Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C): Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Turning Cutting Speed Recommendation

Materials				Negative and Positive Inserts Cutting Speed Recommendation											
Best P - Alloy Steel M - Stainless Steel K - Cast Iron U - Multi Materials				Dorian Insert Grade		DNU10GT		DNU25GT		DNX10UT		DNP25GT			
				Insert Coating		Uncoated		Uncoated		PVD Coated		PVD Coated			
						Hard & Wear Resistant		Impact Resistant		Hard & Abrasive Resistant		Impact & Wear Resistant			
						Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
				Depth of Cut ap		0.002 - 0.118	0.05 - 3.00	0.004 - 0.118	0.10 - 3.00	0.004 - 0.118	0.10 - 3.00	0.004 - 0.118	0.10 - 3.00		
Feed per Rev. fn				0.002 - 0.031	0.05 - 0.80	0.002 - 0.031	0.05 - 0.80	0.002 - 0.031	0.05 - 0.80	0.002 - 0.031	0.05 - 0.80				
				Medium SFM (Vc)		High SFM (Vc)		High SFM (Vc)		High SFM (Vc)					
Brinell HRC				Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric				
Free Machining Low Carbon Steel															
C=0.1-0.25%		Annealed	125												
Alloy Steel > 5%															
Hardened & Tempered		Heat -treated	275 28												
Hardened & Tempered		Heat -treated	350 38												
Stainless Steel															
Austenitic 200 & 300 Series		180	10	495 248	150 75	396 198	120 60	644 322	195 98	644 257	195 78				
Ferretic/Martensitic 400 Series		200	15	545 272	165 83	436 218	132 66	708 354	215 107	762 381	231 116				
Gray Cast Iron															
Low Tensile Strength		180	10	594 330	180 100	475 238	144 72	950 429	288 130	713 356	216 108				
High Tensile Strength		220	20	396 231	120 70	317 158	96 48	634 300	192 91	475 238	144 72				
Aluminum Alloys															
Forged		Annealed	50 70	6353 1271	1925 385	4447 1779	1348 539	7623 1525	2310 462						
Forged		Hardened	90 110	5280 528	1600 160	3696 1478	1120 448	6336 634	1920 192						
Cast		Annealed	70 80	3960 1056	1200 320	2772 1109	840 336	4752 1267	1440 384						
Cast		Hardened	80 100	3135 792	950 240	2195 878	665 266	3762 950	1140 288						
Copper & Copper Alloys															
Free cutting Copper Alloy		90	110	1145 573	347 174	802 401	243 121	1489 744	451 226	1260 630	382 191				
Unleaded Copper		90	110	743 371	225 113	520 260	158 79	965 483	293 146	817 408	248 124				
Electrolytic Copper		90	110	693 347	210 105	485 243	147 74	901 450	273 137	762 381	231 116				
Brass and Bronze															
Brass		80	100	825 413	250 125	578 289	175 88	1073 536	325 163	908 454	275 138				
Unleaded Bronze		80	100	858 429	260 130	601 300	182 91	1115 558	338 169	944 472	286 143				
Leaded Bronze		90	110	891 446	270 135	624 312	189 95	1158 579	351 176	980 490	297 149				
Magnesium-Zinc		Anneled	80 100	2261 1130	685 343	1582 791	480 240	2939 1469	891 445						
Nylon- Plastic & Rubber				2244 1122	680 340	1571 785	476 238	2917 1459	884 442						
Carbon-Graphite-Phenolics				228 139	69 42	159 80	48 24	296 180	90 55						
Super Alloy															
Heat Resistant Super Alloy Iron Base															
Discaloy, Incoloy 801, N-155, 16-25-6, 19-9L, A-286															
Cast:ASTM A297, A351, A608, A567															
Annealed				200	15	149 89	45 27	135 81	41 25	176 106	53 32	162 97	49 30		
Aged or Solution Treated and Aged				280	29	109 65	33 20	99 59	30 18	129 77	39 23	119 71	36 22		
Heat Resistant Super Alloy Nickel Base															
Astrloy, Hastelloy B/C/C-276/X,															
Inconel 601, 617, 625, 700, 706, 713, 718															
Incoloy 901, Monel, Nimonic, Rene41,															
Udimet, Wasploy, IN 102, MAR-M200															
Annealed or Solution Treated		250	25	116 70	35 21	106 63	32 19	137 82	42 25	127 76	38 23				
Aged or Solution Treated and Aged		350	37	91 54	28 17	83 50	25 15	107 64	33 20	99 59	30 18				
Cast and Aged		320	34	58 35	18 11	53 32	16 10	69 41	21 12	63 38	19 12				
Heat Resistant Super Alloy Cobalt Base															
AlResist213, Haynes25, (605) Haynes 188, J-1570, Stellite															
Cast:AlResist 13, Haynes21, MAR-M509, NASA Co-W_Re, WI-52															
Annealed or Solution Treated		200	15	116 70	35 21	106 63	32 19	137 82	42 25	127 76	38 23				
Solution Treated and Aged		300	32	91 54	28 17	83 50	25 15	107 64	33 20	99 59	30 18				
Cast and Aged		320	34	58 35	18 11	53 32	16 10	69 41	21 12	63 38	19 12				
Titanium Alloys															
Pure Titanium: Ti98.8, Ti99.9,															
Alloyed: Ti-5Al-2.5Sn, Ti-6l-4v, Ti-6Al-2Sn-4Zr-2Mo, 3Al															
Ti-3Al-8V-Cr-4Mo-4Zr, Ti-10V-2Fe-3Al, Ti-13V-11Cr-3Al															
Commercial pure (99.5%)				400		330 198	100 60	300 180	91 55	390 234	118 71	360 216	109 66		
Alloys Annealed		950		142 85	43 26	129 77	39 23	167 100	51 30	154 93	47 28				
Alloys In Aged condition		1050		102 61	31 18	92 55	28 17	120 72	36 22	111 67	34 20				

Materials				Negative & Positive Inserts Cutting Speed Recommendation											
Best P - Alloy Steel M - Stainless Steel K - Cast Iron N - Aluminum Alloys S - High Temp Alloy H-Hardened Steel U - Multi Materials		Dorian Insert Grade		DSP10HT				DSP20HT				DUP35RT			
		Insert Coating		PVD Coated				PVD Coated				PVD Coated			
				Hard & Wear Resistant				Hard & Tough				Tougher & Impact			
				Inch		Metric		Inch		Metric		Inch		Metric	
		Depth of Cut ap		0.002 - 0.157		0.05 - 4.00		0.002 - 0.157		0.05 - 4.00		0.002 - 0.157		0.05 - 4.00	
		Feed per Rev. fn		0.002 - 0.016		0.05 - 0.40		0.002 - 0.016		0.05 - 0.40		0.002 - 0.016		0.05 - 0.40	
Brinell HRC		Inch		Metric		Inch		Metric		Inch		Metric			
Unalloyed Carbon Steel															
C=0.1-0.25%	Annealed	125		1372	686	416	208	1247	624	378	189	1067	480	323	145
C=0.25-0.55%	Annealed	150		1241	621	376	188	1129	564	342	171	965	434	292	132
C=0.55-0.80%	Annealed	170	8	1176	588	356	178	1069	535	324	162	914	411	277	125
Low Alloy Steel ≤ 5%															
Annealed		180	10	1078	539	327	163	980	490	297	149	838	377	254	114
Ball Bearing Steel		210	17	1209	604	366	183	1099	549	333	167	940	423	285	128
Hardened & Tempered		275	28	1045	523	317	158	950	475	288	144	813	366	246	111
Hardened & Tempered		350	38	784	392	238	119	713	356	216	108	609	274	185	83
High Alloy Steel > 5%															
Annealed		200	15	849	425	257	129	772	386	234	117	660	297	200	90
Hardened Tool Steel		325	35	751	376	228	114	683	342	207	104	584	263	177	80
Steel Castings															
Unalloyed Carbon Steel		180	10	915	457	277	139	832	416	252	126	711	320	215	97
Low Alloy Steel ≤ 5%		200	15	849	425	257	129	772	386	234	117	660	297	200	90
High Alloy Steel > 5%		225	20	784	392	238	119	713	356	216	108	609	274	185	83
Stainless Steel Austenitic Bars 200 & 300 Series															
Bars & Forged Austenitic 303		180	10	817	408	248	124	743	371	225	113	635	286	192	87
Bars & Forged Austenitic 302-304-316		200	15	670	335	203	101	609	304	185	92	521	234	158	71
Bars & Forged Austenitic PH-Hardened		330	35	555	278	168	84	505	252	153	77	432	194	131	59
Stainless Steel Austenitic Cast 200 & 300 Series															
Casting Austenitic 303		180	10	719	359	218	109	653	327	198	99	559	251	169	76
Casting Austenitic 302-304-316		200	15	588	294	178	89	535	267	162	81	457	206	139	62
Casting Austenitic PH-Hardened		330	35	490	245	149	74	446	223	135	68	381	171	115	52
Stainless Steel Ferritic/ Martensitic Bars, 400 Series, 17-4 PH															
Casting Ferritic/Martensitic 400 Series		180	10	866	433	262	131	787	394	239	119	673	303	204	92
Casting Ferritic/Martensitic 400 Series		200	15	539	270	163	82	490	245	149	74	419	189	127	57
Casting Martensitic PH-Hardened		330	35	506	253	153	77	460	230	140	70	394	177	119	54
Stainless Steel Austenitic-Ferretic Duplex															
Stainless Steel Austenitic-Ferretic Duplex 2304		180	10	800	400	243	121	728	364	221	110	622	280	189	85
Stainless Steel Austenitic-Ferretic Duplex 2205		200	15	490	245	149	74	446	223	135	68	381	171	115	52
Stainless Steel Austenitic-Ferretic Duplex 2207		330	35	441	221	134	67	401	200	122	61	343	154	104	47
Stainless Steel Austenitic-Ferretic Duplex															
Stainless Steel Austenitic-Ferretic Duplex 2304		180	10	572	286	173	87	520	260	158	79	444	200	135	61
Stainless Steel Austenitic-Ferretic Duplex 2205		200	15	441	221	134	67	401	200	122	61	343	154	104	47
Stainless Steel Austenitic-Ferretic Duplex 2207		330	35	252	126	76	38	229	114	69	35	196	88	59	27

Cutting Condition: Wet

SFM (V_C): Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C): Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Turning Cutting Speed Recommendation

Gray Cast Iron											
Low Tensile Strength	180	10	882	441	267	134	802	401	243	122	686 309 208 93
High Tensile Strength	220	20	702	351	213	106	639	319	194	97	546 246 165 74
Modular Graphite Cast Iron											
Ferritic	160	6	702	351	213	106	639	319	194	97	546 246 165 74
Pearlitic	250	24	621	310	188	94	564	282	171	86	482 217 146 66
Martensitic	360	39	490	245	149	74	446	223	135	68	381 171 115 52
Malleable Cast Iron											
Ferritic (Short Chips)	130		751	376	228	114	683	342	207	104	584 263 177 80
Pearlitic (Long Chips)	230	20	621	310	188	94	564	282	171	86	482 217 146 66
Aluminum Alloys											
Forged Annealed	50	70									6348 2857 1924 866
Forged Hardened	90	110									2638 1187 799 360
Cast Annealed	70	80									2638 1187 799 360
Cast Hardened	80	100									1792 806 543 244
Copper and Copper Alloys											
Free cutting Copper Alloy	90	110	1898	949	575	288	1726	863	523	261	1476 664 447 201
Unleaded Copper	90	110	1062	531	322	161	965	483	293	146	825 371 250 113
Electrolytic Copper	90	110	1147	573	347	174	1042	521	316	158	891 401 270 122
Brass and Bronze											
Brass	80	100	1895	947	574	287	1723	861	522	261	1473 663 446 201
Unleaded Bronze	80	100	817	408	248	124	743	371	225	113	635 286 192 87
Leaded Bronze	90	110	882	441	267	134	802	401	243	122	686 309 208 93
Magnesium-Zinc											
Annealed	80	100	1503	751	455	228	1366	683	414	207	1168 526 354 159
Nylon- Plastic & Rubber											
			2222	1111	673	337	2020	1010	612	306	1727 777 523 235
Carbon-Graphite-Phenolics											
			261	131	79	40	238	119	72	36	203 91 62 28
Super Alloys											
Heat Resistant Super Alloy Iron Base											
Discaloy, Incoloy 801, N-155, 16-25-6, 19-9L, A-286											
Cast:ASTM A297, A351, A608, A567											
Annealed	200	15	245	123	74	37	223	111	68	34	190 86 58 26
Aged or Solution Treated and Aged	280	29	180	90	54	27	163	82	50	25	140 63 42 19
Heat Resistant Super Alloy Nickel Base											
Astrloy, Hastelloy B/C/C-276/X, Inconel 601, 617, 625, 700, 706, 713, 718											
Incoloy 901, Monel, Nimonic, Rene41, Udimet, Waspoly, IN 102, MAR-M200											
Annealed or Solution Treated	250	25	147	74	45	22	134	67	41	20	114 51 35 16
Aged or Solution Treated and Aged	350	37	114	57	35	17	104	52	32	16	89 40 27 12
Cast and Aged	320	34	75	38	23	11	68	34	21	10	58 26 18 8
Heat Resistant Super Alloy Cobalt Base											
AlResist213, Haynes25, (605) Haynes 188, J-1570, Stellite											
Cast:AlResist 13, Haynes21, MAR-M509, NASA Co-W_Re, WI-52											
Annealed or Solution Treated	200	15	147	74	45	22	134	67	41	20	114 51 35 16
Solution Treated and Aged	300	32	114	57	35	17	104	52	32	16	89 40 27 12
Cast and Aged	320	34	75	38	23	11	68	34	21	10	58 26 18 8
Titanium Alloys											
Pure: Ti98.8, Ti99.9, Alloyed: Ti-5Al-2.5Sn, Ti-6Al-4v, Ti-6Al-2Sn-4Zr-2Mo, 3Al											
Ti-3Al-8V-Cr-4Mo-4Zr, Ti-10V-2Fe-3Al, Ti-13V-11Cr-3Al											
Commercial pure (99.5%)	400		425	212	129	64	386	193	117	59	330 149 100 45
Alloys Annealed	950		180	90	54	27	163	82	50	25	140 63 42 19
Alloys In Aged condition	1050		131	65	40	20	119	59	36	18	102 46 31 14

Cutting Condition: Wet

SFM (V_C): Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C): Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.

Materials			Positive Inserts Cutting Speed Recommendation												
Best P - Alloy Steel M - Stainless Steel K - Cast Iron S - High Temp Alloy H-Hardened Steel U - Multi Materials	Dorian Insert Grade		DUP15VT				DUP25UT				DUP35RT				
	Insert Coating		PVD Coated				PVD Coated				PVD Coated				
			Hard & Wear Resistant				Hard & Tough				Tougher & Impact				
			Inch		Metric		Inch		Metric		Inch		Metric		
	Depth of Cut ap		0.002 - 0.157		0.05 - 4.00		0.002 - 0.157		0.05 - 4.00		0.002 - 0.157		0.05 - 4.00		
	Feed per Rev. fn		0.002 - 0.016		0.05 - 0.40		0.002 - 0.016		0.05 - 0.40		0.002 - 0.016		0.05 - 0.40		
			Medium SFM (Vc)				High SFM (Vc)				High SFM (Vc)				
	Brinell HRC		Inch		Metric		Inch		Metric		Inch		Metric		
	Unalloyed Carbon Steel														
	C=0.1-0.25%	Annealed	125	1403	631	425	191	1123	505	340	153	1067	480	323	145
C=0.25-0.55%	Annealed	150	1270	571	385	173	1016	457	308	139	965	434	292	132	
C=0.55-0.80%	Annealed	170	1203	541	365	164	962	433	292	131	914	411	277	125	
Low Alloy Steel ≤ 5%															
Annealed		180	1103	496	334	150	882	397	267	120	838	377	254	114	
Ball Bearing Steel		210	1236	556	375	169	989	445	300	135	940	423	285	128	
Hardened & Tempered		275	1069	481	324	146	855	385	259	117	813	366	246	111	
Hardened & Tempered		350	802	361	243	109	642	289	194	87	609	274	185	83	
High Alloy Steel > 5%															
Annealed		200	869	391	263	118	695	313	211	95	660	297	200	90	
Hardened Tool Steel		325	768	346	233	105	615	277	186	84	584	263	177	80	
Steel Castings															
Unalloyed Carbon Steel		180	936	421	284	128	748	337	227	102	711	320	215	97	
Low Alloy Steel ≤ 5%		200	869	391	263	118	695	313	211	95	660	297	200	90	
High Alloy Steel > 5%		225	802	361	243	109	642	289	194	87	609	274	185	83	
Stainless Steel Austenitic Bars 200 & 300 Series															
Bars & Forged Austenitic 303		180	835	376	253	114	668	301	203	91	635	286	192	87	
Bars & Forged Austenitic 302-304-316		200	685	308	208	93	548	247	166	75	521	234	158	71	
Bars & Forged Austenitic PH-Hardened		330	568	256	172	77	454	204	138	62	432	194	131	59	
Stainless Steel Austenitic Cast 200 & 300 Series															
Casting Austenitic 303		180	735	331	223	100	588	265	178	80	559	251	169	76	
Casting Austenitic 302-304-316		200	601	271	182	82	481	217	146	66	457	206	139	62	
Casting Austenitic PH-Hardened		330	501	226	152	68	401	180	122	55	381	171	115	52	
Stainless Steel Ferritic/ Martensitic Bars, 400 Series, 17-4 PH															
Bars & Forged Ferritic/Martensitic 400 Series		180	885	398	268	121	708	319	215	97	673	303	204	92	
Bars & Forged Ferritic/Martensitic 400 Series		200	551	248	167	75	441	198	134	60	419	189	127	57	
Bars & Forged Martensitic PH-Hardened		330	518	233	157	71	414	186	126	56	394	177	119	54	
Stainless Steel Ferritic/ Martensitic Bars, 400 Series, 17-4 PH															
Casting Ferritic/Martensitic 400 Series		180	819	368	248	112	655	295	198	89	622	280	189	85	
Casting Ferritic/Martensitic 400 Series		200	501	226	152	68	401	180	122	55	381	171	115	52	
Casting Martensitic PH-Hardened		330	451	203	137	62	361	162	109	49	343	154	104	47	
Stainless Steel Austenitic-Ferretic Duplex															
Stainless Steel Austenitic-Ferretic Duplex 2304		180	585	263	177	80	468	210	142	64	444	200	135	61	
Stainless Steel Austenitic-Ferretic Duplex 2205		200	451	203	137	62	361	162	109	49	343	154	104	47	
Stainless Steel Austenitic-Ferretic Duplex 2207		330	257	116	78	35	206	93	62	28	196	88	59	27	

Cutting Condition: Wet

SFM (V_c): Value are given in wet cutting condition. Reduced V_c 20% when cutting in dry condition.

SFM (V_c): Value are given at minimum Feed Rate. Reduced V_c from 10% to 50% when increase Feed Rate.

Turning Cutting Speed Recommendation







Gray Cast Iron															
Low Tensile Strength		180	10	902	406	273	123	722	325	219	98	686	309	208	93
High Tensile Strength		220	20	718	323	218	98	575	259	174	78	546	246	165	74
Modular Graphite Cast Iron															
Ferritic		160	6	718	323	218	98	575	259	174	78	546	246	165	74
Pearlitic		250	24	635	286	192	87	508	229	154	69	482	217	146	66
Martensitic		360	39	501	226	152	68	401	180	122	55	381	171	115	52
Malleable Cast Iron															
Ferritic (Short Chips)		130		768	346	233	105	615	277	186	84	584	263	177	80
Pearlitic (Long Chips)		230	20	635	286	192	87	508	229	154	69	482	217	146	66
Aluminum Alloys															
Forged	Annealed	50	70	8353	3759	2531	1139	6683	3007	2025	911	6348	2857	1924	866
Forged	Hardened	90	110	3471	1562	1052	473	2777	1250	842	379	2638	1187	799	360
Cast	Annealed	70	80	3471	1562	1052	473	2777	1250	842	379	2638	1187	799	360
Cast	Hardened	80	100	2357	1061	714	321	1886	849	572	257	1792	806	543	244
Copper and Copper Alloys															
Free cutting Copper Alloy		90	110	1942	874	588	265	1553	699	471	212	1476	664	447	201
Unleaded Copper		90	110	1086	489	329	148	869	391	263	118	825	371	250	113
Electrolytic Copper		90	110	1173	528	355	160	938	422	284	128	891	401	270	122
Brass and Bronze															
Brass		80	100	1938	872	587	264	1550	698	470	211	1473	663	446	201
Unleaded Bronze		80	100	835	376	253	114	668	301	203	91	635	286	192	87
Leaded Bronze		90	110	902	406	273	123	722	325	219	98	686	309	208	93
Magnesium-Zinc															
Annealed		80	100	1537	692	466	210	1230	553	373	168	1168	526	354	159
Nylon- Plastic & Rubber															
				2272	1022	689	310	1818	818	551	248	1727	777	523	235
Carbon-Graphite-Phenolics															
				267	120	81	36	214	96	65	29	203	91	62	28
Super Alloys															
Heat Resistant Super Alloy Iron Base															
Discaloy, Incoloy 801, N-155, 16-25-6, 19-9L, A-286															
Cast:ASTM A297, A351, A608, A567															
Annealed		200	15	251	113	76	34	200	90	61	27	190	86	58	26
Aged or Solution Treated and Aged		280	29	184	83	56	25	147	66	45	20	140	63	42	19
Heat Resistant Super Alloy Nickel Base															
Astrloy, Hastelloy B/C/C-276/X, Inconel 601, 617, 625, 700, 706, 713, 718															
Annealed or Solution Treated		250	25	150	68	46	21	120	54	36	16	114	51	35	16
Aged or Solution Treated and Aged		350	37	117	53	35	16	94	42	28	13	89	40	27	12
Cast and Aged		320	34	77	35	23	10	61	28	19	8	58	26	18	8
Heat Resistant Super Alloy Cobalt Base															
AlResist213, Haynes25, (605) Haynes 188, J-1570, Stellite															
Cast:AlResist 13, Haynes21, MAR-M509, NASA Co-W_Re, WI-52															
Annealed or Solution Treated		200	15	150	68	46	21	120	54	36	16	114	51	35	16
Solution Treated and Aged		300	32	117	53	35	16	94	42	28	13	89	40	27	12
Cast and Aged		320	34	77	35	23	10	61	28	19	8	58	26	18	8
Titanium Alloys															
Pure: Ti98.8, Ti99.9, Alloyed: Ti-5Al-2.5Sn, Ti-6l-4v, Ti-6Al-2Sn-4Zr-2Mo, 3Al															
Ti-3Al-8V-Cr-4Mo-4Zr, Ti-10V-2Fe-3Al, Ti-13V-11Cr-3Al															
Commercial pure (99.5%)		400		434	195	132	59	347	156	105	47	330	149	100	45
Alloys Annealed		950		184	83	56	25	147	66	45	20	140	63	42	19
Alloys In Aged condition		1050		134	60	41	18	107	48	32	15	102	46	31	14

Cutting Condition: Wet






SFM (V_C): Value are given in wet cutting condition. Reduced V_C 20% when cutting in dry condition.

SFM (V_C): Value are given at minimum Feed Rate. Reduced V_C from 10% to 50% when increase Feed Rate.






Positive Turning Insert ANSI - ISO Crossover Chart

	ANSI (Inch)					ISO (mm)				
Geometry	Description	Dimensions				Description	Dimensions			
		I.C.	Thick	Radius (± .004)	Hole Diameter		L	Thick	Radius (± 0,1)	Hole Diameter
CC __ 	CC__ -21.50.5	.2500	.0937	.0080	.107	CC__ -060202	6,35	2,38	0,2	2,7
	CC__ -21.51	.2500	.0937	.0156	.107	CC__ -060204	6,35	2,38	0,4	2,7
	CC__ -21.52	.2500	.0937	.0312	.107	CC__ -060208	6,35	2,38	0,8	2,7
	CC__ -32.50.5	.3750	.1562	.0080	.178	CC__ -09T302	9,52	3,97	0,2	4,5
	CC__ -32.51	.3750	.1562	.0156	.178	CC__ -09T304	9,52	3,97	0,4	4,5
	CC__ -32.52	.3750	.1562	.0312	.178	CC__ -09T308	9,52	3,97	0,8	4,5
	CC__ -431	.5000	.1875	.0156	.220	CC__ -120404	12,70	4,76	0,4	5,6
	CC__ -432	.5000	.1875	.0312	.220	CC__ -120408	12,70	4,76	0,8	5,6
	CC__ -433	.5000	.1875	.0468	.220	CC__ -120412	12,70	4,76	0,2	5,6
CD __ 	CD__ -1.20.60.2	.1563	.0400	.0040	.084	CD__ -S4T001	3,97	1,00	0,1	2,1
	CD__ -1.20.60.5	.1563	.0400	.0080	.084	CD__ -S4T002	3,97	1,00	0,2	2,1
	CD__ -1.510.5	.1875	.0625	.0080	.084	CD__ -040102	4,76	1,59	0,2	2,1
	CD__ -1.511	.1875	.0625	.0156	.084	CD__ -040104	4,76	1,59	0,4	2,1
CP __ 	CP__ -1.81.20.5	.2188	.075	.0080	.084	CP__ -05T102	5,56	1,98	0,2	2,1
	CP__ -1.81.21	.2188	.075	.0156	.084	CP__ -05T104	5,56	1,98	0,4	2,1
	CP__ -21.50.5	.2500	.0937	.0080	.107	CP__ -060202	6,53	2,38	0,2	2,7
	CP__ -21.51	.2500	.0937	.0156	.107	CP__ -060204	6,53	2,38	0,4	2,7
	CP__ -32.51	.3750	.1562	.0156	.178	CP__ -09T304	9,53	3,97	0,4	4,5
	CP__ -32.52	.3750	.1562	.0312	.178	CP__ -09T308	9,53	3,97	0,8	4,5
DC __ 	DC__ -21.50.2	.2500	.0937	.0040	.107	DC__ -070201	6,35	2,38	0,1	2,7
	DC__ -21.50.5	.2500	.0937	.0080	.107	DC__ -070202	6,35	2,38	0,2	2,7
	DC__ -21.51	.2500	.0937	.0156	.107	DC__ -070204	6,35	2,38	0,4	2,7
	DC__ -21.52	.2500	.0937	.0312	.107	DC__ -070208	6,35	2,38	0,8	2,7
	DC__ -32.50.5	.3750	.1562	.0080	.178	DC__ -11T302	11,00	3,97	0,2	4,5
	DC__ -32.51	.3750	.1562	.0156	.178	DC__ -11T304	11,00	3,97	0,4	4,5
	DC__ -32.52	.3750	.1562	.0312	.178	DC__ -11T308	11,00	3,97	0,8	4,5
	DC__ -431	.5000	.1875	.0156	.220	DC__ -150404	15,88	4,76	0,4	5,6
	DC__ -432	.5000	.1875	.0312	.220	DC__ -150408	15,88	4,76	0,8	5,6
RC __ 	N/A					RC__ -0602MO	6.00	2,38	N/A	2,7
						RC__ -0803MO	8.00	3,18	N/A	3,4
						RC__ -1003MO	10.00	3,18	N/A	4,5
						RC__ -1204MO	12.00	4,76	N/A	4,5
						RC__ -1606MO	16.00	6,35	N/A	5,6
						RC__ -2006MO	20.00	6,35	N/A	5,6
						RC__ -3209MO	32.00	9,52	N/A	5,6
SC __ 	SC__ -32.51	.375	.1562	.0156	.178	SC__ -09T304	9,53	3,97	0,4	4,5
	SC__ -32.52	.375	.1562	.0312	.178	SC__ -09T308	9,53	3,97	0,8	4,5
	SC__ -431	.500	.1875	.0156	.220	SC__ -120404	12,70	4,76	0,4	5,6
	SC__ -432	.500	.1875	.0312	.220	SC__ -120408	12,70	4,76	0,8	5,6
	SC__ -433	.500	.1875	.0468	.220	SC__ -120412	12,70	4,76	1,2	5,6




Positive Turning Insert ANSI - ISO Crossover Chart

	ANSI (Inch)					ISO (mm)				
Geometry	Description	Dimensions				Description	Dimensions			
		I.C.	Thick	Radius (± .004)	Hole Diameter		L	Thick	Radius (± 0,1)	Hole Diameter
SP 	SP__ -321	.3750	.1250	.0156	.178	SP__ -090304	9,53	3,18	0,4	4,5
	SP__ -322	.3750	.1250	.0312	.178	SP__ -090308	9,53	3,18	0,8	4,5
	SP__ -422	.5000	.1250	.0312	.220	SP__ -120308	12,70	3,18	0,8	5,6
	SP__ -432	.5000	.1875	.0312	.220	SP__ -120408	12,70	7,6	0,8	5,6
SD 	SD__ -322	.3750	.1250	.0312	.158	SD__ -090308	9,53	3,18	0,8	4,5
	SD__ -422	.5000	.1250	.0312	.178	SD__ -120308	12,70	3,18	0,8	4,5
	SD__ -532	.6250	.1875	.0312	.203	SD__ -150408	15,88	4,76	0,8	5,2
	SD__ -09C01	.3750	.1563	.0156	.178	SD__ -09T3C04	9,53	3,97	0,4	4,5
	SD__ -09C02	.3750	.1563	.0312	.178	SD__ -09T3C08	9,53	3,97	0,8	4,5
	SD__ -09C03	.3750	.1563	.0468	.178	SD__ -09T3C12	9,53	3,97	1,2	4,5
	SD__ -09C04	.3750	.1563	.0625	.178	SD__ -09T3C16	9,53	3,97	1,6	4,5
	SD__ -19C05	.7500	.1875	.0781	.220	SD__ -1904C20	19,05	4,76	2,0	5,6
	SD__ -19C06	.7500	.1875	.0937	.220	SD__ -1904C24	19,05	4,76	2,4	5,6
	SD__ -19C07	.7500	.1875	.1094	.220	SD__ -1904C28	19,05	4,76	2,8	5,6
	SD__ -19C08	.7500	.1875	.1250	.220	SD__ -1904C32	19,05	4,76	3,2	5,6
	SD__ -19C09	.7500	.1875	.1406	.220	SD__ -1904C36	19,05	4,76	3,6	5,6
	SD__ -19C10	.7500	.1875	.1562	.220	SD__ -1904C40	19,05	4,76	4,0	5,6
	SD__ -19C11	.7500	.1875	.1719	.220	SD__ -1904C44	19,05	4,76	4,4	5,6
	SD__ -19C12	.7500	.1875	.1875	.220	SD__ -1904C48	19,05	4,76	4,8	5,6
	SD__ -19C13	.7500	.1875	.2031	.220	SD__ -1904C52	19,05	4,76	5,2	5,6
	SD__ -19C14	.7500	.1875	.2187	.220	SD__ -1904C56	19,05	4,76	5,6	5,6
	SD__ -19C15	.7500	.1875	.2344	.220	SD__ -1904C60	19,05	4,76	6,0	5,6
	SD__ -19C16	.7500	.1875	.2500	.220	SD__ -1904C64	19,05	4,76	6,4	5,6
TC 	TC__ -1.21.20.2	.1563	.0750	.0040		TC__ -06T101	6,53	1,98	0,1	
	TC__ -21.50.2	.2500	.0937	.0040	.107	TC__ -110201	11,00	2,38	0,1	2,7
	TC__ -21.50.5	.2500	.0937	.0080	.107	TC__ -110202	11,00	2,38	0,2	2,7
	TC__ -21.51	.2500	.0937	.0156	.107	TC__ -110204	11,00	2,38	0,4	2,7
	TC__ -21.52	.2500	.0937	.0312	.107	TC__ -110208	11,00	2,38	0,8	2,7
	TC__ -32.51	.3750	.1562	.0156	.178	TC__ -16T304	16,50	3,97	0,4	4,5
	TC__ -32.52	.3750	.1562	.0312	.178	TC__ -16T308	16,50	3,97	0,8	4,5
TP 	TP__ -21.50.5	.2500	.0937	.0080	.107	TP__ -110202	11,00	2,38	0,2	2,7
	TP__ -21.51	.2500	.0937	.0312	.107	TP__ -110204	11,00	2,38	0,4	2,7
	TP__ -21.52	.2500	.0938	.0313	.107	TP__ -110208	11,00	2,38	0,8	2,7
	TP__ -221	.2500	.1250	.0156	.107	TP__ -110304	11,00	3,18	0,4	2,7
	TP__ -222	.2500	.1250	.0312	.107	TP__ -110308	11,00	3,18	0,8	2,7
	TP__ -321	.3750	.1250	.0156	.178	TP__ -160304	16,50	3,18	0,4	4,5
	TP__ -322	.3750	.1250	.0313	.178	TP__ -160308	16,50	3,18	0,8	4,5
	TP__ -32.51	.3750	.1562	.0156	.178	TP__ -16T304	16,50	3,97	0,4	4,5
	TP__ -32.52	.3750	.1562	.0312	.178	TP__ -16T308	16,50	3,97	0,8	4,5
	TP__ -431	.5000	.1875	.0156	.220	TP__ -220404	22,00	4,76	0,4	5,6
	TP__ -432	.5000	.1875	.0312	.320	TP__ -220408	22,00	4,76	0,8	5,6






Positive Turning Insert ANSI - ISO Crossover Chart

	ANSI (Inch)					ISO (mm)				
Geometry	Description	Dimensions				Description	Dimensions			
		I.C.	Thick	Radius (± .004)	Hole Diameter		L	Thick	Radius (± 0,1)	Hole Diameter
TE__ 										
	TE__ -1.81.51	.2188	.0937	.100204	.104	TE__ -100404	6,93	2,38	0,4	2,7
VC__ 	VC__ -220.5	.2500	.1250	.0080	.107	VC__ -110302	11,00	3,18	0,2	2,7
	VC__ -220.5	.2500	.1250	.0080	.107	VC__ -110302	11,00	3,18	0,2	2,7
	VC__ -221	.2500	.1250	.0156	.107	VC__ -110304	11,00	3,18	0,4	2,7
	VC__ -330.5	.3750	.1875	.0080	.178	VC__ -160402	16,50	4,76	0,2	4,5
	VC__ -331	.3750	.1875	.0156	.178	VC__ -160404	16,50	4,76	0,4	4,5
	VC__ -332	.3750	.1875	.0312	.178	VC__ -160408	16,50	4,76	0,8	4,5
	VC__ -333	.3750	.1875	.0468	.178	VC__ -160412	16,50	4,76	1,2	4,5
	VC__ -448	.5000	.2500	.1250	.220	VC__ -220530	22,00	5,56	3,0	5,6
VB__ 	VB__ -221	.2500	.1250	.0156	.107	VB__ -110304	11,00	3,18	0,4	2,7
	VB__ -330.5	.3750	.1875	.0080	.178	VB__ -160402	16,50	4,76	0,2	4,5
	VB__ -331	.3750	.1875	.0156	.178	VB__ -160404	16,50	4,76	0,4	4,5
	VB__ -332	.3750	.1875	.0312	.178	VB__ -160408	16,50	4,76	0,8	4,5
	VB__ -333	.3750	.1875	.0468	.178	VB__ -160412	16,50	4,76	1,2	4,5
VP__ 	VP__ -221	.2500	.1250	.0156	.107	VP__ -110304	11,00	3,18	0,4	2,7
	VP__ -333	.3750	.1875	.0468	.178	VP__ -160412	16,50	4,76	1,2	4,5
	VP__ -444	.5000	.2500	.0625	.220	VP__ -220516	22,00	5,56	1,6	5,6
WC__ 	WC__ -1.210.2	.1563	.0625	.0040	.084	WC__ -S20101	3,55	1,59	0,1	2,1
	WC__ -1.51.50.2	.1875	.0937	.0040	.084	WC__ -S30201	4,34	2,38	0,1	2,1
	WC__ -1.51.50.5	.1875	.0937	.0080	.084	WC__ -S30202	4,34	2,38	0,2	2,1
	WC__ -21.51	.2500	.0937	.0156	.107	WC__ -040204	4,34	2,38	0,4	2,7
	WC__ -32.50.5	.3750	.1562	.0080	.178	WC__ -06T302	6,52	3,97	0,2	4,5
	WC__ -32.51	.3750	.1562	.0156	.178	WC__ -06T304	6,52	3,97	0,4	4,5
	WC__ -32.52	.3750	.1562	.0312	.178	WC__ -06T308	6,52	3,97	0,8	4,5
	WC__ -431	.5000	.1875	.0156	.220	WC__ -080404	8,69	4,76	0,4	5,6
	WC__ -432	.5000	.1875	.0312	.220	WC__ -080408	8,69	4,76	0,8	5,6


Negative Turning Insert ANSI - ISO Crossover Chart

Geometry	ANSI (Inch)					ISO (mm)				
	Description	Dimensions				Description	Dimensions			
		I.C.	Thick	Radius (± .004)	Hole Diameter		L	Thick	Radius (± 0,1)	Hole Diameter
CN__ 	CN__-321	.3750	.1250	.0156	.150	CN__-090304	9,5	3,18	0,4	3,8
	CN__-322	.3750	.1250	.0312	.150	CN__-090308	9,5	3,18	0,8	3,8
	CN__-431	.5000	.1875	.0156	.203	CN__-120404	12,7	4,76	0,4	5,2
	CN__-432	.5000	.1875	.0312	.203	CN__-120408	12,7	4,76	0,8	5,2
	CN__-433	.5000	.1875	.0468	.203	CN__-120412	12,7	4,76	1,2	5,2
	CN__-434	.5000	.1875	.0625	.203	CN__-120416	12,7	4,76	1,6	5,2
	CN__-542	.6250	.2500	.0312	.250	CN__-160608	16,5	6,35	0,8	6,4
	CN__-543	.6250	.2500	.0468	.250	CN__-160612	16,5	6,35	1,2	6,4
	CN__-544	.6250	.2500	.0625	.250	CN__-160616	16,5	6,35	1,6	6,4
	CN__-643	.7500	.2500	.0468	.312	CN__-190612	19,05	6,35	1,2	7,9
	CN__-644	.7500	.2500	.0625	.312	CN__-190616	19,05	6,35	1,6	7,9
	CN__-646	.7500	.2500	.0937	.312	CN__-190624	19,05	6,35	2,4	7,9
	CN__-856	1.0000	.3125	.0937	.359	CN__-250724	25,40	7,94	2,4	9,1
	CN__-866	1.0000	.3750	.0937	.359	CN__-250924	25,40	9,52	2,4	9,1
DN__ 	DN__-331	.3750	.1875	.0156	.150	DN__-110404	11,00	4,76	0,4	3,8
	DN__-332	.3750	.1875	.0312	.150	DN__-110408	11,00	4,76	0,8	3,8
	DN__-431	.5000	.1875	.0156	.203	DN__-150404	15,88	4,76	0,4	5,2
	DN__-432	.5000	.1875	.0312	.203	DN__-150408	15,88	4,76	0,8	5,2
	DN__-433	.5000	.1875	.0468	.203	DN__-150612	15,88	6,35	1,2	5,2
	DN__-441	.5000	.2500	.0156	.203	DN__-150604	15,88	4,76	0,4	5,2
	DN__-442	.5000	.2500	.0312	.203	DN__-150608	15,88	6,35	0,8	5,2
	DN__-443	.5000	.2500	.0468	.203	DN__-150612	15,88	4,76	1,2	5,2
	DN__-444	.5000	.2500	.0625	.203	DN__-150616	15,88	6,35	1,6	5,2
SN__ 	SN__-321	.3750	.1250	.0156	.150	SN__-090304	9,53	3,18	0,4	3,8
	SN__-322	.3750	.1250	.0312	.150	SN__-090308	9,53	3,18	0,8	3,8
	SN__-431	.5000	.1875	.0156	.203	SN__-120404	12,70	4,76	0,4	5,2
	SN__-432	.5000	.1875	.0312	.203	SN__-120408	12,70	4,76	0,8	5,2
	SN__-433	.5000	.1875	.0469	.203	SN__-120412	12,70	4,76	1,2	5,2
	SN__-434	.5000	.1875	.0625	.203	SN__-120416	12,70	4,76	1,6	5,2
	SN__-542	.6250	.2500	.0312	.250	SN__-150608	15,88	6,35	0,8	6,4
	SN__-543	.6250	.2500	.0468	.250	SN__-150612	15,88	6,35	1,2	6,4
	SN__-544	.6250	.2500	.0625	.250	SN__-150616	15,88	6,35	1,6	6,4
	SN__-633	.7500	.1875	.0468	.312	SN__-190412	19,05	4,76	1,2	7,9
	SN__-643	.7500	.2500	.0468	.312	SN__-190612	19,05	6,35	1,2	7,9
	SN__-644	.7500	.2500	.0625	.312	SN__-190616	19,05	6,35	1,6	7,9
	SN__-646	.7500	.2500	.0937	.312	SN__-190624	19,05	6,35	2,4	7,9
	SN__-648	.7500	.2500	.1250	.312	SN__-190632	19,05	6,35	3,2	7,9
	SN__-856	1.0000	.3125	.0937	.359	SN__-250724	25,40	7,94	2,4	9,1
	SN__-866	1.0000	.3750	.0937	.359	SN__-250924	25,40	9,52	2,4	9,1

Negative Turning Insert ANSI - ISO Crossover Chart

Geometry	ANSI (Inch)					ISO (mm)				
	Description	Dimensions				Description	Dimensions			
		I.C.	Thick	Radius (± .004)	Hole Diameter		L	Thick	Radius (± 0,1)	Hole Diameter
TN__ 	TN_-221	.2500	.1250	.0156	.089	TN_-110304	11,00	3,18	0,4	2,3
	TN_-222	.2500	.1250	.0312	.089	TN_-110308	11,00	3,18	0,8	2,3
	TN_-321	.3750	.1250	.0156	.150	TN_-160304	16,50	3,18	0,4	3,8
	TN_-322	.3750	.1250	.0312	.150	TN_-160408	16,50	4,76	0,8	3,8
	TN_-331	.3750	.1875	.0156	.150	TN_-160404	16,50	4,76	0,4	3,8
	TN_-332	.3750	.1875	.0312	.150	TN_-160408	16,50	4,76	0,8	3,8
	TN_-333	.3750	.1875	.0468	.150	TN_-160412	16,50	4,76	1,2	3,8
	TN_-431	.5000	.1875	.0156	.203	TN_-220404	22,00	4,76	0,4	5,2
	TN_-432	.5000	.1875	.0312	.203	TN_-220408	22,00	4,76	0,8	5,2
	TN_-433	.5000	.1875	.0468	.203	TN_-220412	22,00	4,76	1,2	5,2
	TN_-434	.5000	.1875	.0625	.203	TN_-220416	22,00	4,76	1,6	5,2
VN__ 	VN_-331	.3750	.1875	.0156	.150	VN_-160404	16,50	4,76	0,4	3,8
	VN_-332	.3750	.1875	.0312	.150	VN_-160408	16,50	4,76	0,8	3,8
	VN_-333	.3750	.1875	.0468	.150	VN_-160412	16,50	4,76	1,2	3,8
	VN_-432	.5000	.1875	.0312	.203	VN_-220408	22,00	4,76	0,8	5,2
	VN_-433	.5000	.1875	.0469	.203	VN_-220412	22,00	4,76	1,2	5,2
WN__ 	WN_-331	.3750	.1875	.0156	.150	WN_-060404	6,52	4,76	0,4	3,8
	WN_-332	.3750	.1875	.0312	.150	WN_-060408	6,85	4,76	0,8	3,8
	WN_-431	.5000	.1875	.0156	.203	WN_-080404	8,69	4,76	0,4	3,8
	WN_-432	.5000	.1875	.0313	.203	WN_-080408	8,69	4,76	0,8	5,2
	WN_-433	.5000	.1875	.0468	.203	WN_-080412	8,69	4,76	1,2	5,2
KNUX 	N/A					KNUX-160405	16,50	4,76	0,5	N/A
						KNUX-160410	16,50	4,76	1,0	N/A
RN__ 	RN_-32	.3750	.1250	.1875	.150	RN_-090300	9,53	3,18	3,76	3,8
	RN_-43	.5000	.1875	.2500	.203	RN_-120400	12,70	4,76	6,35	5,2
	RN_-54	.6250	.2500	.3125	.250	RN_-150600	15,88	6,43	7,93	6,4
	RN_-64	.7500	.2500	.3750	.312	RN_-190600	19,05	6,35	9,52	7,9
	RN_-84	1.0000	.2500	.5000	.359	RN_-250600	25,40	6,35	12,7	9,1

Turning Insert Identification System

Inch		Metric									
 Insert "I.C." (Inscribed Circle): Measures surface in 1/8" increments, 1 unit = 1/8" EX: 4 units (4 x 1/8") = 1/2"		 Cutting Edge Length (L) by Shape (mm) designated with an insert shape symbol									
Unit		I.C.									
		inch	mm	C	D	R	S	T	V	W	K
1.2(5)		5/32	03,97	04	04	03	03	06	-	02	-
1.5(6)		3/16	04,76	04	05	04	04	08	08	53	08
1.8(7)		7/32	05,56	05	-	-	-	10	-	03	-
2		1/4	06,35	06	07	06	-	11	11	04	-
2.5		5/16	08,00	-	-	08	-	-	-	-	-
3		3/8	09,53	09	11	09	09	16	16	06	16
-		3/8	10,00	-	-	10	-	-	-	-	-
4		1/2	12,70	12	15	12	12	22	22	08	-
5		5/8	15,88	16	19	15	15	27	-	-	-
6		3/4	19,05	19	-	19	19	33	-	-	-
7		7/8	22,22	22	27	22	22	38	38	15	38
-		.984	25,00	-	-	25	-	-	-	-	-
8		1.0	25,40	25	-	25	25	-	-	-	-
-		1.260	32,00	-	-	32	-	-	-	-	-

Note: Old A.N.S.I. standards shown in parenthesis for I.C.s under 1/4"

Inch		Metric	
 Insert "T" (Thickness): Measures width, expressed in units, 1 unit = 1/16" EX: 3 units (3 x 1/16") = 3/16"		 Insert "T" (Thickness): Measures width, expressed in 1mm increments. 1 unit = 1/64" Single integers preceded by a 0.	
Symbol	Thickness	Symbol	Thickness
.5(1)	1/32	0,79	-
.6	.040	1,00	T0
1(2)	1/16	1,59	01
1.2	5/64	1,98	T1
1.5(3)	3/32	2,38	02
2	1/8	3,18	03
2.5	5/32	3,97	T3
3	3/16	4,76	04
3.5	7/32	5,56	05
4	1/4	6,35	06
5	5/16	7,94	07
6	3/8	9,52	09
7	7/16	11,11	11
8	1/2	12,70	12

Inch		Metric	
 Insert "R" (Radius): Measures radius, expressed in units, 1 unit = 1/64" EX: 3 units (3 x 1/64") = 3/16"		 Insert "R" (Radius): Measures radius, expressed in 1/10mm increments.	
Symbol	Corner Radius	Symbol	Corner Radius
X0	.0015	.04	X0
.2	.004	0,1	01
.5	.008	0,2	02
1	1/64	0,4	04
2	1/32	0,8	08
3	3/64	1,2	12
4	1/16	1,6	16
5	5/64	2,0	20
6	3/32	2,4	24
7	7/64	2,8	28
8	1/8	3,2	32
-	round insert (inch)	00	
-	round insert (mm)	M0	

5. Size

6. Thickness

7. Radius

Insert Style			
T	N	M	G

1 2 3 4


4	3	3
---	---	---


ANSI

22	04	12
----	----	----

ISO

Insert Size

1. Geometry		2. Clearance Angle		3. Tolerances		4. Type			
	C 80° Diamond		A Positive		Tolerance on Dimensions				A Hole, no Chipbreaker
	D 55° Diamond		B Positive		inch	mm	M* inch mm		B Hole, 1 Sided Countersink
	R Round		C Positive		5/32	3,97			F No Hole, 2 Sided Chipbreaker
	S Square		D Positive		3/16	4,76			G Hole, 2 Sided Chipbreaker
	T Triangle		E Positive		7/32	5,56	.002		H Hole, 1 Sided Chipbreaker and 70°-90° Countersink
	W 80° Trigon		F Positive		1/4	6,35	.005		M Hole, 1 Sided Chipbreaker
	V 35° Diamond		G Positive		5/16	7,94			N No Hole, No Chipbreaker
	K 55° Parallelogram		N Negative		3/8	9,52			P Hole, 2 Sided Chipbreaker
			P Positive		7/16	11,11	.003		R No Hole, 1 Sided Chipbreaker
			T Positive		1/2	12,70	.003		S Hole, 1 Sided Chipbreaker
					9/16	14,29	.006		T Hole, 1 Sided Chipbreaker 40°-60° ISO Countersink
					5/8	15,88			W Hole, 1 Sided 40°-60° ISO Countersink
					11/16	17,46	.004		X Special
					3/4	19,05			
					7/8	22,22	.005		
					1	25,40	.007		
					1 1/4	31,75	.006		

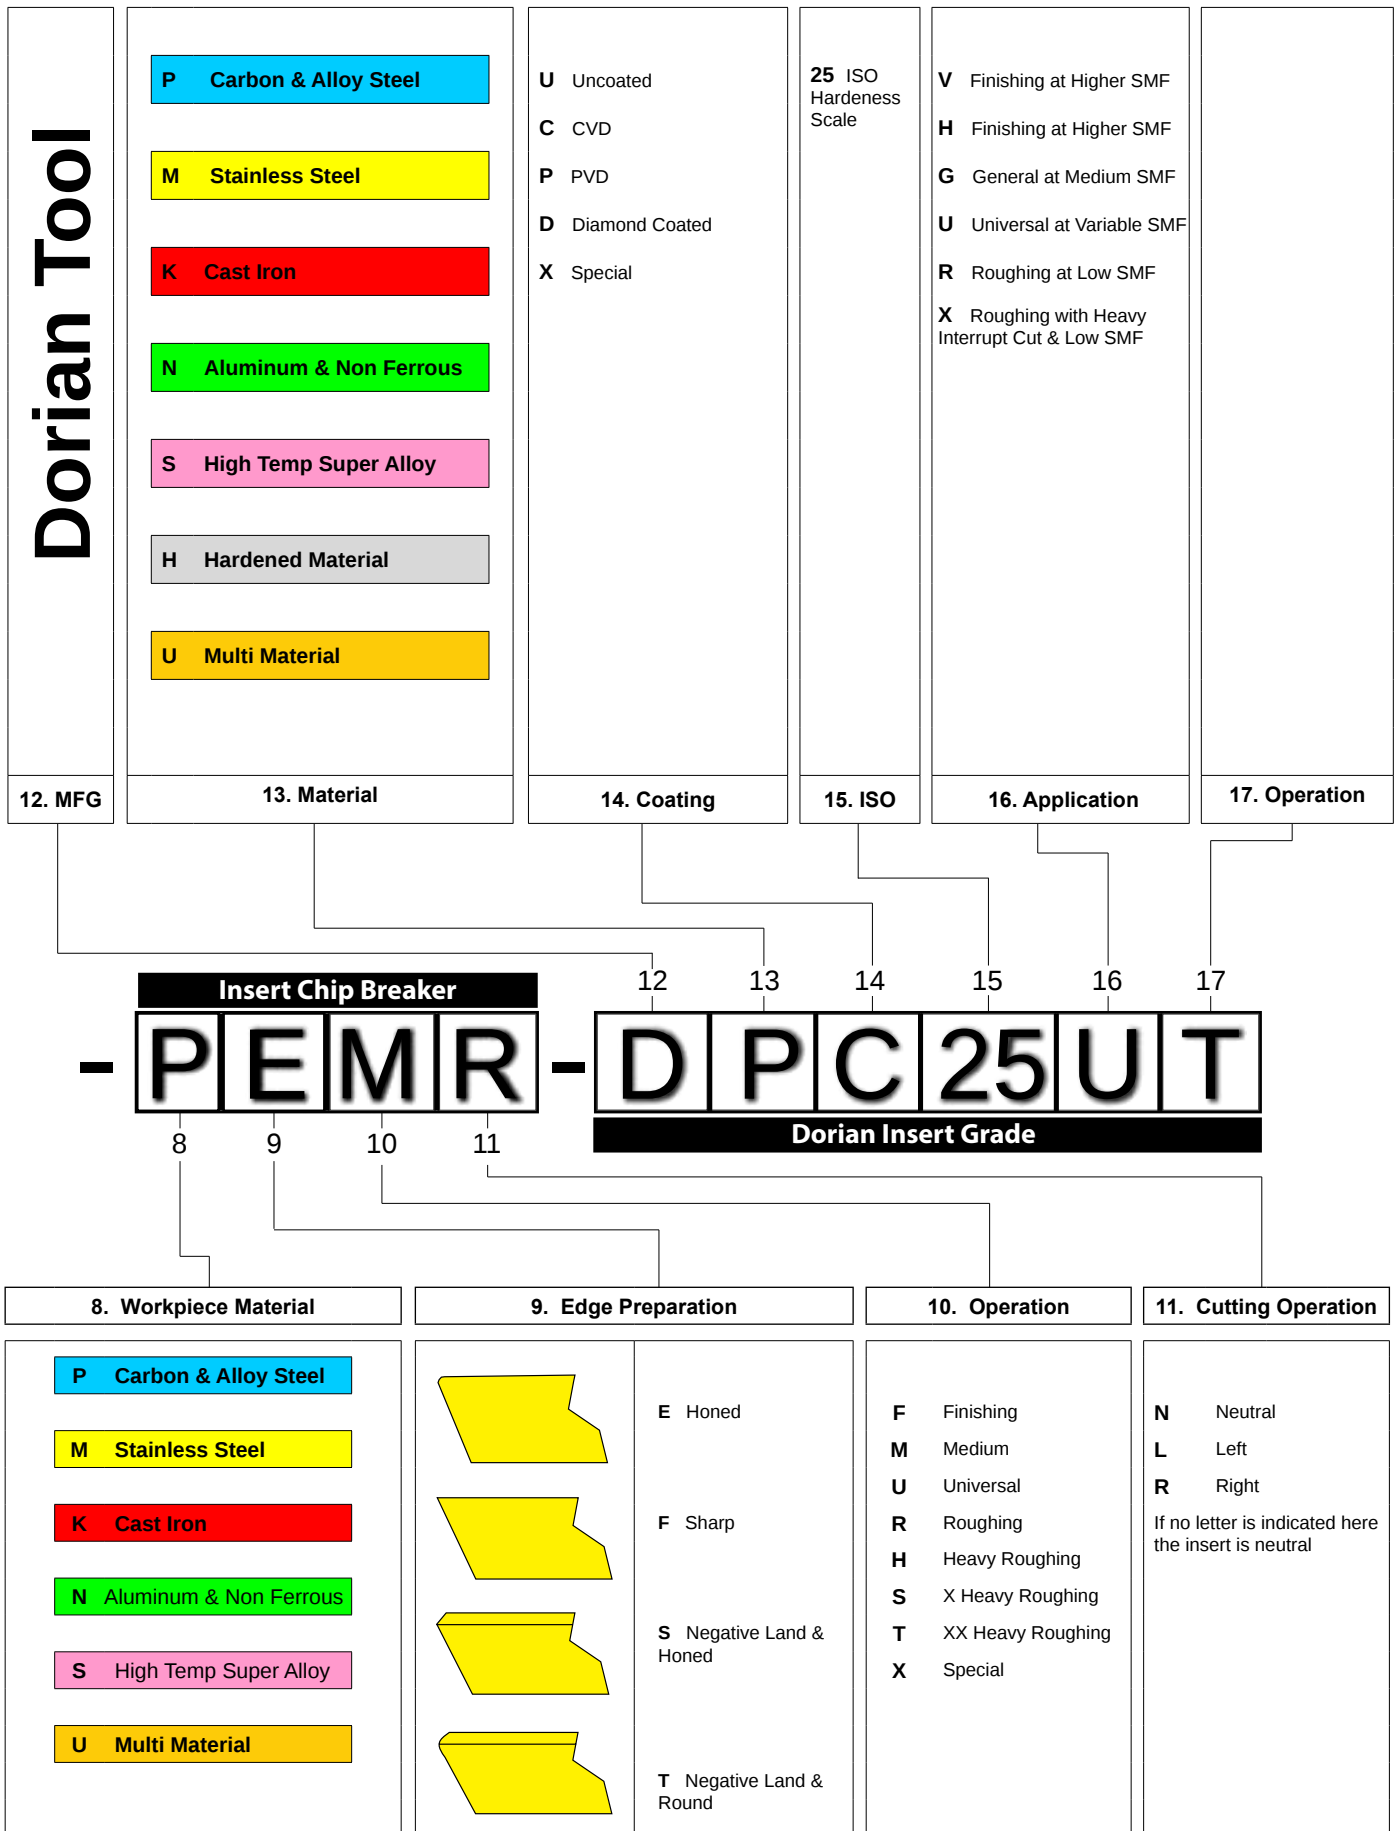

Note: See page A-36, and A-37

Positive Precision Ground Inserts

Insert Chip Breaker UEF				Turning Application			
Material	Insert Grades			General Purpose	Universal	Unstable Condition	
	DNU25GT	DUP25GT	DUP35RT	Grade	Grade	Grade	
Application Best	SFM (V _c)			DNU25GT	DUP25GT	DUP35RT	
Carbon & Alloy Steel ○	1123	286	1066	274	M25 N25 K25 S25	P15 M15 K15 N25 S25	P20 M25 K30 N30 S30
Metric	340	87	323	83	C1-C2	C3-C7	
Stainless Steel ○	545	272	708	93	634	89	Hard & Tough
Metric	165	82	215	28	192	27	
Cast Iron ●	475	158	722	180	686	172	
Metric	144	48	219	55	208	52	
Aluminum ○	3812	379	6683	849	6349	805	
Metric	1155	115	2025	257	1924	244	
Brass, Bronze, Copper ●	802	243	1726	863	1475	287	
Metric	243	74	523	261	447	87	
Inconel, Hastelloy, Waspaloy ●	244	36	200	28	191	26	
Metric	74	11	61	8	58	8	
Titanium Alloys ●	196	78	347	28	330	46	
Metric	59	24	105	8	100	14	
Carbon-Graphite-Phenolics ●	175	83	215	96	205	92	
Metric	53	25	65	29	62	28	
For complete Cutting Data see page				Low SFM (Vc)	High SFM (Vc)	Medium SFM (Vc)	

Description	ANSI	ISO	Grade DNU25GT	Grade DUP25GT	Grade DUP35RT
			UPC 733101-	UPC 733101-	UPC 733101-
CDGX-UEFR 80° Diamond Universal 	CDGX-1.510.5-UEFR	CDGX-040102-UEFR	68562	68563	68564
	CDGX-1.511-UEFR	CDGX-040104-UEFR	68572	68573	68574
CDGX-UEFL 80° Diamond Universal 	CDGX-1.20.60.2-UEFL	CDGX-S4T001-UEFL	68547	68548	68549
	CDGX-1.510.5-UEFL	CDGX-040102-UEFL	68567	68568	68569
	CDGX-1.511-UEFL	CDGX-040104-UEFL	68577	68578	68579
CCGX-UEFR 80° Diamond Universal 	CCGX-21.51-UEFR	CCGX-060204-UEFR	68592	68593	68594
CCGX-UEFL 80° Diamond Universal 	CCGX-21.51-UEFL	CCGX-060204-UEFL	68597	68598	68599
CPGX-UEFL 80° Diamond Universal 	CPGX-1.81.20.5-UEFL	CPGX-05T102-UEFL	68637	68638	68639
	CPGX-21.50.5-UEFL	CPGX-060202-UEFL	68657	68658	68659
DCGX-UEFR 55° Diamond Universal 	DCGX-21.51-UEFR	DCGX-060204-UEFR	68712	68713	68714

Turning Application		
General Purpose	Universal	Unstable Condition
UEF	UEF	UEF

Description	ANSI	ISO	Grade DNU25GT	Grade DUP25GT	Grade DUP35RT
	DCGX-21.51-UEFL	DCGX-070204-UEFL	UPC 733101- 68717	UPC 733101- 68718	UPC 733101- 68719
DCGX-UEFL 55° Diamond Universal 					
	TCGX-21.50.5-UEFR	TCGX-110202-UEFR	68762	68763	68764
	TCGX-21.51-UEFR	TCGX-110204-UEFR	68772	68773	68774
TCGX-UEFR 60° Triangle Universal 					
	VBGX-221-UEFR	VBGX-110304-UEFR	68902	68903	68904
VBGX-UEFR 35° Diamond Universal 					
	VBGX-221-UEFL	VBGX-110304-UEFL	68907	68908	68909
VBGX-UEFL 35° Diamond Universal 					
	VCGX-221-UEFR	VCGX-110304-UEFR	68962	68963	68964
VCGX-UEFR 35° Diamond Universal 					
	VCGX-2215-UEFL	VCGX-110304-UEFL	68967	68968	68969
VCGX-UEFL 35° Diamond Universal 					

Cutting Material	Finishing Applications				Medium Applications				Roughing Applications			
	Chipbreaker	a_p	f_n	V_c	Chipbreaker	a_p	f_n	V_c	Chipbreaker	a_p	f_n	V_c
Carbon & Alloy Steel	Positive	Small	Low	High	Negative	Medium	Medium	Medium	Negative	Large	High	Low
Stainless Steel	Positive	Small	Low	High	Positive	Medium	Medium	Medium	Positive	Large	High	Low
Cast Iron	Positive	Small	Low	High	Negative	Medium	Medium	Medium	Negative	Large	High	Low
Non Ferrous	Positive	Small	Low	High	Positive	Medium	Medium	Medium	Positive	Large	High	Low
Aluminum & Plastic	Positive	Small	Low	High	Positive	Medium	Medium	Medium	Positive	Large	High	Low

Positive Precision Ground Inserts

Insert Chip Breaker UEU						Turning Application					
Material		Insert Grades				General Purpose		Universal		Unstable Condition	
		DUP15VT	DUP25GT	DUP35RT		Grade		Grade		Grade	
Application	Best	SFM (V _c)				DUP15VT		DUP25GT		DUP35RT	
Carbon & Alloy Steel	○	1403	361	1123	286	1066	274	P10 M10 K10 N10 S10	P15 M15 K15 N25 S25	P20 M25 K30 N30 S30	
	Metric	425	109	340	87	323	83	C3-C8	C3-C7	C3-C7	
Stainless Steel	○	885	116	708	93	634	89	High Wear Resistant	Wear & Impact Resistant	Hard & Tough	
	Metric	268	35	215	28	192	27				
Cast Iron	○	902	226	722	180	686	172				
	Metric	273	68	219	55	208	52				
Aluminum	○	8353	1061	6683	849	6349	805				
	Metric	2531	322	2025	257	1924	244				
Brass, Bronze, Copper	●	1942	376	1726	863	1475	287				
	Metric	588	114	523	261	447	87				
Inconel, Hastelloy, Waspaloy	●	251	35	200	28	191	26				
	Metric	76	11	61	8	58	8				
Titanium Alloys	●	434	78	347	28	330	46				
	Metric	132	24	105	8	100	14				
Carbon-Graphite-Phenolics	●	267	119	215	96	205	92				
	Metric	81	36	65	29	62	28				
For complete Cutting Data see page						Low SFM (Vc)		High SFM (Vc)		Medium SFM (Vc)	

Description		ANSI	ISO	Grade DUP15VT	Grade DUP25GT	Grade DUP35RT
CCGT-UEU 80° Diamond Universal		CCGT-21.50.2-UEU	CCGT-060201-UEU	UPC 733101-79451	UPC 733101-	UPC 733101-
		CCGT-21.50.5-UEU	CCGT-060202-UEU		79453	79454
		CCGT-21.51-UEU	CCGT-060204-UEU	79456	79458	79459
		CCGT-32.50.5-UEU	CCGT-09T302-UEU		79463	79464
		CCGT-32.51-UEU	CCGT-09T304-UEU	79466	79468	79469
		CCGT-431-UEU	CCGT-120404-UEU	79476	79478	79479
		CCGT-432-UEU	CCGT-120408-UEU	79481	79483	79484
CPGT-UEU 80° Diamond Universal		CPGT-1.81.20.5-UEU	CPGT-05T102-UEU	79486	79488	79489
		CPGT-1.81.21-UEU	CPGT-05T104-UEU	79491	79493	79494
		CPGT-21.50.2-UEU	CPGT-060201-UEU		79518	79519
		CPGT-21.50.5-UEU	CPGT-060202-UEU	79496	79498	79499
		CPGT-32.50.5-UEU	CCGT-09T302-UEU		79508	79509
		CPGT-32.51-UEU	CCGT-09T304-UEU	79511	79513	79514
DCGT-UEU 55° Diamond Universal		DCGT-21.50.2-UEU	DCGT-070201-UEU	79531		
		DCGT-21.50.5-UEU	DCGT-070202-UEU		79533	79534
		DCGT-21.51-UEU	DCGT-070204-UEU	79536	79538	79539
		DCGT-32.50.2-UEU	DCGT-11T301-UEU	79541		
		DCGT-32.50.5-UEU	DCGT-11T302-UEU		79543	79544
		DCGT-32.51-UEU	DCGT-11T304-UEU	79546	79548	79549
		DCGT-431-UEU	DCGT-150404-UEU	79556	79558	79559
		DCGT-432-UEU	DCGT-150408-UEU	79561	79563	79564
SCGT-UEU Square Universal		SCGT-32.51-UEU	SCGT-09T304-UEU	79566	79568	79569
		SCGT-32.52-UEU	SCGT-09T308-UEU	79571	79573	79574
		SCGT-431-UEU	SCGT-120404-UEU	79576	79578	79579
		SCGT-432-UEU	SCGT-120408-UEU	79581	79583	79584
TCGT-UEU 60° Triangle Universal		TCGT-21.50.2-UEU	TCGT-110201-UEU	79586	79588	79589
		TCGT-21.50.5-UEU	TCGT-110202-UEU		79593	79594
		TCGT-21.51-UEU	TCGT-110204-UEU	79596	79598	79599
		TCGT-32.50.5-UEU	TCGT-16T302-UEU		79608	79609
		TCGT-32.51-UEU	TCGT-16T304-UEU	79611	79613	79614
		TCGT-32.52-UEU	TCGT-16T308-UEU	79616	79618	79619
TPGT-UEU 60° Triangle Universal		TPGT-21.50.2-UEU	TPGT-110201-UEU		79623	79624
		TPGT-21.50.5-UEU	TPGT-110202-UEU		79628	79629
		TPGT-21.51-UEU	TPGT-110204-UEU	79631	79633	79634
		TPGT-32.50.5-UEU	TPGT-16T302-UEU		79643	79644
		TPGT-32.51-UEU	TPGT-16T304-UEU	79646	79648	79649
		TPGT-32.52-UEU	TPGT-16T308-UEU	79651	79653	79654

Turning Application		
General Purpose	Universal	Unstable Condition
UEU	UEU	UEU

Description	ANSI	ISO	Grade DUP15VT	Grade DUP25GT	Grade DUP35RT
VBGT-UEU 35° Diamond Universal 	VBGT-221-UEU	VBGT-110304-UEU	UPC 733101-79661	UPC 733101-79663	UPC 733101-79664
	VBGT-331-UEU	VBGT-160404-UEU	79671	79673	79674
	VBGT-332-UEU	VBGT-160408-UEU	79676	79678	79679
VCGT-UEU 35° Diamond Universal 	VCGT-220.2-UEU	VCGT-110301-UEU	79681		
	VCGT-220.5-UEU	VCGT-110302-UEU		79683	79684
	VCGT-221-UEU	VCGT-110304-UEU	79686	79688	79689
	VCGT-331-UEU	VCGT-160404-UEU	79701	79703	79704
	VCGT-332-UEU	VCGT-160408-UEU	79706	79708	79709
WCGT-UEU 80° Trigon Universal 	WCGT-1.51.50.2-UEU	WCGT-S30201-UEU	79711	79713	79714
	WCGT-1.51.50.5-UEU	WCGT-S30202-UEU	79716	79718	79719
	WCGT-21.51-UEU	WCGT-040204-UEU	79726	79728	79729
	WCGT-32.51-UEU	WCGT-06T304-UEU	79736	79738	79739
	WCGT-32.52-UEU	WCGT-06T308-UEU	79741	79743	79744

Insert Performance

Material	Roughing Operation	Universal Operation	Finishing Operation
Cold Rolled Bar Stock Even surface No interrupted Cuts	Use a hard and wear resistant coated insert grade, with a large nose radius, honed cutting edge, and a large positive chipbreaker. Cut with medium to high SFM (Vc), large depth of cut (ap) and high feed rate (fn).	Use a hard and wear resistant coated insert grade, with a large nose radius, honed cutting edge, and a medium positive chipbreaker. Cut with medium to high SFM (Vc), medium to large depth of cut (ap) and medium to high feed rate (fn).	Use a hard and wear resistant coated insert grade, with a small nose radius for unstable workpiece and thin wall tubing, large nose radius for stable workpiece, small honed cutting edge, and a small positive chipbreaker. Cut with high SFM (Vc), small depth of cut (ap), and low feed rate (fn).
Hot Rolled Bar Stock Uneven surface Small interrupted cuts	Use a hard, tough and wear resistant coated insert grade, with a large nose radius, honed cutting edge, and a large positive chipbreaker. Cut with medium SFM (Vc), medium depth of cut (ap) and low feed rate (fn).	Use a hard, tough and wear resistant coated insert grade, with a large nose radius, honed cutting edge, and a medium positive chipbreaker. Cut with medium SFM (Vc), medium depth of cut (ap), and medium feed rate (fn).	Use a hard, tough and wear resistant coated insert grade, with a small nose radius for stable work piece, small honed cutting edge, and a small positive chipbreaker. Cut with medium SFM (Vc), small depth of cut (ap), and low feed rate (fn).
Castings Forgings Large Interrupted Cuts	Use a tough and impact resistant coated insert grade, with a large honed to a negative land cutting edge, and a large positive chipbreaker. Cut with low SFM (Vc), depth of cut (ap), and low feed rate (fn).	Use a tough and impact resistant coated insert grade, with a large nose radius, large honed cutting edge, and a medium positive chipbreaker. Cut with low SFM (Vc), small depth of cut (ap), and low feed rate (fn).	Use a tough and impact resistant coated insert grade, with a large nose radius, honed cutting edge, and a small positive chipbreaker. Cut with medium to low SFM (Vc), small depth of cut (ap), and low feed rate (fn).
Coolant Coolant Statement Jet-Stream			

Positive Pressed Inserts

Insert Chip Breaker PEF PEM PEU						Turning Application					
Material		Insert Grades				Finishing			Medium		
		DPC15HT	DPC25UT	DPC35RT		Grade			Grade		
Application	Best	SFM (V _c)				DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
Carbon Steel Annealed ●		1188	462	1010	393	594	231		P10-25	P15-P35	P25-P45
	Metric	360	140	306	119	180	70		C6-C7	C5-C6	C5
Alloy Steel Annealed ●		990	330	842	281	495	165		Harder	Tough & Hard	Tougher
	Metric	300	100	255	85	150	50		Harder	Tough & Hard	Tougher
Alloy Steel Heat Treated ●		561	330	477	281	281	165		Chip Breaker		
	Metric	170	100	145	85	85	50		Chip Breaker		
Stainless Steel ○		858	330	729	281	429	165		Chip Breaker		
	Metric	260	100	221	85	130	50		Chip Breaker		
Gray Cast Iron ○		1056	330						Chip Breaker		
	Metric	320	100						Chip Breaker		
For complete Cutting Data see page						Coating			Coating		
						CVD			CVD		
						TiN/ Al ₂ O ₃ /TiCN			TiN/ Al ₂ O ₃ /TiCN		
						Depth of Cut a _p			Depth of Cut a _p		
						Inch	Metric		Inch	Metric	
						.002-.039	.05-1.0		.008-.080	.20-2.0	
						Feed per Revolution f _n			Feed per Revolution f _n		
						Inch	Metric		Inch	Metric	
						.002-.008	.05-.20		.002-.012	.05-.30	
						Cutting Condition			Cutting Condition		
						Wet			Wet		
						High V _c	Medium V _c	Low V _c	High V _c	Medium V _c	Low V _c

Description	ANSI	ISO	Grade		Grade			Grade			
			DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
CCMT-PEF 80° Diamond Finishing		CCMT-21.51-PEF	CCMT-060204-PEF	71877	71878						
		CCMT-21.52-PEF	CCMT-060208-PEF	71879	71880						
		CCMT-32.51-PEF	CCMT-09T304-PEF	71883	71884						
		CCMT-32.52-PEF	CCMT-09T308-PEF	71885	71886						
		CCMT-431-PEF	CCMT-120404-PEF	71889	71890						
CCMT-PEM 80° Diamond Medium		CCMT-21.50.5-PEM	CCMT-060202-PEM				71875	71876			
		CCMT-21.51-PEM	CCMT-060204-PEM				71933	71934			
		CCMT-21.52-PEM	CCMT-060208-PEM				71881	71882			
		CCMT-32.51-PEM	CCMT-09T304-PEM				71935	71936			
		CCMT-32.52-PEM	CCMT-09T308-PEM				71887	71888			
		CCMT-431-PEM	CCMT-120404-PEM				71937	71938			
		CCMT-432-PEM	CCMT-120408-PEM				71891	71892			
DCMT-PEF 55° Diamond Finishing		DCMT-21.51-PEF	DCMT-070204-PEF	71893	71894						
		DCMT-32.51-PEF	DCMT-11T304-PEF	71897	71898						
DCMT-PEM 55° Diamond Medium		DCMT-21.51-PEM	DCMT-070204-PEM				71895	71896			
		DCMT 32.51-PEM	DCMT-11T304-PEM				71899	71900			
		DCMT 32.52-PEM	DCMT-11T308-PEM				71901	71902			
SCMT-PEF Square Finishing		SCMT-32.51-PEF	SCMT-09T304-PEF	71903	71904						
SCMT-PEM Square Medium		SCMT-32.52-PEM	SCMT-09T308-PEM				71905	71906			
		SCMT-432-PEM	SCMT-120408-PEM				71907	71908			
		SCMT-433-PEM	SCMT-120412-PEM				71939	71940			


Turning Application		
Finishing	Medium	Universal
PEF	PEM	PEU

Description	ANSI	ISO	Grade		Grade		Grade	
			DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
TCMT-PEF 60° Triangle Finishing 	TCMT-1.21.20.5-PEF	TCMT-06T102-PEF	UPC 733101-		UPC 733101-		UPC 733101-	
	TCMT-520-PEF	TCMT-02T101-PEF	80245	80246				
	TCMT-21.50.5-PEF	TCMT-110202-PEF	71909	71910				
	TCMT-21.51-PEF	TCMT-110204-PEF	71911	71912				
TCMT-PEM 60° Triangle Medium 	TCMT-21.51-PEM	TCMT-110204-PEM				71941	71942	
	TCMT-21.52-PEM	TCMT-110208-PEM				71913	71914	
	TCMT-32.51-PEM	TCMT-16T304-PEM				71915	71916	
	TCMT-32.52-PEM	TCMT-16T308-PEM				71917	71918	
TPMR-PEU 60° Triangle Medium 	TPMR-221-PEU	TPMR-110304-PEU						71945
	TPMR-222-PEU	TPMR-110308-PEU						71946
	TPMR-321-PEU	TPMR-160304-PEU						71947
	TPMR-322-PEU	TPMR-160308-PEU						71948
								71949
VBMT-PEF 35° Diamond Finishing 	VBMT-331-PEF	VBMT-160404-PEF	71919	71920				71950
	VBMT-332-PEF	VBMT-160408-PEF	71921	71922				71951
	VBMT-333-PEF	VBMT-160412-PEF	71923	71924				71952
								71953
								71954
VCMT-PEF 35° Diamond Finishing 	VCMT-221-PEF	VCMT-110304-PEF	71925	71926				
	VCMT331-PEF	VCMT-160404-PEF	71927	71928				
	VCMT332-PEF	VCMT-160408-PEF	71931	71932				
VCMT-PEM 35° Diamond Medium 	VCMT-331-PEM	VCMT-160404-PEM				71943	71944	
	VCMT-332-PEM	VCMT-160408-PEM				71929	71930	
WCMT-PEF 80° Trigon Finishing 	WCMT-520-PEF	WCMT-020102-PEF	80254	80255				

Positive Precision Pressed Inserts

Insert Chip Breaker MEH MEM KEM					Turning Application					
Material		Insert Grades			High Performance		Universal		General	
		DMC20HT DMC30UT DKC15RT			Grade		Grade		Grade	
Application	Best	SFM (V _C)			DMC20HT		DMC30UT		DKC15RT	
300 Series Stainless Steel ●		759	429	594 238	M15-M20		M25-M35		K15 P15 M15	
	Metric	230	130	180 72	C6-C7		C5-C6		C1-C2	
400 Series Stainless Steel ●		759	429	594 238	High & Wear Resistant		Impact & Wear Resistant		High & Wear Resistant	
	Metric	230	130	180 72	Chip Breaker		Chip Breaker		Chip Breaker	
17-4 PH Series Stainless Steel ●		759	429	594 238	MEH		MEM		KEM	
	Metric	230	130	180 72	Coating		Coating		Coating	
Austenitic-Ferritic Duplex ●		759	429	594 238	CVD		PVD		PVD	
	Metric	230	130	180 72	TiCN/TiN		TiCN/TiN		TiCN/TiN	
Gray Cast Iron ●				477 281	Depth of Cut ap		Depth of Cut ap		Depth of Cut ap	
	Metric			225 95	Inch	Metric	Inch	Metric	Inch	Metric
Modular Cast Iron ●				729 281	.012-.394	.30-10.0	.004-.125	.10-3.0	.008-.125	.20-3.0
	Metric			215 72	Feed per Revolution f _n		Feed per Revolution f _n		Feed per Revolution f _n	
					Inch	Metric	Inch	Metric	Inch	Metric
					.004-.032	.10-.80	.002-.012	.05-.30	.002-.012	.05-.30
					Cutting Condition		Cutting Condition		Cutting Condition	
					Wet		Wet		Wet	
					High V _C		Medium V _C		High V _C	
For complete Cutting Data see page										

For complete Cutting Data see page


Description	ANSI	ISO	Grade DMC20HT	Grade DMC30UT	Grade DKC15RT
CCMT-MEM 80° Diamond Finishing/Medium 	CCMT-32.51-MEM	CCMT-09T304-MEM	UPC 733101-	UPC 733101-	UPC 733101-
	CCMT-32.52-MEM	CCMT-09T308-MEM		70750	
	CCMT-431-MEM	CCMT-120404-MEM		70751	
				70752	
CCMT-MEH 80° Diamond High Performance 	CCMT-31.51-MEH	CCMT-09T304-MEH	70786		
	CCMT-31.52-MEH	CCMT-09T308-MEH	70787		
CCMT-KEM 80° Diamond Finishing/Medium 	CCMT-32.51-KEM	CCMT-09T304-KEM			70753
	CCMT-32.52-KEM	CCMT-09T308-KEM			70754
	CCMT-432-KEM	CCMT-120408-KEM			70755
DCMT-MEM 55° Diamond Finishing / Medium 	DCMT-32.51-MEM	DCMT-11T304-MEM		70760	
	DCMT-32.52-MEM	DCMT-11T308-MEM		70761	
DCMT-MEH 55° Diamond High Performance 	DCMT-32.51-MEH	DCMT-11T304-MEH	70788		
	DCMT-32.52-MEH	DCMT-11T308-MEH	70789		
DCMT-KEM 55° Diamond Finishing/Medium 	DCMT-21.51-KEM	DCMT-070204-KEM			70763
	DCMT-21.52-KEM	DCMT-070208-KEM			70765
	DCMT-32.51-KEM	DCMT-11T304-KEM			70767
	DCMT-32.52-KEM	DCMT-11T308-KEM			70769

Turning Application		Turning Application
High Performance	Universal	General
MEH	MEM	KEM

Description	ANSI	ISO	Grade DMC20HT	Grade DMC30UT	Grade DKC15RT
	SCMT-432-MEM	SCMT-120408-MEM	UPC 733101-	UPC 733101- 70772	UPC 733101-
SCMT-MEM Square Medium					
	SCMT-432-KEM	SCMT-120408-KEM			70773
SCMT-KEM Square Medium					
	TCMT-21.51-MEM	TCMT-110204-MEM		70776	
	TCMT-21.52-MEM	TCMT-110208-MEM		70777	
	TCMT-32.51-MEM	TCMT-16T304-MEM		70778	
	TCMT-32.52-MEM	TCMT-16T308-MEM		70779	
TCMT-MEM 60° Triangle Medium					
	VCMT-331-MEM	VCMT-160404-MEM		70783	
	VCMT-332-MEM	VCMT-160408-MEM		70784	
	VCMT-333-MEM	VCMT-160412-MEM		70785	
VCMT-MEM 35° Diamond Medium					

Insert Cutting Angles

LEAD and CLEARANCE ANGLE - Positive




Lead Angle - The angle formed by the side flank of the insert cutting side and the line perpendicular to the workpiece centerline.

A **positive** lead angle moves the cutting side flank ahead of the cutting line.

Clearance Angle (Cutting Edge Angle) - The angle formed by the trailing end flank of the insert.

LEAD and CLEARANCE ANGLE - Negative




Lead Angle - The angle formed by the side flank of the insert cutting side and the line perpendicular to the workpiece centerline.

A **negative** lead angle moves the cutting side flank behind the cutting line.

Clearance Angle (Cutting Edge Angle) - The angle formed by the trailing end flank of the insert.

RAKE and RELIEF ANGLE



Rake Angle - The angle formed on the insert from the top surface area and the bottom of the insert chip flow area when parallel to the floor.

Relief Angle - The angle measured from the line perpendicular to the cutting edge of the insert and the cutting face of the insert.

Precision Positive Ground Inserts

Insert Chip Breaker KEU						Turning Application					
Material		Insert Grades				General Purpose		High Performance		Unstable Condition	
		DKU10HT	DUP15VT	DUP35RT		Grade		Grade		Grade	
Application	Best	SFM (V _C)				DKU10HT		DUP15VT		DUP35RT	
Carbon & Alloy Steel ●		1403	360	1066	274	K10 N10 S10		P10 M10 K10 N10 S10		P20 M25 K30 N30 S30	
	Metric	425	109	323	83	C2-C3		C3-C8		C3-C7	
Stainless Steel ●		884	116	634	89	High Wear Resistant		High Wear Resistant		Tough & Hard	
	Metric	268	35	192	27	Chip Breaker		Chip Breaker		Chip Breaker	
Modular Malleable Cast Iron ●		515	261	769	287	KEU		KEU		KEU	
	Metric	156	79	233	87	Coating		Coating		Coating	
Brass , Bronze, Copper ●		1145	347	1942	376	Uncoated		PVD		PVD	
	Metric	347	105	588	114	Depth of Cut a _p		Depth of Cut a _p		Depth of Cut a _p	
Carbon-Graphite ●		188	79	267	119	Inch Metric		Inch Metric		Inch Metric	
	Metric	57	24	81	36	.002-.040 .05-1.0		.002-.080 .05-2.0		.002-.120 .05-3.0	
Hardened Alloy Steel ●		73	30	129	77	23		Feed per Revolution f _n		Feed per Revolution f _n	
	Metric	22	9	39	23	Inch Metric		Inch Metric		Inch Metric	
						.002-.008 .05-.20		.002-.012 .05-.20		.002-.016 .05-.20	
						Cutting Condition		Cutting Condition		Cutting Condition	
						Wet		Wet		Wet	
						Low V _C		Low V _C		Medium V _C	
For complete Cutting Data see page											


For complete Cutting Data see page

Description	ANSI	ISO	Grade DKU10HT	Grade DUP15VT	Grade DUP35RT
CDGW-KEU 80° Diamond Universal 	CDGW-1.20.60.2-KEU	CCDGW-S4T001-KEU	UPC 733101- 79340	UPC 733101- 79341	UPC 733101- 79343
	CDGW-1.20.60.5-KEU	CCDGW-S4T002-KEU	79344	79345	79347
	CDGW-1.510.5-KEU	CDGW-040102-KEU	79348	79349	79351
	CDGW-1.511-KEU	CDGW-040104-KEU	79352	79353	79355
CCGW-KEU CCMW-KEU 80° Diamond Universal 	CCGW-21.51-KEU	CCGW-060204-KEU	79356	79357	79359
	CCGW-32.52-KEU	CCGW-09T308-KEU	79364	79365	79367
CPGW-KEU 80° Diamond Universal 	CPGW-1.81.20.5-KEU	CPGW-05T102-KEU	79368	79369	79371
	CPGW-1.81.21-KEU	CPGW-05T104-KEU	79372	79373	79375
	CPGW-21.51-KEU	CPGW-060204-KEU	79376	79377	79379
	CPGW-32.51-KEU	CPGW-09T304-KEU	79380	79381	79383
	CPGW-32.52-KEU	CPGW-09T308-KEU	79384	79385	79387
DCGW-KEU DCMW-KEU 55° Diamond Universal 	DCGW-21.51-KEU	DCGW-070204-KEU	79388	79389	79391
	DCMW-32.51-KEU	DCMW-11T304-KEU	70770	79392	
	DCMW-32.52-KEU	DCMW-11T308-KEU	70771	79393	
TCGW-KEU TCMW-KEU 60° Triangle Universal 	TCGW-21.51-KEU	TCGW-110204-KEU	79400	79401	79403
	TCGW-32.52-KEU	TCGW-16T308-KEU	79408	79409	79411
TPGW-KEU 60° Triangle Universal 	TPGW-21.51-KEU	TPGW-110204-KEU	79412	79413	79415
	TPGW-32.51-KEU	TPGW-16T304-KEU	79416	79417	79419
	TPGW-32.52-KEU	TPGW-16T308-KEU	79420	79421	79423

Turning Application					
General Purpose		General Purpose		General Purpose	
KEU		KEU		KEU	
Description	ANSI	ISO	Grade DKU10HT	Grade DUP15VT	Grade DUP35RT
VBGW-KEU 35° Diamond Universal 	VBGW-221-KEU	VBGW-110304-KEU	UPC 733101-	UPC 733101-	UPC 733101-
	VBGW-331-KEU	VBGW-160404-KEU	79424	79425	79427
	VBGW-332-KEU	VBGW-160408-KEU	79428	79429	79431
			79432	79433	79435
VCGW-KEU 35° Diamond Universal 	VCGW-221-KEU	VCGW-110304-KEU	79436	79437	79439
	VCGW-331-KEU	VCGW-160404-KEU	79440	79441	79443
	VCGW-332-KEU	VCGW-160408-KEU	79444	79445	79447

Insert Cutting Force Aptitude and Application

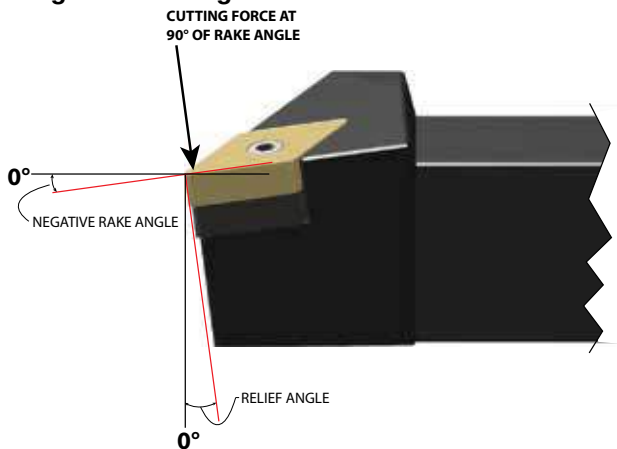Negative Turning Inserts




Aptitude

Application

Double Sided Cutting Edge	High Material Removal Rate
Stronger Cutting Edge	Heavy Roughing & Interrupt Cuts
Larger Body Mass	Large and Solid Workpiece
Multi Geometry	Large and Shallow Boring
Molded & Precision Ground	Multi Turning
Multi Chip Breaker & Rake Angle	
0° Relief Angle	
Higher Cutting Force	

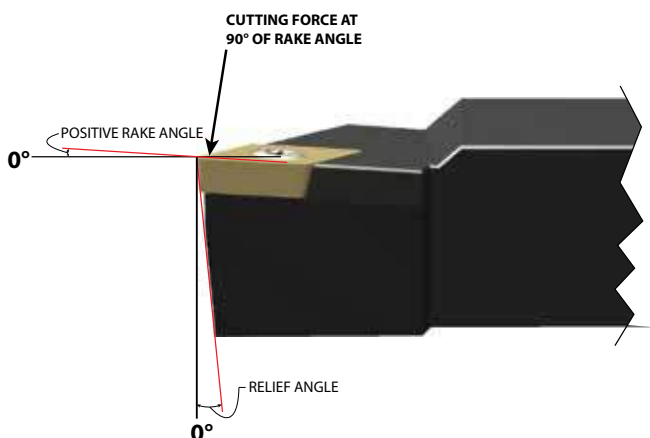Positive Inserts



Aptitude

Application

Single Side Cutting Edge	Low Material Removal Rate
Weaker Cutting Edge	Light Roughing and Smooth Cuts
Smaller Body Mass	Small and Thin Wall Workpiece
Multi Geometry	Small and Deep Boring
Molded & Precision Ground	High Surface Finish
Multi Chip Breaker & Rake Angle	
Multi Relief Angle	
Lower Cutting Force	

Insert Chip Breaker NFU				Turning Application			
Material		Insert Grades		General Purpose		General Purpose	
		DNU10GT DNX10UT		Grade		Grade	
Application	Best	SFM (V _C)		DNU10GT		DNX10UT	
Aluminum ●		6353 792	7623 950	K10 N10 S10		P10 M10 K10 N10 S10	
	Metric	1925 240	2310 288	C2-C3		C2-C4	
Magnesium - Zinc ●		2261 1132	2940 1469	High Wear Resistant		High Wear & Abrasive Resistant	
	Metric	685 343	891 445	Chip Breaker		Chip Breaker	
Brass , Bronze, Copper ●		1145 446	1488 581	NFU		NFU	
	Metric	347 135	451 176	Coating		Coating	
Super Alloy ●		330 36	389 40	Uncoated		PVD	
	Metric	100 11	118 12			Micropuls® Plasma	
Carbon-Graphite-Phenolics ●		228 139	297 182	Depth of Cut a _p		Depth of Cut a _p	
	Metric	69 42	90 55	Inch Metric		Inch Metric	
Nylon-Plastic & Rubber ●		2244 1122	2917 1459	.002-.156 .05-4.0		.002-.156 .05-4.0	
	Metric	680 340	884 442	Feed per Revolution f _n		Feed per Revolution f _n	
Carbon & Alloy Steel ○			1122 198	Inch Metric		Inch Metric	
	Metric		340 60	.002-.016 .05-.40		.002-.016 .05-.40	
For complete Cutting Data see page				Cutting Condition		Cutting Condition	
				Wet		Wet	
				Medium V _C		High V _C	

Description	ANSI	ISO	Grade DNU10GT	Grade DNX10UT
CCGT-NFU 80° Diamond Universal 	CCGT-21.50.5-NFU	CCGT-060202-NFU	UPC 733101- 80020	UPC 733101- 80021
	CCGT-21.51-NFU	CCGT-060204-NFU	80024	80025
	CCGT-32.50.5-NFU	CCGT-09T302-NFU	80028	80029
	CCGT-32.51-NFU	CCGT-09T304-NFU	80032	80033
	CCGT-32.52-NFU	CCGT-09T308-NFU	80036	80037
	CCGT-431-NFU	CCGT-120404-NFU	80040	80041
	CCGT-432-NFU	CCGT-120408-NFU	80044	80045
DCGT-NFU 55° Diamond Universal 	DCGT-21.50.5-NFU	DCGT-070202-NFU	80048	80049
	DCGT-21.51-NFU	DCGT-070204-NFU	80052	80053
	DCGT-32.50.5-NFU	DCGT-11T302-NFU	80056	80057
	DCGT-32.51-NFU	DCGT-11T304-NFU	80060	80061
	DCGT-32.52-NFU	DCGT-11T308-NFU	80064	80065
RCMT-NFU Round Universal 	RCMT-0602MO-NFU	RCMT-0602MO-NFU	70798	
RCGT-NFU Round Universal 	RCGT-0602MO-NFU	RCGT-0602MO-NFU	80068	80069
	RCGT-0803MO-NFU	RCGT-0803MO-NFU	80072	80073
	RCGT-1003MO-NFU	RCGT-1003MO-NFU	80076	80077
SCGT-NFU Square Universal 	SCGT-432-NFU	SCGT-120408-NFU	80084	80085
TCGT-NFU 60° Triangle Universal 	TCGT-21.51-NFU	TCGT-110204-NFU	80089	80090
	TCGT-32.51-NFU	TCGT-16T304-NFU	80093	80094

Turning Application

General Purpose

NFU

General Purpose

NFU

Description	ANSI	ISO	Grade DNU10GT	Grade DNX10UT
VCGT-NFU 35° Triangle Universal 	VCGT-220.5-NFU	VCGT-110302-NFU	UPC 733101- 80098	UPC 733101- 80099
	VCGT-221-NFU	VCGT-110304-NFU	80103	80104
	VCGT-330.5-NFU	VCGT-160402-NFU	80107	80108
	VCGT-331-NFU	VCGT-160404-NFU	80111	80112
	VCGT-332-NFU	VCGT-160408-NFU	80115	80116
	VCGT-333-NFU	VCGT-160412-NFU	80119	80120
	VCGT-448-NFU	VCGT-220530-NFU	80123	80124
VPGT-NFU 35° Triangle Universal 	VPGT-221-NFU	VPGT-110304-NFU	80127	80128
	VPGT-333-NFU	VPGT-160412-NFU	80131	80133
	VPGT-444-NFU	VPGT-220516-NFU	80135	80136
WCGT-NFU 80° Trigon Universal 	WCGT-32.50.5-NFU	WCGT-06T302-NFU	80140	80141
	WCGT-32.51-NFU	WCGT-06T304-NFU	80144	80145
	WCGT-32.52-NFU	WCGT-06T308-NFU	80148	80149
	WCGT-431-NFU	WCGT-080404-NFU	80152	80153
	WCGT-432-NFU	WCGT-080408-NFU	80156	80157

Insert Application Guide

Finishing

- Hard and Wear resistant
- PVD and CVD Coating
- Small Nose radius
- Light Honed Edge
- Small Chipbreaker

Cutting Data

- Small Depth of cut (a_p)
- Small Feed per Revolution (f_n)
- High Surface Cutting Speed (V_c)
- Use Coolant if Insert Allows

Universal

- Wear Resistant and Tough
- PVD and CVD Coating
- Medium Nose Radius
- Medium Honed Cutting Edge
- Medium Chipbreaker

Cutting Data

- Medium Depth of cut (a_p)
- Medium Feed per Revolution (f_n)
- Medium Surface Cutting Speed (V_c)
- Use Coolant if Insert Allows

Roughing

- Tough and Impact Resistant
- PVD and CVD Coating
- Large Nose Radius
- Heavy Honed Cutting Edge
- Large Chip Breaker

Cutting Data

- Large Depth of cut (a_p)
- High Feed per Revolution (f_n)
- Low Surface Cutting Speed (V_c)
- Use Coolant if Insert Allows

Positive Precision Ground Inserts

Insert Chip Breaker UEN					Turning Application					
Material		Insert Grades			General Purpose		General Purpose		General Purpose	
		DNU25GT	DNP25GT	DPP30GT	Grade		Grade		Grade	
Application	Best	SFM (V _c)			DNU25GT		DNP25GT		DPP30GT	
Carbon & Alloy Steel ●		1010	143	798	230	K25 P25 M25 N25 S25	P10 M15 K25-S25	P20-P35	M20-M35	
Metric		306	43	242	70	C1-C2	C1-C3	C3-C7		
Stainless Steel 300 Series ○		624	232	695	299	Tough & Wear Resistant	Hard & Wear Resistant	Tough & Wear Resistant		
Metric		189	70	211	91	Chip Breaker	Chip Breaker	Chip Breaker		
Cast Iron ○		772	273	927	328	UEN	UEN	UEN		
Metric		234	83	281	99	Coating	Coating	Coating		
Aluminum ○		5717	582			Uncoated	PVD	PVD		
Metric		1732	176				TiN/TiAlN	TiAlN/WC/C		
Brass , Bronze, Copper ●		1328	297	1593	385	Depth of Cut ap	Depth of Cut ap	Depth of Cut ap		
Metric		402	90	483	117	Inch Metric	Inch Metric	Inch Metric		
Super Alloy ●		135	32	360	67	.002-.156 .05-3.0	.002-.156 .05-3.0	.002-.156 .05-3.0		
		41	10	109	20	Feed per Revolution f _n	Feed per Revolution f _n	Feed per Revolution f _n		
Carbon-Graphite ●		356	143	428	171	Inch Metric	Inch Metric	Inch Metric		
Metric		108	43	130	52	.002-.016 .05-.30	.002-.016 .05-.30	.002-.016 .05-.30		
Hardened Alloy Steel ●						Cutting Condition	Cutting Condition	Cutting Condition		
Metric						Wet	Wet	Wet		
For complete Cutting Data see page					Low V _c	High V _c	Medium V _c			

For complete Cutting Data see page

Description	ANSI	ISO	Grade DNU25GT	Grade DNP25GT	Grade DPP30GT
SDP-UEN Square General Purpose 	SDP-322-UEN	SDP-090308-UEN	UPC 733101-71541	UPC 733101-71543	UPC 733101-71544
	SDP-422-UEN	SDP-120308-UEN	71547	71549	71550
	SDP-532-UEN	SDP-150408-UEN	71553	71555	71556
SPG-UEN Square General Purpose 	SPG-321-UEN	SPG-090304-UEN	71559	71561	71562
	SPG-322-UEN	SPG-090308-UEN	71565	71567	71568
	SPG-422-UEN	SPG-120308-UEN	71571	71573	71574
	SPG-432-UEN	SPG-120408-UEN		71577	71579
TEGE/TPG-UEN 60° Triangle General Purpose 	TEGE-1.81.51-UEN	CTEGE-100204-UEN	71600	71601	
	TPG-221-UEN	TPG-110304-UEN	71605	71607	71608
	TPG-222-UEN	TPG-110308-UEN	71611	71613	71614
	TPG-321-UEN	TPG-160304-UEN	71617	71619	71620
TEGE/TPG-UEN 60° Triangle General Purpose 	TPG-322-UEN	TPG-160308-UEN	71623	71625	71626
	TPG-431-UEN	TPG-220404-UEN	71629	71631	71632
	TPG-432-UEN	TPG-220408-UEN	71635	71637	71638
TPGB-UEN 60° Triangle General Purpose 	TPG-542-UEN	TPG-270608-UEN			71644
	TPG-543-UEN	TPG-270612-UEN			71650
	TPGB-21.51-UEN	TPGB-110204-UEN	71652		71654
TPGH-UEN 60° Triangle General Purpose 	TPGB-21.52-UEN	TPGB-110208-UEN	71655		71657
	TPGB-321-UEN	TPGB-160404-UEN	71659		71661
	TPGB-322-UEN	TPGB-160408-UEN	71662		71664
	TPGB-431-UEN	TPGB-220404-UEN	71673		71675
TPGH-UEN 60° Triangle General Purpose 	TPGB-432-UEN	TPGB-220408-UEN	71676		71678
	TPGH-21.52-UEN	TPGH-110208-UEN	71706	71709	71708
	TPGH-321-UEN	TPGH-160304-UEN	71712	71716	71715
TPGH-UEN 60° Triangle General Purpose 	TPGH-322-UEN	TPGH-160308-UEN	71718	71720	71722
	TPGH-431-UEN	TPGH-220404-UEN	71726	71728	71730
	TPGH-432-UEN	TPGH-220408-UEN	71734	71737	71736

Turning Application					
General Purpose		General Purpose		General Purpose	
UEN		UEN		UEN	
Description	ANSI	ISO	Grade DNU25GT	Grade DNP25GT	Grade DPP30GT
TPHT-UEN 60° Triangle General Purpose 	TPHT-32.51-UEN	TPHT-16T304-UEN	71748	71750	71751
	TPHT-32.52-UEN	TPHT-16T308-UEN	<u>71753</u>	<u>71755</u>	<u>71756</u>

Insert Edge Preparation

The process used to prepare the insert's edge cutting condition for specific application and material. Achieved by honing, chamfering, "T" land or any combination there of.

Symbol	Edge Preparation	Material	Application
F 	Sharp	Aluminum Nylon Plastics	Roughing - Medium - Finishing
E 	Honed Light	Carbon Steel Alloy Steel Stainless Steel Cast Iron High Temp Super Alloy All non Ferrous Metals	Finishing
E 	Honed Medium	Carbon Steel Alloy Steel Stainless Steel Cast Iron High Temp Super Alloy All non Ferrous Metals	Roughing - Medium
S 	Negative Land and Honed	Carbon Steel Alloy Steel Stainless Steel Cast Iron	Heavy Roughing with Interrupted Cuts
T 	Negative Land and Round	Carbon Steel Alloy Steel Stainless Steel Cast Iron	Extra Heavy Roughing in Forging and Casting with Heavy Interrupted Cuts

Positive Precision Ground Inserts

Insert Chip Breaker UEX						Turning Application			
Material	Insert Grades					Universal	Universal	Universal	Universal
	DPC15HT	DPC25UT	DPC35RT			Grade	Grade	Grade	Grade
Application	SFM (V _c)					DPC15HT	DPC25UT	DPC35RT	DMC30UT
Carbon Steel Annealed ●	1188 462	1010 393	594 231			P10-P25	P15-P35	P25-P45	M30-M35
Metric	360 140	306 119	180 70			C6-C7	C5-C6	C5	C5-C6
Alloy Steel Annealed ●	990 330	842 281	495 165			Wear Resistant	Tough & Hard	Impact Resistant	Tough & Hard
Metric	300 100	255 85	150 50			Chip Breaker	Chip Breaker	Chip Breaker	Chip Breaker
Alloy Steel Heat Treated ●	561 330	477 281	281 165			UEX	UEX	UEX	UEX
Metric	170 100	145 85	85 50			Coating	Coating	Coating	
Stainless Steel ○	858 330	729 281	429 165			CVD	CVD	CVD	PVD
Metric	260 100	221 85	130 50			TiN/ Al ₂ O ₃ /TiCN	TiN/ Al ₂ O ₃ /TiCN	TiN/ Al ₂ O ₃ /TiCN	TiAlN/WC/C
Gray Cast Iron ○	1056 330					Depth of Cut a_p	Depth of Cut a_p	Depth of Cut a_p	
Metric	320 100					Inch Metric	Inch Metric	Inch Metric	Inch Metric
						.004-.039 .05-2.0	.008-.125 .20-3.0	.012-.156 .30-4.0	.004-.125 .01-3.0
Stainless Steel ●				DUP35RT		Feed per Revolution f_n	Feed per Revolution f_n	Feed per Revolution f_n	Feed per Revolution f_n
Metric				594 330		Inch Metric	Inch Metric	Inch Metric	Inch Metric
				180 100		.002-.008 .05-.20	.002-.008 .05-.20	.002-.008 .05-.20	.002-.008 .05-.20
						Cutting Condition	Cutting Condition	Cutting Condition	Cutting Condition
						Wet	Wet	Wet	Wet
						High V _c	Medium V _c	Low V _c	Medium V _c

For complete Cutting Data see page

Description	ANSI	ISO	Grade DPC15HT	Grade DPC25UT	Grade DPC35RT	Grade DMC30UT
			UPC 733101-	UPC 733101-	UPC 733101-	UPC 733101-
CCGT-UEXL 80° Diamond Universal	CCGT-21.51 UEXL	CCGT-060204 UEXL		70676	70677	70678
	CCGT-21.52 UEXL	CCGT-060208 UEXL		70682	70683	70684
	CCGT-32.51 UEXL	CCGT-09T304 UEXL		70688	70689	70690
	CCGT-32.52 UEXL	CCGT-09T308 UEXL		70694	70695	70696
	CCGT-432 UEXL	CCGT-120408 UEXL		70700	70701	70702
	CCGT-433 UEXL	CCGT-120412 UEXL		70706	70707	70708
CCGT-UEXR 80° Diamond Universal	CCGT-21.51 UEXR	CCGT-060204 UEXR		70679	70680	70681
	CCGT-21.52 UEXR	CCGT-060208 UEXR		70685	70686	70687
	CCGT-31.51 UEXR	CCGT-09T304 UEXR		70691	70692	70693
	CCGT-31.52 UEXR	CCGT-09T308 UEXR		70697	70698	70699
	CCGT-432 UEXR	CCGT-120408 UEXR		70703	70704	70705
	CCGT-433 UEXR	CCGT-120412 UEXR		70709	70710	70711
DCGT-UEXL 55° Diamond Medium	DCGT-21.51 UEXL	DCGT-070204 UEXL		70712	70713	70714
	DCGT-32.51 UEXL	DCGT-11T304 UEXL		70718	70719	70720
	DCGT-32.52 UEXL	DCGT-11T308 UEXL	70724	70725	70726	70727
DCGT-UEXR 55° Diamond Roughing	DCGT-21.51 UEXR	DCGT-070204 UEXR		70715	70716	70717
	DCGT-32.51 UEXR	DCGT-11T304 UEXR		70721	70722	70723
	DCGT-32.52 UEXR	DCGT-11T308 UEXR	70728	70729	70730	70731
RCMX-UEX 55° Round Roughing	RCMX-1003MO-UEX	RCMX-1003MO-UEX			71957	
	RCMX-1204MO-UEX	RCMX-1204MO-UEX		71958	71959	
	RCMX-1606MO-UEX	RCMX-1606MO-UEX	71961	71962	71963	
	RCMX-2006MO-UEX	RCMX-2006MO-UEX	71966	71967	71968	
	RCMX-2507MO-UEX	RCMX-2507MO-UEX	71971	71972	71973	
	RCMX-3209MO-UEX	RCMX-3209MO-UEX		71976	71977	
TCGT-UEXL 60° Triangle Universal	TCGT-21.51 UEXL	TCGT-110204 UEXL		70732	70733	70734
	TCGT-32.51 UEXL	TCGT-16T304 UEXL		70738	70739	70740
	TCGT-32.52 UEXL	TCGT-16T308 UEXL		70744	70745	70746

Turning Application						
Universal		Universal		Universal		Universal
UEX		UEX		UEX		UEX
Description	ANSI	ISO	Grade DPC15HT	Grade DPC25UT	Grade DPC35RT	Grade DMC30UT
TCGT-UEXR 60° Triangle Finishing/Medium			UPC 733101-	UPC 733101-	UPC 733101-	
	TCGT-21.51 UEXR	TCGT-110204 UEXR		70735	70736	70737
	TCGT-32.51 UEXR	TCGT-16T304 UEXR		70741	70742	70743
	TCGT-32.52 UEXR	TCGT-16T308 UEXR		70747	70748	70749



Technical Support

Chipbreaker:

The formed groove or recess along the cutting edge of the insert that breaks chips into small manageable lengths, allowing the chips to flow freely over the insert, removing heat away from the cutting edge and avoiding edge build up.

How to Select a Chipbreaker:


Choose **The Insert Chipbreaker** according to the cutting material, turning application and depth of cut.

Cutting Material	Finishing Applications	General Applications	Roughing Applications
Carbon & Alloy Steel	Use a negative or Positive Turning Insert with a light honed cutting edge, small and high positive rake angle and molded chipbreaker.	Use a negative or Positive Turning Insert with a small honed cutting edge, medium and positive rake angle and molded chipbreaker.	Use a negative or Positive Turning Insert with a negative and heavy honed cutting edge, wide and positive rake angle and molded chipbreaker.
Stainless Steel	Use a negative or Positive Turning Insert with a light honed cutting edge, small and high positive rake angle, and molded or ground chipbreaker.	Use a negative or Positive Turning Insert with a small honed cutting edge, medium and high positive rake angle and molded or ground chipbreaker.	Use a negative or Positive Turning Insert with a honed cutting edge, a wide and high positive rake angle and molded or ground chipbreaker.
Aluminum & Plastic	Use a Positive Turning Insert with a sharp cutting edge, medium and high positive rake angle, and molded or ground high polished chipbreaker. To avoid edge build up and Poor Surface Finish: Always use coolant.		

Positive/Negative Pressed Inserts

Insert Chip Breaker SEH			Turning Application			
Material	Insert Grades		High Performance		High Performance	
	DSP10HT	DSP20HT	Grade		Grade	
Application	SFM (V _c)		DSP10HT		DSP20HT	
Best						
Supper Alloy Iron Base ●	245 90	223 98	S5-S15		S10-S25	
Metric	74 27	68 30	C3-C4		C1-C2	
Supper Alloy Nickel Base ●	147 36	134 40	Abrasive Resistant Impact Resistant		Abrasive Resistant Impact Resistant	
Metric	45 11	41 12	Chip Breaker		Chip Breaker	
Supper Alloy Cobalt Base ●	147 36	134 40	SEH		SEH	
Metric	45 11	41 12	Coating		Coating	
Titanium Alloys ●	425 66	386 73	Plasma CVD		Plasma CVD	
Metric	129 20	117 22	TiBN		TiBN	
For complete Cutting Data see page			Depth of Cut ap		Depth of Cut ap	
			Inch	Metric	Inch	Metric
			.008-.160	.20-4.0	.008-.160	.20-4.0
			Feed per Revolution f _n		Feed per Revolution f _n	
			Inch	Metric	Inch	Metric
			.004-.0016	.10-.40	.004-.0016	.10-.40
			Cutting Condition		Cutting Condition	
			Wet		Wet	
			High V _c	Lower V _c	High V _c	Lower V _c
Description	ANSI	ISO	Grade DSP10HT		Grade DSP20HT	
			UPC 733101-		UPC 733101-	
CCMT-SEH 80° Diamond Universal	CCMT-32.51-SEH	CCMT-093T04-SEH	69725		69722	
CNMG-SEH 80° Diamond Universal	CNMG-432-SEH	CNMG-120408-SEH	69726		69727	
DCMT-SEH 55° Diamond Universal	DCMT-32.51-SEH	DCMT-11T04-SEH	69728		69729	
DNMG-SEH 55° Diamond Universal	DNMG-442-SEH	DNMG-150608-SEH	69730		69731	
RCMT-SEH Round Roughing	RCMT-1606MO-SEH RCMT-2006MO-SEH	RCMT-1606-MO-SEH RCMT-2006-MO-SEH	69732 69734			
WNMG-SEH 80° Trigon Universal	WNGG-432-SEH	WNGG-080408-SEH	69736		69737	

Insert Chip Breaker SDGX			Turning Application			
Material	Insert Grades		Radius Forming		Radius Forming	
	DNU25GT DUP25GT		Grade		Grade	
Application	Best	SFM (V _C)	DNU25GT		DUP25GT	
Carbon Steel Annealed ●		1010 143	K25 P25 M25 N25 S25		P10 M15 K25-S25	
Metric		306 43	C1-C2		C1-C3	
Stainless Steel ●	624 232	695 299	Tough & Wear Resistant		Hard & Wear Resistant	
Metric	189 70	211 91	Chip Breaker		Chip Breaker	
Cast Iron ●	772 273	927 328	SDGX		SDGX	
Metric	234 83	281 99	Coating		Coating	
Aluminum ○	5717 582		Uncoated		PVD	
Metric	1732 176				TIN/TIAlN	
Brass, Bronze, Copper ●	1328 297	1593 385	Depth of Cut a_p		Depth of Cut a_p	
	402 90	483 117	Inch	Metric	Inch	Metric
Super Alloy Iron Base ●	135 32	360 67	Full Radius	Full Radius	Full Radius	Full Radius
Metric	41 10	109 20	Feed per Revolution f_n		Feed per Revolution f_n	
Carbon-Graphite ●	129 76	168 99	Inch	Metric	Inch	Metric
Metric	39 23	51 30	.001-.004	.02-.10	.001-.006	.02-.12
For complete Cutting Data see page			Cutting Condition		Cutting Condition	
			Wet		Wet	
			Low V _C		High V _C	

Description	ANSI	ISO	Grade DNU25GT	Grade DUP25GT
			UPC 733101-	UPC 733101-
SDGX-UEN 3/8" Square Convex Radius 	SDGX-09C01-E	SDGX-09T3C04-E	95297	95299
	SDGX-09C02-E	SDGX-09T3.C08-E	95301	95303
	SDGX-09C03-E	SDGX-09T3C12-E	95305	95307
	SDGX-09C04-E	SDGX-09T3C16-E	95309	95311
SDGX-UEXL 60° Triangle Universal 	SDGX-19C05-E	SDGX-1904C05-E	95249	95250
	SDGX-19C06-E	SDGX-1904C06-E	95253	95254
	SDGX-19C07-E	SDGX-1904C07-E	95257	95258
	SDGX-19C08-E	SDGX-1904C08-E	95261	95262
	SDGX-19C09-E	SDGX-1904C09-E	95265	95266
	SDGX-19C10-E	SDGX-1904C10-E	95269	95270
	SDGX-19C11-E	SDGX-1904C11-E	95273	95274
	SDGX-19C12-E	SDGX-1904C12-E	95277	95278
	SDGX-19C13-E	SDGX-1904C13-E	95281	95282
	SDGX-19C14-E	SDGX-1904C14-E	95285	95286
	SDGX-19C15-E	SDGX-1904C15-E	95289	95290
	SDGX-19C16-E	SDGX-1904C16-E	95293	95294

Negative Pressed Inserts

Insert Chip Breaker UEX						Turning Application										
Material		Insert Grades				Universal		Universal		Universal		Universal				
		DPC15HT	DPC25UT	DPC35RT		Grade		Grade		Grade		Grade				
Application	Best	SFM (V _C)				DPC15HT		DPC25UT		DPC35RT		DMC30UT				
Carbon Steel Annealed	●	1188	462	1010	393	594 231		P10-P25	P15-P35	P25-P45	M30-M35					
	Metric	360	140	306	119	180 70		C6-C7	C5-C6	C5	C5-C6					
Alloy Steel Annealed	●	990	330	842	281	495 165		Wear Resistant	Tough & Hard	Impact Resistant	Tough & Hard					
	Metric	300	100	255	85	150 50		Chip Breaker	Chip Breaker	Chip Breaker	Chip Breaker					
Alloy Steel Heat Treated	●	561	330	477	281	281 165		UEX	UEX	UEX	UEX					
	Metric	170	100	145	85	85 50		Coating	Coating	Coating	Coating					
Stainless Steel	○	858	330	729	281	429 165		CVD	CVD	CVD	CVD					
	Metric	260	100	221	85	130 50		TiN/Al ₂ O ₃ /TiCN	TiN/Al ₂ O ₃ /TiCN	TiN/Al ₂ O ₃ /TiCN	TiAlN/WC/C					
Gray Cast Iron	○	1056	330	DUP35RT				Depth of Cut a _p	Depth of Cut a _p	Depth of Cut a _p	Depth of Cut a _p					
	Metric	320	100					Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	
								.004 - 0.39	.05 - 2.0	.008 - .125	.20 - 3.0	.012 - .156	.30 - 4.0	.004 - .125	.01 - 3.0	
Stainless Steel	●							Feed per Revolution f _n	Feed per Revolution f _n	Feed per Revolution f _n	Feed per Revolution f _n					
	Metric							Inch	Metric	Inch	Metric	Inch	Metric			
								.002 - .008	.05 - .20	.002 - .008	.05 - .20	.002 - .008	.05 - .20			
								Cutting Condition	Cutting Condition	Cutting Condition	Cutting Condition					
								Wet	Wet	Wet	Wet					
								Higher V _C	Medium V _C	Low V _C	Medium V _C					
For complete Cutting Data see page																

For complete Cutting Data see page

Description	ANSI	ISO	Grade DPC15HT	Grade DPC25UT	Grade DPC35RT	Grade DMC30UT
			UPC 733101-	UPC 733101-	UPC 733101-	UPC 733101-
CNMX-UEXL 80° Diamond Universal 	CNMX-431-UEXL	CNMX-120404-UEXL		69411	69412	69413
	CNMX-432-UEXL	CNMX-120408-UEXL		69417	69418	69419
CNMX-UEXR 80° Diamond Universal 	CNMX-431-UEXR	CNMX-120404-UEXR		69414	69415	69416
	CNMX-432-UEXR	CNMX-120408-UEXR		69420	69421	69422
	CNMX-433-UEXR	CNMX-120412-UEXR				
DNMX-UEXL 55° Diamond Medium 	DNMX-331-UEXL	DNMX-110404-UEXL	69429	69430	69431	
	DNMX-332-UEXL	DNMX-110408-UEXL	69435	69436	69437	
	DNMX-431-UEXL	DNMX-150404-UEXL		69441		
	DNMX-432-UEXL	DNMX-150408-UEXL		69447		
	DNMX-441-UEXL	DNMX-150604-UEXL	69453	69454	69455	69456
	DNMX-442-UEXL	DNMX-150608-UEXL	69461	69462	69463	69464
DNMX-UEXR 55° Diamond Roughing 	DNMX-331-UEXR	DNMX-110404-UEXR	69432	69433	69434	
	DNMX-332-UEXR	DNMX-110408-UEXR	69438	69439	69440	
	DNMX-431-UEXR	DNMX-150404-UEXR		69444		
	DNMX-432-UEXR	DNMX-150408-UEXR		69450		
	DNMX-441-UEXR	DNMX-150604-UEXR	69457	69458	69459	69460
	DNMX-442-UEXR	DNMX-150608-UEXR	69465	69466	69467	69468
TNMX-UXL 60° Triangle Universal 	TNMX-321-UEXL	TNMX-160404-UEXL	69469	69470	69471	69472
	TNMX-322-UEXL	TNMX-160408-UEXL	69477	69478	69479	69480
TNMX-UEXR 60° Triangle Universal 	TNMX-321-UEXR	TNMX-160404-UEXR	69473	69474	69475	69476
	TNMX-322-UEXR	TNMX-160408-UEXR	69481	69482	69483	69484

Insert Chip Breaker PEX				Turning Application			
Material		Insert Grades		Finishing		Medium	
		DPC15HT	DPC25UT	Grade		Grade	
Application	Best	SFM (V _C)		DPC15HT		DPC25UT	
Carbon Steel Annealed ●		1188 462	1010 393	P10-P25		P15-P35	
	Metric	360 140	306 119	C6-C7		C5-C6	
Alloy Steel Annealed ●		990 330	842 281	Harder & Abrasive Resistant		Tough & Hard	
	Metric	300 100	255 85	Chip Breaker		Chip Breaker	
Alloy Steel Heat Treated ●		561 330	477 281	PEX		PEX	
	Metric	170 100	145 85	Coating		Coating	
Stainless Steel ○		858 330	729 281	CVD		CVD	
	Metric	260 100	221 85	TiN/Al ₂ O ₃ /TiCN		TiN/Al ₂ O ₃ /TiCN	
Gray Cast Iron ○		1056 330		Depth of Cut a _p		Depth of Cut a _p	
	Metric	320 100		Inch Metric		Inch Metric	
				.004 - .079 .1 - 2.0		.008 - .125 .20 - 3.0	
				Feed per Revolution f _n		Feed per Revolution f _n	
				Inch Metric		Inch Metric	
				.002 - .008 .05 - .20		.002 - .008 .05 - .20	
				Cutting Condition		Cutting Condition	
				Wet		Wet	
				High V _C		Medium V _C	

For complete Cutting Data see page

Description	ANSI	ISO	Grade DPC15HT	Grade DPC25UT
CNMG-PEX 80° Diamond High Performance 	CNMG-432-PEX	CNMG-120408-PEX	UPC 733101- 69485	UPC 733101- 69486
	CNMG-433-PEX	CNMG-120412-PEX	69489	69490
DNMG-PEX 55° Diamond High Performance 	DNMG-443-PEX	DNMG-150612-PEX	69487	69488

High Performance Wiper Insert Technology

Double Leading Angle

To maximize insert cutting edge strength

Triple Nose Radius

To minimize cutting friction

Wiper Angle

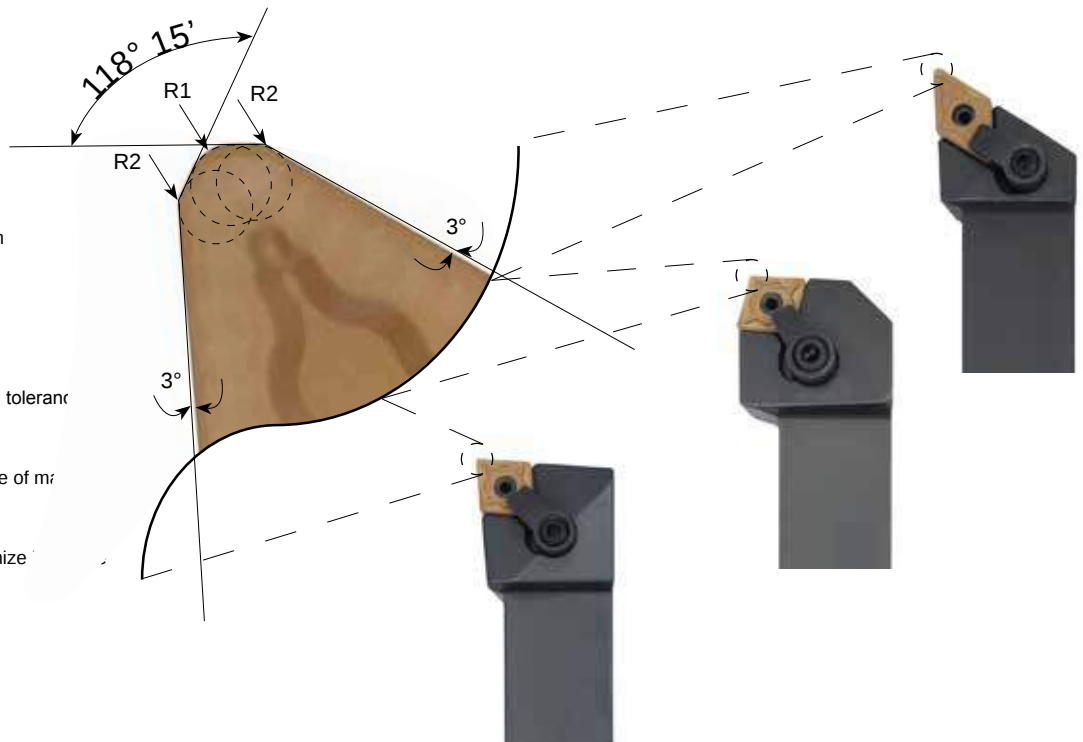
For high surface finish and close turning toleranc

Rake Angle

For chip control evacuation and high rate of m

Cutting Edge Preparation

To minimize cutting pressure and maximize



Negative Pressed Inserts

Insert Chip Breaker PEF PEM PER						Turning Application								
Material		Insert Grades				Finishing			Medium			Roughing		
		DPC15HT	DPC25UT	DPC35RT		Grade			Grade			Grade		
Application	Best	SFM (V _C)				DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
Carbon Steel Annealed ●		1188	462	1010	393	594	231		P10-25	P15-P35	P25-P45	P10-25	P15-P35	P25-P45
	Metric	360	140	306	119	180	70		C6-C7	C5-C6	C5	C6-C7	C5-C6	C5
Alloy Steel Annealed ●		990	330	842	281	495	165		Harder	Tough & Hard	Tougher	Harder	Tough & Hard	Tougher
	Metric	300	100	255	85	150	50		Chip Breaker			Chip Breaker		
Alloy Steel Heat Treated ●		561	330	477	281	281	165		PEF			PEM		
	Metric	170	100	145	85	85	50		Coating			Coating		
Stainless Steel ○		858	330	729	281	429	165		CVD			CVD		
	Metric	260	100	221	85	130	50		TiN/ Al ₂ O ₃ /TiCN			TiN/ Al ₂ O ₃ /TiCN		
Gray Cast Iron ○		1056	330						Depth of Cut ap			Depth of Cut ap		
	Metric	320	100						Inch	Metric		Inch	Metric	
						.002 - .039	.05 - 1.0		.016 - .236	.40 - 6.0		.032 - .394	.80 - 10.0	
						Feed per Revolution f _n			Feed per Revolution f _n			Feed per Revolution f _n		
						Inch	Metric		Inch	Metric		Inch	Metric	
						.002 - .012	.05 - .30		.008 - .016	.20 - .40		.012 - .024	.03 - .60	
						Cutting Condition			Cutting Condition			Cutting Condition		
						Wet			Wet			Wet		
For complete Cutting Data see page						High V _C	Medium V _C	Low V _C	High V _C	Medium V _C	Low V _C	High V _C	Medium V _C	Low V _C

Description	ANSI	ISO	Grade			Grade			Grade		
			DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
CNMG-PEF 80° Diamond Finishing		CNMG-431-PEF	CNMG-120404-PEF	69250	69251						
		CNMG-432-PEF	CNMG-120408-PEF	69252	69253						
CNMG-PEM 80° Diamond Medium		CNMG-322-PEM	CNMG-090308-PEM			69491	69276	69277			
		CNMG-432-PEM	CNMG-120408-PEM			69408	69278	69279			
		CNMG-433-PEM	CNMG-120412-PEM			69280	69281	69282			
		CNMG-542-PEM	CNMG-160608-PEM			69283	69284	69285			
		CNMG-543-PEM	CNMG-160612-PEM			69286	69287	69288			
		CNMG-544-PEM	CNMG-160616-PEM			69492	69289	69290			
		CNMG-643-PEM	CNMG-190612-PEM			69409	69291	69292			
		CNMG-644-PEM	CNMG-190616-PEM			69410	69293	69294			
CNMG-PER 80° Diamond Roughing		CNMG-432-PER	CNMG-120408-PER						69351	69352	69353
		CNMG-433-PER	CNMG-120412-PER						69354	69355	69356
		CNMG-542-PER	CNMG-160608-PER						69357	69358	69359
		CNMG-543-PER	CNMG-160612-PER						69360	69361	69362
		-544-PER	CNMG-160616-PER						69363	69364	69365
		CNMG-643-PER	CNMG-190612-PER						69366	69367	69368
		CNMG-644-PER	CNMG-190616-PER						69369	69370	69371
		CNMG-646-PER	CNMG-190624-PER						69372	69373	69374
DNMG-PEF 55° Diamond Finishing		DNMG-331-PEF	DNMG-110404-PEF	69254	69255						
		DNMG-332-PEF	DNMG-110408-PEF	69256	69257						
		DNMG-431-PEF	DNMG-150404-PEF	69258	69259						
		DNMG-432-PEF	DNMG-150408-PEF	69260	69261						
		DNMG-441-PEF	DNMG-150604-PEF	69262	69263						
		DNMG-442-PEF	DNMG-150608-PEF	69264	69265						
DNMG-PEM 55° Diamond Medium		DNMG-332-PEM	DNMG-110408-PEM			69295	69296	69297			
		DNMG-432-PEM	DNMG-150408-PEM			69298	69299	69300			
		DNMG-433-PEM	DNMG-150412-PEM			69301	69302	69303			
		DNMG-442-PEM	DNMG-150608-PEM			69304	69305	69306			
		DNMG-443-PEM	DNMG-150612-PEM			69307	69308	69309			
		DNMG-444-PEM	DNMG-150616-PEM			69310	69311	69312			
DNMG-PER 55° Diamond Roughing		DNMG-432-PER	DNMG-150408-PER						69375	69376	69377
		DNMG-433-PER	DNMG-150412-PER						69378	69379	69380
		DNMG-442-PER	DNMG-150608-PER						69381	69382	69383
		DNMG-443-PER	DNMG-150612-PER						69384	69385	69386
		DNMG-444-PER	DNMG-150616-PER						69387	69388	69389

Turning Application		
Finishing	Medium	Roughing
PEF	PEM	PER

Description	ANSI	ISO	Grade			Grade			Grade		
			DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
			UPC 733101-			UPC 733101-			UPC 733101-		
SNMG-PEF Square Finishing	SNMG-431-PEF	SNMG-120404-PEF	69266	69267							
SNMG-PEM Square Medium	SNMG-432-PEM	SNMG-120408-PEM				69313	69314	69315			
	SNMG-433-PEM	SNMG-120412-PEM				69316	69317	69318			
	SNMG-542-PEM	SNMG-150608-PEM				69319	69320	69321			
	SNMG-643-PEM	SNMG-190612-PEM				69322	69323	69324			
SNMG-PER Square Roughing	SNMG-432-PER	SNMG-120408-PER							69390	69391	69392
	SNMG-433-PER	SNMG-120412-PER							69393	69394	69395
	SNMG-643-PER	SNMG 190612-PER							69396	69397	69398
	SNMG-644-PER	SNMG-190616-PER							69399	69400	69401
TNMG-PEF 60° Triangle Finishing	TNMG-331-PEF	TNMG-160404-PEF	69268	69269							
	TNMG-332-PEF	TNMG-160408-PEF	69270	69271							
TNMG-PEM 60° Triangle Medium	TNMG-332-PEM	TNMG-160408-PEM				69325	69326	69327			
	TNMG-333-PEM	TNMG-160412-PEM				69328	69329	69330			
	TNMG-432-PEM	TNMG-220408-PEM				69331	69332	69333			
	TNMG-433-PEM	TNMG-220412-PEM				69334	69335				
VNMG-PEF 35° Diamond Finishing	VNMG-331-PEF	VNMG-160404-PEF	69272	69273							
	VNMG-332-PEF	VNMG-160408-PEF	69274	69275							
VNMG-PEM 35° Diamond Finishing	VNMG-332-PEM	VNMG-160408-PEM				69336	69337	69338			
	VNMG-333-PEM	VNMG-160412-PEM				69339	69340	69341			
WNMG-PEM 80° Trigon Medium	WNMG-332-PEM	WNMG-060408-PEM				69342	69343	69344			
	WNMG-432-PEM	WNMG-080408-PEM				69345	69346	69347			
	WNMG-433-PEM	WNMG-080412-PEM				69348	69349	69350			
WNMG-PER 80° Trigon Roughing	WNMG-432-PER	WNMG-080408-PER							69402	69403	69404
	WNMG-433-PER	WNMG-080412-PER							69405	69406	69407

Negative Pressed Inserts

Insert Chip Breaker UEM						Turning Application					
Material		Insert Grades				Finishing to Medium		Finishing to Medium		Finishing to Medium	
		DPC15HT	DPC25UT	DPC35RT		Grade		Grade		Grade	
Application	Best	SFM (V _c)				DPC15HT		DPC25UT		DPC35RT	
Carbon Steel Annealed ●		1188	462	1010	393	594	231	P10-P25		P25-P45	
	Metric	360	140	306	119	180	70	C6-C7		C5	
Alloy Steel Annealed ●		990	330	842	281	495	165	Wear Resistant		Tough & Hard	
	Metric	300	100	255	85	150	50	Chip Breaker		Chip Breaker	
Alloy Steel Heat Treated ●		561	330	477	281	281	165	UEM		UEM	
	Metric	170	100	145	85	85	50	Coating		Coating	
Stainless Steel ○		858	330	729	281	429	165	CVD		CVD	
	Metric	260	100	221	85	130	50	TiN/ Al ₂ O ₃ /TiCN		TiN/ Al ₂ O ₃ /TiCN	
Gray Cast Iron ○		1056	330					Depth of Cut a _p		Depth of Cut a _p	
	Metric	320	100					Inch Metric		Inch Metric	
						.004 - .079 .1 - 2.0		.008 - .125 .20 - 3.0		.012 - .156 .30 - 4.0	
						Feed per Revolution f _n		Feed per Revolution f _n		Feed per Revolution f _n	
						Inch Metric		Inch Metric		Inch Metric	
						.002 - .008 .05 - .20		.002 - .008 .05 - .20		.002 - .008 .05 - .20	
						Cutting Condition		Cutting Condition		Cutting Condition	
						Wet		Wet		Wet	
For complete Cutting Data see page						High V _c	Medium V _c	Low V _c	High V _c	Medium V _c	Low V _c

Description	ANSI	ISO	Grade DPC15HT	Grade DPC25UT	Grade DPC35RT
CNMG-UEM 80° Diamond Universal 	CNMG-431-UEM	CNMG-120404-UEM	UPC 733101- 69826	UPC 733101- 69828	UPC 733101- 69829
	CNMG-432-UEM	CNMG-120408-UEM	69832	69833	69834
DNMG-UEM 55° Diamond Universal 	DNMG-331-UEM	DNMG-110404-UEM	69835	69836	69837
	DNMG-332-UEM	DNMG-110408-UEM	69840	69841	
	DNMG-432-UEM	DNMG-150408-UEM		69844	
	DNMG-441-UEM	DNMG-150604-UEM	69845	69846	69847
	DNMG-442-UEM	DNMG-150608-UEM	69848	69849	69850
SNMG-UEM Square Universal 	SNMG-321-UEM	SNMG-090304-UEM	69851	69852	
TNMG-UEM 60° Triangle Universal 	TNMG-331-UEM	TNMG-160404-UEM	69853	69854	69855
	TNMG-332-UEM	TNMG-160408-UEM	69856	69857	69858
VNMG-UEM 35° Diamond Universal 	VNMG-332-UEM	VNMG-160408-UEM	69859	69860	
WNMG-UEM 80° Trigon Universal 	WNMG-331-UEM	WNMG-060404-UEM	69861	69862	69863
	WNMG-332-UEM	WNMG-060408-UEM	69864	69865	69866
	WNMG-431-UEM	WNMG-080404-UEM	69867	69868	69869
	WNMG-432-UEM	WNMG 080408-UEM	69870	69871	69872
	WNMG-433-UEM	WNMG 080412-UEM		69873	

Insert Chip Breaker PHS PSS PST								Turning Application								
Material		Insert Grades						High Performance			Universal			Unstable Condition		
		DPC15HT	DPC25UT	DPC35RT				Grade			Grade			Grade		
Application	Best	SFM (V _C)						DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
Carbon Steel Annealed	●	1188	462	1010	393	594 231		P10-P25	P15-P35	P25-P45	P10-25	P15-P35	P25-P45	P10-25	P15-P35	P25-P45
	Metric	360	140	306	119	180 70		C6-C7	C5-C6	C5	C6-C7	C5-C6	C5	C6-C7	C5-C6	C5
Alloy Steel Annealed	●	990	330	842	281	495 165		Harder	Tough & Hard	Tougher	Harder	Tough & Hard	Tougher	Harder	Tough & Hard	Tougher
	Metric	300	100	255	85	150 50		Chip Breaker			Chip Breaker			Chip Breaker		
Alloy Steel Heat Treated	●	561	330	477	281	281 165		PSH			PST			PSS		
	Metric	170	100	145	85	85 50		Coating			Coating			Coating		
Stainless Steel	○	858	330	729	281	429 165		CVD			CVD			CVD		
	Metric	260	100	221	85	130 50		TiN/ Al ₂ O ₃ /TiCN			TiN/ Al ₂ O ₃ /TiCN			TiN/ Al ₂ O ₃ /TiCN		
Gray Cast Iron	○	1056	330					Depth of Cut ap			Depth of Cut ap			Depth of Cut ap		
	Metric	320	100					Inch	Metric		Inch	Metric		Inch	Metric	
								.039 - .397	1.0 - 10.0		.079 - .441	2.0 - 11.20		.098 - .492	2.50 - 12.50	
								Feed per Revolution f _η			Feed per Revolution f _η			Feed per Revolution f _η		
								Inch	Metric		Inch	Metric		Inch	Metric	
								.008 - .048	.20 - 1.2		.016 - .063	.40 - 1.6		.032 - .079	.80 - 2.0	
								Cutting Condition			Cutting Condition			Cutting Condition		
								Wet			Wet			Wet		
For complete Cutting Data see page								High V _C	Medium V _C	Low V _C	High V _C	Medium V _C	Low V _C	High V _C	Medium V _C	Low V _C

For complete Cutting Data see page


Description		ANSI	ISO	Grade			Grade			Grade		
				DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT	DPC15HT	DPC25UT	DPC35RT
				UPC 733101-			UPC 733101-			UPC 733101-		
CNMM-PSH 80° Diamond Roughing		CNMM-432-PSH	CNMM-120408-PSH	70160	70161	70162						
		CNMM-433-PSH	CNMM-120412-PSH	70163	70164	70165						
		CNMM-543-PSH	CNMM-160612-PSH	70166	70167	70168						
		CNMM-544-PSH	CNMM-160616-PSH	70169	70170	70171						
		CNMM-643-PSH	CNMM-190612-PSH	70172	70173	70174						
		CNMM-644-PSH	CNMM-190616-PSH	70175	70176	70177						
		CNMM-646-PSH	CNMM-190624-PSH	70178	70179	70180						
CNMM-PSS 80° Diamond Heavy Roughing		CNMM-644-PSS	CNMM-190616-PSS	70205	70206	70207						
CNMM-PST 80° Diamond X Heavy Roughing		CNMM-856-PST	CNMM-250724-PST							70216	70217	70218
		CNMM-866-PST	CNMM 250924-PST							70220	70221	70222
SNMM-PHS Square Roughing		SNMM-432-PSH	SNMM-120408-PSH	70181	70182	70183						
		SNMM-433-PSH	SNMM-120412-PSH	70184	70185	70186						
		SNMM-543-PSH	SNMM-150612-PSH	70187	70188	70189						
		SNMM-544-PSH	SNMM-150616-PSH	70190	70191	70192						
		SNMM-643-PSH	SNMM-190612-PSH	70193	70194	70195						
		SNMM-644-PSH	SNMM-190616-PSH	70196	70197	70198						
		SNMM-646-PSH	SNMM-190624-PSH	70199	70200	70201						
		SNMM-648-PSH	SNMM-190632-PSH	70202	70203	70204						
SNMM-PSS Square Heavy Roughing		SNMM-644-PSS	SNMM-190616-PSS				70210	70211	70212			
		SNMM-646-PSS	SNMM-190624-PSS				70213	70214	70215			
SNMM-PST Square X Heavy Roughing		SNMM-856-PST	SNMM-250724-PST							70224	70225	70226
		SNMM-866-PST	SNMM-250924-PST							70228	70229	70230

Negative Inserts

Insert Chip Breaker MEH MEF MEM MER				Turning Application							
Material	Insert Grades			High Performance		Finishing		Medium		Roughing	
	DMC20HT DCM30UT			Grade		Grade		Grade		Grade	
Application	Best	SFM (V _C)		DMC20HT		DMC30UT		DMC30UT		DMC30UT	
300 Series Stainless Steel ●		759 429	594 238	M-15 M-20		M25-M35		M25-M35		M25-M35	
Metric		230 130	180 72	C6-C7		C5-C6		C5-C6		C5-C6	
400 Series Stainless Steel ●		759 429	594 238	High & Resistant		Impact & Wear Resistant		Impact & Wear Resistant		Impact & Wear Resistant	
Metric		230 130	180 72	Chip Breaker		Chip Breaker		Chip Breaker		Chip Breaker	
17-4 PH Series Stainless Steel ●		759 429	594 238	MEH		MEF		MEM		MER	
Metric		230 130	180 72	Coating		Coating		Coating		Coating	
Austenitic-Ferritic Duplex ●		759 429	594 238	CVD		CVD		CVD		CVD	
Metric		230 130	180 72	TiCN/TiN		TiCN/TiN		TiCN/TiN		TiCN/TiN	
				Depth of Cut a _p		Depth of Cut a _p		Depth of Cut a _p		Depth of Cut a _p	
		Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric
		.012 - .394	.30 - 10.0	.004 - .125	.20 - 3.0	.008 - .160	.20 - 4.0	.016 - .236	.40 - 6.0		
				Feed per Revolution f _n		Feed per Revolution f _n		Feed per Revolution f _n		Feed per Revolution f _n	
		Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric
		.004 - .032	.10 - .80	.002 - .012	.05 - .30	.004 - .016	.1 - .40	.008 - .024	.20 - .60		
				Cutting Condition		Cutting Condition		Cutting Condition		Cutting Condition	
				Wet		Wet		Wet		Wet	
				Higher V _C		Medium/High V _C		Medium V _C		Low V _C	

For complete Cutting Data see page

Description	ANSI	ISO	Grade DMC20HT	Grade DMC30UT	Grade DMC30UT	Grade DMC30UT
			UPC 733101-	UPC 733101-	UPC 733101-	UPC 733101-
CNMG-MEF 80° Diamond Finishing 	CNMG-321-MEF	CNMG-090304-MEF		69964		
	CNMG-431-MEF	CNMG-120404-MEF		69965		
	CNMG-432-MEF	CNMG-120408-MEF		69966		
	CNMG-433-MEF	CNMG-120412-MEF		69967		
CNMG-MEM 80° Diamond Medium 	CNMG-432-MEM	CNMG-120408-MEM		69968		
	CNMG-433-MEM	CNMG-120412-MEM		69969		
CNMG-MEH 80° Diamond High Performance 	CNMG-432-MEH	CNMG-120408-MEH	70020			
	CNMG-433-MEH	CNMG-120412-MEH	70021			
	CNMG-543-MEH	CNMG-160612-MEH	70022			
	CNMG-544-MEH	CNMG-160616-MEH	70023			
	CNMG-643-MEH	CNMG-190612-MEH	70024			
	CNMG-644-MEH	CNMG-190616-MEH	70028			
CNMG-MER 80° Diamond Roughing 	CNMG-433-MER	CNMG-120412-MER				69970
	CNMG-543-MER	CNMG-160612-MER				69971
	CNMG-643-MER	CNMG-190612-MER				69972
DNMG-MEF 55° Diamond Finishing 	DNMG-331-MEF	DNMG-110404-MEF		69973		
	DNMG-441-MEF	DNMG-150604-MEF		69974		
	DNMG-442-MEF	DNMG-150608-MEF		69975		
DNMG-MEM 55° Diamond Medium 	DNMG-332-MEM	DNMG-110408-MEM			69976	
	DNMG-432-MEM	DNMG-150408-MEM			69977	
	DNMG-442-MEM	DNMG-150608-MEM			69978	
	DNMG-443-MEM	DNMG-150612-MEM			69979	

Turning Application						
High Performance		Finishing		Medium	Roughing	
MEH		MEF		MEM	MER	
Description	ANSI	ISO	Grade DMC20HT	Grade DMC30UT	Grade DMC30UT	Grade DMC30UT
			UPC 733101-	UPC 733101-	UPC 733101-	UPC 733101-
DNMG-MEH 55° Diamond High Performance 	DNMG-442-MEH	DNMG-150608-MEH	70037			
	DNMG-443-MEH	DNMG-150612-MEH	70038			
DNMG-MER 55° Diamond Medium 	DNMG-442-MER	DNMG-150608-MER				69980
	DNMG-443-MER	DNMG-150612-MER				69981
SNMG-MEF Square Finishing 	SNMG-321-MEF	SNMG-090304-MEF		69982		
SNMG-MEH Square High Performance 	SNMG-543-MEH	SNMG-150612-MEH	70041			
	SNMG-544-MEH	SNMG-150616-MEH	70044			
	SNMG-643-MEH	SNMG-190612-MEH	70052			
	SNMG-644-MEH	SNMG-190616-MEH	70053			
SNMG-MER Square Roughing 	SNMG-432-MER	SNMG-120408-MER				69983
	SNMG-433-MER	SNMG-120412-MER				69984
	SNMG-643-MER	SNMG-190612-MER				69985
TNMG-MEM 60° Triangle Medium 	TNMG-332-MEM	TNMG-160408-MEM			69986	
	TNMG-432-MEM	TNMG-220408-MEM			69987	
	TNMG-433-MEM	TNMG-220412-MEM			69988	
WNMG-MEF 80° Trigon Finishing 	WNMG-331-MEF	WNMG-060404-MEF		69989		
	WNMG-431-MEF	WNMG-080404-MEF		69990		
	WNMG-432-MEF	WNMG-080408-MEF		69991		
WNMG-MEH 80° Trigon High Performance 	WNMG-432-MEH	WNMG-080412-MEH	70056			
WNMG-MEM 80° Trigon Medium 	WNMG-332-MEM	WNMG-060408-MEM			69992	
	WNMG-432-MEM	WNMG-080408-MEM			69993	
	WNMG-433-MEM	WNMG-080412-MEM			69994	
	WNMG-434-MEM	WNMG-080416-MEM			69995	
WNMG-MER 80° Trigon Roughing 	WNMG-432-MER	WNMG-080408-MER				69996
	WNMG-433-MER	WNMG-080412-MER				69997

Negative Pressed Inserts

Insert Chip Breaker KEF KEM KER													
Material		Insert Grades					Universal			Roughing			
		DKC05HT	DKC10UT	DKC15RT		Grade			Grade				
Application	Best	SFM (V _c)					DKC05HT	DKC10UT	DKC15RT	DKC05HT	DKC10UT	DKC15RT	
Gray Cast Iron ●		1069	452	891	376	743	314	K5	K10	K15	K5	K10	K15
	Metric	324	137	270	114	225	95	C3-C4	C2-C3	C1-C2	C3-C4	C2-C3	C1-C2
Modular Cast Iron ●		1023	356	851	297	710	248	Harder	Tough & Hard	Tougher	Harder	Tough & Hard	Tougher
	Metric	310	108	258	90	215	75	Chip Breaker			Chip Breaker		
Malleable Cast Iron ●		950	452	792	376	660	314	KEM			KER		
	Metric	288	137	240	114	200	95	Coating			Coating		
Hardened Alloy Steel ○		168	99	129	76	99	59	CVD			CVD		
	Metric	51	30	39	23	30	18	TiN/ Al ₂ O ₃ /TiCN			TiN/ Al ₂ O ₃ /TiCN		
							Depth of Cut a _p			Depth of Cut a _p			
							Inch	Metric		Inch	Metric		
							.016 - .315	.40 - 8.0		.032 - .472	.80 - 12		
							Feed per Revolution f _n			Feed per Revolution f _n			
							Inch	Metric		Inch	Metric		
							.008 - .032	.20 - .80		.012 - .024	.03 - .60		
							Cutting Condition			Cutting Condition			
							Wet			Wet			
For complete Cutting Data see page							High V _c	Medium V _c	Low V _c	High V _c	Medium V _c	Low V _c	

Description	ANSI	ISO	Grade DKC10UT	Grade DKC15RT
			UPC 733101-	UPC 733101-
CNMG-KEF 80° Diamond Finishing 	CNMG-431-KEF	CNMG-120404-KEF	67052	67053
CNMA-KEU 80° Diamond General Purpose 	CNMA-432-KEU	CNMA-120408-KEU	69874	69875
	CNMA-433-KEU	CNMA-120412-KEU	69876	69877
	CNMA-644-KEU	CNMA-190616-KEU		69878
	CNMA-866-KEU	CNMA-250924-KEU		69879
CNMG-KER 80° Diamond Roughing 	CNMG-432-KER	CNMG-120408-KER	69904	69905
	CNMG-433-KER	CNMG-120412-KER	69906	69907
	CNMG-434-KER	CNMG-120416-KER	69908	69909
	CNMG-543-KER	CNMG-160612-KER	69910	69911
	CNMG-544-KER	CNMG-160616-KER	69912	69913
DNMG-KEF 55° Diamond Finishing 	DNMG-331-KEF	DNMG-110404-KEF	67054	67055
	DNMG-332-KEF	DNMG-110408-KEF	67056	
DNMA-KEU 55° Diamond General Purpose 	DNMA-442-KEU	DNMA-150608-KEU		69880
DNMG-KER 55° Diamond Roughing 	DNMG-432-KER	DNMG-150408-KER	69914	69915
	DNMG-433-KER	DNMG-150412-KER	69916	69917
	DNMG-442-KER	DNMG-150608-KER	69918	69919
	DNMG-443-KER	DNMG-150612-KER	69920	69921

Universal	Roughing
KEM	KER


Description	ANSI	ISO	Grade DKC10UT	Grade DKC15RT
SNMA-KEU Square General Purpose 	SNMA-432-KEU	SNMA-120408-KEU	UPC 733101- 69882	UPC 733101- 69883
	SNMA-433-KEU	SNMA-120412-KEU	69884	69885
	SNMA-434-KEU	SNMA-120416-KEU	69886	69887
	SNMA-664-KEU	SNMA-190616-KEU		69888
	SNMA-856-KEU	SNMA-250724-KEU		69889
SNMG-KER Square Roughing 	SNMG-432-KER	SNMG-120408-KER	69922	69923
	SNMG-433-KER	SNMG-120412-KER	69924	69925
	SNMG-643-KER	SNMG-190612-KER		69926
	SNMG-644-KER	SNMG-190616-KER	69927	69928
TNMA-KEU Triangle General Purpose 	TNMA-332-KEU	TNMA-160408-KEU	69890	69891
	TNMA-333-KEU	TNMA-160412-KEU	69892	69893
	TNMA-434-KEU	TNMA-220416-KEU	69894	69895
WNMA-KEU 80° Trigon General Purpose 	WNMA-432-KEU	WNMA-080408-KEU	69896	69897
	WNMA-433-KEU	WNMA-080412-KEU	69898	69899
WNMG-KER 80° Trigon Roughing 	WNMG-432-KER	WNMG-080408-KER	69929	69930
	WNMG-433-KER	WNMG-080412-KER		69931

Negative Pressed Inserts

Insert Chip Breaker SEH SEF SEM SER						Turning Application							
Material		Insert Grades				High Performance		Finishing		Medium		Roughing	
		DSP10HT	DSP20HT	DSP15HT		Grade		Grade		Grade		Grade	
Application	Best	SFM (V _C)				DSP10HT	DSP20HT	DSP15HT		DSP15HT		DSP15HT	
Carbon & Alloy Steel 		1373	376	1247	343	1066	274	S5-S15		S10-S25		S20-S35	
	Metric	416	114	378	104	323	83	C3-C4		C1-C2		C3-C7	
Stainless Steel 		865	125	789	116	634	89	Abrasive Resistant		Impact Resistant		Hard & Tough	
	Metric	262	38	239	35	192	27	Chip Breaker		Chip Breaker		Chip Breaker	
Cast Iron 		881	244	802	224	686	172	SEH		SEF		SEM	
	Metric	267	74	243	68	208	52	Coating		Coating		Coating	
Aluminum 						6349	805	PVD		PVD		PVD	
	Metric					1924	244	TiCN/TiN		TiCN/TiN		TiCN/TiN	
Brass, Bronze, Copper 		1894	574	1723	521	1475	287	Depth of Cut a _p		Depth of Cut a _p		Depth of Cut a _p	
	Metric	574	174	522	158	447	87	Inch		Metric		Inch	
Inconel, Hastelloy, Waspaloy 		244	36	224	33	191	26	.008 - .160		.20 - 4.0		.002 - .039	
	Metric	74	11	68	10	58	8	Feed per Revolution f _n		Feed per Revolution f _n		Feed per Revolution f _n	
Titanium Alloys 		426	66	386	33	330	46	Inch		Metric		Inch	
	Metric	129	20	117	10	100	14	.004 - .0016		.10 - .40		.002 - .008	
Carbon-Graphite-Phenolics 						205	92	Cutting Condition		Cutting Condition		Cutting Condition	
	Metric					62	28	Wet		Wet		Wet	
For complete Cutting Data see page						Higher V _C	Lower V _C	Medium/High V _C		Medium/High V _C		Medium/High V _C	

Description	ANSI	ISO	Grade		Grade	Grade	Grade	Grade
			DSP10HT	DSP20HT	DSP15HT	DSP15HT	DSP15HT	DSP15HT
CNKG-SEF 80° Diamond Finishing 	CNKG-431-SEF	CNKG-120404-SEF	UPC 733101-		UPC 733101-		UPC 733101-	
	CNKG-432-SEF	CNKG-120408-SEF			69932			
	CNKG-433-SEF	CNKG-120412-SEF			69933			
					69934			
CNMG-SEM 80° Diamond Medium 	CNMG-431-SEM	CNMG-120404-SEM					69935	
	CNMG-432-SEM	CNMG-120408-SEM					69936	
	CNMG-433-SEM	CNMG-120412-SEM					69937	
	CNMG-431-SEM	CNMG-120404-SEM					69938	
	CNMG-432-SEM	CNMG-120408-SEM					69939	
CNKG-SER 80° Diamond Roughing 	CNKG-432-SER	CNKG-120408-SER						
	CNKG-433-SER	CNKG-120412-SER						
CNMG-SEH 80° Diamond Universal 	CNMG-432-SEH	CNMG-120408-SEH	69726	69727				
DNKG-SEF 55° Diamond Finishing 	DNKG-431-SEF	DNKG-150404-SEF			69942			
	DNKG-432-SEF	DNKG-150408-SEF			69943			
	DNKG-433-SEF	DNKG-150412-SEF			69944			
	DNKG-441-SEF	DNKG-150604-SEF			69945			
	DNKG-442-SEF	DNKG-150608-SEF			69946			
	DNKG-443-SEF	DNKG-150612-SEF			69947			
DNMG-SEM 55° Diamond Medium 	DNMG-431-SEM	DNMG-150404-SEM					69948	
	DNMG-432-SEM	DNMG-150408-SEM					69949	
	DNMG-433-SEM	DNMG-150412-SEM					69950	
	DNMG-441-SEM	DNMG-150604-SEM					69951	
	DNMG-442-SEM	DNMG-150608-SEM					69952	
	DNMG-443-SEM	DNMG-150612-SEM					69953	

Turning Application			
High Performance	Finishing	Medium	Roughing
SEH	SEF	SEM	SER

Description	ANSI	ISO	Grade		Grade	Grade	Grade
			DSP10HT	DSP20HT	DSP15HT	DSP15HT	DSP15HT
			UPC 733101-		UPC 733101-	UPC 733101-	UPC 733101-
DNMG-SEH 55° Diamond Universal	DNMG-442-SEH	DNMG- 150608-SEH	69730	69731			
							
VNMG-SEF 35° Diamond Finishing	VNMG-331-SEF	VNMG-160404-SEF			69954		
	VNMG-332-SEF	VNMG-160408-SEF			69955		
WNGG-SEF 80° Trigon Finishing	WNGG-431-SEF	WNGG-080404-SEF			69956		
	WNGG-432-SEF	WNGG-080408-SEF			69957		
	WNGG-433-SEF	WNGG-080412-SEF			69958		
WNMG/GG-SEM 80° Trigon Medium	WNGG-431-SEM	WNGG-080404-SEM				69959	
	WNGG-432-SEM	WNGG-080408-SEM				69960	
	WNMG-431-SEM	WNMG-080404-SEM				69961	
	WNMG-432-SEM	WNMG-080408-SEM				69962	
	WNMG-433-SEM	WNMG-080412-SEM				69963	
WNMG-SEH 80° Trigon Universal	WNGG-432-SEH	WNGG-080408-SEH	69736	69737			
							

The Insert Nose Radius (r_ϵ) on the insert will determine:

The Depth of Cut a_p , Feed Rate f_n , Surface Finish and the best performance in the turning operations.

Depth of Cut:

Surface Feed:

The nose radius controls the:

- Surface finish
- Breaking and Size of Chip

- Strength of Insert
- Metal Removal Rate

Use a small nose radius for:

- Finishing application
- Small Depths of Cut • High Surface Feeds

- To Reduces Vibration
- To Reduce Radial Forces
- Weak Cutting Edges

Use a large nose radius for:

- Roughing application
- Large depths of Cut • High Feed Rates

- High Surface Finish
- Increase Radial forces
- Strong Cutting Edge

NOTES:

