

Thread milling cutters with chamfer - ISO metric threads




NEW HB Shank

| Material | | Suitability |
|----------|-----------------|-------------|
| P | Steel | ● |
| M | Stainless steel | ● |
| K | Cast iron | ● |
| N | Aluminum | ● |
| S | Ni / Ti alloys | ● |
| H | Hardened steel | ○ |

●=Optimal ○=Secondary

| Series | 3526 | 3544 |
|------------------|---------------|--------|
| Tool material | Solid Carbide | |
| Coating | TiCN* | TiCN* |
| Type | TMC SP | TMC SP |
| Shank | HA | HB |
| Coolant delivery | axial | axial |



* TiCN coated thread mills will transition to Sirius coating as stock is replenished

| D Ø | P mm | d1 mm | d2 mm | d3 mm | l1 mm | l3 mm | l2 mm | No. of flutes | Code no. | EDP Number | EDP Number |
|--------|---------|----------|----------|----------|----------|----------|----------|------------------|----------|---------------|---------------|
| ‡ M3 | 0.50 | 2.30 | 6.00 | 3.40 | 48.00 | 36.00 | 6.80 | 3 | 3.000 | 9035260030000 | 9035440030000 |
| M4 | 0.70 | 3.00 | 6.00 | 4.50 | 48.00 | 36.00 | 8.80 | 3 | 4.000 | 9035260040000 | 9035440040000 |
| M5 | 0.80 | 4.00 | 6.00 | 5.50 | 54.00 | 36.00 | 10.80 | 3 | 5.000 | 9035260050000 | 9035440050000 |
| M6 | 1.00 | 4.80 | 8.00 | 6.60 | 62.00 | 36.00 | 13.50 | 3 | 6.000 | 9035260060000 | 9035440060000 |
| M8 | 1.25 | 6.40 | 10.00 | 9.00 | 74.00 | 40.00 | 18.10 | 3 | 8.000 | 9035260080000 | 9035440080000 |
| M10 | 1.50 | 7.95 | 12.00 | 11.00 | 80.00 | 45.00 | 21.80 | 4 | 10.000 | 9035260100000 | 9035440100000 |
| M12 | 1.75 | 9.95 | 14.00 | 13.50 | 90.00 | 45.00 | 25.40 | 4 | 12.000 | 9035260120000 | 9035440120000 |
| M14 | 2.00 | 11.20 | 16.00 | 15.50 | 102.00 | 48.00 | 31.00 | 4 | 14.000 | 9035260140000 | 9035440140000 |
| M16 | 2.00 | 12.80 | 18.00 | 17.50 | 102.00 | 48.00 | 35.00 | 4 | 16.000 | 9035260160000 | 9035440160000 |
| M20 | 2.50 | 14.50 | 20.00 | 21.50 | 125.00 | 50.00 | 41.30 | 4 | 20.000 | 9035260200000 | 9035440200000 |

‡ coolant through tools ≥M4 size

See page 84 for machining parameters

See page 74 for tap/drill size info

Thread milling cutters with chamfer - ISO metric fine threads




NEW HB Shank

| Material | | Suitability |
|----------|-----------------|-------------|
| P | Steel | ● |
| M | Stainless steel | ● |
| K | Cast iron | ● |
| N | Aluminum | ● |
| S | Ni / Ti alloys | ● |
| H | Hardened steel | ○ |

●=Optimal ○=Secondary

| Series | 3528 | 3546 |
|------------------|---------------|--------|
| Tool material | Solid Carbide | |
| Coating | TiCN* | TiCN* |
| Type | TMC SP | TMC SP |
| Shank | HA | HB |
| Coolant delivery | axial | axial |



* TiCN coated thread mills will transition to Sirius coating as stock is replenished

| D Ø | P mm | d1 mm | d2 mm | d3 mm | l1 mm | l3 mm | l2 mm | No. of flutes | Code no. | EDP Number | EDP Number |
|--------|---------|----------|----------|----------|----------|----------|----------|------------------|----------|---------------|---------------|
| M4 | 0.50 | 3.00 | 6.00 | 4.50 | 48.00 | 36.00 | 8.80 | 3 | 4.003 | 9035280040030 | 9035460040030 |
| M5 | 0.50 | 4.00 | 6.00 | 5.50 | 54.00 | 36.00 | 10.80 | 3 | 5.003 | 9035280050030 | 9035460050030 |
| M6 | 0.50 | 4.80 | 8.00 | 6.60 | 62.00 | 36.00 | 12.80 | 3 | 6.003 | 9035280060030 | 9035460060030 |
| M6 | 0.75 | 4.80 | 8.00 | 6.60 | 62.00 | 36.00 | 13.10 | 3 | 6.004 | 9035280060040 | 9035460060040 |
| M8 | 0.75 | 6.40 | 10.00 | 9.00 | 74.00 | 40.00 | 16.90 | 3 | 8.004 | 9035280080040 | 9035460080040 |
| M8 | 1.00 | 6.40 | 10.00 | 9.00 | 74.00 | 40.00 | 17.50 | 3 | 8.005 | 9035280080050 | 9035460080050 |
| M10 | 1.00 | 7.95 | 12.00 | 11.00 | 80.00 | 45.00 | 21.50 | 4 | 10.005 | 9035280100050 | 9035460100050 |
| M10 | 1.25 | 7.95 | 12.00 | 11.00 | 80.00 | 45.00 | 21.90 | 4 | 10.006 | 9035280100060 | 9035460100060 |
| M12 | 1.00 | 9.95 | 14.00 | 13.50 | 90.00 | 45.00 | 25.50 | 4 | 12.005 | 9035280120050 | 9035460120050 |
| M12 | 1.50 | 9.95 | 14.00 | 13.50 | 90.00 | 45.00 | 26.30 | 4 | 12.007 | 9035280120070 | 9035460120070 |
| M14 | 1.50 | 11.20 | 16.00 | 15.50 | 102.00 | 48.00 | 30.80 | 4 | 14.007 | 9035280140070 | 9035460140070 |
| M16 | 1.50 | 12.80 | 18.00 | 17.50 | 102.00 | 48.00 | 33.80 | 4 | 16.007 | 9035280160070 | 9035460160070 |

See page 84 for machining parameters

See page 74 for tap/drill size info

TMC SP – Thread milling cutters with 45° chamfer

GUHRING

CNC Data Sheet



Date 12.11.2019

| Machining Task | Material | |
|---------------------------------|-------------------|---|
| Thread Dimension | 5/16-18 UNC right | Corrosion- and acid-resistant steels martenstic |
| Length | 0.50 Inch | |
| countersink $\alpha = 90^\circ$ | Yes | |

| Tool | Cutting Values | | |
|-------------------------|-------------------------|----------------|--------------------------------|
| Description | TMC SP 2xD mit Senkfase | Milling | |
| Milling cutter diameter | d1 = 0.234 Inch | Vc | 1969 Inch/min n 2675 1/min |
| Programmed Radius | 0.115 Inch | fz | 0.001 Inch/tooth |
| Order-No | 3517_7938 | Vf | 9.00 Inch/min Vm 2.37 Inch/min |

| NC-Options | Cycle Time | | |
|-----------------|--------------------------------|------------|------------|
| Machine Control | Sinumerik [DIN] | Total Time | 21.75 sec. |
| Cutting Path | Center point path, incremental | | |
| Milling process | Conventional milling | | |
| No. of passes | 2 passes radial (2/3–1/3) | | |


Note CNC-program serves as a programming example and should be tested by simulation before use on component.

CNC-Code

- Tool= TMC SP 2xD mit Senkfase 5/16-18 UNC right
- Material= M2
- Vc=1969 Inch/min
- fz=0.001 Inch/tooth
- Conventional milling
- 2 passes radial (2/3–1/3)
- Thread Type= Internal Right-Hand Thread

Attention, for controls that refer to outer path, values in brackets to be used!

EXAMPLE

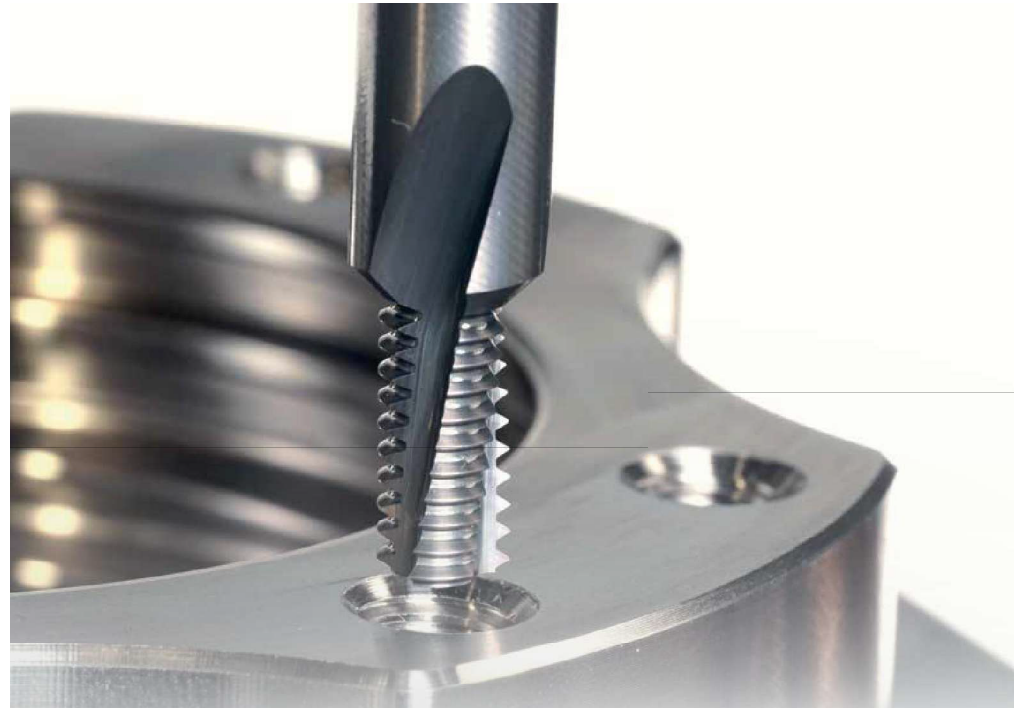

CNC-Code

```

N10 M6 T1
N20 G90 G54 G00 X0.0000 Y0.0000
N30 Z0.0787 S1337 M3 M8
N40 Z-0.6929
N50 G01 Z-0.8821 F4.74
N60 G00 Z-0.4278 S2675
N70 G91
N80 G42 G01 X0.0000 Y0.1171 F1.19 ;(F4.74)
N90 G02 X0.0000 Y-0.2641 I0.0000 J-0.1321 Z-0.0083
N100 G02 X0.0000 Y0.0000 I0.0000 J0.1470 Z-0.0556 F2.37 ;(F9.48)
N110 G02 X0.0000 Y0.2641 I0.0000 J0.1321 Z-0.0083
N120 G40 G01 X0.0000 Y-0.1171
N130 G90
N140 G00 Z-0.4278
N150 G91
N160 G42 G01 X0.0000 Y0.1171 F1.19 ;(F4.74)
N170 G02 X0.0000 Y-0.2734 I0.0000 J-0.1367 Z-0.0083
N180 G02 X0.0000 Y0.0000 I0.0000 J0.1563 Z-0.0556 F2.37 ;(F9.48)
N190 G02 X0.0000 Y0.2734 I0.0000 J0.1367 Z-0.0083
N200 G40 G01 X0.0000 Y-0.1171
N210 G90
N220 G00 Z0.0787 M9
N230 M30
    
```

Attention, for controls that refer to outer path, values in brackets to be used!

Drill size for thread milling cutters

Std. ISO metric threads
DIN 13

| nom. Ø | pitch P | tapping size hole Ø | | core diameter of int. thread ØH* | |
|--------|---------|---------------------|--------|----------------------------------|------|
| | | min. | max. | min. | max. |
| M 1 | 0.25 | 0.75 | 0.729 | 0.785 | |
| M 1.1 | 0.25 | 0.85 | 0.829 | 0.885 | |
| M 1.2 | 0.25 | 0.95 | 0.929 | 0.985 | |
| M 1.4 | 0.30 | 1.10 | 1.075 | 1.142 | |
| M 1.6 | 0.35 | 1.25 | 1.221 | 1.321 | |
| M 1.8 | 0.35 | 1.45 | 1.421 | 1.521 | |
| M 2 | 0.40 | 1.60 | 1.567 | 1.679 | |
| M 2.2 | 0.45 | 1.75 | 1.713 | 1.838 | |
| M 2.5 | 0.45 | 2.05 | 2.013 | 2.138 | |
| M 3 | 0.50 | 2.50 | 2.459 | 2.599 | |
| M 3.5 | 0.60 | 2.90 | 2.850 | 3.010 | |
| M 4 | 0.70 | 3.30 | 3.242 | 3.422 | |
| M 4.5 | 0.75 | 3.70 | 3.688 | 3.878 | |
| M 5 | 0.80 | 4.20 | 4.134 | 4.334 | |
| M 6 | 1.00 | 5.00 | 4.917 | 5.153 | |
| M 7 | 1.00 | 6.00 | 5.917 | 6.153 | |
| M 8 | 1.25 | 6.80 | 6.647 | 6.912 | |
| M 9 | 1.25 | 7.80 | 7.647 | 7.912 | |
| M 10 | 1.50 | 8.50 | 8.376 | 8.676 | |
| M 11 | 1.50 | 9.50 | 9.376 | 9.676 | |
| M 12 | 1.75 | 10.20 | 10.106 | 10.441 | |
| M 14 | 2.00 | 12.00 | 11.835 | 12.210 | |
| M 16 | 2.00 | 14.00 | 13.835 | 14.210 | |
| M 18 | 2.50 | 15.50 | 15.294 | 15.744 | |
| M 20 | 2.50 | 17.50 | 17.294 | 17.744 | |
| M 22 | 2.50 | 19.50 | 19.294 | 19.744 | |
| M 24 | 3.00 | 21.00 | 20.752 | 21.252 | |
| M 27 | 3.00 | 24.00 | 23.752 | 24.252 | |
| M 30 | 3.50 | 26.50 | 26.211 | 26.711 | |
| M 33 | 3.50 | 29.50 | 29.211 | 29.711 | |
| M 36 | 4.00 | 32.00 | 31.670 | 32.270 | |
| M 39 | 4.00 | 35.00 | 34.670 | 35.270 | |
| M 42 | 4.50 | 37.50 | 37.129 | 37.799 | |
| M 45 | 4.50 | 40.50 | 40.129 | 40.799 | |
| M 48 | 5.00 | 43.00 | 42.587 | 43.297 | |
| M 52 | 5.00 | 47.00 | 46.587 | 47.297 | |
| M 56 | 5.50 | 50.50 | 50.046 | 50.796 | |

* M 1,1 up to M 1,4 tapping size hole of int. thread 5H

(Whitworth - BSPP) threads
DIN-ISO 228-1

| nom. Ø | threads per inch | tapping size hole Ø | | core diameter of int. thread | |
|---------|------------------|---------------------|--------|------------------------------|------|
| | | min. | max. | min. | max. |
| G 1/16 | 28 | 6.80 | 6.561 | 6.843 | |
| G 1/8 | 28 | 8.80 | 8.566 | 8.848 | |
| G 1/4 | 19 | 11.80 | 11.445 | 11.890 | |
| G 3/8 | 19 | 15.25 | 14.950 | 15.395 | |
| G 1/2 | 14 | 19.00 | 18.631 | 19.172 | |
| G 5/8 | 14 | 21.00 | 20.587 | 21.128 | |
| G 3/4 | 14 | 24.50 | 24.117 | 24.658 | |
| G 7/8 | 14 | 28.25 | 27.877 | 28.418 | |
| G 1 | 11 | 30.75 | 30.291 | 30.931 | |
| G 1 1/8 | 11 | 35.50 | 34.939 | 35.579 | |
| G 1 1/4 | 11 | 39.50 | 38.952 | 39.592 | |
| G 1 1/2 | 11 | 45.25 | 44.845 | 45.485 | |
| G 1 3/4 | 11 | 51.00 | 50.788 | 51.428 | |
| G 2 | 11 | 57.00 | 56.656 | 57.296 | |

ISO metric fine threads
DIN 13

| nom. Ø | x | pitch P | tapping size hole Ø | | core diameter of int. thread ØH | |
|--------------|-------|---------|---------------------|------|---------------------------------|------|
| | | | min. | max. | min. | max. |
| M 2.5 x 0.35 | 2.15 | 2.121 | 2.221 | | | |
| M 3.0 x 0.35 | 2.65 | 2.621 | 2.721 | | | |
| M 3.5 x 0.35 | 3.15 | 3.121 | 3.221 | | | |
| M 4.0 x 0.50 | 3.50 | 3.459 | 3.599 | | | |
| M 4.5 x 0.50 | 4.00 | 3.959 | 4.099 | | | |
| M 5.0 x 0.50 | 4.50 | 4.459 | 4.599 | | | |
| M 5.5 x 0.50 | 5.00 | 4.959 | 5.099 | | | |
| M 6.0 x 0.75 | 5.20 | 5.188 | 5.378 | | | |
| M 7.0 x 0.75 | 6.20 | 6.188 | 6.378 | | | |
| M 8.0 x 0.50 | 7.50 | 7.459 | 7.599 | | | |
| M 8.0 x 0.75 | 7.20 | 7.188 | 7.378 | | | |
| M 8.0 x 1.00 | 7.00 | 6.917 | 7.153 | | | |
| M 9.0 x 0.75 | 8.20 | 8.188 | 8.378 | | | |
| M 9.0 x 1.00 | 8.00 | 7.917 | 8.153 | | | |
| M 10 x 0.75 | 9.20 | 9.188 | 9.378 | | | |
| M 10 x 1.00 | 9.00 | 8.917 | 9.153 | | | |
| M 11 x 1.25 | 8.80 | 8.647 | 8.912 | | | |
| M 11 x 0.75 | 10.20 | 10.188 | 10.378 | | | |
| M 11 x 1.00 | 10.00 | 9.917 | 10.153 | | | |
| M 12 x 1.00 | 11.00 | 10.917 | 11.153 | | | |
| M 12 x 1.25 | 10.80 | 10.647 | 10.912 | | | |
| M 12 x 1.50 | 10.50 | 10.376 | 10.676 | | | |
| M 14 x 1.00 | 13.00 | 12.917 | 13.153 | | | |
| M 14 x 1.25 | 12.80 | 12.647 | 12.912 | | | |
| M 14 x 1.50 | 12.50 | 12.376 | 12.676 | | | |
| M 15 x 1.00 | 14.00 | 13.917 | 14.153 | | | |
| M 15 x 1.50 | 13.50 | 13.376 | 13.676 | | | |
| M 16 x 1.00 | 15.00 | 14.917 | 15.153 | | | |
| M 16 x 1.25 | 14.80 | 14.647 | 14.912 | | | |
| M 16 x 1.50 | 14.50 | 14.376 | 14.676 | | | |
| M 17 x 1.00 | 16.00 | 15.917 | 16.153 | | | |
| M 17 x 1.50 | 15.50 | 15.376 | 15.676 | | | |
| M 18 x 1.00 | 17.00 | 16.917 | 17.153 | | | |
| M 18 x 1.50 | 16.50 | 16.376 | 16.676 | | | |
| M 20 x 1.00 | 19.00 | 18.917 | 19.153 | | | |
| M 20 x 1.50 | 18.50 | 18.376 | 18.676 | | | |
| M 20 x 2.00 | 18.00 | 17.835 | 18.210 | | | |
| M 22 x 1.00 | 21.00 | 20.917 | 21.153 | | | |

MJ threads
DIN ISO 5855

| nom. Ø | x | pitch P | tapping size hole Ø | | core diameter of int. thread ØH* | |
|--------------|-------|---------|---------------------|------|----------------------------------|------|
| | | | min. | max. | min. | max. |
| MJ 3 x 0.50 | 2.60 | 2.513 | 2.653 | | | |
| MJ 4 x 0.70 | 3.40 | 3.318 | 3.498 | | | |
| MJ 5 x 0.80 | 4.30 | 4.221 | 4.421 | | | |
| MJ 6 x 0.50 | 5.55 | 5.513 | 5.825 | | | |
| MJ 6 x 0.75 | 5.35 | 5.269 | 5.419 | | | |
| MJ 6 x 1.00 | 5.10 | 5.026 | 5.216 | | | |
| MJ 8 x 0.50 | 7.55 | 7.513 | 7.825 | | | |
| MJ 8 x 0.75 | 7.35 | 7.269 | 7.419 | | | |
| MJ 8 x 1.00 | 7.10 | 7.026 | 7.216 | | | |
| MJ 8 x 1.25 | 6.90 | 6.782 | 6.994 | | | |
| MJ 10 x 1.00 | 9.10 | 9.026 | 9.216 | | | |
| MJ 11 x 0.90 | 8.90 | 8.782 | 8.994 | | | |
| MJ 10 x 1.50 | 8.60 | 8.539 | 8.775 | | | |
| MJ 12 x 1.75 | 10.40 | 10.295 | 10.560 | | | |
| MJ 16 x 2.00 | 14.20 | 14.051 | 14.351 | | | |

UNC metric fine threads
ASME B1.1

| nom. Ø | threads per inch | tapping size hole Ø | | core diameter of int. thread 2B | |
|-------------|------------------|---------------------|--------|---------------------------------|------|
| | | min. | max. | min. | max. |
| Nr. 1 - 64 | 1.55 | 1.473 | 1.610 | | |
| Nr. 2 - 56 | 1.85 | 1.694 | 1.872 | | |
| Nr. 3 - 48 | 2.10 | 1.941 | 2.146 | | |
| Nr. 4 - 40 | 2.35 | 2.157 | 2.385 | | |
| Nr. 5 - 40 | 2.65 | 2.487 | 2.698 | | |
| Nr. 6 - 32 | 2.85 | 2.642 | 2.896 | | |
| Nr. 8 - 32 | 3.50 | 3.302 | 3.531 | | |
| Nr. 10 - 24 | 3.90 | 3.683 | 3.937 | | |
| Nr. 12 - 24 | 4.50 | 4.343 | 4.597 | | |
| 1/8 - 20 | 5.10 | 4.978 | 5.258 | | |
| 1/8 - 18 | 6.80 | 6.401 | 6.731 | | |
| 1/8 - 16 | 8.00 | 7.798 | 8.153 | | |
| 1/8 - 14 | 9.40 | 9.144 | 9.550 | | |
| 1/8 - 13 | 10.80 | 10.592 | 11.024 | | |
| 1/8 - 12 | 12.20 | 11.989 | 12.446 | | |
| 1/8 - 11 | 13.50 | 13.396 | 13.868 | | |
| 1/8 - 10 | 16.50 | 16.307 | 16.840 | | |
| 1/8 - 9 | 19.50 | 19.177 | 19.761 | | |
| 1/8 - 8 | 22.50 | 21.971 | 22.606 | | |
| 1/8 - 7 | 25.00 | 24.638 | 25.349 | | |
| 1/8 - 6 | 30.75 | 27.813 | 28.524 | | |
| 1/8 - 5 | 39.50 | 36.938 | 39.802 | | |
| 2 - 4.5 | 45.00 | 44.679 | 45.593 | | |

UNJC-threads
ISO 3161

| nom. Ø | threads per inch | tapping size hole Ø | | core diameter of int. threads 3B | |
|-------------|------------------|---------------------|--------|----------------------------------|------|
| | | min. | max. | min. | max. |
| Nr. 6 - 32 | 2.85 | 2.733 | 2.939 | | |
| Nr. 8 - 32 | 3.55 | 3.393 | 3.599 | | |
| Nr. 10 - 24 | 4.00 | 3.795 | 4.064 | | |
| Nr. 12 - 24 | 4.60 | 4.455 | 4.704 | | |
| 1/8 - 20 | 5.30 | 5.113 | 5.387 | | |
| 1/8 - 18 | 6.75 | 6.563 | 6.833 | | |
| 1/8 - 16 | 8.20 | 7.978 | 8.255 | | |
| 1/8 - 14 | 9.60 | 9.346 | 9.639 | | |
| 1/8 - 13 | 11.00 | 10.798 | 11.095 | | |
| 1/8 - 12 | 12.40 | 12.228 | 12.482 | | |
| 1/8 - 11 | 13.80 | 13.627 | 13.904 | | |

UNJF-threads
ISO 3161

| nom. Ø | threads per inch | tapping size hole Ø | | Kern-Ø Innengewinde 3B | |
|-------------|------------------|---------------------|--------|------------------------|------|
| | | min. | max. | min. | max. |
| Nr. 6 - 40 | 3.00 | 2.888 | 3.053 | | |
| Nr. 8 - 36 | 3.60 | 3.480 | 3.663 | | |
| Nr. 10 - 32 | 4.20 | 4.054 | 4.255 | | |
| Nr. 12 - 28 | 4.75 | 4.602 | 4.816 | | |
| 1/8 - 28 | 5.60 | 5.466 | 5.662 | | |
| 1/8 - 24 | 7.00 | 6.906 | 7.109 | | |
| 1/8 - 20 | 8.60 | 8.494 | 8.679 | | |
| 1/8 - 18 | 10.00 | 9.876 | 10.084 | | |
| 1/8 - 16 | 11.60 | 11.463 | 11.661 | | |
| 1/8 - 14 | 13.00 | 12.913 | 13.122 | | |
| 1/8 - 12 | 14.60 | 14.501 | 14.702 | | |


UNF-threads
ASME B1.1

| nom. Ø | threads per inch | tapping size hole Ø | | core diameter of int. thread 2B | |
|-------------|------------------|---------------------|--------|---------------------------------|------|
| | | min. | max. | min. | max. |
| Nr. 1 - 72 | 1.55 | 1.473 | 1.610 | | |
| Nr. 2 - 64 | 1.85 | 1.755 | 1.910 | | |
| Nr. 3 - 56 | 2.15 | 2.024 | 2.197 | | |
| Nr. 4 - 48 | 2.40 | 2.271 | 2.459 | | |
| Nr. 5 - 44 | 2.70 | 2.550 | 2.741 | | |
| Nr. 6 - 40 | 2.95 | 2.819 | 3.023 | | |
| Nr. 8 - 36 | 3.50 | 3.404 | 3.607 | | |
| Nr. 10 - 32 | 4.10 | 3.962 | 4.166 | | |
| Nr. 12 - 28 | 4.60 | 4.496 | 4.724 | | |
| 1/8 - 28 | 5.50 | 5.359 | 5.588 | | |
| 1/8 - 24 | 6.90 | 6.782 | 7.036 | | |
| 1/8 - 20 | 8.50 | 8.382 | 8.636 | | |
| 1/8 - 18 | 9.90 | 9.728 | 10.033 | | |
| 1/8 - 16 | 11.50 | 11.328 | 11.608 | | |
| 1/8 - 14 | 12.90 | 12.751 | 13.081 | | |
| 1/8 - 12 | 14.50 | 14.351 | 14.681 | | |
| 1/8 - 10 | 17.50 | 17.323 | 17.678 | | |
| 1/8 - 8 | 19.50 | 19.264 | 19.621 | | |
| 1/8 - 6 | 23.75 | 23.639 | 23.996 | | |
| 1/8 - 5 | 28.00 | 27.813 | 28.524 | | |

UNC (UNC-STI) EG-threads
for wire thread inserts ASME B18.29.1


| nom. Ø | threads per inch | tapping size hole Ø | | core diameter of int. thread | |
|----------------|------------------|---------------------|--------|------------------------------|------|
| | | min. | max. | min. | max. |
| EG Nr. 6 - 32 | 3.80 | 3.678 | 3.879 | | |
| EG Nr. 8 - 32 | 4.40 | 4.338 | 4.524 | | |
| EG Nr. 10 - 24 | 5.20 | 5.055 | 5.283 | | |
| EG Nr. 12 - 24 | 5.80 | 5.715 | 5.944 | | |
| EG 1/8 - 20 | 6.70 | 6.624 | 6.868 | | |
| EG 1/8 - 18 | 8.40 | 8.242 | 8.489 | | |
| EG 1/8 - 16 | 10.00 | 9.868 | 10.127 | | |
| EG 1/8 - 14 | 11.60 | 11.506 | 11.783 | | |
| EG 1/8 - 13 | 13.30 | 13.122 | 13.393 | | |
| EG 1/8 - 12 | 14.90 | 14.747 | 15.032 | | |
| EG 1/8 - 11 | 16.50 | 16.375 | 16.673 | | |

Reverse rotation milling
clockwise, with G02

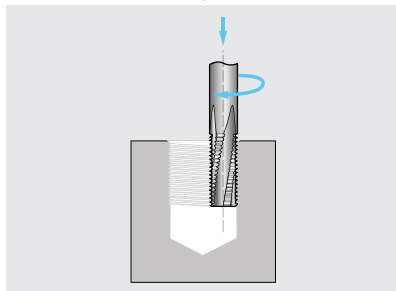

Reverse rotation milling is preferentially applied for the machining of harder materials or to remedy taper threads.


Synchronous milling
counter clockwise, with G03

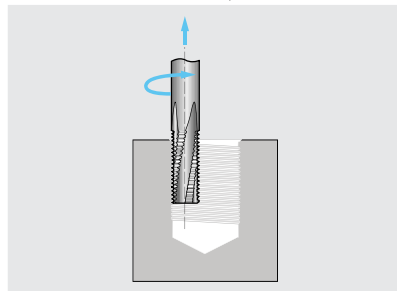

Synchronous milling is applied with thread depths smaller than 1.5xD. Advantage: A better surface finish is achieved.


Thread production with one tool

Right-hand thread
Reverse rotation milling

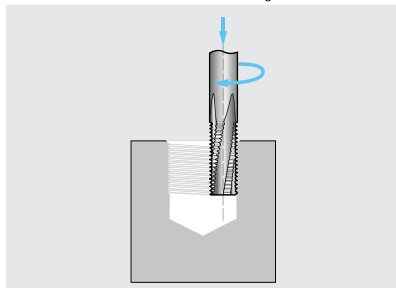


Tool rotates clockwise from top to bottom

Left-hand thread
Reverse rotation milling

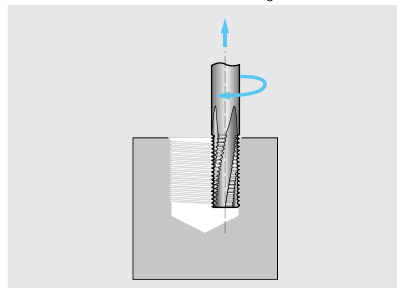


Tool rotates clockwise from bottom to top

Right-hand thread
Synchronous milling

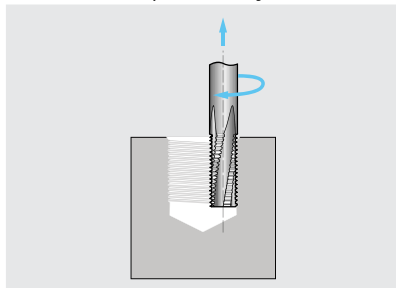

Tool rotates clockwise from bottom to top

Left-hand thread
Synchronous milling

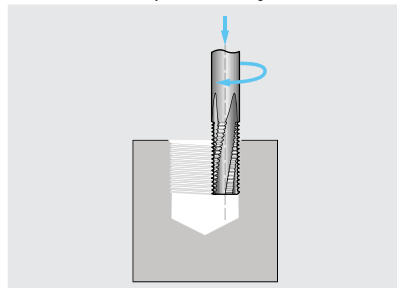

Tool rotates clockwise from top to bottom

| Illustration | Modification | Effect |
|--------------|---|--|
| | Cooling slots on shank | Targeted cooling, without weakening the tool cross-section in the cutting edge area |
| | Radial coolant exits | Targeted cooling with through hole threads |
| | Threads removed | Reduced cutting forces but longer machining time because two cycles are required |
| | De-burring cutting edge | Removing the incomplete threads at the thread run-in without additional operating step |
| | First thread profile lengthened at the face | Chamfering a tapping size hole |
| | Grinding collar | Enables axial distribution of cuts – useful for deep threads |

Thread milling programming



Program specifications

Thread milling functions

| | |
|--|--|
| G00 Rapid movement | G90 Absolute dimension |
| G01 Feed | G91 Incremental dimension |
| G02 Circular interpolation (clockwise) | M03 Spindle on (clockwise rotation) |
| G03 Circular interpolation (anti-clockwise) | M05 Spindle stop |
| G17 Layer selection x-y axis | M08 Coolant on |
| G18 Layer selection z-x axis | X Axis |
| G19 Layer selection y-z axis | Y Axis |
| G40 Cancel tool correction | Z Axis |
| G41 Tool path correction (left of contour) | I Thread pitch parallel to X-axis |
| G42 Tool path correction (right of contour) | J Thread pitch parallel to Y-axis |
| G43 Tool length compensation (call-up) | S Spindle speed |
| G49 Tool length compensation (deselect) | F Feed |
| G54 Work offset | |

CNC internal thread milling

1. Moving to start position
2. Moving to thread depth in bore
3. 180° descending loop to contour
4. 360° full circular movement of thread milling cutter
5. 180° exit loop to center of bore
6. Rapid movement from bore to start position

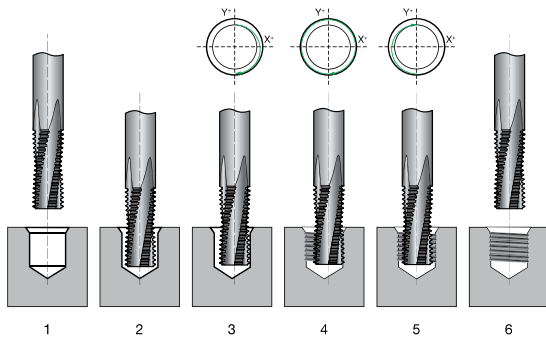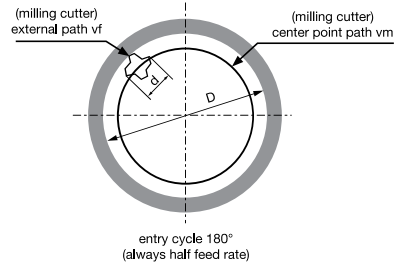

Formula of calculation

$$v_c = \frac{d \cdot \pi \cdot n}{1000}$$

$$n = \frac{v_c \cdot 1000}{d \cdot \pi}$$

$$v_f = n \cdot z \cdot f_z$$


$$v_m = v_f \cdot \frac{(D - d)}{D}$$

$$v_b = n \cdot f_b$$

v_c = cutting speed
 v_f = contour feed
 v_m = centre point path feed
 n = revolutions
 z = number of teeth
 f_z = feed per tooth
 f_b = feed per drill per revolution* v_b = drill feed rate*
 D = Ø nom. of thread [mm]
 d = milling cutter nom. Ø [mm]
 * for drill/thread milling

Thread milling programming

Programming process for micro-thread milling (right-hand thread in reverse rotation)

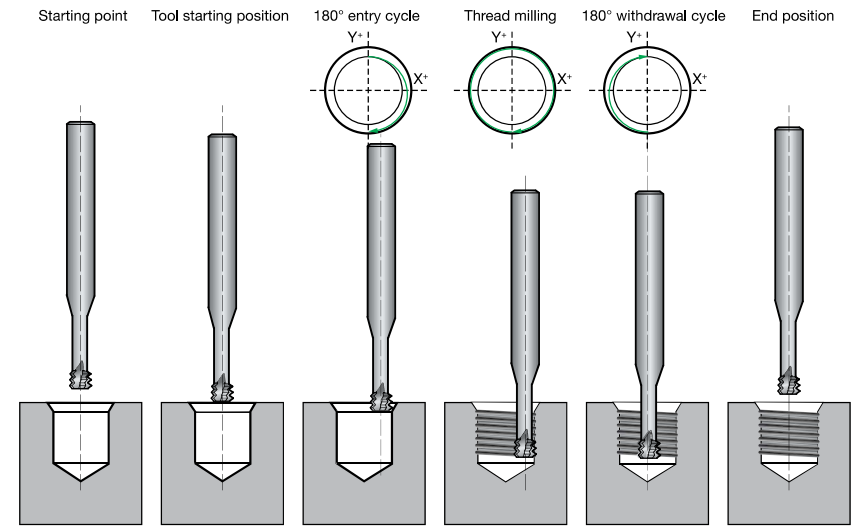

Possibilities to reduce radial forces

To reduce radial forces cut distribution can be undertaken:


Advantage:

- for larger thread depths
- counteracts taper threads
- for unstable clamping conditions



Disadvantage:

- increased tool wear
- longer production time

Axial distribution of cut



Radial distribution of cut



Selecting the correct clamping chuck

Correct tool clamping also plays an essential role with thread milling. Thread milling cutters should as a rule be clamped as short as possible. A compact and mechanical clamping force is preferable. The error in concentricity should not exceed 0.02 millimeters.

Power chucks



A power chuck excels thanks to extremely accurate concentricity. The high clamping forces and optimal smooth running are a perfect prerequisite for the production of threads in all materials including a high pitch.

max. permissible error in concentricity: 0.003 mm

Side lock holders



A side lock holder for HB and HE shanks is a robust, cost-efficient clamping chuck with a maximum clamping force. The clamping surface prevents the tool twisting or being pulled out during machining. Therefore, side lock holders are suitable for the production in all materials including a high pitch.

max. permissible error in concentricity: 0.002 mm

Shrink fit chucks



A shrink fit chuck creates a rigid connection with the shrink fitted tool. Incorrect shrink fitting or older shrink fit chucks can result in the pulling out of the tool. Tool breakage and possible loss of the component would be the consequence. Therefore, the shrink fit chuck is only suitable for a thread pitch $< P=1.5$ mm.

max. permissible error in concentricity: 0.005 mm

Hydraulic chucks



A hydraulic chuck, similar to the shrink fit chuck, has only limited suitability for thread milling. Especially with high radial forces this clamping chuck reaches its limits. Therefore, the hydraulic chuck is recommended for softer materials such as aluminum and a thread pitch $< P=1.5$ mm.

max. permissible error in concentricity: 0.005 mm

Collet holders



Collet chucks are very well suited for micro-thread milling because only axial stresses are created. The low clamping forces only permit the milling of softer materials. Consequently, collet holders are not suitable for conventional thread milling.

max. permissible error in concentricity: 0.01 mm

Practical application of thread milling cutters

1.) Tool clamping:

good concentricity is important, therefore clamping as short and rigid as possible

2.) Enter tool data in machine memory

- 1.) Tool length from the front face, take drill/thread milling cutters (DTMC) from point.
- 2.) Measure tool radius with tool pre-setting equipment. General rule: measured radius - 0.022 x pitch provides the input value in machine memory.

3.) Input of CNC program in control

- (preferably integrated as sub-program at corresponding positions)
- a.) Call-up of a self-controlling cycle (procedures should be known)
 - b.) Integration of data file from our threadmill-software (DIN or Haidenhain).

4.) Trial run over workpiece

- a) Tool length dimension in memory extending by an approximate value dependent on contact length (i.e. 30 mm) or offset zero point.
- b) Run program in single set, visual check of travel path.
- c) Allow program to run in automatic mode.

Attention:

With controls where it is not definitely clear what milling path is assigned it must be clarified if the feed is positioned on the external path v_f or at the center path v_m . As a rule we specify the milling center point path v_m .

5.) Application in workpiece

Re-set the tool extension or the zero point. Then allow the program to run in the workpiece the feed regulation must be 100% selected. Should the thread not be true to gauge, the tool radius requires correction in the tool memory:

Example:

- thread too tight: Radius correction - input
- thread too large: Radius correction + input





| | Material group | Examples |
|----------|--|--|
| P | Common structural steels | A283, A516, Gr50, 30, 35, 42, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 100, 110, 135, 140, 145, 150, 160 |
| | Free-cutting steels | 1151, 1215, L10, 10L10, 10L15, 10L17, 10L20, 10L23, 10L25, 10L30, 10L35, 10L40, 10L42, 10L45, 10L49, 10L50, 10L55, 11L15, 11L16, 11L17, 11L37, 11L38, 11L39, 11L41, 11L44, 11L46, 12L11, 12L12, 12L13, 12L14, 12L15, 41L25, 41L30, 41L35, 41L40, 41L42, 41L47, 41L50 51L15, 51L17, 51L20, 86L20, 86L40 |
| | Unalloyed heat-treatable steels | 1005, 1006, 1008, 1009, 1010, 1011, 1012, 1013, 1015, 1016, 1017, 1018, 1019, 1020, 1021, 1022, 1023, 1025, 1026, 1029, 1030, 1033, 1035, 1037, 1038, 1039, 1040, 1042, 1043, 1044, 1045, 1046, 1049, 1050, 1053, 1055, 1059, 1060, 1064, 1065, 1069, 1070, 1071, 1074, 1075, 1078, 1080, 1084, 1085, 1086, 1090, 1095 |
| | Alloyed heat-treatable steels | 1330, 1335, 1340, 1345, 2340, 3140, 3145, 3150, 3230, 3240, 3335, 3340, 3435, 3450, 4032, 4037, 4063, 4130, 4135, 4137, 4140, 4142, 4145, 4147, 4150, 4161, 4337, 4340, 4640, 5045, 5046, 5060, 5130, 5132, 5135, 5140, 5145, 5157, 5150, 5155, 5160, 6130, 6135, 6140, 6145, 6150, 7140, 6145, 6150, 7140, 8630, 8632, 8635, 8637, 8640, 8642, 8645, 8650, 8650, 8660, 8735, 8740, 8742, 9250, 9254, 9255, 9260, 9262, 9840, 9850 |
| | Unalloyed case hardened steels | 1005, 1006, 1008, 1009, 1010, 1011, 1012, 1013, 1015, 1016, 1017, 1018, 1019, 1020, 1021, 1022, 1023, 1025, 1026, 1029, 1030, 1033, 1035, 1037, 1038, 1039, 1040, 1042, 1043, 1044, 1045, 1046, 1049, 1050, 1053, 1055, 1059, 1060, 1064, 1065, 1069, 1070, 1071, 1074, 1075, 1078, 1080, 1084, 1085, 1086, 1090, 1095 |
| | Alloyed case hardened steels | 2317, 2512, 2515, 2517, 3115, 3120, 3215, 3220, 3312, 3316, 3325, 4012, 4023, 4024, 4027, 4028, 4119, 4119, 4125, 4217, 4320, 4419, 4422, 4427, 4608, 4615, 4617, 4620, 4621, 4626, 4718, 4720, 4815, 4817, 4820, 5015, 5115, 5117, 5120, 6115, 6118, 6120, 6125, 8115, 8615, 8617, 8620, 8622, 8625, 8627, 8720, 8822, 9310, 9315, 9317 |
| | Nitriding steels | 1132, 1137, 1138, 1139, 1140, 1141, 1144, 1145, 1146, 1151 |
| | Tool steels | A2, A3, A4, A5, A6, A8, A9, A10, O1, O2, O6, O7, A7, D2, D3, D4, D5, D7, H10, H11, H12, H13, H14, H19, H20, H21, H22, H23, H24, H25, H26, H41, H42, H43, L1, L3, W1, W2, W5 |
| | High speed steels | M1, M2, M3-1, M3-2, M4, M6, M7, M10, M30, M33, M34, M36, M41, M42, M43, M44, M46, M47, T1, T2, T4, T5, T6, T8, T15 |
| | Spring steels | 5150, 5155, 6145, 6150, 9255 |
| H | Hardened steels >48-60 Rc | Heat Treated Steels |
| M | Stainless steels, sulphured | 203 Ez, 303 Se, 303 Ma, 303 Pb, 303 PlusX, 430F Se, 416 Se, 416 PlusX, 420F, 420F Se, 440F, 440F Se |
| | austenitic | 201, 202, 301, 302B, 303, 304, 304L, 305, 308, 309, 309S, 310, 310S, 314, 316, 316L, 317, 321, 330, 347, 348, 384, 385, Nitronic 32, Nitronic 33, Nitronic 40, Nitronic 50, Nitronic 60, 17-7PH |
| | martensitic | 403, 405, 410, 414, 416, 420, 422, 430, 431, 440A, 440B, 440C, 446, 501, 502, 630, Greek Ascology |
| K | Cast iron | A48-20 B, A48-30 B, A48-40 B, A48-50B, A159G1800, A159G2500, A159G3000, A159G3500, A159G4000 |
| | Spheroidal graphite iron and malleable cast iron | 60-10-18, 60-40-18, 65-45-12, 80-55-06, 100-70-03, 120-90-02, 32510, 35018, 40010, 50005, 60004, 70003, 80002, 90001, A220-70003, A220-8002, A536 |
| | Chilled cast iron | |
| S | Special alloys | Inconel, Hastelloy, Monel, Nimonic, MAR-M246, DS-Ni, Waspalloy, Rene41 |
| | Ti and Ti-alloys | Ti6AL4V, 5390A, TiCu2 |
| N | Aluminium and Al-alloys | EC 1060, 1100, 1145, 1175, 1235, 2011, 2014, 2017, 2018, 2021, 2024, 2025, 2117, 2218, 2219, 2618, 3003, 3004, 3005, 4032, 4032-T6, 5005, 5050, 5052, 5056, 5083, 5086, 5154, 5252, 5254, 5454, 5456, 5457, 5652, 5657, 6053, 6061, 6061-T6, 6063, 6066, 6070, 6101, 6151, 6253, 6262, 6463, 6951, 7001, 7004, 7005, 7039, 7049, 7050, 7075, 7075-T6, 7079, 7175, 7178 |
| | Al wrought alloys | 1100-0, 3003-H18, 5056-0, 2024-T4, 4043-H18 |
| | Al cast alloys | 295-T6, 319-F, 356-T6, 380-F, 384-F, 390-F, 443-F, 413-F, 518-F, 713-TS, 850-TS |
| | Magnesium alloys | AZ31B, AZ63A, AZ80A, AZ91C, EZ33A, HK31A, QE22A, ZK60A |
| | Copper, low-alloyed | C10100, C27000, C71500, C52400, C77000, C17200, C71500, C95500, C86500 |
| | Brass, short-chipping | CUZn10, CUZn20 |