


CAT taper hydraulic chucks

Product information

- balancing quality: G2.5 / 25,000 rev./min or U< 1gmm
- Taper according to ANSI/ASME B 5.50
- Coolant through center and also through flange (plugged with set screws when supplied)
- Axial length setting
- CAT 40 - 5/8 x 11 retention knob thread
- CAT 50 - 1" x 8 retention knob thread

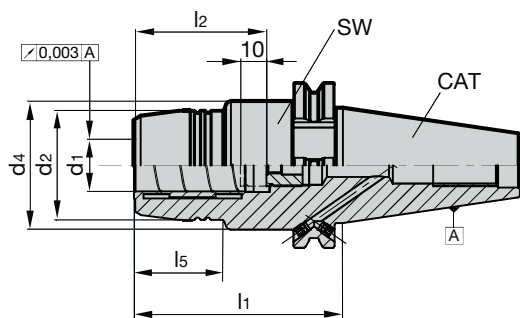

Scope of delivery

- Including setting screw, Guhring no. 4900
- Including hex wrench, Guhring no. 4912
- Special dimensions on request



Series no.

4216


CAT	for clamping dia. d1 in h6 inch	d2 mm	d4 mm	l1 mm	l2 mm	l5 mm	SW	incl. setting screw 4900 ...	Code no.	EDP Number
40	1/4	26	44.5	64	37	29.5	5	9049000060140	106.040	9042161060400
40	3/8	30	44.5	64	41	31	5	9049000080140	109.040	9042161090400
40	1/2	32	44.5	64	46	31.5	5	9049000120140	112.040	9042161120400
40	5/8	38	44.5	64	49	33	5	9049000160140	115.040	9042161150400
40	3/4	40	44.5	64	49	33	5	9049000160140	119.040	9042161190400
40	1	49.5	44.5	81	57	40	6	9049000201140	125.040	9042161250400
40	1 1/4	63	80	81	61	25.5	6	9049000201140	131.040	9042161310400
50	1/4	26	69.9	81	37	29.5	5	9049000060140	106.050	9042161060500
50	3/8	30	69.9	81	41	31	5	9049000080140	109.050	9042161090500
50	1/2	32	69.9	81	46	31.5	5	9049000120140	112.050	9042161120500
50	5/8	38	69.9	81	49	33	5	9049000160140	115.050	9042161150500
50	3/4	40	69.9	81	49	33	5	9049000201140	119.050	9042161190500
50	1	57	69.9	81	57	40	6	9049000201140	125.050	9042161250500
50	1 1/4	63	69.9	81	61	45	6	9049000201140	131.050	9042161310500
40	6	26	44.5	64	37	29.5	5	9049000060140	6.040	9042160060400
40	8	28	44.5	64	37	30	5	9049000080140	8.040	9042160080400
40	10	30	44.5	64	41	31	5	9049000100140	10.040	9042160100400
40	12	32	44.5	64	46	31.5	5	9049000120140	12.040	9042160120400
40	14	34	44.5	64	46	31.5	5	9049000120140	14.040	9042160140400
40	16	38	44.5	64	49	33	5	9049000160140	16.040	9042160160400
40	18	40	44.5	64	49	33	5	9049000160140	18.040	9042160180400
40	20	42	44.5	64	51	34	5	9049000201140	20.040	9042160200400
40	25	49.5	44.5	81	57	40	6	9049000201140	25.040	9042160250400
40	32	63	80	81	61	25.5	6	9049000201140	32.040	9042160320400
50	6	26	69.9	81	37	29.5	5	9049000060140	6.050	9042160060500
50	8	28	69.9	81	37	30	5	9049000080140	8.050	9042160080500
50	10	30	69.9	81	41	31	5	9049000100140	10.050	9042160100500
50	12	32	69.9	81	46	31.5	5	9049000120140	12.050	9042160120500
50	14	34	69.9	81	46	31.5	5	9049000120140	14.050	9042160140500
50	16	38	69.9	81	49	33	5	9049000160140	16.050	9042160160500
50	18	40	69.9	81	49	33	5	9049000160140	18.050	9042160180500
50	20	42	69.9	81	51	34	5	9049000201140	20.050	9042160200500
50	25	57	69.9	81	57	40	6	9049000201140	25.050	9042160250500
50	32	63	69.9	81	61	45	6	9049000201140	32.050	9042160320500

Product information

- for clamping smaller shank-Ø in hydraulic chucks
- clamping-Ø for tool shank tolerance h6
- concentricity $\leq 2 \mu\text{m}$
- with adjustable limit stop
- the application of reduction sleeves makes it possible to increase the permissible transferable torque by approx. 25% in comparison to direct clamping

Scope of delivery

- incl. stop element

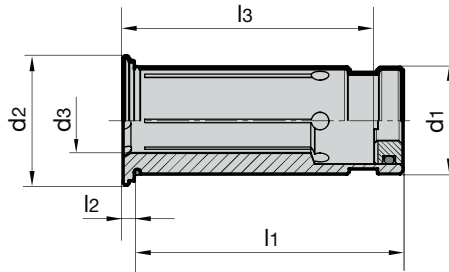

Series no. 4368

d1 inch/mm	for shank Ø d3 h6 inch/mm	d2 mm	l1 mm	l2 mm	l3 mm	Code no.	EDP Number
1/2	1/8	16.5	45	2	26.5	3.013	9043680030130
1/2	3/16	16.5	45	2	26.5	4.013	9043680040130
1/2	1/4	16.5	45	2	26.5	6.013	9043680060130
1/2	5/16	16.5	45	2	26.5	8.013	9043680080130
1/2	3/8	16.5	45	2	26.5	9.013	9043680090130
1/2	3	16.5	45	2	26.5	103.013	9043681030130
1/2	4	16.5	45	2	26.5	104.013	9043681040130
1/2	5	16.5	45	2	26.5	105.013	9043681050130
1/2	6	16.5	45	2	26.5	106.013	9043681060130
1/2	8	16.5	45	2	34.5	108.013	9043681080130
3/4	1/8	24	50.5	2	28.5	3.019	9043680030190
3/4	3/16	24	50.5	2	28.5	4.019	9043680040190
3/4	1/4	24	50.5	2	37.5	6.019	9043680060190
3/4	5/16	24	50.5	2	37.5	8.019	9043680080190
3/4	3/8	24	50.5	2	42.5	9.019	9043680090190
3/4	7/16	24	50.5	2	47.5	11.019	9043680110190
3/4	1/2	24	50.5	2	47.5	13.019	9043680130190
3/4	9/16	24	50.5	2	47.5	14.019	9043680140190
3/4	5/8	24	50.5	2	47.5	15.019	9043680150190
3/4	3	24	50.5	2	28.5	103.019	9043681030190
3/4	4	24	50.5	2	28.5	104.019	9043681040190
3/4	5	24	50.5	2	28.5	105.019	9043681050190
3/4	6	24	50.5	2	37.5	106.019	9043681060190
3/4	8	24	50.5	2	37.5	108.019	9043681080190
3/4	10	24	50.5	2	42.5	110.019	9043681100190
3/4	12	24	50.5	2	47.5	112.019	9043681120190
3/4	14	24	50.5	2	47.5	114.019	9043681140190
1 1/4	1/4	35.5	60.5	2	37.5	6.031	9043680060310
1 1/4	5/16	35.5	60.5	2	37.5	8.031	9043680080310
1 1/4	3/8	35.5	60.5	2	37.5	9.031	9043680090310
1 1/4	7/16	35.5	60.5	2	40.5	11.031	9043680110310
1 1/4	1/2	35.5	60.5	2	44.5	13.031	9043680130310
1 1/4	9/16	35.5	60.5	2	44.5	14.031	9043680140310
1 1/4	5/8	35.5	60.5	2	50.5	15.031	9043680150310
1 1/4	11/16	35.5	60.5	2	50.5	17.031	9043680170310
1 1/4	3/4	35.5	60.5	2	50.5	19.031	9043680190310
1 1/4	13/16	35.5	60.5	2	50.5	20.031	9043680200310
1 1/4	7/8	35.5	60.5	2	50.5	22.031	9043680220310
1 1/4	15/16	35.5	60.5	2	58.5	24.031	9043680240310
1 1/4	1	35.5	60.5	2	58.5	25.031	9043680250310
1 1/4	8	35.5	60.5	2	37.5	108.031	9043681080310
1 1/4	10	35.5	60.5	2	40.5	110.031	9043681100310
1 1/4	12	35.5	60.5	2	44.5	112.031	9043681120310
1 1/4	14	35.5	60.5	2	44.5	114.031	9043681140310
1 1/4	16	35.5	60.5	2	50.5	116.031	9043681160310
1 1/4	18	35.5	60.5	2	50.5	118.031	9043681180310

Reduction sleeves for hydraulic chucks, sealed

Series no. 4368


d ₁ inch/mm	for shank Ø d ₃ h ₆ inch/mm	d ₂ mm	l ₁ mm	l ₂ mm	l ₃ mm	Code no.	EDP Number
1 1/4	20	35.5	60.5	2	50.5	120.031	9043681200310
1 1/4	25	35.5	60.5	2	58.5	125.031	9043681250310
12	1/8	16.5	45	2	26.5	103.012	9043681030120
12	3/16	16.5	45	2	26.5	104.012	9043681040120
12	1/4	16.5	45	2	34.5	106.012	9043681060120
12	5/16	16.5	45	2	34.5	108.012	9043681080120
12	3/8	16.5	45	2	34.5	109.012	9043681090120
12	3	16.5	45	2	26.5	3.012	9043680030120
12	4	16.5	45	2	26.5	4.012	9043680040120
12	5	16.5	45	2	26.5	5.012	9043680050120
12	6	16.5	45	2	34.5	6.012	9043680060120
12	8	16.5	45	2	34.5	8.012	9043680080120
20	1/8	24	50.5	2	28.5	103.020	9043681030200
20	3/16	24	50.5	2	28.5	104.020	9043681040200
20	1/4	24	50.5	2	37.5	106.020	9043681060200
20	5/16	24	50.5	2	37.5	108.020	9043681080200
20	3/8	24	50.5	2	42.5	109.020	9043681090200
20	7/16	24	50.5	2	42.5	111.020	9043681110200
20	1/2	24	50.5	2	47.5	113.020	9043681130200
20	9/16	24	50.5	2	47.5	114.020	9043681140200
20	5/8	24	50.5	2	47.5	115.020	9043681150200
20	3	24	50.5	2	28.5	3.020	9043680030200
20	4	24	50.5	2	28.5	4.020	9043680040200
20	5	24	50.5	2	28.5	5.020	9043680050200
20	6	24	50.5	2	37.5	6.020	9043680060200
20	7	24	50.5	2	37.5	7.020	9043680070200
20	8	24	50.5	2	37.5	8.020	9043680080200
20	9	24	50.5	2	42.5	9.020	9043680090200
20	10	24	50.5	2	42.5	10.020	9043680100200
20	11	24	50.5	2	42.5	11.020	9043680110200
20	12	24	50.5	2	47.5	12.020	9043680120200
20	13	24	50.5	2	47.5	13.020	9043680130200
20	14	24	50.5	2	47.5	14.020	9043680140200
20	15	24	50.5	2	47.5	15.020	9043680150200
20	16	24	50.5	2	47.5	16.020	9043680160200
32	1/4	35.5	60.5	2	37.5	106.032	9043681060320
32	5/16	35.5	60.5	2	37.5	108.032	9043681080320
32	3/8	35.5	60.5	2	37.5	109.032	9043681090320
32	7/16	35.5	60.5	2	40.5	111.032	9043681110320
32	1/2	35.5	60.5	2	44.5	113.032	9043681130320
32	9/16	35.5	60.5	2	50.5	114.032	9043681140320
32	5/8	35.5	60.5	2	50.5	115.032	9043681150320
32	11/16	35.5	60.5	2	50.5	117.032	9043681170320
32	3/4	35.5	60.5	2	50.5	119.032	9043681190320
32	13/16	35.5	60.5	2	50.5	120.032	9043681200320
32	7/8	35.5	60.5	2	50.5	122.032	9043681220320
32	15/16	35.5	60.5	2	50.5	124.032	9043681240320
32	1	35.5	60.5	2	58.5	125.032	9043681250320
32	6	35.5	60.5	2	37.5	6.032	9043680060320
32	8	35.5	60.5	2	37.5	8.032	9043680080320
32	10	35.5	60.5	2	40.5	10.032	9043680100320
32	12	35.5	60.5	2	44.5	12.032	9043680120320
32	14	35.5	60.5	2	44.5	14.032	9043680140320
32	16	35.5	60.5	2	50.5	16.032	9043680160320
32	18	35.5	60.5	2	50.5	18.032	9043680180320
32	20	35.5	60.5	2	50.5	20.032	9043680200320
32	25	35.5	60.5	2	58.5	25.032	9043680250320

Product information

- for clamping smaller shank-Ø in hydraulic chucks
- clamping-Ø for tool shank tolerance h6
- with coolant slots for peripheral cooling, therefore process and tool life improvement
- concentricity $\leq 2 \mu\text{m}$
- with adjustable limit stop
- the application of reduction sleeves makes it possible to increase the permissible transferable torque by approx. 25% in comparison to direct clamping

Scope of delivery

- incl. stop element

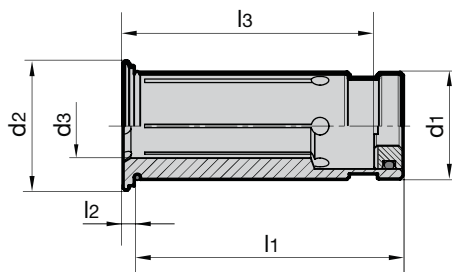

Series no. 4369

d ₁ inch/mm	for shank Ø d ₃ h6 inch/mm	d ₂ mm	l ₁ mm	l ₂ mm	l ₃ mm	Code no.	EDP Number
1/2	1/8	16.5	45	2	26.5	3.013	9043690030130
1/2	3/16	16.5	45	2	26.5	4.013	9043690040130
1/2	1/4	16.5	45	2	26.5	6.013	9043690060130
1/2	5/16	16.5	45	2	26.5	8.013	9043690080130
1/2	3/8	16.5	45	2	26.5	9.013	9043690090130
1/2	5	16.5	45	2	26.5	105.013	9043691050130
1/2	6	16.5	45	2	26.5	106.013	9043691060130
3/4	1/8	24	50.5	2	28.5	3.019	9043690030190
3/4	3/16	24	50.5	2	28.5	4.019	9043690040190
3/4	1/4	24	50.5	2	37.5	6.019	9043690060190
3/4	5/16	24	50.5	2	37.5	8.019	9043690080190
3/4	3/8	24	50.5	2	42.5	9.019	9043690090190
3/4	7/16	24	50.5	2	42.5	11.019	9043690110190
3/4	1/2	24	50.5	2	47.5	13.019	9043690130190
3/4	9/16	24	50.5	2	47.5	14.019	9043690140190
3/4	5/8	24	50.5	2	47.5	15.019	9043690150190
3/4	3	24	50.5	2	28.5	103.019	9043691030190
3/4	4	24	50.5	2	28.5	104.019	9043691040190
3/4	6	24	50.5	2	37.5	106.019	9043691060190
3/4	8	24	50.5	2	37.5	108.019	9043691080190
3/4	10	24	50.5	2	42.5	110.019	9043691100190
3/4	12	24	50.5	2	47.5	112.019	9043691120190
3/4	14	24	50.5	2	47.5	114.019	9043691140190
1 1/4	1/4	35.5	60.5	2	37.5	6.031	9043690060310
1 1/4	5/16	35.5	60.5	2	37.5	8.031	9043690080310
1 1/4	3/8	35.5	60.5	2	37.5	9.031	9043690090310
1 1/4	1/2	35.5	60.5	2	44.5	13.031	9043690130310
1 1/4	9/16	35.5	60.5	2	44.5	14.031	9043690140310
1 1/4	5/8	35.5	60.5	2	50.5	15.031	9043690150310
1 1/4	11/16	35.5	60.5	2	50.5	17.031	9043690170310
1 1/4	3/4	35.5	60.5	2	50.5	19.031	9043690190310
1 1/4	7/8	35.5	60.5	2	50.5	22.031	9043690220310
1 1/4	1	35.5	60.5	2	58.5	25.031	9043690250310
1 1/4	20	35.5	60.5	2	50.5	120.031	9043691200310
1 1/4	25	35.5	60.5	2	58.5	125.031	9043691250310
12	1/8	16.5	45	2	26.5	103.012	9043691030120
12	3/16	16.5	45	2	26.5	104.012	9043691040120
12	1/4	16.5	45	2	34.5	106.012	9043691060120
12	5/16	16.5	45	2	34.5	108.012	9043691080120
12	3/8	16.5	45	2	34.5	109.012	9043691090120
12	3	16.5	45	2	26.5	3.012	9043690030120
12	4	16.5	45	2	26.5	4.012	9043690040120
12	5	16.5	45	2	26.5	5.012	9043690050120
12	6	16.5	45	2	34.5	6.012	9043690060120
12	8	16.5	45	2	34.5	8.012	9043690080120

Series no.

4369

d ₁ inch/mm	for shank Ø d ₃ h ₆ inch/mm	d ₂ mm	l ₁ mm	l ₂ mm	l ₃ mm	Code no.	EDP Number
20	1/8	24	50.5	2	28.5	103.020	9043691030200
20	3/16	24	50.5	2	28.5	104.020	9043691040200
20	1/4	24	50.5	2	37.5	106.020	9043691060200
20	5/16	24	50.5	2	37.5	108.020	9043691080200
20	3/8	24	50.5	2	42.5	109.020	9043691090200
20	7/16	24	50.5	2	42.5	111.020	9043691110200
20	1/2	24	50.5	2	47.5	113.020	9043691130200
20	9/16	24	50.5	2	47.5	114.020	9043691140200
20	5/8	24	50.5	2	47.5	115.020	9043691150200
20	3	24	50.5	2	28.5	3.020	9043690030200
20	4	24	50.5	2	28.5	4.020	9043690040200
20	5	24	50.5	2	28.5	5.020	9043690050200
20	6	24	50.5	2	37.5	6.020	9043690060200
20	7	24	50.5	2	37.5	7.020	9043690070200
20	8	24	50.5	2	37.5	8.020	9043690080200
20	9	24	50.5	2	42.5	9.020	9043690090200
20	10	24	50.5	2	42.5	10.020	9043690100200
20	11	24	50.5	2	42.5	11.020	9043690110200
20	12	24	50.5	2	47.5	12.020	9043690120200
20	13	24	50.5	2	47.5	13.020	9043690130200
20	14	24	50.5	2	47.5	14.020	9043690140200
20	15	24	50.5	2	47.5	15.020	9043690150200
20	16	24	50.5	2	47.5	16.020	9043690160200
32	1/2	35.5	60.5	2	44.5	113.032	9043691130320
32	5/8	35.5	60.5	2	50.5	115.032	9043691150320
32	3/4	35.5	60.5	2	50.5	119.032	9043691190320
32	7/8	35.5	60.5	2	50.5	122.032	9043691220320
32	1	35.5	60.5	2	58.5	125.032	9043691250320
32	6	35.5	60.5	2	37.5	6.032	9043690060320
32	8	35.5	60.5	2	37.5	8.032	9043690080320
32	10	35.5	60.5	2	40.5	10.032	9043690100320
32	12	35.5	60.5	2	44.5	12.032	9043690120320
32	14	35.5	60.5	2	44.5	14.032	9043690140320
32	16	35.5	60.5	2	50.5	16.032	9043690160320
32	18	35.5	60.5	2	50.5	18.032	9043690180320
32	20	35.5	60.5	2	50.5	20.032	9043690200320
32	25	35.5	60.5	2	58.5	25.032	9043690250320

Product information

- for Series no. 4368 and 4369
- for the simple removal of reduction bushes



Series no.		4099
for reduction bushes d ₁		EDP Number
12 to 32		9040990010000

Senso 3000

Product information

- accurate, quick and simple measuring of the clamping force of hydraulic chucks
- mobility allows measuring within machines and fixtures
- determines clamping force via a pressure sensitive plug gauge
- display of absolute measuring value or percentage clamping force in relation to reference value

Scope of delivery

- incl. type CR 2430 battery
- incl. sturdy case
- Inch dimensions upon request



Series no.		4038
clamping diameter mm	kg	EDP Number
6.0	1.1	9040380060000
8.0	1.1	9040380080000
10.0	1.3	9040380100000
12.0	1.3	9040380120000
14.0	1.3	9040380140000
16.0	1.3	9040380160000
18.0	1.5	9040380180000
20.0	1.5	9040380200000
25.0	2.0	9040380250000
32.0	2.5	9040380320000

Operating instructions for Hydraulic chucks

TECHNICAL INFORMATION AND ADVANTAGES

Clamping standard tool shanks to DIN 6535 in hydraulic chucks

Direct clamping
of tool preferred
run-out ≤ 0.003 mm

Form HA Ø 6 ... 20 mm



Form HA Ø 25 ... 32 mm




Form HB Ø 6 ... 20 mm




Clamping of tool shank
only with reduction bushes
run-out ≤ 0.005 mm

Form HB Ø 25 ... 32 mm



Form HE Ø 6 ... 20 mm



Form HE Ø 25 ... 32 mm



General notes:


Our hydraulic chucks must not be operated with motor-driven tools (impulse screwdrivers or similar). The hexagonal key should not exceed the key size over its entire length, this largely prevents excessive torque being transferred. We recommend the hexagon clamping key, Series no. 4912. A tightening moment of 10 Nm must not be exceeded.

Gühring Hydraulic chucks with increased clamping force

Hydraulic chucks are suitable for clamping rotary symmetrical tools or workpieces. Straight shank tools without drive flats may be clamped up to Ø 32 mm, but also shanks according to DIN 6535 form HA and HB up to Ø 20 mm without reduction sleeves. The given values in the table below are not to be exceeded. If the inserted length is less than the given minimum insertion depth or other tool shanks than specified above are applied, lower accuracy and breakage may occur!

Above all it is the high revolutions with High-Speed-Cutting operations that puts special demands on the tool holder. The clamping of the tool in a hydraulic chuck is, therefore, especially significant. Gühring has developed a hydraulic chuck that offers reliable and powerful clamping with higher torque figures, guaranteeing excellent tool clamping in the tool holder.

Combined with precise concentricity (max. 3 µm deviation from concentricity), a very fast and simple tool change as well as the vibration cushioning effect of the pressure chamber, the new hydraulic chuck can tackle the most demanding of machining tasks. The result is optimal tool life and excellent surface qualities or dimensional accuracy of the workpiece respectively.


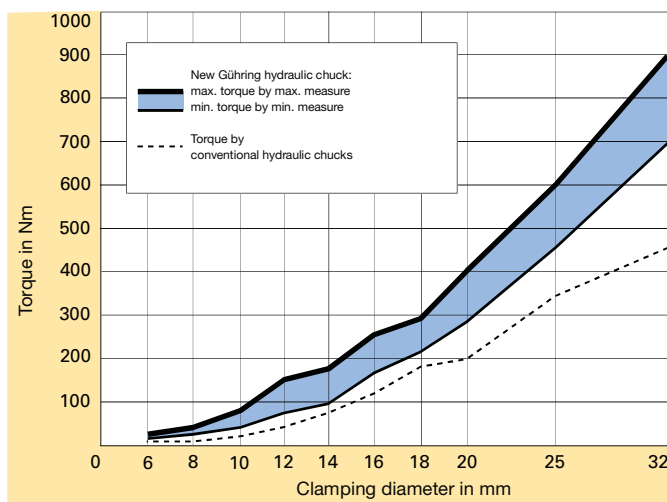


Considerably higher:
The clamping force of Gühring's new HSK-A hydraulic chuck in comparison to conventional chucks.

Modern machining processes place heavy demands on tool holding. Hydraulic chucks provide excellent clamping characteristics combined with precise concentricity. Furthermore, they enable a simple and fast tool change, with the assistance of a special extraction key. Turning the pressure screw generates sufficient pressure in the pressure chamber resulting in an elastic deformation of the clamping bush, providing powerful tool clamping and precise concentricity. A safe and powerful fit is guaranteed. If reduction sleeves are applied that are able to hold varying tool diameters, the tool application may be extended without problem. If such bushes are not applied, it is essential to observe the minimum clamping length!

A summary of the advantages:

- precise tool clamping with a maximum 3 µm deviation from concentricity
- transmission of high torque through (excellent clamping) optimised bush clamping system
- high speed compatibility (no centrifugal forces from clamping segments)
- precise concentricity, therefore excellent surface qualities and dimensional accuracy of the workpiece
- rapid tool change thanks to simple operation of the clamping screw
- optimal tool life
- hydraulic cushioning has vibration absorbing effect

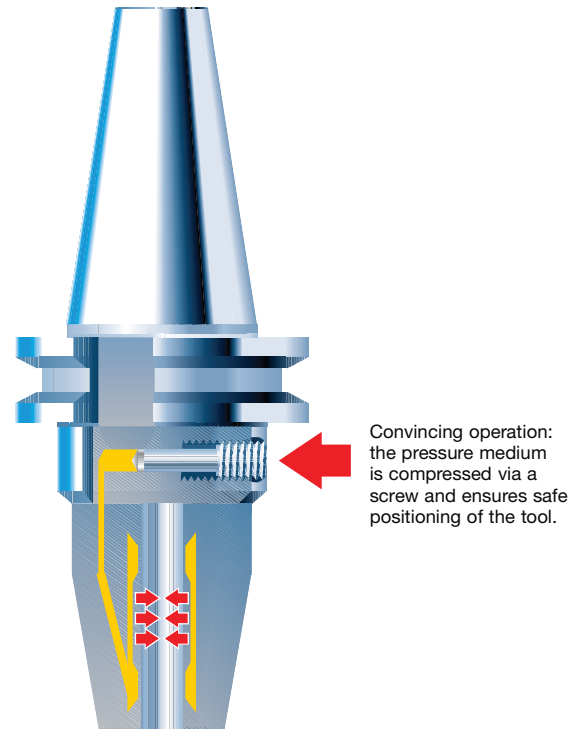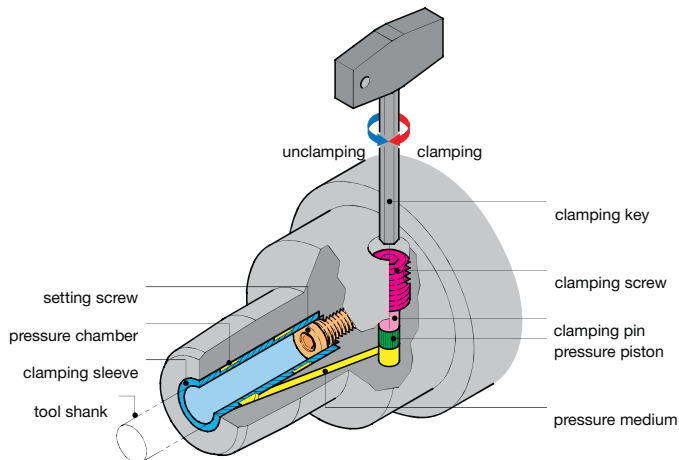

for shank-Ø in mm	max. r.p.m. in 1/min	max. transferable torque in Nm	min. insertion depth in mm	max. adjustment l ₃ mm	max. rad. force F on chuck with 50 mm from the nose in N	operating temperature in °C	max. coolant pressure in bar
3 h6	50 000	2.5	27	7	25	20 - 50	80
4 h6	50 000	6	27	7	40	20 - 50	80
5 h6	50 000	10	27	7	65	20 - 50	80
6 h6	50 000	16	27	10	225	20 - 50	80
8 h6	50 000	26	27	10	370	20 - 50	80
10 h6	50 000	50	31	10	540	20 - 50	80
12 h6	50 000	82	36	10	650	20 - 50	80
14 h6	50 000	125	36	10	900	20 - 50	80
16 h6	50 000	190	39	10	1410	20 - 50	80
18 h6	50 000	275	39	10	1580	20 - 50	80
20 h6	50 000	310	41	10	1860	20 - 50	80
25 h6	25 000	520	47	10	4400	20 - 50	80
32 h6	25 000	770	51	10	6500	20 - 50	80