


ELECTRONIC CALIPER WITH INTERCHANGEABLE POINTS PART NO. 1526-200

2


short spherical points (included)



long spherical/flat points (included)




spherical blade points (included)



- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution .0005"/0.01mm
- Buttons: on/off, set, inch/mm, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: points (part no. 1526-T101, 7392, 7391, 7381, 7321), depth stop (part no. 6143), data output cable (part no. 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A, 7305-A01/A02)




1526-200

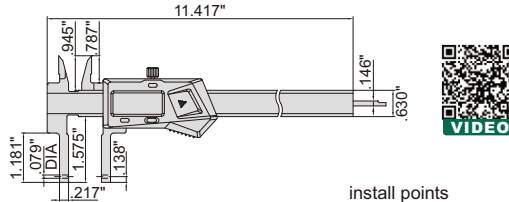


preset buttons



install points



measure internal and external grooves

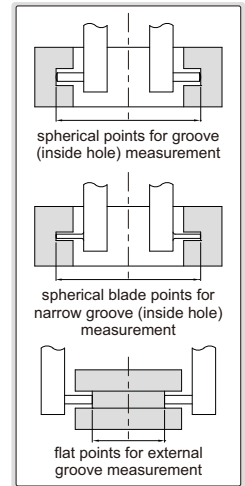


zero setting block for external measurement (included)



Point	Range	Accuracy	Application
short spherical points	.5-8.5"/12-212mm (internal)	±.0012"	for grooves inside small hole
long spherical/flat points	1-8.8"/24-224mm (internal) 0-7.5"/0-187mm (external)	±.0012"	spherical points for grooves inside hole flat points for external grooves
spherical blade points	1-8.8"/24-224mm (internal) 0-7.5"/0-187mm (external)	±.0012"	for narrow grooves inside hole


Depth stop (optional)

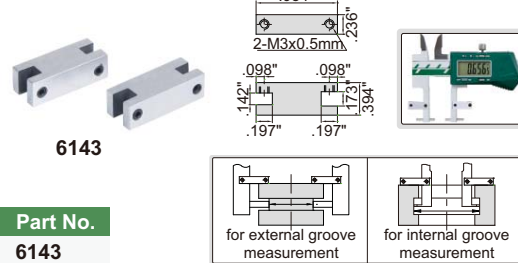

6143

Part No.
6143

Multifunctional points (optional)

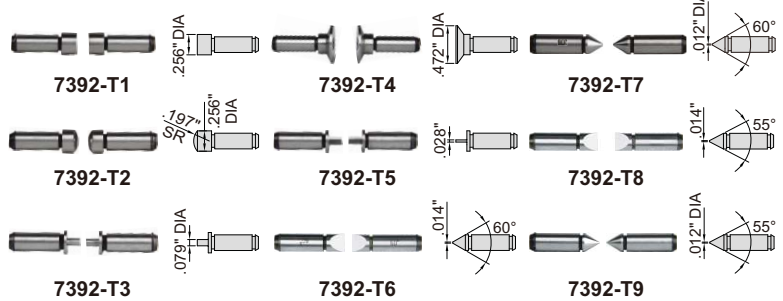

Part No.	Type	Part No.	Type	Part No.	Type
7392-T1*	flat	7392-T4*	disk	7392-T7*	point
7392-T2*	spherical	7392-T5*	blade	7392-T8*	knife-edge
7392-T3*	spline	7392-T6*	knife-edge	7392-T9*	point

* It is necessary to use point sleeve (part no. 1526-T101) for these points

Screw thread points (optional)



Internal thread (60° thread angle)

Part No.	Pitch
7321-T11*	64-48TPI/0.4-0.5mm
7321-T12*	44-28TPI/0.6-0.9mm
7321-T13*	24-14TPI/1-1.75mm
7321-T14*	13-9TPI/2-3mm
7321-T15*	8-5TPI/3.5-5mm
7321-T16*	4.5-3.5TPI/5.5-7mm
7321-T1S*	6 pairs/set, including all above points

External thread (60° thread angle)

Part No.	Pitch
7381-T11*	64-48TPI/0.4-0.5mm
7381-T12*	44-28TPI/0.6-0.9mm
7381-T13*	24-14TPI/1-1.75mm
7381-T14*	13-9TPI/2-3mm
7381-T15*	8-5TPI/3.5-5mm
7381-T16*	4.5-3.5TPI/5.5-7mm
7381-TS*	6 pairs/set, including all above points

Ball points (optional)



7391-T5



Part No.	Ball dia.(D)
7391-T3*	.079" DIA
7391-T4*	.098" DIA
7391-T5*	.118" DIA
7391-T6*	.138" DIA
7391-T7*	.157" DIA
7391-T8*	.177" DIA
7391-T9*	.197" DIA
7391-T10*	.236" DIA

* It is necessary to use point sleeve (part no. 1526-T101) for these points