


PIN GAGE HANDLES

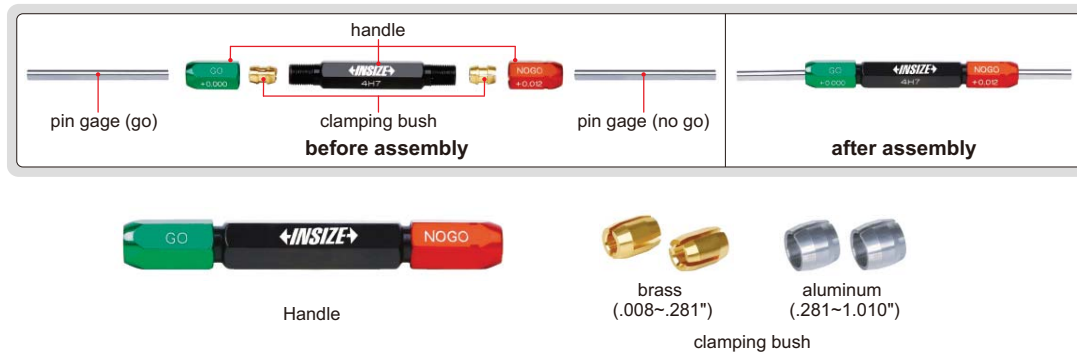

- Wrench is needed to install pins
- Clamping bushes (.008~.281\") are made of brass, clamping bushes (.281~1.010\") are made of aluminum

Part No.	Applicable pin gage diameter	Including	
		Handle	Clamping bush
7341-0S	.008-.040"	1 pc	6 pairs (the clamping range are .008-.015", .015-.020", .020-.025", .025-.030", .030-.035", .035-.040")
7341-1S	.040-.075"	1 pc	7 pairs (the clamping range are .040-.045", .045-.050", .050-.055", .055-.060", .060-.065", .065-.070", .070-.075")
7341-2S	.075-.131"	1 pc	8 pairs (the clamping range are .075-.082", .082-.089", .089-.096", .096-.103", .103-.110", .110-.117", .117-.124", .124-.131")
7341-3S	.131-.180"	1 pc	7 pairs (the clamping range are .131-.138", .138-.145", .145-.152", .152-.159", .159-.166", .166-.173", .173-.180")
7341-4S	.180-.228"	1 pc	6 pairs (the clamping range are .180-.188", .188-.196", .196-.204", .204-.212", .212-.220", .220-.228")
7341-5S	.228-.281"	1 pc	6 pairs (the clamping range are .228-.236", .236-.244", .244-.252", .252-.261", .261-.271", .271-.281")

Part No.	Applicable pin gage diameter	Including	
		Handle	Clamping bush
7341-6S	.281-.341"	1 pc	6 pairs (the clamping range are .281-.291", .291-.301", .301-.311", .311-.321", .321-.331", .331-.341")
7341-7S	.341-.406"	1 pc	6 pairs (the clamping range are .341-.351", .351-.361", .361-.371", .371-.382", .382-.394", .394-.406")
7341-8S	.406-.465"	1 pc	4 pairs (the clamping range are .406-.420", .420-.435", .435-.450", .450-.465")
7341-9S	.465-.510"	1 pc	3 pairs (the clamping range are .465-.480", .480-.495", .495-.510")
7341-10S	.510-.579"	1 pc	4 pairs (the clamping range are .510-.532", .532-.547", .547-.563", .563-.579")
7341-11S	.579-.635"	1 pc	4 pairs (the clamping range are .579-.594", .594-.610", .610-.625", .625-.635")
7341-12S	.635-.704"	1 pc	4 pairs (the clamping range are .635-.656", .656-.672", .672-.688", .688-.704")
7341-13S	.704-.760"	1 pc	4 pairs (the clamping range are .704-.719", .719-.735", .735-.750", .750-.760")
7341-15S	.760-1.010"	1 pc	8 pairs (the clamping range are .760-.781", .781-.812", .812-.843", .843-.875", .875-.907", .907-.937", .937-.968", .968-1.010")

9

Part No.	Size (mm)	Part No.	Size (mm)	Part No.	Size (mm)
4130-2 *	M2x0.4	4130-10 *	M10x1.5	4130-39 *	M39x4
4130-2D2 *	M2.2x0.45	4130-11 *	M11x1.5	4130-42 *	M42x4.5
4130-2D5 *	M2.5x0.45	4130-12 *	M12x1.75	4130-45 *	M45x4.5
4130-3 *	M3x0.5	4130-14 *	M14x2	4130-48 *	M48x5
4130-3D5 *	M3.5x0.6	4130-16 *	M16x2	4130-52 *	M52x5
4130-4 *	M4x0.7	4130-18 *	M18x2.5	4130-56 *	M56x5.5
4130-5 *	M5x0.8	4130-20 *	M20x2.5	4130-60 *	M60x5.5
4130-6 *	M6x1	4130-22 *	M22x2.5	4130-33 *	M33x3.5
4130-7 *	M7x1	4130-24 *	M24x3	4130-36 *	M36x4
4130-8 *	M8x1.25	4130-27 *	M27x3		
4130-9 *	M9x1.25	4130-30 *	M30x3.5		

* Supplied with manufacturer inspection certificate

METRIC THREAD PLUG GAGES

ATTENTION:
BASIC MODEL

INSPECTION
CERTIFICATE



4130-10

- Supplied with Go and No-Go end
- Class 6H
- Standard ISO1502