

YG-1 CO., LTD.

YG-1 USA

730 Corporate Woods Parkway, Vernon Hills, IL 60061 U.S.A.

Phone: +1-800-765-8665

Technical Assistance: +1-888-868-5988

E-mail: info@yg1usa.com

www.yg1usa.com

YG-1 CANADA

3375 North Service Road, Unit A8, Burlington, ON, CANADA, L7N 3G2

Phone: +1-905-335-2500

Fax: +1-905-335-4003

E-mail: orders@yg1.ca

www.yg1.ca

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea

Notice YG-1 Global head office is relocating from December 2020 to a new address as above;

Phone: +82-32-526-0909

E-mail: yg1@yg1.kr

www.yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets

SCAN QR CODE
TO SEE i-ONE DRILLS AT WORK



YG1YUIO201200001

i-ONE DRILLS


**MICRO GRAIN CARBIDE INSERTS
AND PREMIUM TOOL STEEL HOLDERS**

Cost Efficient High Performance
Exchangeable Drilling Tools

FEATURES OF *i*-ONE DRILLS

Micro Grain Carbide Inserts and Premium Tool Steel Holder with Coolant Holes


“COST EFFICIENT HIGH PERFORMANCE EXCHANGEABLE DRILLING TOOLS”

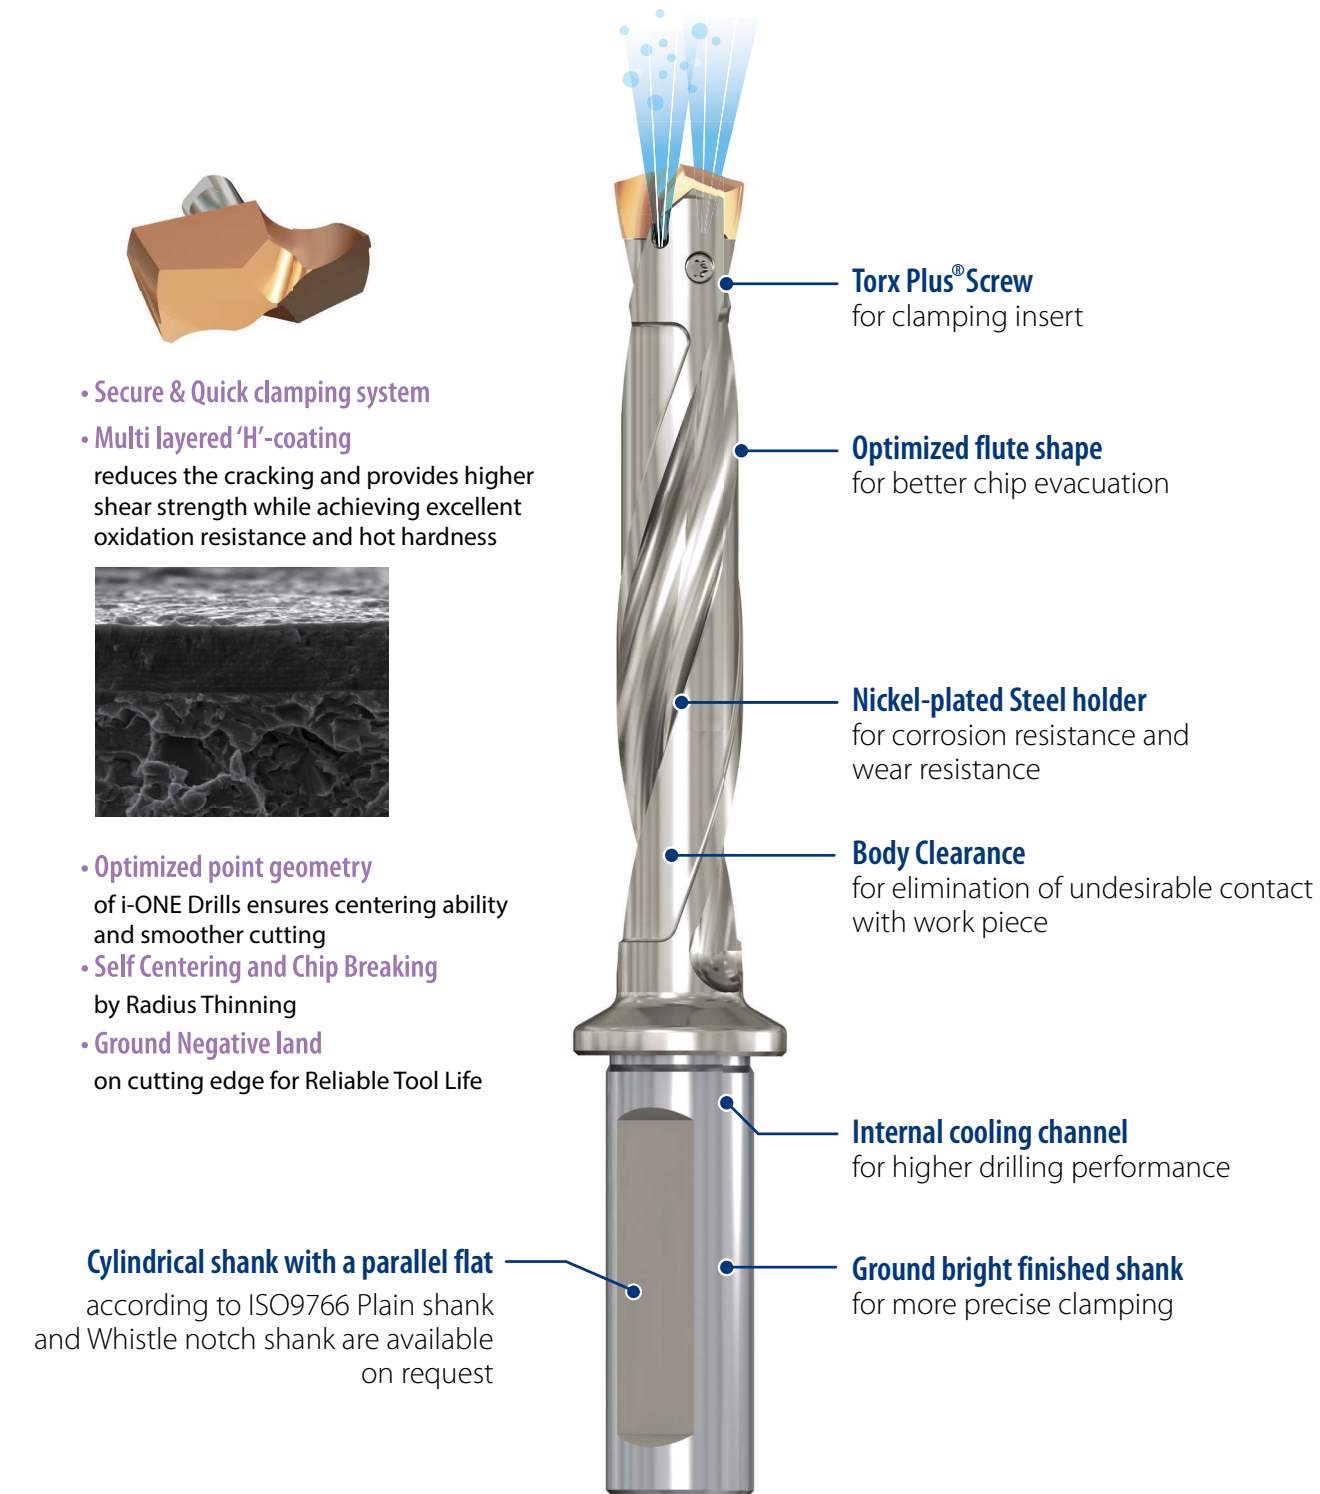

CASE STUDY


► Ø14.0mm, Alloy Steel

Tool	Y141H1400	Competitors
O.D Size (mm)	Ø14.0 (0.5512 inch)	
Work Material	-DIN: 42CrMo4 -AISI: 4140 -JIS: SCM440(HRc30)	
Cutting Speed	80 m/min. (262.5 ft/min.)	
RPM	1,819 rev./min.	
Feed	0.18 mm/rev. (0.0071 in/rev.)	
Drilling Depth	65.0 mm (5XD / Blind)	
Cooling Method	Internal Cooling (35 bar) Water Soluble (9% Emulsion)	
Machine	Machining Center	

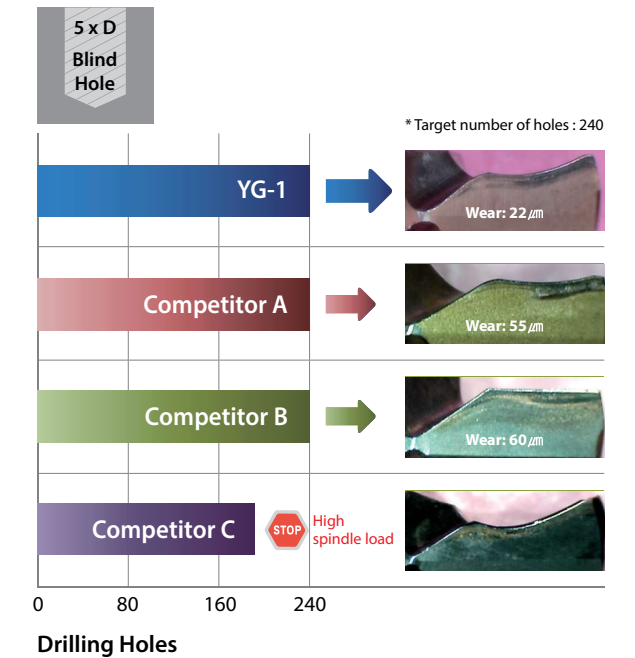

► Ø16.0mm, Pre-Hardened

Tool	YG-1	Competitor A
O.D Size (mm)	Ø16.0 (0.6299 inch)	
Work Material	-DIN: CK45 -AISI: 1045 -JIS: S45C(HRc20)	
Cutting Speed	75 m/min. (246.1 ft/min.)	
RPM	1,493 rev./min.	
Feed	0.3 mm/rev. (0.0118 in/rev.)	
Drilling Depth	35.0 mm (Through)	
Cooling Method	Internal Cooling (10 bar) Water Soluble (9% Emulsion)	
Machine	Machining Center	

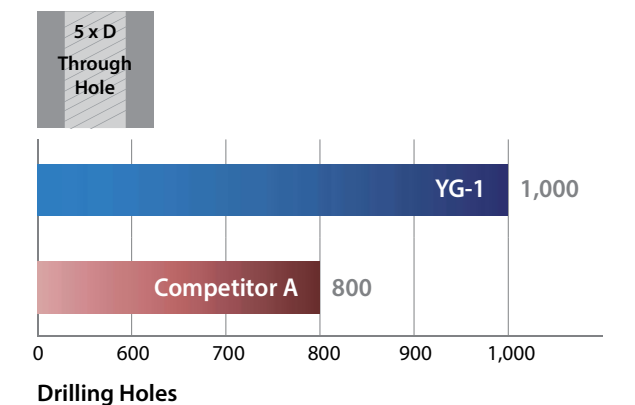

SELECTION GUIDE



i-ONE DRILLS


High Performance Exchangeable Carbide Inserts
for General Steels and Cast Iron

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC				
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎	◎
	3		About 0.45% C	Quenched & tempered	250	25	◎	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C	Quenched & tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel		Annealed	180	10	◎	◎	◎	◎
	7			Quenched & tempered	275	29	◎	◎	◎	◎
	8			Quenched & tempered	300	32	◎	◎	◎	◎
	9			Quenched & tempered	350	38	◎	◎	◎	◎
	10	High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎	◎
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15				
	13		Martensitic	Quenched & Tempered	240	23				
	14		Austenitic		180	10				
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎
	16		Pearlitic (Martensitic)		260	26	◎	◎	◎	◎
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎	◎
	18		Pearlitic		250	25	◎	◎	◎	◎
	19	Malleable cast iron	Ferritic		130		◎	◎	◎	◎
	20		Pearlitic		230	21	◎	◎	◎	◎
N	21	Aluminum-wrought alloy	Not Curable		60					
	22		Curable	Hardened	100					
	23		≤ 12% Si, Not Curable		75					
	24	Aluminum-cast, alloyed	≤ 12% Si, Curable	Hardened	90					
	25		> 12% Si, Not Curable		130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110					
	27		CuZn, CuSnZn (Brass)		90					
	28		CuSn, lead-free copper and electrolytic copper		100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15				
	32			Cured	280	30				
	33			Annealed	250	25				
	34		Ni or Co Based	Cured	350	38				
	35			Cast	320	34				
	36	Titanium Alloys	Pure Titanium		400 Rm					
	37		Alpha + Beta Alloys	Hardened	1050 Rm					
H	38	Hardened steel		Hardened	550	55				
	39			Hardened	630	60				
	40	Chilled Cast Iron		Cast	400	42				
	41	Hardened Cast Iron		Hardened	550	55				


SERIES	Y101H	Y121H	Y141H	Y161H
SIZE MIN	10.00	12.00	14.00	16.00
SIZE MAX	11.91	13.90	15.90	17.90
PAGE	6	7	8	9

H-Coating

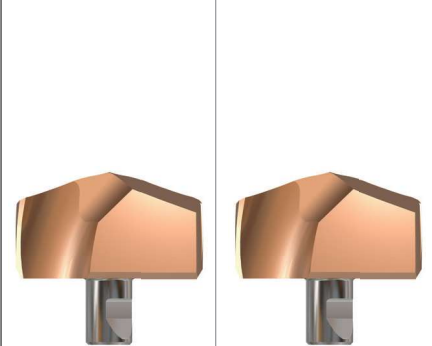

Y181H	Y201H	Y221H	Y241H	Y261H	Y281H	Y301H	Y321H	ZD*3	ZD*5	ZD*8
18.00	20.00	22.00	24.00	26.00	28.00	30.00	32.00			
19.90	21.90	23.90	25.90	27.90	29.90	31.90	33.90			
10	11	12	13	14	15	16	17	3XD	5XD	8XD

H-Coating

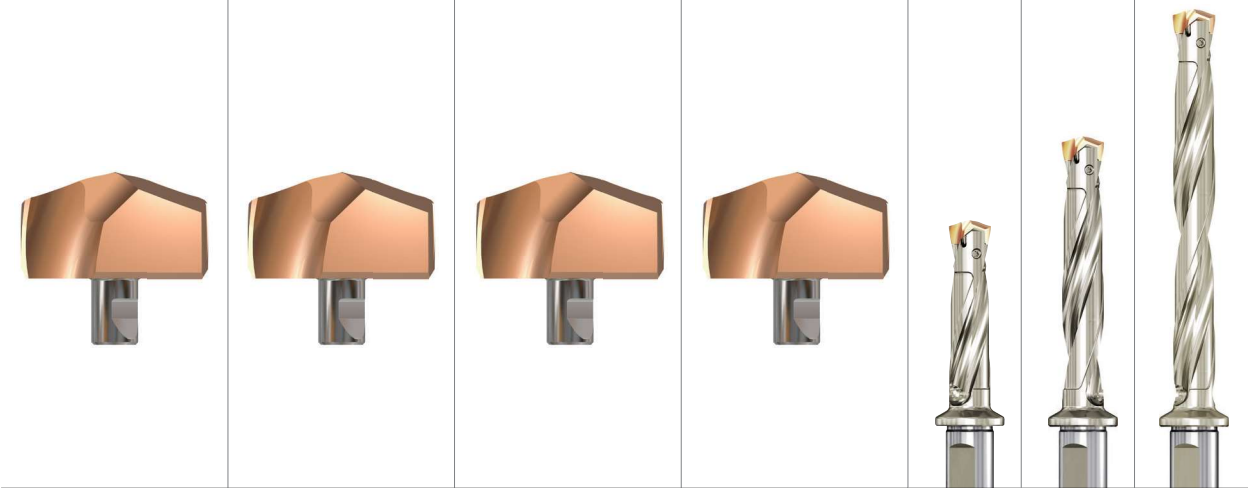

◎	◎	◎	◎	◎	◎	◎	◎				1
◎	◎	◎	◎	◎	◎	◎	◎				2
◎	◎	◎	◎	◎	◎	◎	◎				3
◎	◎	◎	◎	◎	◎	◎	◎				4
◎	◎	◎	◎	◎	◎	◎	◎				5
◎	◎	◎	◎	◎	◎	◎	◎				6
◎	◎	◎	◎	◎	◎	◎	◎				7
◎	◎	◎	◎	◎	◎	◎	◎				8
◎	◎	◎	◎	◎	◎	◎	◎				9
◎	◎	◎	◎	◎	◎	◎	◎				10
◎	◎	◎	◎	◎	◎	◎	◎				11
											12
											13
											14
◎	◎	◎	◎	◎	◎	◎	◎				15
◎	◎	◎	◎	◎	◎	◎	◎				16
◎	◎	◎	◎	◎	◎	◎	◎				17
◎	◎	◎	◎	◎	◎	◎	◎				18
◎	◎	◎	◎	◎	◎	◎	◎				19
◎	◎	◎	◎	◎	◎	◎	◎				20

GUIDE LINE TO ICONS

Tool Raw Material



Point Angle



Cutting Condition Page



Tolerance of Dimension



Tolerance of Outside Diameter



Tolerance of Shank Diameter

MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y101H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

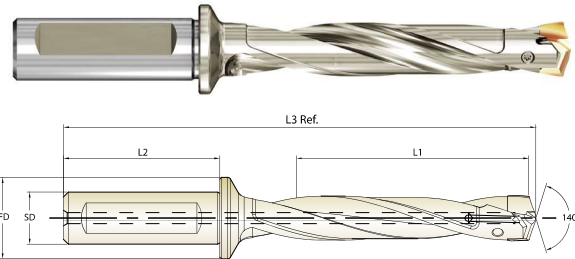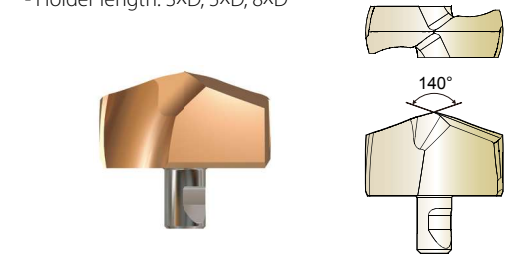

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S10 Ø10.00 to Ø11.99	Y101H1000	0.3937		10.00	ZD10003063 ZD10005063 ZD10008063	5/8	1-7/8	29/32	3D	1-15/64	4-3/64	TX1011P5
	Y101H1010	0.3976		10.10					5D	2-1/16	4-53/64	
	Y101H1020	0.4016		10.20					8D	3- 5/16	6-1/64	
	Y101H1030	0.4055		10.30								
	Y101H1032	0.4063	13/32	10.32								
	Y101H1040	0.4094		10.40								
	Y101H1050	0.4134		10.50	ZD10503063 ZD10505063 ZD10508063	5/8	1-7/8	29/32	3D	1-19/64	4-5/64	
	Y101H1060	0.4173		10.60					5D	2-11/64	4-29/32	
	Y101H1070	0.4213		10.70					8D	3-15/32	6-9/64	
	Y101H1072	0.4219	27/64	10.72								
	Y101H1080	0.4252		10.80								
	Y101H1090	0.4291		10.90	ZD11003063 ZD11005063 ZD11008063	5/8	1-7/8	29/32	3D	1-23/64	4-1/8	
	Y101H1100	0.4331		11.00					5D	2-17/64	4-63/64	
	Y101H1110	0.4370		11.10					8D	3-5/8	6-9/32	
	Y101H1111	0.4375	7/16	11.11								
	Y101H1120	0.4409		11.20								
	Y101H1130	0.4449		11.30	ZD11503063 ZD11505063 ZD11508063	5/8	1-7/8	29/32	3D	1-27/64	4-5/32	
	Y101H1140	0.4488		11.40					5D	2-23/64	5-1/16	
	Y101H1150	0.4528		11.50					8D	3-25/32	6-27/64	
	Y101H1151	0.4531	29/64	11.51								
	Y101H1160	0.4567		11.60								
	Y101H1170	0.4606		11.70								
	Y101H1180	0.4646		11.80								
	Y101H1190	0.4685		11.90								
	Y101H1191	0.4688	15/32	11.91								

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	13	25	28	32	10	29	32	38	15	35	23	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																				

MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS


Y121H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

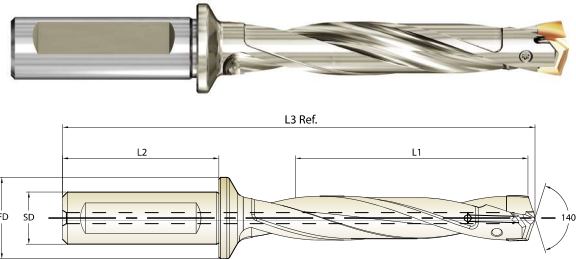

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S12 Ø12.00 to Ø13.99	Y121H1200	0.4724		12.00	ZD12003063 ZD12005063 ZD12008063	5/8	1-7/8	29/32	3D 5D 8D	1-15/32 2-29/64 3-15/16	4-5/16 5-8/32 6-43/64	TX1213P5
	Y121H1210	0.4764		12.10								
	Y121H1220	0.4803		12.20								
	Y121H1230	0.4844	31/64	12.30								
	Y121H1240	0.4882		12.40								
	Y121H1250	0.4921		12.50	ZD12503063 ZD12505063 ZD12508063	5/8	1-7/8	29/32	3D 5D 8D	1-17/32 2-9/16 4-3/32	4-11/32 6-33/64 6-13/16	
	Y121H1260	0.4961		12.60								
	Y121H1270	0.5000	1/2	12.70								
	Y121H1280	0.5039		12.80								
	Y121H1290	0.5079		12.90								
	Y121H1300	0.5118		13.00	ZD13003063 ZD13005063 ZD13008063	5/8	1-7/8	29/32	3D 5D 8D	1-19/32 2-21/32 4-1/4	4-27/64 5-29/64 6-63/64	
	Y121H1310	0.5156	33/64	13.10								
	Y121H1320	0.5197		13.20								
	Y121H1330	0.5236		13.30								
	Y121H1340	0.5276		13.40								
	Y121H1349	0.5313	17/32	13.49	ZD13503063 ZD13505063 ZD13508063	5/8	1-7/8	29/32	3D 5D 8D	1-21/32 2-3/4 4-13/32	4-15/32 5-17/32 7-1/8	
	Y121H1350	0.5315		13.50								
	Y121H1360	0.5354		13.60								
	Y121H1370	0.5394		13.70								
	Y121H1380	0.5433		13.80								
Y121H1389	0.5469	35/64	13.89									
Y121H1390	0.5472		13.90									

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323																					
HRC		13	25	28	32		10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180		180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					



MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y141H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

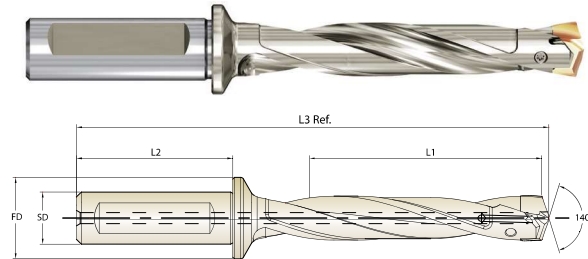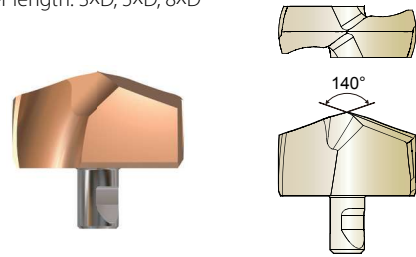

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S14 Ø14.00 to Ø15.99	Y141H1400	0.5512		14.00	ZD14003063 ZD14005063 ZD14008063	5/8	1-7/8	29/32				TX1415P7
	Y141H1410	0.5551		14.10								
	Y141H1420	0.5591		14.20								
	Y141H1429	0.5625	9/16	14.29								
	Y141H1430	0.5630		14.30								
	Y141H1440	0.5669		14.40								
	Y141H1450	0.5709		14.50								
	Y141H1460	0.5748		14.60	ZD14503063 ZD14505063 ZD14508063	5/8	1-7/8	29/32				
	Y141H1468	0.5781	37/64	14.68								
	Y141H1470	0.5787		14.70								
	Y141H1480	0.5827		14.80								
	Y141H1490	0.5866		14.90								
	Y141H1500	0.5906		15.00								
	Y141H1508	0.5938	19/32	15.08	ZD15003063 ZD15005063 ZD15008063	5/8	1-7/8	29/32				
	Y141H1510	0.5945		15.10								
	Y141H1520	0.5984		15.20								
	Y141H1530	0.6024		15.30								
	Y141H1540	0.6063		15.40								
	Y141H1548	0.6094	39/64	15.48								
	Y141H1550	0.6102		15.50	ZD15503063 ZD15505063 ZD15508063	5/8	1-7/8	29/32				
Y141H1560	0.6142		15.60									
Y141H1570	0.6181		15.70									
Y141H1580	0.6220		15.80									
Y141H1588	0.6250	5/8	15.88									
Y141H1590	0.6260		15.90									

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	23	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum- wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																				



MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y161H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

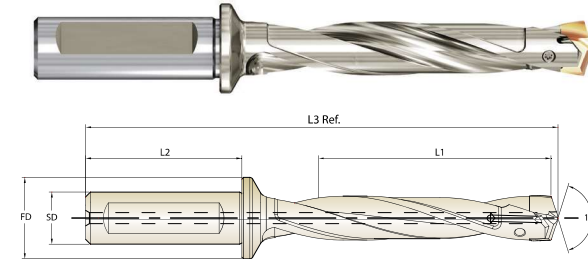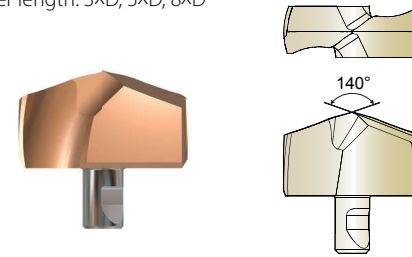

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	 Screw No.
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	
S16 Ø16.00 to Ø17.99	Y161H1600	0.6299		16.00	ZD16003075 ZD16005075 ZD16008075	3/4	2	1	3D 5D 8D	2-1/64 3-11/32 5-23/64	5-1/32 6-21/64 8-9/32	TX1617P7
	Y161H1609	0.6335		16.09								
	Y161H1610	0.6339		16.10								
	Y161H1620	0.6378		16.20								
	Y161H1627	0.6406	41/64	16.27								
	Y161H1630	0.6417		16.30								
	Y161H1640	0.6457		16.40								
	Y161H1650	0.6496		16.50								
	Y161H1660	0.6535		16.60								
	Y161H1667	0.6563	21/32	16.67								
	Y161H1670	0.6575		16.70	ZD17003075 ZD17005075 ZD17008075	3/4	2	1	3D 5D 8D	2-1/8 3-35/64 5-43/64	5-5/32 6-17/32 8-19/32	TX1718P7
	Y161H1680	0.6614		16.80								
	Y161H1690	0.6654		16.90								
	Y161H1700	0.6693		17.00								
	Y161H1707	0.6719	43/64	17.07								
	Y161H1710	0.6732		17.10								
	Y161H1720	0.6772		17.20								
	Y161H1730	0.6811		17.30								
	Y161H1740	0.6850		17.40								
	Y161H1746	0.6875	11/16	17.46								
	Y161H1750	0.6890		17.50								
	Y161H1760	0.6929		17.60								
	Y161H1770	0.6969		17.70								
	Y161H1780	0.7008		17.80								
	Y161H1786	0.7031	45/64	17.86								
	Y161H1790	0.7047		17.90								

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M					K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC	13	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎				◎	◎	◎	◎	◎	◎			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended																							

MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y181H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

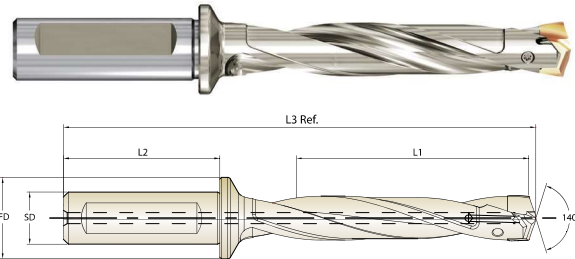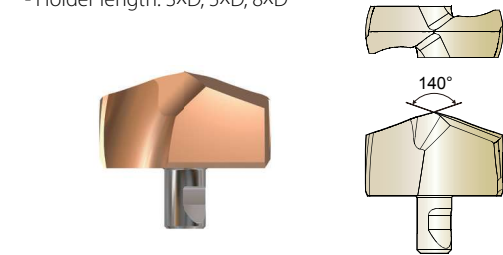

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S18 Ø18.00 to Ø19.99	Y181H1800	0.7087		18.00	ZD18003100 ZD18005100 ZD18008100	1	2-3/16	1-1/4	3D 5D 8D	2-1/4 3-47/64 5-63/64	5-35/64 7 9-3/16	TX1819P9
	Y181H1810	0.7126		18.10								
	Y181H1820	0.7165		18.20								
	Y181H1826	0.7188	23/32	18.26								
	Y181H1830	0.7205		18.30								
	Y181H1840	0.7244		18.40								
	Y181H1850	0.7283		18.50								
	Y181H1860	0.7323		18.60								
	Y181H1865	0.7344	47/64	18.65								
	Y181H1870	0.7362		18.70								
	Y181H1880	0.7402		18.80								
	Y181H1890	0.7441		18.90								
	Y181H1900	0.7480		19.00	ZD19003100 ZD19005100 ZD19008100	1	2-3/16	1-1/4	3D 5D 8D	2-23/64 3-15/16 6-19/64	5-45/64 7-15/64 9-35/64	TX1920P9
	Y181H1905	0.7500	3/4	19.05								
	Y181H1910	0.7520		19.10								
	Y181H1920	0.7559		19.20								
	Y181H1927	0.7587		19.27								
	Y181H1930	0.7598		19.30								
	Y181H1940	0.7638		19.40								
	Y181H1945	0.7656	49/64	19.45								
	Y181H1950	0.7677		19.50								
	Y181H1960	0.7717		19.60								
	Y181H1970	0.7756		19.70								
	Y181H1980	0.7795		19.80								
	Y181H1984	0.7813	25/32	19.84								
	Y181H1990	0.7835		19.90								

► Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	20	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																				

MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y201H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

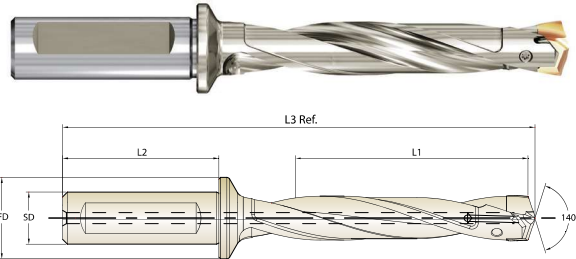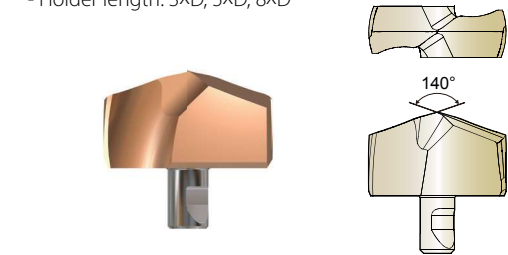

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S20 Ø20.00 to Ø21.99	Y201H2000	0.7874		20.00	ZD20003100 ZD20005100 ZD20008100	1	2-3/16	1-1/4				TX2021P9
	Y201H2010	0.7913		20.10								
	Y201H2020	0.7953		20.20								
	Y201H2024	0.7969	51/64	20.24								
	Y201H2030	0.7992		20.30								
	Y201H2040	0.8031		20.40					3D	2-31/64	5-51/64	
	Y201H2050	0.8071		20.50					5D	4-9/64	7-13/32	
	Y201H2060	0.8110		20.60					8D	6-39/64	9-53/64	
	Y201H2064	0.8125	13/16	20.64								
	Y201H2070	0.8150		20.70								
	Y201H2080	0.8189		20.80								
	Y201H2090	0.8228		20.90								
	Y201H2100	0.8268		21.00	ZD21003100 ZD21005100 ZD21008100	1	2-3/16	1-1/4				TX2122P9
	Y201H2103	0.8281	53/64	21.03								
	Y201H2110	0.8307		21.10								
	Y201H2120	0.8346		21.20								
	Y201H2130	0.8386		21.30								
	Y201H2140	0.8425		21.40					3D	2-19/32	5-29/32	
	Y201H2143	0.8438	27/32	21.43					5D	4-21/64	7-19/32	
	Y201H2150	0.8465		21.50					8D	6-59/64	10-9/64	
	Y201H2160	0.8504		21.60								
	Y201H2170	0.8543		21.70								
	Y201H2180	0.8583		21.80								
	Y201H2183	0.8594	55/64	21.83								
	Y201H2190	0.8622		21.90								

► Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

ISO	P										M					K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		20				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180		260	160	250	130	230				
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎					◎	◎	◎	◎	◎				
ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRC											15	30	25	38	34			55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400 Rm	1050 Rm	550	630	400	550	
Recommended																								



MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y221H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

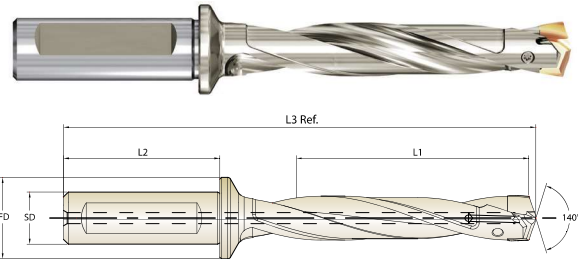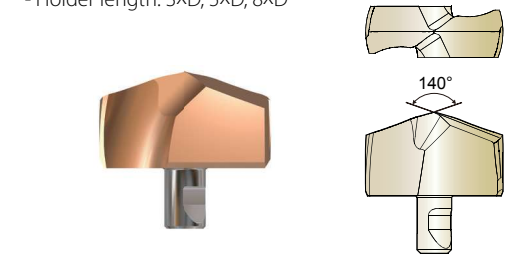

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
S22 Ø22.00 to Ø23.99	Y221H2200	0.8661		22.00	ZD22003100 ZD22005100 ZD22008100	1	2-3/16	1-1/4	3D 5D 8D	2-23/32 4-34/64 7-1/4	6-1/32 7-51/64 10-29/64	TX2223P9
	Y221H2210	0.8701		22.10								
	Y221H2220	0.8740		22.20								
	Y221H2223	0.8750	7/8	22.23								
	Y221H2230	0.8780		22.30								
	Y221H2240	0.8819		22.40								
	Y221H2250	0.8858		22.50								
	Y221H2260	0.8898		22.60								
	Y221H2262	0.8906	57/64	22.62								
	Y221H2270	0.8937		22.70								
	Y221H2280	0.8976		22.80								
	Y221H2290	0.9016		22.90	ZD23003100 ZD23005100 ZD23008100	1	2-3/16	1-1/4	3D 5D 8D	2-53/64 4-23/32 7-9/16	6-3/16 8-1/32 10-13/16	TX2223P9
	Y221H2300	0.9055		23.00								
	Y221H2302	0.9063	29/32	23.02								
	Y221H2310	0.9094		23.10								
	Y221H2320	0.9134		23.20								
	Y221H2330	0.9173		23.30								
	Y221H2340	0.9213		23.40								
	Y221H2342	0.9219	59/64	23.42								
	Y221H2350	0.9252		23.50								
	Y221H2360	0.9291		23.60								
	Y221H2370	0.9331		23.70								
	Y221H2380	0.9370		23.80								
	Y221H2381	0.9375	15/16	23.81								
	Y221H2390	0.9409		23.90								

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	23	23	10	26	3	25	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																				

MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y241H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

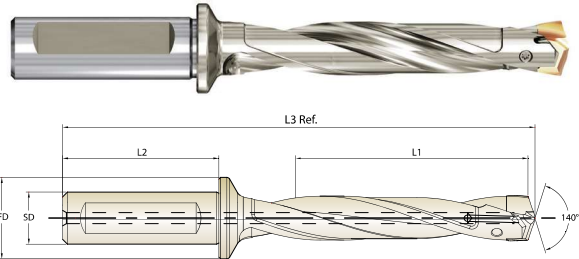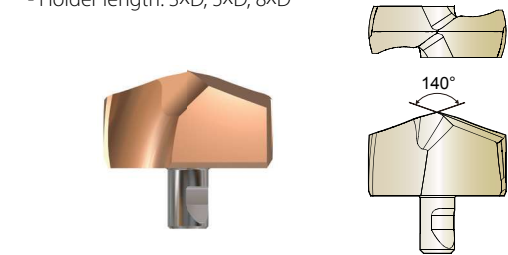

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S24 Ø24.00 to Ø25.99	Y241H2400	0.9449		24.00	ZD24003125 ZD24005125 ZD24008125	1-1/4	2-3/8	1-15/32	3D 5D 8D	2-61/64 4-59/64 7-7/8	6-17/32 8-15/32 11-23/64	TX2425P10
	Y241H2410	0.9488		24.10								
	Y241H2420	0.9528		24.20								
	Y241H2421	0.9531	61/64	24.21								
	Y241H2430	0.9567		24.30								
	Y241H2440	0.9606		24.40								
	Y241H2450	0.9646		24.50								
	Y241H2460	0.9685		24.60								
	Y241H2461	0.9688	31/32	24.61								
	Y241H2470	0.9724		24.70								
	Y241H2480	0.9764		24.80								
	Y241H2490	0.9803		24.90								
	Y241H2500	0.9844	63/64	25.00								
	Y241H2510	0.9882		25.10								
	Y241H2520	0.9921		25.20								
	Y241H2530	0.9961		25.30								
	Y241H2540	1.0000	1	25.40								
	Y241H2550	1.0039		25.50								
	Y241H2560	1.0079		25.60								
	Y241H2567	1.0106		25.67								
	Y241H2570	1.0118		25.70								
	Y241H2580	1.0156	1-1/64	25.80								
	Y241H2590	1.0197		25.90								

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32		10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180		180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					



MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS


Y261H SERIES

Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

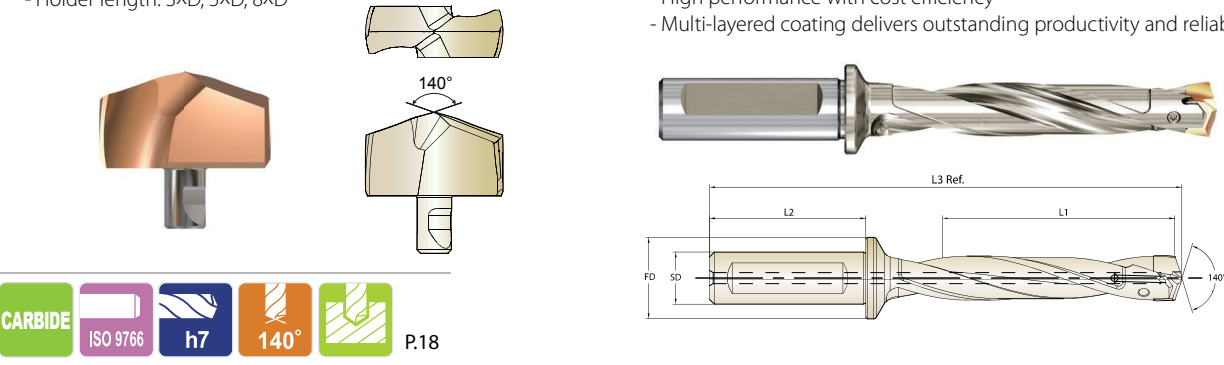

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
S26 Ø26.00 to Ø27.99	Y261H2600	1.0236		26.00	ZD26003125 ZD26005125 ZD26008125	1-1/4	2-3/8	1-15/32				TX2627P10
	Y261H2619	1.0311	1-1/32	26.19								
	Y261H2620	1.0315		26.20								
	Y261H2650	1.0433		26.50								
	Y261H2659	1.0469	1-3/64	26.59								
	Y261H2660	1.0472		26.60								
	Y261H2670	1.0512		26.70								
	Y261H2680	1.0551		26.80								
	Y261H2690	1.0591		26.90								
	Y261H2699	1.0626	1-1/16	26.99	ZD27003125 ZD27005125 ZD27008125	1-1/4	2-3/8	1-15/32	3D	3-3/16	6-51/64	TX2728P10
	Y261H2700	1.0630		27.00					5D	5-5/16	8-7/8	
	Y261H2710	1.0669		27.10					8D	8-1/2	12-1/64	
	Y261H2720	1.0709		27.20								
	Y261H2730	1.0748		27.30								
	Y261H2738	1.0780	1-5/64	27.38								
	Y261H2740	1.0787		27.40								
	Y261H2750	1.0827		27.50								
	Y261H2760	1.0866		27.60								
	Y261H2770	1.0906		27.70								
	Y261H2778	1.0937	1-3/32	27.78								
	Y261H2780	1.0945		27.80								
	Y261H2790	1.0984		27.90								

Other diameters of insert and shank types of holder are available upon request.

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎: Excellent ○: Good

MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS


Y281H SERIES

Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

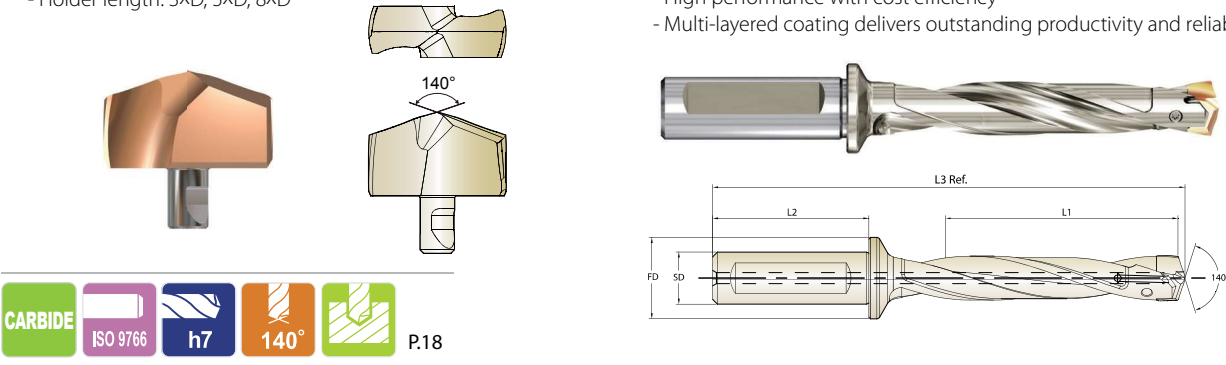

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	Screw No.
		dec.	frac.	mm								
S28 Ø28.00 to Ø29.99	Y281H2800	1.1024		28.00	ZD28003125 ZD28005125 ZD28008125	1-1/4	2-3/8	1-15/32				TX2830P10
	Y281H2810	1.1063		28.10								
	Y281H2818	1.1094	1-7/64	28.18								
	Y281H2820	1.1102		28.20								
	Y281H2830	1.1142		28.30								
	Y281H2840	1.1181		28.40								
	Y281H2850	1.1220		28.50								
	Y281H2858	1.1252	1-1/8	28.58								
	Y281H2860	1.1260		28.60								
	Y281H2870	1.1299		28.70								
	Y281H2880	1.1339		28.80								
	Y281H2890	1.1378		28.90								
	Y281H2900	1.1417		29.00	ZD29003125 ZD29005125 ZD29008125	1-1/4	2-3/8	1-15/32				TX2930P10
	Y281H2910	1.1457		29.10								
	Y281H2920	1.1496		29.20								
	Y281H2930	1.1535		29.30								
	Y281H2937	1.1563	1-5/32	29.37								
	Y281H2940	1.1575		29.40								
	Y281H2950	1.1614		29.50								
	Y281H2960	1.1654		29.60								
	Y281H2970	1.1693		29.70								
	Y281H2977	1.1720	1-11/64	29.77								
	Y281H2980	1.1732		29.80								
	Y281H2990	1.1772		29.90								

Other diameters of insert and shank types of holder are available upon request.

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎: Excellent ○: Good



MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y301H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

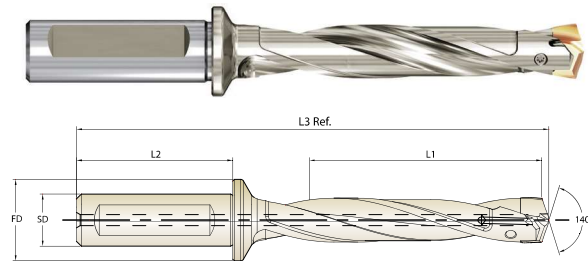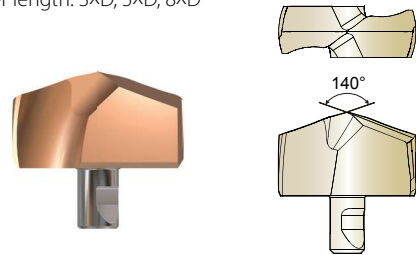

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	 Screw No.
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	
		dec.	frac.	mm								
S30 Ø30.00 to Ø31.99	Y301H3000	1.1811		30.00	ZD30003125 ZD30005125 ZD30008125	1-1/4	2-3/8	1-15/32	3D 5D 8D	3-21/32 6- 7/64 9-49/64	7- 3/8 9-25/32 13- 3/8	TX3031P15
	Y301H3010	1.1850		30.10								
	Y301H3016	1.1874	1-3/16	30.16								
	Y301H3020	1.1890		30.20								
	Y301H3030	1.1929		30.30								
	Y301H3040	1.1969		30.40								
	Y301H3050	1.2008		30.50								
	Y301H3056	1.2031	1-13/64	30.56								
	Y301H3060	1.2047		30.60								
	Y301H3070	1.2087		30.70								
	Y301H3080	1.2126		30.80								
	Y301H3090	1.2165		30.90								
	Y301H3096	1.2189	1-7/32	30.96								
	Y301H3100	1.2205		31.00	ZD31003125 ZD31005125 ZD31008125	1-1/4	2-3/8	1-15/32	3D 5D 8D	3-25/32 6-19/64 10- 5/64	7-17/32 10- 1/64 13-47/64	TX3132P15
	Y301H3110	1.2244		31.10								
	Y301H3120	1.2283		31.20								
	Y301H3130	1.2323		31.30								
	Y301H3140	1.2362		31.40								
	Y301H3150	1.2402		31.50								
	Y301H3160	1.2441		31.60								
	Y301H3170	1.2480		31.70								
	Y301H3175	1.2500	1-1/4	31.75								
	Y301H3180	1.2520		31.80								
	Y301H3190	1.2559		31.90								

► Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

ISO Material Description	P										M					K				
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	23	23	10	26	3	25	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



MICRO GRAIN CARBIDE INSERTS and PREMIUM TOOL STEEL HOLDERS

i-ONE DRILLS INSERTS & HOLDERS



Y321H SERIES

► Applications

- For carbon steels, alloy steels and cast iron
- Holder length: 3XD, 5XD, 8XD

► Benefits

- Secure and quick clamping system
- High performance with cost efficiency
- Multi-layered coating delivers outstanding productivity and reliability

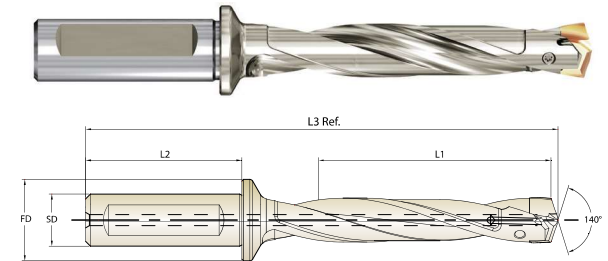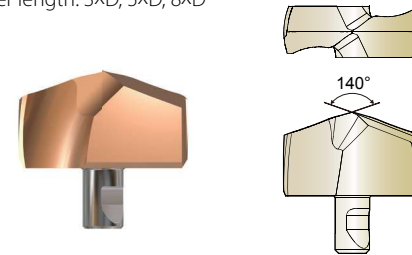

Unit: inch

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	 Screw No.
(mm)	H-Coating	h7				SD	L2	FD	L1		L3 Ref.	
		dec.	frac.	mm								
S32 Ø32.00 to Ø33.99	Y321H3200	1.2598		32.00	ZD32003125 ZD32005125 ZD32008125	1-1/4	2-3/8	1-15/32	3D 5D 8D	3-57/64 6-1/2 10-25/64	7-25/32 10-21/64 14-11/64	TX3233P15
	Y321H3210	1.2638		32.10								
	Y321H3215	1.2657	1-17/64	32.15								
	Y321H3220	1.2677		32.20								
	Y321H3230	1.2717		32.30								
	Y321H3240	1.2756		32.40								
	Y321H3250	1.2795		32.50								
	Y321H3254	1.2811	1-9/32	32.54								
	Y321H3260	1.2835		32.60								
	Y321H3270	1.2874		32.70								
	Y321H3280	1.2913		32.80								
	Y321H3290	1.2953		32.90								
	Y321H3294	1.2969	1-19/64	32.94								
	Y321H3300	1.2992		33.00								
	Y321H3310	1.3031		33.10								
	Y321H3320	1.3071		33.20								
	Y321H3330	1.3110		33.30								
	Y321H3334	1.3126	1-5/16	33.34								
	Y321H3340	1.3150		33.40								
	Y321H3350	1.3189		33.50								
	Y321H3360	1.3228		33.60								
	Y321H3370	1.3268		33.70								
	Y321H3373	1.3280	1-21/64	33.73								
	Y321H3380	1.3307		33.80								
	Y321H3390	1.3346		33.90								
					ZD33003125 ZD33005125 ZD33008125	1-1/4	2-3/8	1-15/32	3D 5D 8D	4-1/64 6-11/16 10-45/64	7-15/16 10-37/64 14-17/32	TX3334P15

► Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32		10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎				◎	◎	◎	◎	◎	◎


ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze/ Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34	36	37	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended																							

SFM = ft/min.
Feed(IPR) = inch/rev.


ISO	VDI 3323	Material Description	Cutting Speed	Feed(IPR)					
			SFM	Ø10.0~11.99	Ø12.09~14.99	Ø15.00~17.99	Ø18.00~21.99	Ø22.0~26.99	Ø27.0~33.99
P	1	Non-alloy steel	328~413	0.006~0.009	0.007~0.012	0.009~0.015	0.012~0.017	0.015~0.022	0.016~0.024
	2		276~361	0.005~0.008	0.006~0.010	0.009~0.015	0.012~0.017	0.015~0.022	0.016~0.024
	3		207~276	0.004~0.007	0.005~0.009	0.007~0.012	0.009~0.014	0.013~0.020	0.014~0.021
	4		190~243	0.004~0.006	0.004~0.007	0.007~0.011	0.009~0.013	0.011~0.017	0.013~0.019
	5		190~243	0.004~0.006	0.004~0.007	0.007~0.011	0.009~0.013	0.011~0.017	0.013~0.019
	6	Low alloy steel	243~312	0.004~0.007	0.005~0.009	0.007~0.012	0.009~0.014	0.013~0.020	0.015~0.022
	7		207~276	0.004~0.007	0.005~0.009	0.007~0.011	0.009~0.014	0.013~0.020	0.015~0.022
	8		190~243	0.004~0.006	0.004~0.007	0.006~0.009	0.009~0.013	0.011~0.017	0.013~0.019
	9		154~207	0.003~0.004	0.004~0.005	0.006~0.009	0.009~0.013	0.011~0.017	0.013~0.019
	10	High alloyed steel, and tool steel	174~223	0.004~0.006	0.004~0.007	0.006~0.009	0.008~0.011	0.009~0.013	0.010~0.015
	11		138~190	0.004~0.006	0.004~0.007	0.005~0.008	0.009~0.013	0.009~0.013	0.010~0.015
K	15	Grey cast iron	344~430	0.005~0.009	0.007~0.011	0.009~0.016	0.012~0.018	0.016~0.022	0.017~0.024
	16		259~328	0.004~0.007	0.005~0.009	0.007~0.013	0.009~0.013	0.011~0.015	0.013~0.017
	17	Nodular cast iron	328~413	0.004~0.008	0.006~0.009	0.007~0.013	0.009~0.014	0.012~0.017	0.014~0.019
	18		259~328	0.004~0.007	0.005~0.009	0.006~0.011	0.008~0.013	0.011~0.015	0.013~0.017
	19	Malleable cast iron	344~430	0.004~0.008	0.006~0.009	0.007~0.013	0.009~0.014	0.012~0.017	0.014~0.019
	20		259~328	0.004~0.006	0.005~0.008	0.006~0.011	0.008~0.013	0.011~0.015	0.013~0.017

- The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.
- Recommend you to reduce the feed rate to 85%, 70% when you use 5xD, 8xD holders.
- For use of 8xD holder, we recommend to use a pilot drill with equal to or larger than 140° point angle (0.5xD ~ 1.5xD).
The use of the centering pre-hole improves hole location, roundness and surface finish.



YG-1 EXCHANGEABLE RANGE OF DRILLS - POSITIONING MAP

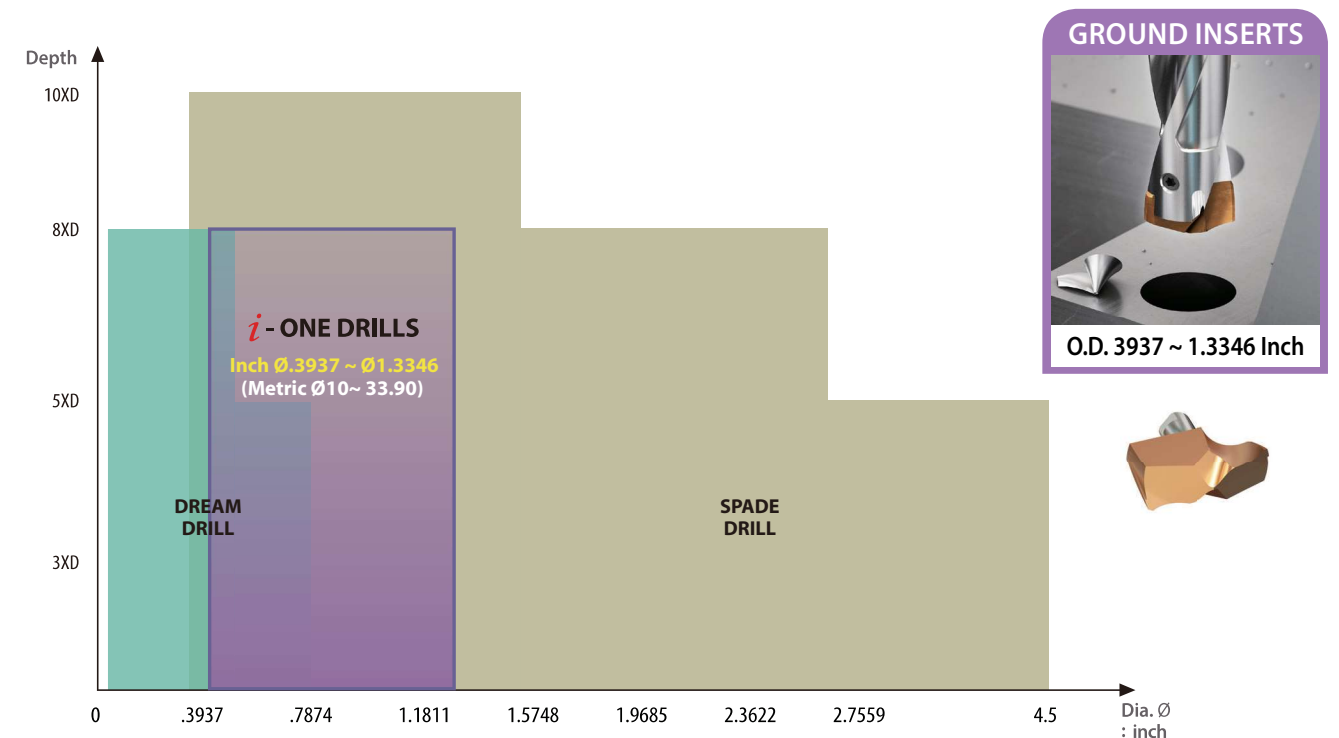


COMPARISON WITH SPLIT POINT DRILL - SPADE DRILL & DREAM DRILL

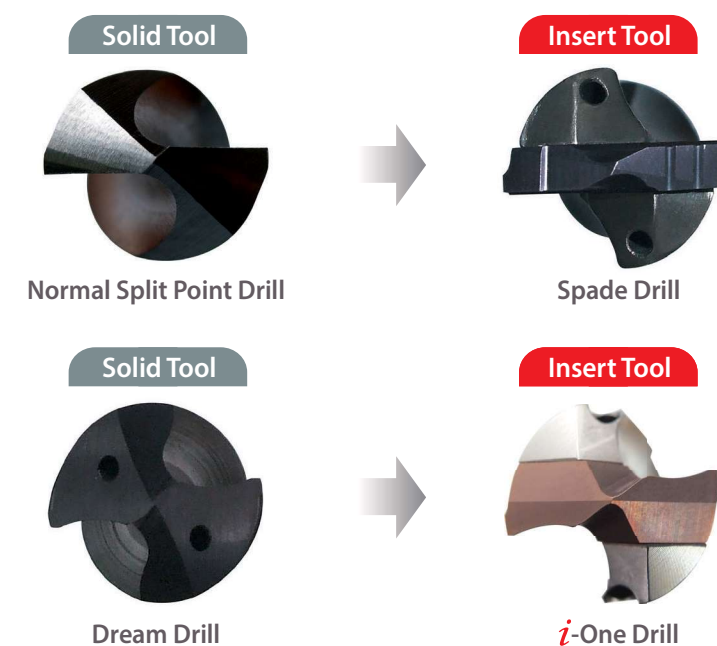



ASSEMBLY OF *i*-ONE DRILLS

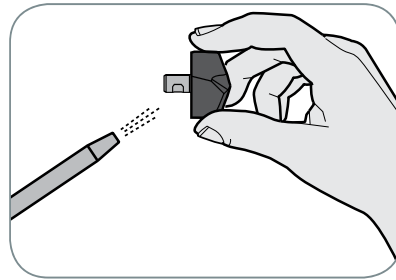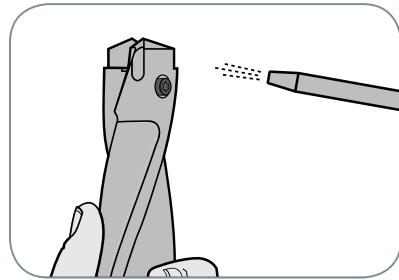

Make sure to clean the insert and insert seat.

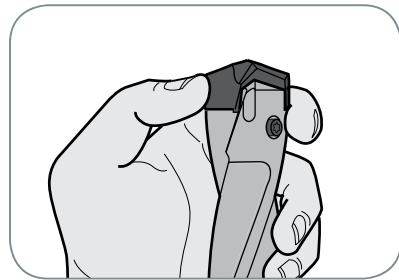

Slide the drill insert into the slot of the holder and press down the insert to touch the bottom of the slot.

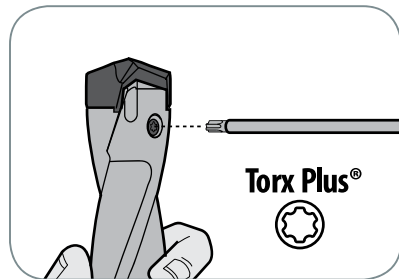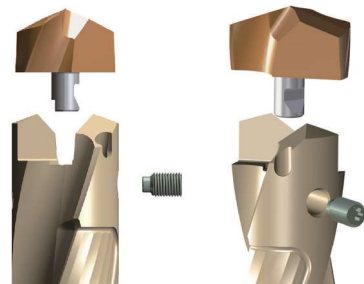


After confirming the insert is pressed down to the bottom of the slot, tighten the screw using anti-seize compound.

Wrench Type	Product No.	Series (Insert Size)	Torx Plus®	Torque (lbs-in)
	TWFP05	S10 ~ S12 Inch: Ø.3937~ Ø.5472 Metric: Ø10.00~ Ø13.90	5IP	5.5
	TWDP07	S14 ~ S16 Inch: Ø.5512~ Ø.7047 Metric: Ø14.00~ Ø17.90	7IP	9.0
	TWDP09	S18 ~ S22 Inch: Ø.7087~ Ø.9409 Metric: Ø18.00~ Ø23.90	9IP	13.5
	TWDP10	S24 ~ S28 Inch: Ø.9449 ~ Ø1.1772 Metric: Ø24.00 ~ Ø29.90	10IP	20.0
	TWDP15	S30 ~ S32 Inch: Ø1.1811~ Ø1.3346 Metric: Ø30.00~ Ø33.90	15IP	28.5


Use the Torx Plus® wrench

- ▶ Need to use appropriate wrenches and screws as indicated.
- ▶ It's important to tighten up the screw properly.


CAUTION-NOT RECOMMENDABLE APPLICATION

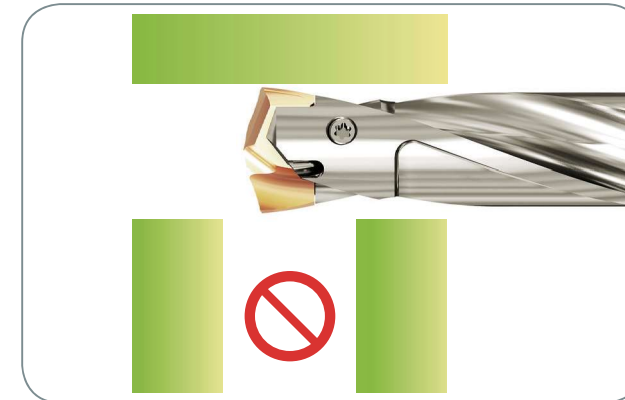

Intersecting cross hole is bigger than the drill insert's Margin Length.

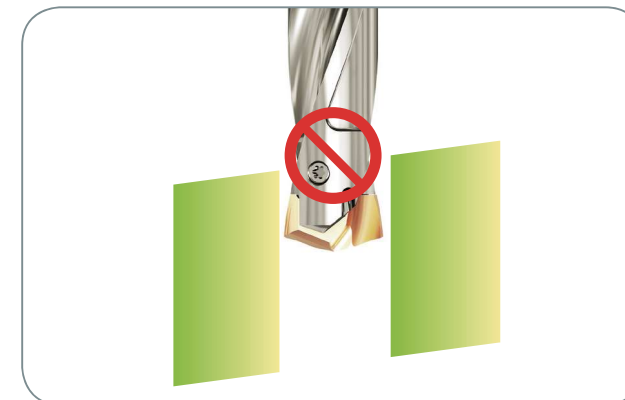


Material with slanting entrance and exit over 7 degree. (If drilling 7 degree or under slanting surface, reduce the feed about 30-50%)

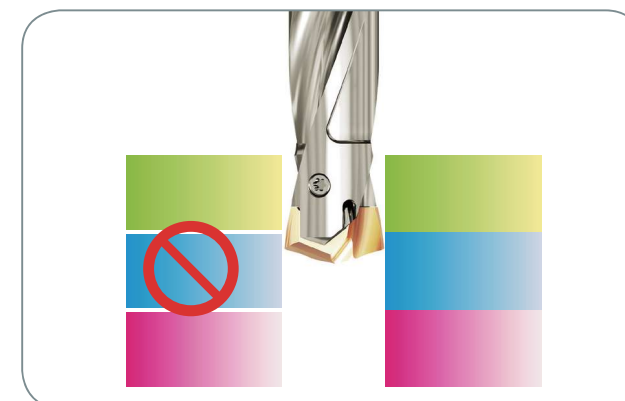


For drilling stacked plates, minimize the space between the plates.

The space stacked plates can cause insert breakage or poor chip control.

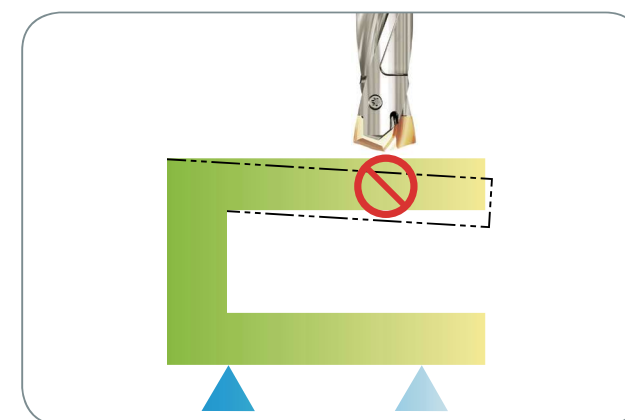

The material needs to be fixtured securely before drilling.

RECOMMENDED COOLANT PRESSURE AND FLOW RATE ON VERTICAL DRILLING

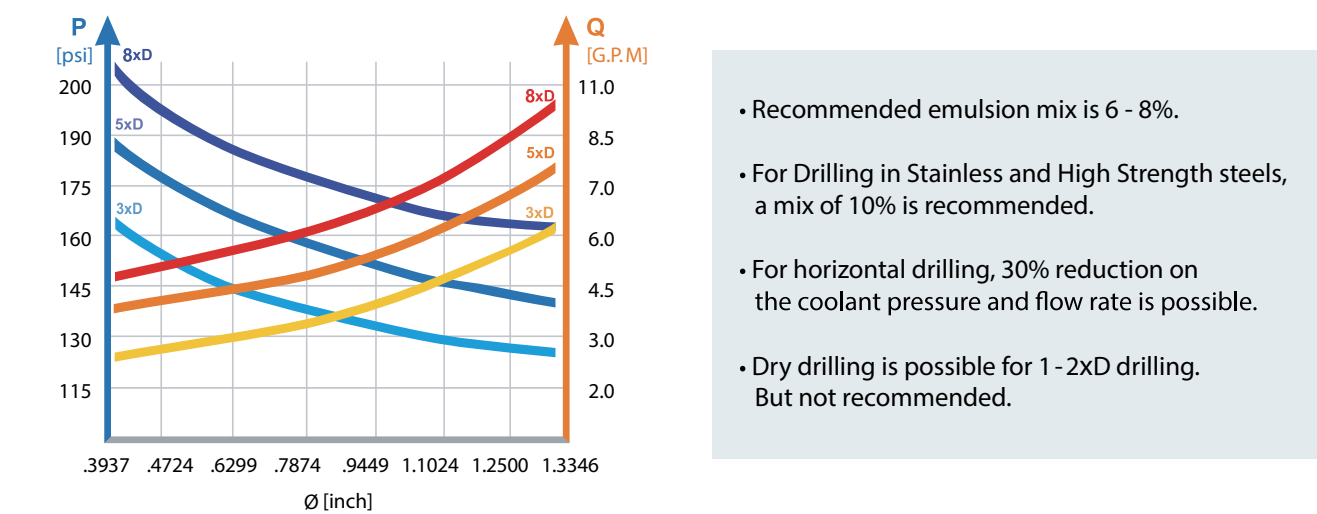

TROUBLE SHOOTING

1) Heavy flank wear / Fast flank wear

- Reduce cutting speed
- Increase feed

2) Chipping on cutting edge

- Reduce feed
- Check the rigidity of spindle and chuck
- Rigid clamping of workpiece

3) Build up on cutting edge

- Increase cutting speed
- Use a coated insert

4) Chipping or break down on outer corner

- Reduce feed
- Rigid clamping of workpiece

5) Wear of land margin

- Rigid clamping of workpiece
- Reduce cutting speed
- Increase coolant flow

6) Unsatisfactory positioning of the hole

- Rigid clamping of workpiece
- Reduce feed during entrance or exit

7) Scratching on holder

- Rigid clamping of workpiece
- Reduce feed
- Increase coolant flow

8) Unsatisfactory surface finish

- Rigid clamping of workpiece
- Increase coolant flow and pressure

HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TURKEY
CZECH REPUBLIC	GERMANY	NORWAY	RUSSIA	SWEDEN	UNITED KINGDOM
DENMARK	HUNGARY	POLAND	SERBIA	SWITZERLAND	

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SINGAPORE	UNITED ARAB EMIRATES
CHINA	ISRAEL	PAKISTAN	SOUTH KOREA	VIETNAM
HONG KONG	JAPAN	PHILIPPINES	TAIWAN	
INDIA	KINGDOM OF SAUDI ARABIA		THAILAND	

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

YG-1 CO., LTD.

* For more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE
13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea
Phone: +82-32-526-0909
E-mail: yg1@yg1.kr
www.yg1.kr

YG-1 USA
730 Corporate Woods Parkway, Vernon Hills, IL 60061 U.S.A.
Phone : 800-765-8665
Technical Assistance : 888-868-5988
www.yg1usa.com