
SHRINK FIT HOLDER CCT



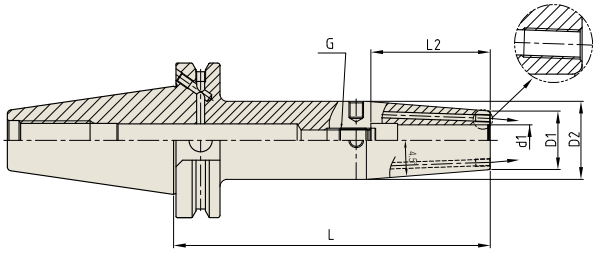


CCT40 - Coolant Channel Resealable (Inch)

CCT | AT3 | 2.5G | 25,000 RPM | (at 3D) ≤0.00012" | AD/B+CR

Unit : inch

EDP No.	MODEL No.	d1	D1	D2	L	L2	G
VB203JR	CCT40 AD/B - SFH 1/4CR - 5.12	0.250	0.827	1.063	5.120	1.417	M5x0.8mm
VB204JR	CCT40 AD/B - SFH 5/16CR - 5.12	0.313	0.827	1.063	5.120	1.417	M6x1.0mm
VB205JR	CCT40 AD/B - SFH 3/8CR - 5.12	0.375	0.945	1.260	5.120	1.713	M8x1.0mm
VB206JR	CCT40 AD/B - SFH 7/16CR - 5.12	0.438	0.945	1.260	5.120	1.929	M10x1.0mm
VB207JR	CCT40 AD/B - SFH 1/2CR - 5.12	0.500	0.945	1.260	5.120	1.929	M10x1.0mm
VB208JR	CCT40 AD/B - SFH 5/8CR - 5.12	0.625	1.063	1.339	5.120	2.047	M12x1.0mm
VB209JR	CCT40 AD/B - SFH 3/4CR - 5.12	0.750	1.299	1.654	5.120	2.126	M16x1.0mm
VB210JR	CCT40 AD/B - SFH 1CR - 5.12	1.000	1.732	2.087	5.120	2.362	M16x1.0mm

* Resealable type (Thread for plugging screw & screws)

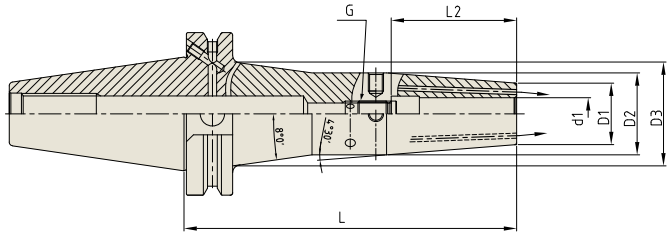

CCT40 - Coolant Channel & Thick Wall (Inch)


CCT | AT3 | 2.5G | 25,000 RPM | (at 3D) ≤0.00012" | AD/B+C

Unit : inch

EDP No.	MODEL No.	d1	D1	D2	D3	L	L2	G
VB026JTW	CCT40 AD/B - SFH 1/4C TW - 6.30	0.250	0.827	1.063	1.661	6.300	1.417	M5x0.8mm
VB220JTW	CCT40 AD/B - SFH 5/16C TW - 6.30	0.313	0.827	1.063	1.661	6.300	1.417	M6x1.0mm
VB205JTW	CCT40 AD/B - SFH 3/8C TW - 6.30	0.375	0.945	1.260	1.750	6.300	1.673	M8x1.0mm
VB221JTW	CCT40 AD/B - SFH 7/16C TW - 6.30	0.438	0.945	1.260	1.732	6.300	1.929	M10x1.0mm
VB034JTW	CCT40 AD/B - SFH 1/2C TW - 6.30	0.500	0.945	1.260	1.732	6.300	1.929	M10x1.0mm
VB038JTW	CCT40 AD/B - SFH 5/8C TW - 6.30	0.625	1.063	1.339	1.732	6.300	2.047	M12x1.0mm


* Resealable type available. (Thread for plugging screw & screws)

01. High Precision I.D Run-out : ≤ 0.00012"

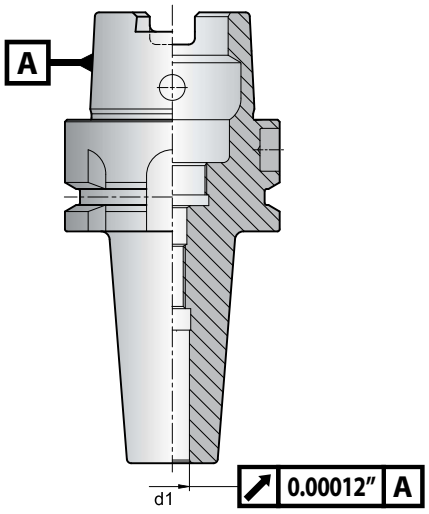


- Less than 0.00012" of Tool Holder accuracy at I.D

02. Strong and Consistent Torque Power

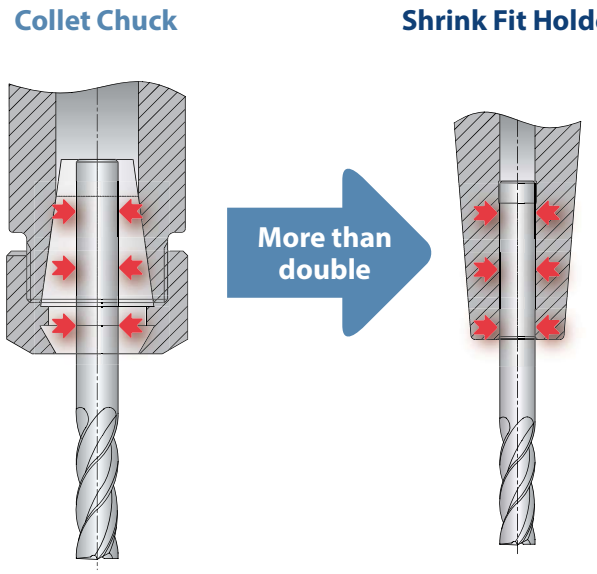

- Achieving strong torque power by integration of chuck and tool

03. Deep hole Machining

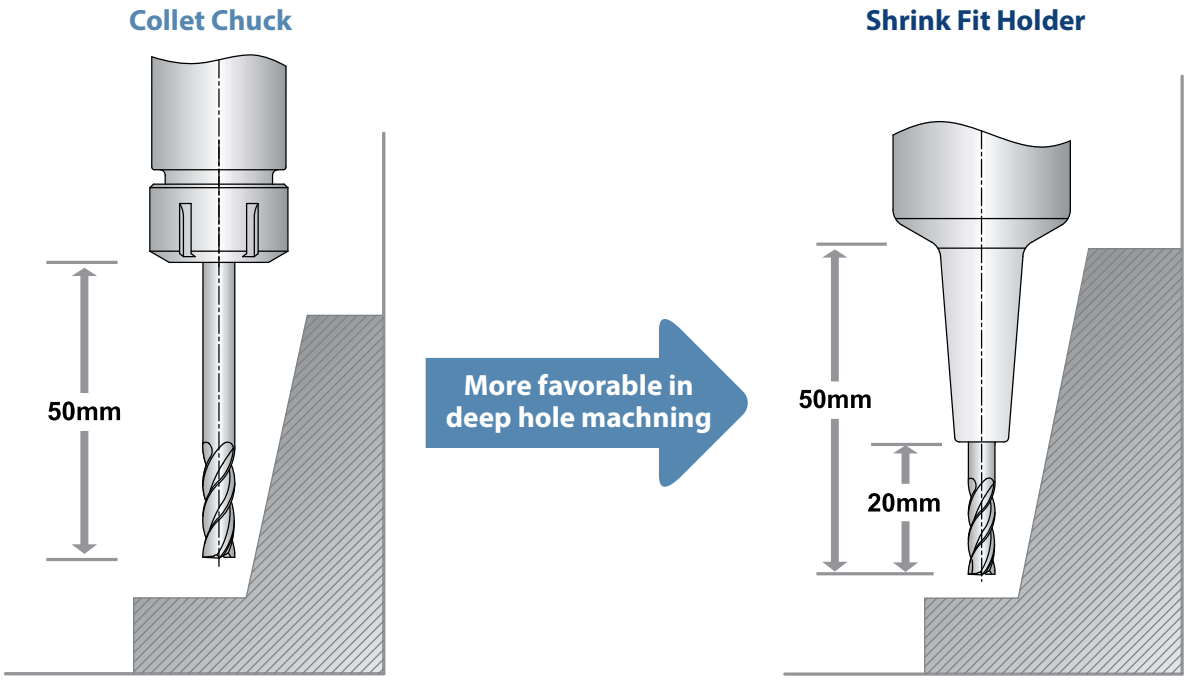


- Suitable for High Speed precision deep hole machining

SHANK TYPE OF CUTTING TOOL

Straight shank



One weldon flat shaft type



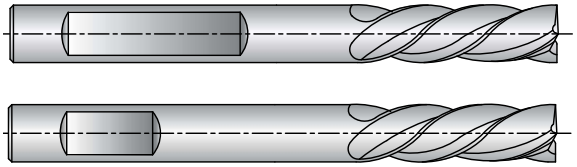





MATERIAL OF CUTTING TOOL

CARBIDE TOOL	HSS TOOL
YES	NO

- One Weldon flat shaft type tool is usable, but there is a possibility that the I.D of Shrink Fit Holder may be deformed.

APPLICATION

Rough Milling	Finish Milling	High Speed Cutting
		

Drilling	Reaming	Countersinking
		

T.I.R (TOTAL INDICATED RUN-OUT)

HYDRAULIC CHUCK
Concentric to 0.00012″ T.I.R (at 3D)

SHRINK FIT HOLDER
Concentric to 0.00012″ T.I.R (at I.D)

ER COLLET CHUCK
Concentric to 0.0002″ T.I.R (at I.D)

END MILL HOLDER
Concentric to 0.0002″ T.I.R (at I.D)

SLITTING SAW ARBOR
Face perpendicular to taper within 0.0002″ T.I.R (at I.D)

STUB ARBOR
Face perpendicular to taper within 0.0002″ T.I.R (at I.D)

SHELL MILL ARBOR
Face perpendicular to taper within 0.0001″ T.I.R
Out diameter to taper within 0.0002″ T.I.R

MORSE & JACOBS TAPER ARBOR
Concentric to 0.0003″ T.I.R

* To put tool precisely on spindle center line for getting correct T.I.R

- **AT3 or better accuracy on all shank tapers**
- **Accurate and rigid tool holder mounting to spindle**
- **The bore diameter of all tool holders is controlled by H5 grade tolerance limit.**

TAPER	AT3
#30	0.000078″
#40	0.00012″
#50	0.00016″