


SCREW THREAD
INSERT TAP

T7405 SERIES

Straight Flute STI Tap Plug and Bottoming Style for General Purpose

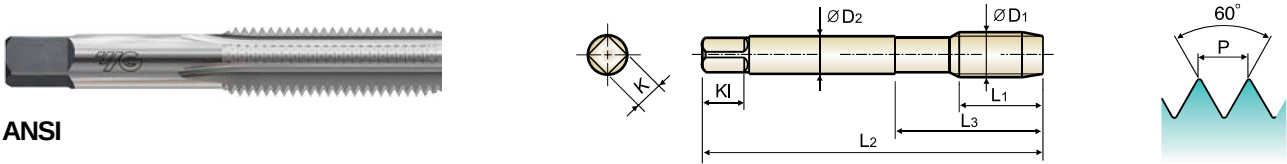

Material groups
GS

HSS

M

USCTI
322A

4P~5P
Plug


1.5P~2P
Bottoming

Bright



p.B295


Thread Depth /
Hole Type
2.0xD




Unit : Inch

Size	Pitch	EDP No.		Limit	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute
D1	P	Plug	Bottoming		L2	L1	L3	D2	K	KL	
M2	x 0.4	T7405137	T7405138	D2	1.811	.492	.728	.141	.110	.190	2
M2.5	x 0.45	T7405177	T7405178	D2	1.937	.626	.882	.141	.110	.190	2
M3	x 0.5	T7405207	T7405208	D2	2.000	.689	.965	.141	.110	.190	3
M4	x 0.7	T7405247	T7405248	D3	2.374	.906	1.220	.194	.152	.250	3
M5	x 0.8	T7405287	T7405288	D3	2.500	1.000	-	.255	.191	.310	3
M6	x 1.0	T7405317	T7405318	D3	2.720	1.126	-	.318	.238	.380	3
M8	x 1.25	T7405367	T7405368	D3	2.937	1.252	1.646	.381	.286	.440	3
M10	x 1.5	T7405427	T7405428	D4	3.374	1.657	-	.367	.275	.440	3
M12	x 1.75	T7405507	T7405508	D4	3.594	1.657	-	.429	.322	.500	3


ISO	P											M				K						◎: Excellent ○: Good	
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○	○	○	○		○									○	○							
ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	○	○	○	○																			

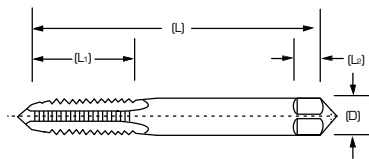
STI STRAIGHT TAP DIMENSION


Blank Design (1)

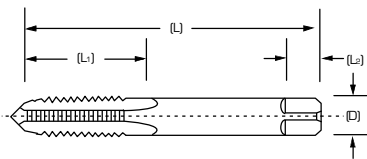

Blank Design (2)

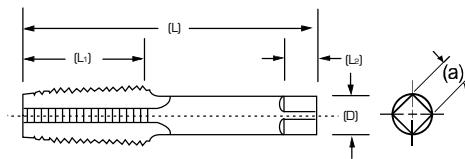

Blank Design (3)

STI Tap blank (Inch)

Nominal Size (STI)	Threads per Inch		Overall Length	Thread Length	Shank Diameter	Square Length	Square Size	Blank Design No.	Table 302 Blank Equivalent
	UNC	UNF	[L]	[L ₂]	[D]	[L ₃]	[a]		
#2	56	—	1.88	.560	.141	.190	.110	1	No.4
#2		64	1.88	.560	.141	.190	.110	1	No.4
#3	48	—	1.94	.630	.141	.190	.110	1	No.5
#3		56	1.94	.630	.141	.190	.110	1	No.5
#4	40	—	2.00	.690	.141	.190	.110	1	No.6
#4		48	2.00	.690	.141	.190	.110	1	No.6
#5	40	—	2.13	.750	.168	.250	.131	1	No.8
#6	32	—	2.38	.880	.194	.250	.152	1	No.10
#6		40	2.13	.750	.168	.250	.131	1	No.8
#8	32	—	2.38	.940	.220	.280	.165	1	No.12
#8		36	2.38	.940	.220	.280	.165	1	No.12
#10	24	—	2.50	1.000	.255	.310	.191	2	1/4
#10		32	2.50	1.000	.255	.310	.191	2	1/4
#12	24	—	2.72	1.130	.318	.380	.238	2	5/16
1/4	20	—	2.72	1.130	.318	.380	.238	2	5/16
1/4		28	2.72	1.130	.318	.380	.238	2	5/16
5/16	18	—	2.94	1.250	.381	.440	.286	2	3/8
5/16		24	2.94	1.250	.381	.440	.286	2	3/8
3/8	16	—	3.38	1.660	.367	.440	.275	3	1/2
3/8		24	3.16	1.440	.323	.410	.242	3	7/16
7/16	14	—	3.59	1.660	.429	.500	.322	3	9/16
7/16		20	3.38	1.660	.367	.440	.275	3	1/2
1/2	13	—	3.81	1.810	.480	.560	.360	3	5/8
1/2		20	3.59	1.660	.429	.500	.322	3	9/16

STI Tap blank (Metric)

Nominal Size (STI)	Thread Pitch (mm)	Overall Length	Thread Length	Shank Diameter	Square Length	Square Size	Blank Design No.	Table 302 Blank Equivalent
		[L]	[L ₂]	[D]	[L ₃]	[a]		
M2	0.4	1.81	.50	.141	.190	.110	1	No.3
M2.5	0.45	1.94	.630	.141	.190	.110	1	No.5
M3	0.5	2.00	.690	.141	.190	.110	1	No.6
M4	0.7	2.38	.880	.194	.250	.152	1	No.10
M5	0.8	2.50	1.000	.255	.310	.191	2	1/4
M6	1	2.72	1.130	.318	.380	.238	2	5/16
M8	1.25	2.94	1.250	.381	.440	.286	2	3/8
M10	1.5	3.38	1.660	.367	.440	.275	3	1/2
M12	1.75	3.59	1.660	.429	.500	.322	3	9/16

SCREW THREAD INSERT (STI) TAP DRILL CHART

NOMINAL THREAD SIZE (COARSE SERIES)	SUGGESTED DRILL SIZE (INCH)		NOMINAL THREAD SIZE	SUGGESTED DRILL SIZE (INCH)	
	ALUMINUM	STEEL, MAGNESIUM PLASTIC		ALUMINUM	STEEL, MAGNESIUM PLASTIC
M2.2X0.45	#42 (.0935)	#42 (.0935)	2 (.086)-56	3/32 (.0938)	#41 (.0960)
M2.5X0.45	#37 (.1040)	#37 (.1040)	3 (.099)-48	#36 (.1065)	7/64 (.1094)
M3X0.5	1/8 (.1250)	1/8 (.1250)	4 (.112)-40	#31 (.1200)	#31 (.1200)
M3.5X0.6	#27 (.1440)	#26 (.1470)	5 (.125)-40	3.4mm (.1339)	#29 (.1360)
M4X0.7	#19 (.1660)	#19 (.1660)	6 (.138)-32	#26 (.1470)	#25 (.1495)
M5X0.8	#5 (.2055)	#4 (.2090)	8 (.164)-32	#17 (.1730)	#16 (.1770)
M6X1	D (.2460)	1/4 (.2500)	10 (.190)-24	13/64 (.2031)	#5 (.2055)
M7X1	L (.2900)	L (.2900)	12 (.216)-24	#1 (.2280)	#1 (.2280)
M8X1.25	21/64 (.3281)	Q (.3320)	1/4 (.2500)-20	H (.2660)	H (.2660)
M10X1.5	Z (.4130)	Z (.4130)	5/16 (.3125)-18	Q (.3320)	Q (.3320)
M12X1.75	31/64 (.4844)	1/2 (.5000)	3/8 (.3750)-16	X (.3970)	X (.3970)
M14X2	37/64 (.5781)	37/64 (.5781)	7/16 (.4375)-14	29/64 (.4531)	29/64 (.4531)
M16X2	21/32 (.6562)	21/32 (.6562)	1/2 (.5000)-13	33/64 (.5156)	17/32 (.5312)
M18X2.5	47/64 (.7344)	47/64 (.7344)	9/16 (.5625)-12	37/64 (.5781)	19/32 (.5938)
M20X2.5	13/16 (.8125)	13/16 (.8125)	5/8 (.6250)-11	21/32 (.6562)	21/32 (.6562)
M22X2.5	57/64 (.8906)	57/64 (.8906)	3/4 (.7500)-10	25/32 (.7812)	25/32 (.7812)
M24X3	63/64 (.9844)	63/64 (.9844)	7/8 (.8750)-9	29/32 (.9062)	29/32 (.9062)
M27X3	1-3/32 (1.0938)	1-3/32 (1.0938)	1 (1.0000)-8	1-1/32 (1.0312)	1-1/32 (1.0312)
M30X3.5	1-7/32 (1.1288)	1-7/32 (1.1288)	1-1/8 (1.1250)-7	1-11/64 (1.1719)	1-11/64 (1.1719)
M33X3.5	1-11/32 (1.3438)	1-11/32 (1.3438)	1-1/4 (1.2500)-7	1-19/64 (1.2969)	1-19/64 (1.2969)
M36X4	1-29/64 (1.4531)	1-15/32 (1.4688)	1-3/8 (1.3750)-6	1-27/64 (1.4219)	1-27/64 (1.4219)
M39X4	1-37/64 (1.5781)	1-37/64 (1.5781)	1-1/2 (1.5000)-6	1-35/64 (1.5469)	1-35/64 (1.5469)
(FINE SERIES)					
M8X1	21/64 (.3281)	21/64 (.3281)	3 (.099)-56	#37 (.1040)	#36 (.1065)
M10X1	Y (.4040)	13/32 (.4062)	4 (.112)-48	3mm (.1181)	#31 (.1200)
M10X1.25	Y (.4040)	13/32 (.4062)	6 (.138)-40	#26 (.1470)	#25 (.1495)
M12X1.25	31/64 (.4844)	31/64 (.4844)	8 (.164)-36	#17 (.1730)	#16 (.1770)
M12X1.5	31/64 (.4844)	1/2 (.5000)	10 (.190)-32	#7 (.2010)	13/64 (.2031)
M14X1.5	9/16 (.5625)	37/64 (.5781)	1/4 (.2500)-28	G (.2610)	6.7mm (.2638)
M16X1.5	41/64 (.6406)	21/32 (.6562)	5/16 (.3125)-24	21/64 (.3281)	21/64 (.3281)
M18X1.5	23/32 (.7188)	47/64 (.7344)	3/8 (.3750)-24	25/64 (.3906)	25/64 (.3906)
M20X1.5	51/64 (.7969)	13/16 (.8125)	7/16 (.4375)-20	29/64 (.4531)	29/64 (.4531)
M22X1.5	7/8 (.8750)	57/64 (.8906)	1/2 (.5000)-20	33/64 (.5156)	33/64 (.5156)
M18X2	47/64 (.7344)	47/64 (.7344)	9/16 (.5625)-18	37/64 (.5781)	37/64 (.5781)
M20X2	13/16 (.8125)	13/16 (.8125)	5/8 (.6250)-18	41/64 (.6406)	41/64 (.6406)
M22X2	57/64 (.8906)	57/64 (.8906)	3/4 (.7500)-16	49/64 (.7656)	49/64 (.7656)
M24X2	31/32 (.9688)	31/32 (.9688)	7/8 (.8750)-14	57/64 (.8906)	57/64 (.8906)
M27X2	1-5/64 (1.0781)	1-3/32 (1.0938)	1 (1.0000)-14	1-1/64 (1.0156)	1-1/32 (1.0312)
M30X2	1-13/64 (1.2031)	1-13/64 (1.2031)	1 (1.0000)-12	1-1/64 (1.0156)	1-1/32 (1.0312)
M33X2	1-5/16 (1.3125)	1-21/64 (1.3281)	1-1/8 (1.1250)-12	1-9/64 (1.1406)	1-5/32 (1.1562)
M36X2	1-7/16 (1.4375)	1-7/16 (1.4375)	1-1/4 (1.2500)-12	1-17/64 (1.2656)	1-9/32 (1.2812)
M39X2	1-35/64 (1.5469)	1-9/16 (1.5625)	1-3/8 (1.3750)-12	1-25/64 (1.3906)	1-13/32 (1.4062)
M36X3	1-29/64 (1.4531)	1-29/64 (1.4531)	1-1/2 (1.5000)-12	1-33/64 (1.5156)	1-17/32 (1.5312)
M39X3	1-9/16 (1.5625)	1-9/16 (1.5625)			