

SELECTION GUIDE



HSS-PM
YG TAP
HARDENED
STEEL

- For Hardened Steels Applications





Please visit
global.yg1.com/mat
for material search


◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC						
P	1	Non-alloy steel	About 0.15% C	Annealed	125							
	2		About 0.45% C	Annealed	190	13						
	3		About 0.45% C	Quenched & Tempered	250	25						
	4		About 0.75% C	Annealed	270	28						
	5		About 0.75% C	Quenched & Tempered	300	32						
	6	Low alloy steel		Annealed	180	10	○	6-30	○	10-35	○	10-35
	7			Quenched & Tempered	275	29	○	6-30	○	10-35	○	10-35
	8			Quenched & Tempered	300	32	⊗	6-30	⊗	10-35	⊗	10-35
	9			Quenched & Tempered	350	38	⊗	6-12	⊗	6-12	⊗	6-12
	10	High alloyed steel, and tool steel		Annealed	200	15	⊗	6-12	⊗	6-12	⊗	6-12
	11			Quenched & Tempered	325	35	⊗	6-12	⊗	6-12	⊗	6-12
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15						
	13		Martensitic	Quenched & Tempered	240	23						
	14		Austenitic		180	10						
K	15	Grey cast iron	Pearlitic / ferritic		180	10						
	16		Pearlitic (Martensitic)		260	26						
	17	Nodular cast iron	Ferritic		160	3						
	18		Pearlitic		250	25						
	19		Ferritic		130							
	20	Malleable cast iron	Pearlitic		230	21						
N	21	Aluminum-wrought alloy	Not Curable		60							
	22		Curable	Hardened	100							
	23		≤ 12% Si, Not Curable		75							
	24	Aluminum-cast, alloyed	≤ 12% Si, Curable	Hardened	90							
	25		> 12% Si, Not Curable		130							
	26		Copper and Copper	Cutting Alloys, PB>1%		110						
	27	Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)		90							
	28		CuSn, lead-free copper and electrolytic copper		100							
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic									
	30		Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15						
	32			Cured	280	30						
	33			Annealed	250	25						
	34		Ni or Co Based	Cured	350	38						
	35			Cast	320	34						
	36	Titanium Alloys	Pure Titanium		400 Rm							
	37		Alpha + Beta Alloys	Hardened	1050 Rm							
H	38	Hardened steel		Hardened	550	55						
	39			Hardened	630	60						
	40		Chilled Cast Iron		Cast	400	42					
	41		Hardened Cast Iron		Hardened	550	55					

 Max. 2.5xD Blind Hole			 Max. 3.0xD Through Hole						
2P-3P			HSS-PM						
Spiral Flute			4P-5P						
R15			Spiral Point						
			-						
TQ858 (p.B211)	TK858 (p.B211)	TR858 (p.B211)					TQ808 (p.B214)	TK808 (p.B214)	TR808 (p.B214)
			M4 (p.B213)	M5 (p.B213)	M6 (p.B213)	M7 (p.B213)			

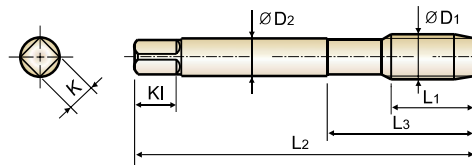Spiral Flute Tap Modified Bottoming Style for Steels up to HRc25 ~ 45Thread Depth /
Hole Type

2.5xD



p.B209

Unit : Inch

Size	Pitch	EDP No.			Limit	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute
D1	P	Steam Oxide	TiCN	Hardslick		L2	L1	L3	D2	K	KI	
M3	x 0.5	TQ858203	TK858203	TR858203HAR	D3	1.937	.197	.646	.141	.110	.190	3
M4	x 0.7	TQ858244	TK858244	TR858244HAR	D4	2.126	.276	.768	.168	.131	.250	3
M4	x 0.5	TQ858253	TK858253	TR858253HAR	D3	2.126	.276	.768	.168	.131	.250	3
M5	x 0.8	TQ858284	TK858284	TR858284HAR	D4	2.374	.354	.933	.194	.152	.250	3
M5	x 0.5	TQ858293	TK858293	TR858293HAR	D3	2.374	.354	.933	.194	.152	.250	3
M6	x 1.0	TQ858315	TK858315	TR858315HAR	D5	2.500	.433	1.000	.255	.191	.310	3
M6	x 0.75	TQ858324	TK858324	TR858324HAR	D4	2.500	.433	1.000	.255	.191	.310	3
M6	x 0.5	TQ858333	TK858333	TR858333HAR	D3	2.500	.433	1.000	.255	.191	.310	3
M8	x 1.25	TQ858365	TK858365	TR858365HAR	D5	2.720	.472	1.126	.318	.238	.380	3
M8	x 1.0	TQ858375	TK858375	TR858375HAR	D5	2.720	.433	1.126	.318	.238	.380	3
M10	x 1.5	TQ858426	TK858426	TR858426HAR	D6	2.937	.512	1.252	.381	.286	.440	3
M10	x 1.25	TQ858435	TK858435	TR858435HAR	D5	2.937	.472	1.252	.381	.286	.440	3
M10	x 1.0	TQ858445	TK858445	TR858445HAR	D5	2.937	.433	1.252	.381	.286	.440	3
M12	x 1.75	TQ858506	TK858506	TR858506HAR	D6	3.374	.591	2.067	.367	.275	.440	3
M12	x 1.5	TQ858516	TK858516	TR858516HAR	D6	3.374	.591	2.067	.367	.275	.440	3
M12	x 1.25	TQ858526	TK858526	TR858526HAR	D6	3.374	.551	2.067	.367	.275	.440	3
M12	x 1.0	TQ858535	TK858535	TR858535HAR	D5	3.374	.551	2.067	.367	.275	.440	3
M14	x 2.0	TQ858547	TK858547	TR858547HAR	D7	3.594	.709	2.067	.429	.322	.500	3
M14	x 1.5	TQ858556	TK858556	TR858556HAR	D6	3.594	.551	2.067	.429	.322	.500	3
M16	x 2.0	TQ858607	TK858607	TR858607HAR	D7	3.811	.709	2.205	.480	.360	.560	4
M16	x 1.5	TQ858616	TK858616	TR858616HAR	D6	3.811	.551	2.205	.480	.360	.560	4
M18	x 2.5	TQ858657	TK858657	TR858657HAR	D7	4.031	.787	2.205	.542	.406	.630	4
M18	x 1.5	TQ858676	TK858676	TR858676HAR	D6	4.031	.551	2.205	.542	.406	.630	4
M20	x 2.5	TQ858707	TK858707	TR858707HAR	D7	4.469	.787	2.480	.652	.489	.690	4

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended							○	○	◎	◎	◎													
ISO	N										S								H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys			Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc											15	30	25	38	34			55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended																								





YG TAP
HARDENED STEEL

TQ858 / TK858 SERIES


TR858 SERIES

Spiral Flute Tap Modified Bottoming Style for Steels up to HRc25 ~ 45

ANSI

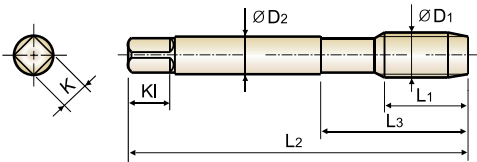

Thread Depth /
Hole Type
2.5xD



HSS
PM

M/MF

USCTI
302A

2P~3P

Steam
Oxide

TiCN

Hardslick

R15




p.B209


Unit : Inch

Size	Pitch	EDP No.			Limit	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute
D1	P	Steam Oxide	TiCN	Hardslick		L2	L1	L3	D2	K	K1	
M20	x 1.5	TQ858726	TK858726	TR858726HAR	D6	4.469	.551	2.480	.652	.489	.690	4
M22	x 2.5	TQ858747	TK858747	TR858747HAR	D7	4.689	.787	2.815	.697	.523	.750	4
M22	x 1.5	TQ858766	TK858766	TR858766HAR	D6	4.689	.551	2.815	.697	.523	.750	4
M24	x 3.0	TQ858788	TK858788	TR858788HAR	D8	4.906	.945	2.815	.760	.570	.750	4
M24	x 1.5	TQ858806	TK858806	TR858806HAR	D6	4.906	.551	2.815	.760	.570	.750	4


ISO	P											M			K						◎ : Excellent ○ : Good		
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended							○	○	◎	◎	◎												
ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended																							


MODI TAP BLANK DIMENSION - METRIC



Blank Design (1)



Blank Design (2)



Blank Design (3)


Metric Tap Blank

Nominal Size	Overall Length [L]	Thread Length		Length to neck		Shank Diameter [D]	Neck Diameter [d1]	Square Length [L3]	Square Size [a]	Blank Design No.
		SF	SP	SF	SP					
M3	1.94	.197	.374	.646		.141	.090	.19	.110	1
M3.5	2.00	.276	.413	.646		.141	.104	.19	.110	1
M4	2.13	.276	.453	.768		.168	.119	.25	.131	1
M4.5	2.38	.354	.531	.933		.194	.135	.25	.152	1
M5	2.38	.354	.531	.933		.194	.152	.25	.152	1
M5.5	2.38	.354	.571	1.000		.220	.189	.28	.165	2
M6	2.50	.433	.591	1.000		.255	.181	.31	.191	2
M7	2.72	.433	.669	1.126		.318	.220	.38	.238	2
M8x 1.25	2.72	.472	.669	1.126		.318	.246	.38	.238	2
M8x 1.0		.433								2
M10x 1.5	2.94	.512	.748	1.252		.381	.310	.44	.286	2
M10x 1.25		.472								2
M12x 1.75	3.38	.591	.984	2.067	1.657	.367	.354	.44	.275	3
M12x 1.25		.551								3
M14x 2.0	3.59	.709	.984	2.067	1.657	.429	.417	.50	.322	3
M14x 1.5		.551								3
M16x 2.0	3.81	.709	1.083	2.205	1.811	.480	.469	.56	.360	3
M16x 1.5		.551								3
M18x 2.5	4.03	.787	1.083	2.205	1.811	.542	.530	.63	.406	3
M18x 1.5		.551								3
M20x 1.5	4.47	.551	1.201	2.48	2.000	.652	.64	.69	.489	3
M20x 2.5		.787								3
M22x 1.5	4.69	.551	1.339	2.815	2.220	.697	.685	.75	.523	3
M22x 2.5		.787								3
M24x 1.5	4.91	.551	1.339	2.815	2.220	.760	.748	.75	.57	3
M24x 3		.945								3
M27x 1.5	5.13	.591	1.496	3.091	2.500	.896	.878	.88	.672	3
M27x 3		.945								3
M30x 1.5	5.44	.591	1.713	3.15	2.854	1.021	1.002	1.00	.766	3
M30x 3.5		1.102								3

*SF : Spiral Fluted Taps

*SP : Spiral Pointed Taps



TAP RECOMMENDATIONS FOR CLASSES OF THREAD -METRIC

Size	Pitch	Recommended Tap for Class of Thread		Pitch Diameter Limits for Class of Thread (mm)			Pitch Diameter Limits for Class of Thread (inch)		
		4H	6H	Min. (Basic)	Max. 4H	Max. 6H	Min. (Basic)	Max. 4H	Max. 6H
M1.6	0.35	D1	D3	1.373	1.426	1.458	.05406	.05614	.05740
M2	0.40	D1	D3	1.740	1.796	1.830	.06850	.07071	.07205
M2.5	0.45	D1	D3	2.208	2.268	2.303	.08693	.08929	.09067
M3	0.50	D1	D3	2.675	2.738	2.775	.10531	.10780	.10925
M3.5	0.60	D1	D4	3.110	3.181	3.222	.12244	.12524	.12685
M4	0.70	D2	D4	3.545	3.620	3.663	.13957	.14252	.14421
M4.5	0.75	D2	D4	4.013	4.088	4.131	.15789	.16094	.16264
M5	0.80	D2	D4	4.480	4.560	4.605	.17638	.17953	.18130
M6	1.00	D3	D5	5.350	5.445	5.500	.21063	.21437	.21654
M7	1.00	D3	D5	6.350	6.445	6.500	.25000	.25374	.25591
M8	1.25	D3	D5	7.188	7.288	7.348	.28299	.28693	.28929
M10	1.50	D3	D6	9.026	9.138	9.206	.35535	.35976	.36244
M12	1.75	D3	D6	10.863	10.988	11.063	.42768	.43260	.43555
M14	2.00	D3	D7	12.701	12.833	12.913	.50004	.50524	.50839
M16	2.00	D4	D7	14.701	14.833	14.913	.57878	.58398	.58713
M20	2.50	D4	D7	18.376	18.516	18.600	.72346	.72898	.73228
M24	3.00	D4	D8	22.051	22.221	22.316	.86815	.87484	.87858
M30	3.50	D5	D9	27.727	27.907	28.007	1.09161	1.0987	1.10264
M36	4.00	D5	D9	33.402	33.592	33.702	1.31504	1.32252	1.32685



TOLERANCE CHART - USCTI

Element	Nominal Diameter Range in Inches		Direction	Tolerance (Inches)
	Over	To (Inc.)		
Overall Length - L	.0520	1.0100	Plus or Minus	.031
	1.0100	4.0100	Plus or Minus	.063
Thread Length - L1	.0520	.2230	Plus or Minus	.047
	.2230	.5100	Plus or Minus	.063
	.5100	1.5100	Plus or Minus	.094
	1.5100	4.0100	Plus or Minus	.125
Square Length - L3	.0520	1.0100	Plus or Minus	.031
	1.0100	4.0100	Plus or Minus	.063
Shank Diameter - D	.0520	.2230	Minus	.0015
	.2230	.6350	Minus	.0015
	.6350	1.0100	Minus	.0020
	1.0100	1.5100	Minus	.0020
	1.5100	2.0100	Minus	.0030
	2.0100	4.0100	Minus	.0030
Square Size - a	.0520	.5100	Minus	.004
	.5100	1.0100	Minus	.006
	1.0100	2.0100	Minus	.008
	2.0100	4.0100	Minus	.010



TAP DRILL SIZES - METRIC THREAD

Size	Pitch		Minor dia.		Tap Drill Diameter									
	M	MF	Min. 6H	Max. 6H	80% Thread		75% Thread		70% Thread		65% Thread		60% Thread	
					mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
M1	0.25	–	.729	.798	0.74	.0291	0.76	.0298	0.77	.0304	0.79	.0311	0.81	.0317
	–	0.2	.783	.841	0.79	.0312	0.81	.0317	0.82	.0322	0.83	.0327	0.84	.0332
M1.1	0.25	–	.829	.898	0.84	.0331	0.86	.0337	0.87	.0344	0.89	.0350	0.91	.0356
	–	0.2	.883	.941	0.89	.0351	0.91	.0356	0.92	.0361	0.93	.0367	0.94	.0372
M1.2	0.25	–	.929	.998	0.94	.0370	0.96	.0377	0.97	.0383	0.99	.0389	1.01	.0396
	–	0.2	.983	1.041	0.99	.0391	1.01	.0396	1.02	.0401	1.03	.0406	1.04	.0411
M1.4	0.3	–	1.075	1.159	1.09	.0428	1.11	.0436	1.13	.0444	1.15	.0451	1.17	.0459
	–	0.2	1.183	1.241	1.19	.0469	1.21	.0474	1.22	.0480	1.23	.0485	1.24	.0490
M1.6	0.35	–	1.221	1.321	1.24	.0487	1.26	.0496	1.28	.0505	1.30	.0514	1.33	.0523
	–	0.2	1.383	1.441	1.39	.0548	1.41	.0553	1.42	.0558	1.43	.0563	1.44	.0569
M1.7	0.35	–	1.321	1.421	1.34	.0526	1.36	.0535	1.38	.0544	1.40	.0553	1.43	.0562
	–	0.3	1.375	1.459	1.39	.0547	1.41	.0554	1.43	.0562	1.45	.0570	1.47	.0577
	–	0.25	1.429	1.498	1.44	.0567	1.46	.0573	1.47	.0580	1.49	.0586	1.51	.0593
	–	0.2	1.483	1.541	1.49	.0587	1.51	.0593	1.52	.0598	1.53	.0603	1.54	.0608
M1.8	0.35	–	1.421	1.521	1.44	.0565	1.46	.0574	1.48	.0583	1.50	.0592	1.53	.0601
	–	0.2	1.583	1.641	1.59	.0627	1.61	.0632	1.62	.0637	1.63	.0642	1.64	.0647
M2	0.4	–	1.567	1.679	1.58	.0624	1.61	.0634	1.64	.0644	1.66	.0654	1.69	.0665
	–	0.25	1.729	1.798	1.74	.0685	1.76	.0692	1.77	.0698	1.79	.0704	1.81	.0711
M2.2	0.45	–	1.713	1.838	1.73	.0682	1.76	.0694	1.79	.0705	1.82	.0717	1.85	.0728
	–	0.25	1.929	1.998	1.94	.0764	1.96	.0770	1.97	.0777	1.99	.0783	2.01	.0789
M2.3	0.4	–	1.867	1.979	1.88	.0742	1.91	.0752	1.94	.0762	1.96	.0773	1.99	.0783
	–	0.35	1.921	2.021	1.94	.0762	1.96	.0771	1.98	.0780	2.00	.0789	2.03	.0798
M2.5	–	0.25	2.029	2.098	2.04	.0803	2.06	.0810	2.07	.0816	2.09	.0822	2.11	.0829
	0.45	–	2.013	2.138	2.03	.0800	2.06	.0812	2.09	.0823	2.12	.0835	2.15	.0846
M2.6	–	0.35	2.121	2.221	2.14	.0841	2.16	.0850	2.18	.0859	2.20	.0868	2.23	.0877
	0.45	–	2.113	2.238	2.13	.0840	2.16	.0851	2.19	.0863	2.22	.0874	2.25	.0886
M3	–	0.35	2.221	2.321	2.24	.0880	2.26	.0889	2.28	.0898	2.30	.0907	2.33	.0916
	0.5	–	2.459	2.599	2.48	.0977	2.51	.0989	2.55	.1002	2.58	.1015	2.61	.1028
M3.5	–	0.35	2.621	2.721	2.64	.1038	2.66	.1047	2.68	.1056	2.70	.1065	2.73	.1074
	0.6	–	2.850	3.010	2.88	.1132	2.92	.1148	2.95	.1163	2.99	.1178	3.03	.1194
M4	–	0.35	3.121	3.221	3.14	.1235	3.16	.1244	3.18	.1253	3.20	.1262	3.23	.1271
	0.7	–	3.242	3.422	3.27	.1288	3.32	.1306	3.36	.1324	3.41	.1342	3.45	.1360
M4.5	–	0.5	3.459	3.599	3.48	.1370	3.51	.1383	3.55	.1396	3.58	.1409	3.61	.1421
	0.75	–	3.688	3.878	3.72	.1465	3.77	.1484	3.82	.1503	3.87	.1522	3.92	.1542
M5	–	0.5	3.959	4.099	3.98	.1567	4.01	.1580	4.05	.1593	4.08	.1605	4.11	.1618
	0.9	–	4.026	4.226	4.06	.1600	4.12	.1623	4.18	.1646	4.24	.1669	4.30	.1692
M5.5	0.8	–	4.134	4.334	4.17	.1641	4.22	.1662	4.27	.1682	4.32	.1703	4.38	.1723
	–	0.5	4.459	4.599	4.48	.1764	4.51	.1777	4.55	.1790	4.58	.1802	4.61	.1815
M6	–	0.9	4.526	4.726	4.56	.1797	4.62	.1820	4.68	.1843	4.74	.1866	4.80	.1889
	–	0.75	4.688	4.878	4.72	.1858	4.77	.1878	4.82	.1897	4.87	.1916	4.92	.1935
M7	–	0.5	4.959	5.099	4.98	.1961	5.01	.1974	5.05	.1986	5.08	.1999	5.11	.2012
	1	–	4.917	5.153	4.96	.1953	5.03	.1979	5.09	.2004	5.16	.2030	5.22	.2055
M8	–	0.75	5.188	5.378	5.22	.2055	5.27	.2075	5.32	.2094	5.37	.2113	5.42	.2132
	–	0.5	5.459	5.599	5.48	.2158	5.51	.2170	5.55	.2183	5.58	.2196	5.61	.2209
M8	1	–	5.917	6.153	5.96	.2347	6.03	.2372	6.09	.2398	6.16	.2423	6.22	.2449
	–	0.75	6.188	6.378	6.22	.2449	6.27	.2468	6.32	.2487	6.37	.2507	6.42	.2526
M8	–	0.5	6.459	6.599	6.48	.2551	6.51	.2564	6.55	.2577	6.58	.2590	6.61	.2602
	1.25	–	6.647	6.912	6.70	.2638	6.78	.2670	6.86	.2702	6.94	.2734	7.03	.2766
M8	–	1	6.917	7.153	6.96	.2740	7.03	.2766	7.09	.2792	7.16	.2817	7.22	.2843
	–	0.75	7.188	7.378	7.22	.2843	7.27	.2862	7.32	.2881	7.37	.2900	7.42	.2919
M8	–	0.5	7.459	7.599	7.48	.2945	7.51	.2958	7.55	.2971	7.58	.2983	7.61	.2996

THREAD
MILLSCOMBO
TAPSSPIRAL
FLUTE TAPSSPIRAL
POINT TAPSSTRAIGHT
FLUTE TAPSFORMING
TAPSSCREW
THREAD
INSERT TAPS

PIPE TAPS

TECHNICAL
DATA

HSS

CARBIDE



TECHNICAL DATA

THREAD MILLS

COMBO TAPS

SPIRAL FLUTE TAPS

SPIRAL POINT TAPS

STRAIGHT FLUTE TAPS

FORMING TAPS

SCREW THREAD INSERT TAPS

PIPE TAPS

TECHNICAL DATA

Size	Pitch		Minor dia.		Tap Drill Diameter									
	M	MF	Min. 6H	Max. 6H	80% Thread		75% Thread		70% Thread		65% Thread		60% Thread	
					mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
M9	1.25	–	7.647	7.912	7.70	.3032	7.78	.3064	7.86	.3096	7.94	.3128	8.03	.3160
	–	1	7.917	8.153	7.96	.3134	8.03	.3160	8.09	.3185	8.16	.3211	8.22	.3236
	–	0.75	8.188	8.378	8.22	.3236	8.27	.3256	8.32	.3275	8.37	.3294	8.42	.3313
	–	0.5	8.459	8.599	8.48	.3339	8.51	.3352	8.55	.3364	8.58	.3377	8.61	.3390
M10	1.5	–	8.376	8.676	8.44	.3323	8.54	.3362	8.64	.3400	8.73	.3438	8.83	.3477
	–	1.25	8.647	8.912	8.70	.3426	8.78	.3458	8.86	.3490	8.94	.3521	9.03	.3553
	–	1	8.917	9.153	8.96	.3528	9.03	.3553	9.09	.3579	9.16	.3605	9.22	.3630
	–	0.75	9.188	9.378	9.22	.3630	9.27	.3649	9.32	.3669	9.37	.3688	9.42	.3707
M11	–	0.5	9.459	9.599	9.48	.3732	9.51	.3745	9.55	.3758	9.58	.3771	9.61	.3784
	1.5	–	9.376	9.676	9.44	.3717	9.54	.3755	9.64	.3794	9.73	.3832	9.83	.3870
	–	1	9.917	10.153	9.96	.3922	10.03	.3947	10.09	.3973	10.16	.3998	10.22	.4024
	–	0.75	10.188	10.378	10.22	.4024	10.27	.4043	10.32	.4062	10.37	.4081	10.42	.4101
M12	–	0.5	10.459	10.599	10.48	.4126	10.51	.4139	10.55	.4152	10.58	.4164	10.61	.4177
	1.75	–	10.106	10.441	10.18	.4008	10.30	.4053	10.41	.4098	10.52	.4143	10.64	.4187
	–	1.5	10.376	10.676	10.44	.4111	10.54	.4149	10.64	.4187	10.73	.4226	10.83	.4264
	–	1.25	10.647	10.912	10.70	.4213	10.78	.4245	10.86	.4277	10.94	.4309	11.03	.4341
M13	–	1	10.917	11.153	10.96	.4315	11.03	.4341	11.09	.4366	11.16	.4392	11.22	.4418
	–	0.75	11.188	11.378	11.22	.4418	11.27	.4437	11.32	.4456	11.37	.4475	11.42	.4494
	–	0.5	11.459	11.599	11.48	.4520	11.51	.4533	11.55	.4545	11.58	.4558	11.61	.4571
	–	1.75	11.106	11.441	11.18	.4402	11.30	.4447	11.41	.4492	11.52	.4536	11.64	.4581
M14	–	1.5	11.376	11.676	11.44	.4504	11.54	.4543	11.64	.4581	11.73	.4619	11.83	.4658
	–	1.25	11.647	11.912	11.70	.4607	11.78	.4639	11.86	.4671	11.94	.4703	12.03	.4735
	–	1	11.917	12.153	11.96	.4709	12.03	.4735	12.09	.4760	12.16	.4786	12.22	.4811
	–	0.75	12.188	12.378	12.22	.4811	12.27	.4830	12.32	.4850	12.37	.4869	12.42	.4888
M15	–	0.5	12.459	12.599	12.48	.4914	12.51	.4926	12.55	.4939	12.58	.4952	12.61	.4965
	2	–	11.835	12.210	11.92	.4694	12.05	.4745	12.18	.4796	12.31	.4847	12.44	.4898
	–	1.5	12.376	12.676	12.44	.4898	12.54	.4936	12.64	.4975	12.73	.5013	12.83	.5052
	–	1.25	12.647	12.912	12.70	.5000	12.78	.5032	12.86	.5064	12.94	.5096	13.03	.5128
M16	–	1	12.917	13.153	12.96	.5103	13.03	.5128	13.09	.5154	13.16	.5179	13.22	.5205
	–	0.75	13.188	13.378	13.22	.5205	13.27	.5224	13.32	.5243	13.37	.5262	13.42	.5282
	–	0.5	13.459	13.599	13.48	.5307	13.51	.5320	13.55	.5333	13.58	.5346	13.61	.5358
	–	2	12.835	13.210	12.92	.5087	13.05	.5138	13.18	.5190	13.31	.5241	13.44	.5292
M17	–	1.5	13.376	13.676	13.44	.5292	13.54	.5330	13.64	.5369	13.73	.5407	13.83	.5445
	–	1.25	13.647	13.912	13.70	.5394	13.78	.5426	13.86	.5458	13.94	.5490	14.03	.5522
	–	1	13.917	14.153	13.96	.5496	14.03	.5522	14.09	.5548	14.16	.5573	14.22	.5599
	–	0.75	14.188	14.378	14.22	.5599	14.27	.5618	14.32	.5637	14.37	.5656	14.42	.5675
M18	–	0.5	14.459	14.599	14.48	.5701	14.51	.5714	14.55	.5727	14.58	.5739	14.61	.5752
	2	–	13.835	14.210	13.92	.5481	14.05	.5532	14.18	.5583	14.31	.5634	14.44	.5685
	–	1.5	14.376	14.676	14.44	.5685	14.54	.5724	14.64	.5762	14.73	.5801	14.83	.5839
	–	1	14.917	15.153	14.96	.5890	15.03	.5916	15.09	.5941	15.16	.5967	15.22	.5992
M19	–	2	14.835	15.210	14.92	.5875	15.05	.5926	15.18	.5977	15.31	.6028	15.44	.6079
	–	1.5	15.376	15.676	15.44	.6079	15.54	.6118	15.64	.6156	15.73	.6194	15.83	.6233
	–	1.25	15.647	15.912	15.70	.6181	15.78	.6213	15.86	.6245	15.94	.6277	16.03	.6309
	–	1	15.917	16.153	15.96	.6284	16.03	.6309	16.09	.6335	16.16	.6360	16.22	.6386
M20	–	0.75	16.188	16.378	16.22	.6386	16.27	.6405	16.32	.6424	16.37	.6444	16.42	.6463
	–	0.5	16.459	16.599	16.48	.6488	16.51	.6501	16.55	.6514	16.58	.6527	16.61	.6539
	2.5	–	15.294	15.744	15.40	.6064	15.56	.6128	15.73	.6192	15.89	.6256	16.05	.6319
	–	2	15.835	16.210	15.92	.6268	16.05	.6319	16.18	.6371	16.31	.6422	16.44	.6473
M21	–	1.5	16.376	16.676	16.44	.6473	16.54	.6511	16.64	.6550	16.73	.6588	16.83	.6626
	–	1	16.917	17.153	16.96	.6677	17.03	.6703	17.09	.6729	17.16	.6754	17.22	.6780
	–	2.5	16.294	16.744	16.40	.6457	16.56	.6521	16.73	.6585	16.89	.6649	17.05	.6713
	–	2	16.835	17.210	16.92	.6662	17.05	.6713	17.18	.6764	17.31	.6815	17.44	.6867

Size	Pitch		Minor dia.		Tap Drill Diameter									
	M	MF	Min. 6H	Max. 6H	80% Thread		75% Thread		70% Thread		65% Thread		60% Thread	
					mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
M19	-	1.5	17.376	17.676	17.44	.6867	17.54	.6905	17.64	.6943	17.73	.6982	17.83	.7020
	-	1.25	17.647	17.912	17.70	.6969	17.78	.7001	17.86	.7033	17.94	.7065	18.03	.7097
	-	1	17.917	18.153	17.96	.7071	18.03	.7097	18.09	.7122	18.16	.7148	18.22	.7173
	-	0.75	18.188	18.378	18.22	.7173	18.27	.7193	18.32	.7212	18.37	.7231	18.42	.7250
	-	0.5	18.459	18.599	18.48	.7276	18.51	.7289	18.55	.7301	18.58	.7314	18.61	.7327
M20	2.5	-	17.294	17.744	17.40	.6851	17.56	.6915	17.73	.6979	17.89	.7043	18.05	.7107
	-	2	17.835	18.210	17.92	.7056	18.05	.7107	18.18	.7158	18.31	.7209	18.44	.7260
	-	1.5	18.376	18.676	18.44	.7260	18.54	.7299	18.64	.7337	18.73	.7375	18.83	.7414
	-	1	18.917	19.153	18.96	.7465	19.03	.7490	19.09	.7516	19.16	.7542	19.22	.7567
M21	-	2.5	18.294	18.744	18.40	.7245	18.56	.7309	18.73	.7373	18.89	.7437	19.05	.7501
	-	1.5	19.376	19.676	19.44	.7654	19.54	.7692	19.64	.7731	19.73	.7769	19.83	.7807
	-	1	19.917	20.153	19.96	.7859	20.03	.7884	20.09	.7910	20.16	.7935	20.22	.7961
M22	2.5	-	19.294	19.744	19.40	.7639	19.56	.7702	19.73	.7766	19.89	.7830	20.05	.7894
	-	2	19.835	20.210	19.92	.7843	20.05	.7894	20.18	.7945	20.31	.7997	20.44	.8048
	-	1.5	20.376	20.676	20.44	.8048	20.54	.8086	20.64	.8124	20.73	.8163	20.83	.8201
	-	1	20.917	21.153	20.96	.8252	21.03	.8278	21.09	.8303	21.16	.8329	21.22	.8355
M23	-	2.5	20.294	20.744	20.40	.8032	20.56	.8096	20.73	.8160	20.89	.8224	21.05	.8288
	-	2	20.835	21.210	20.92	.8237	21.05	.8288	21.18	.8339	21.31	.8390	21.44	.8441
	-	1.5	21.376	21.676	21.44	.8441	21.54	.8480	21.64	.8518	21.73	.8556	21.83	.8595
	-	1	21.917	22.153	21.96	.8646	22.03	.8672	22.09	.8697	22.16	.8723	22.22	.8748
M24	3	-	20.752	21.252	20.88	.8221	21.08	.8298	21.27	.8375	21.47	.8452	21.66	.8528
	-	2	21.835	22.210	21.92	.8631	22.05	.8682	22.18	.8733	22.31	.8784	22.44	.8835
	-	1.5	22.376	22.676	22.44	.8835	22.54	.8873	22.64	.8912	22.73	.8950	22.83	.8989
	-	1	22.917	23.153	22.96	.9040	23.03	.9065	23.09	.9091	23.16	.9116	23.22	.9142
M25	-	3	21.752	22.252	21.88	.8615	22.08	.8692	22.27	.8769	22.47	.8845	22.66	.8922
	-	2	22.835	23.210	22.92	.9024	23.05	.9075	23.18	.9127	23.31	.9178	23.44	.9229
	-	1.5	23.376	23.676	23.44	.9229	23.54	.9267	23.64	.9306	23.73	.9344	23.83	.9382
	-	1	23.917	24.153	23.96	.9433	24.03	.9459	24.09	.9485	24.16	.9510	24.22	.9536
M26	-	3	22.752	23.252	22.88	.9009	23.08	.9085	23.27	.9162	23.47	.9239	23.66	.9316
	-	2	23.835	24.210	23.92	.9418	24.05	.9469	24.18	.9520	24.31	.9571	24.44	.9623
	-	1.5	24.376	24.676	24.44	.9623	24.54	.9661	24.64	.9699	24.73	.9738	24.83	.9776
	3	-	23.752	24.252	23.88	.9402	24.08	.9479	24.27	.9556	24.47	.9633	24.66	.9709
M27	-	2.5	24.294	24.744	24.40	.9607	24.56	.9671	24.73	.9735	24.89	.9799	25.05	.9863
	-	2	24.835	25.210	24.92	.9812	25.05	.9863	25.18	.9914	25.31	.9965	25.44	1.0016
	-	1.5	25.376	25.676	25.44	1.0016	25.54	1.0055	25.64	1.0093	25.73	1.0131	25.83	1.0170
	-	1	25.917	26.153	25.96	1.0221	26.03	1.0246	26.09	1.0272	26.16	1.0297	26.22	1.0323
M28	-	3	24.752	25.252	24.88	.9796	25.08	.9873	25.27	.9950	25.47	1.0026	25.66	1.0103
	-	2	25.835	26.210	25.92	1.0205	26.05	1.0256	26.18	1.0308	26.31	1.0359	26.44	1.0410
	-	1.5	26.376	26.676	26.44	1.0410	26.54	1.0448	26.64	1.0487	26.73	1.0525	26.83	1.0563
	-	1	26.917	27.153	26.96	1.0614	27.03	1.0640	27.09	1.0666	27.16	1.0691	27.22	1.0717
M30	3.5	-	26.211	26.771	26.36	1.0379	26.59	1.0469	26.82	1.0558	27.04	1.0648	27.27	1.0737
	-	3	26.752	27.252	26.88	1.0584	27.08	1.0660	27.27	1.0737	27.47	1.0814	27.66	1.0890
	-	2	27.835	28.210	27.92	1.0993	28.05	1.1044	28.18	1.1095	28.31	1.1146	28.44	1.1197
	-	1.5	28.376	28.676	28.44	1.1197	28.54	1.1236	28.64	1.1274	28.73	1.1312	28.83	1.1351
	-	1	28.917	29.153	28.96	1.1402	29.03	1.1427	29.09	1.1453	29.16	1.1479	29.22	1.1504
M32	-	3	28.752	29.252	28.88	1.1371	29.08	1.1448	29.27	1.1524	29.47	1.1601	29.66	1.1678
	-	2	29.835	30.210	29.92	1.1780	30.05	1.1831	30.18	1.1882	30.31	1.1934	30.44	1.1985
	-	1.5	30.376	30.676	30.44	1.1985	30.54	1.2023	30.64	1.2061	30.73	1.2100	30.83	1.2138
M33	3.5	-	29.211	29.771	29.36	1.1560	29.59	1.1650	29.82	1.1739	30.04	1.1829	30.27	1.1918
	-	3	29.752	30.252	29.88	1.1765	30.08	1.1841	30.27	1.1918	30.47	1.1995	30.66	1.2072
	-	2	30.835	31.210	30.92	1.2174	31.05	1.2225	31.18	1.2276	31.31	1.2327	31.44	1.2378
	-	1.5	31.376	31.676	31.44	1.2378	31.54	1.2417	31.64	1.2455	31.73	1.2493	31.83	1.2532
	-	1	31.917	32.153	31.96	1.2583	32.03	1.2609	32.09	1.2634	32.16	1.2660	32.22	1.2685



Size	Pitch		Minor dia.		Tap Drill Diameter									
	M	MF	Min. 6H	Max. 6H	80% Thread		75% Thread		70% Thread		65% Thread		60% Thread	
					mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
M34	-	3	30.752	31.252	30.88	1.2158	31.08	1.2235	31.27	1.2312	31.47	1.2389	31.66	1.2465
	-	2	31.835	32.210	31.92	1.2568	32.05	1.2619	32.18	1.2670	32.31	1.2721	32.44	1.2772
	-	1.5	32.376	32.676	32.44	1.2772	32.54	1.2810	32.64	1.2849	32.73	1.2887	32.83	1.2926
	-	1	32.917	33.153	32.96	1.2977	33.03	1.3002	33.09	1.3028	33.16	1.3053	33.22	1.3079
M35	-	3	31.752	32.252	31.88	1.2552	32.08	1.2629	32.27	1.2706	32.47	1.2782	32.66	1.2859
	-	1.5	33.376	33.676	33.44	1.3166	33.54	1.3204	33.64	1.3243	33.73	1.3281	33.83	1.3319
	-	1	33.917	34.153	33.96	1.3370	34.03	1.3396	34.09	1.3422	34.16	1.3447	34.22	1.3473
M36	4	-	31.670	32.270	31.84	1.2537	32.10	1.2639	32.36	1.2741	32.62	1.2844	32.88	1.2946
	-	3	32.752	33.252	32.88	1.2946	33.08	1.3023	33.27	1.3099	33.47	1.3176	33.66	1.3253
	-	2	33.835	34.210	33.92	1.3355	34.05	1.3406	34.18	1.3457	34.31	1.3508	34.44	1.3560
	-	1.5	34.376	34.676	34.44	1.3560	34.54	1.3598	34.64	1.3636	34.73	1.3675	34.83	1.3713
M37	-	1	34.917	35.153	34.96	1.3764	35.03	1.3790	35.09	1.3815	35.16	1.3841	35.22	1.3866
	-	1.5	35.376	35.676	35.44	1.3953	35.54	1.3992	35.64	1.4030	35.73	1.4068	35.83	1.4107
	-	1	35.917	36.153	35.96	1.4158	36.03	1.4183	36.09	1.4209	36.16	1.4234	36.22	1.4260
M38	-	4	33.670	34.270	33.84	1.3324	34.10	1.3426	34.36	1.3529	34.62	1.3631	34.88	1.3733
	-	3	34.752	35.252	34.88	1.3733	35.08	1.3810	35.27	1.3887	35.47	1.3963	35.66	1.4040
	-	2	35.835	36.210	35.92	1.4142	36.05	1.4193	36.18	1.4245	36.31	1.4296	36.44	1.4347
M39	-	1.5	36.376	36.676	36.44	1.4347	36.54	1.4385	36.64	1.4424	36.73	1.4462	36.83	1.4500
	4	-	34.670	35.270	34.84	1.3718	35.10	1.3820	35.36	1.3922	35.62	1.4025	35.88	1.4127
	-	3	35.752	36.252	35.88	1.4127	36.08	1.4204	36.27	1.4280	36.47	1.4357	36.66	1.4434
	-	2	36.835	37.210	36.92	1.4536	37.05	1.4587	37.18	1.4638	37.31	1.4689	37.44	1.4741
M40	-	1.5	37.376	37.676	37.44	1.4741	37.54	1.4779	37.64	1.4817	37.73	1.4856	37.83	1.4894
	-	1	37.917	38.153	37.96	1.4945	38.03	1.4971	38.09	1.4996	38.16	1.5022	38.22	1.5047
	-	4	35.670	36.270	35.84	1.4111	36.10	1.4214	36.36	1.4316	36.62	1.4418	36.88	1.4521
	-	3	36.752	37.252	36.88	1.4521	37.08	1.4597	37.27	1.4674	37.47	1.4751	37.66	1.4827
	-	2	37.835	38.210	37.92	1.4930	38.05	1.4981	38.18	1.5032	38.31	1.5083	38.44	1.5134
M42	-	1.5	38.376	38.676	38.44	1.5134	38.54	1.5173	38.64	1.5211	38.73	1.5249	38.83	1.5288
	-	1	38.917	39.153	38.96	1.5339	39.03	1.5364	39.09	1.5390	39.16	1.5416	39.22	1.5441
	4.5	-	37.129	37.799	37.32	1.4694	37.62	1.4809	37.91	1.4924	38.20	1.5039	38.49	1.5155
	-	4	37.670	38.270	37.84	1.4899	38.10	1.5001	38.36	1.5103	38.62	1.5206	38.88	1.5308
	-	3	38.752	39.252	38.88	1.5308	39.08	1.5385	39.27	1.5461	39.47	1.5538	39.66	1.5615
M45	-	2	39.835	40.210	39.92	1.5717	40.05	1.5768	40.18	1.5819	40.31	1.5871	40.44	1.5922
	-	1.5	40.376	40.676	40.44	1.5922	40.54	1.5960	40.64	1.5998	40.73	1.6037	40.83	1.6075
	4.5	-	40.129	40.799	40.32	1.5875	40.62	1.5990	40.91	1.6106	41.20	1.6221	45.00	1.7717
	-	4	40.670	41.270	40.84	1.6080	41.10	1.6182	41.36	1.6285	41.62	1.6387	41.88	1.6489
	-	3	41.752	42.252	41.88	1.6489	42.08	1.6566	42.27	1.6643	42.47	1.6719	42.66	1.6796
M46	-	2	42.835	43.210	42.92	1.6898	43.05	1.6949	43.18	1.7001	43.31	1.7052	43.44	1.7103
	-	1.5	43.376	43.676	43.44	1.7103	43.54	1.7141	43.64	1.7180	43.73	1.7218	43.83	1.7256
	-	1	43.917	44.153	43.96	1.7307	44.03	1.7333	44.09	1.7359	44.16	1.7384	44.22	1.7410
	-	1.5	44.376	44.676	44.44	1.7497	44.54	1.7535	44.64	1.7573	44.73	1.7612	44.83	1.7650
M48	5	-	42.587	43.297	42.80	1.6852	43.13	1.6980	43.45	1.7108	43.78	1.7235	44.10	1.7363
	-	4	43.670	44.270	43.84	1.7261	44.10	1.7363	44.36	1.7466	44.62	1.7568	44.88	1.7670
	-	3	44.752	45.252	44.88	1.7670	45.08	1.7747	45.27	1.7824	45.47	1.7900	45.66	1.7977
	-	2	45.835	46.210	45.92	1.8079	46.05	1.8130	46.18	1.8182	46.31	1.8233	46.44	1.8284
	-	1.5	46.376	46.676	46.44	1.8284	46.54	1.8322	46.64	1.8361	46.73	1.8399	46.83	1.8437
M50	-	1	46.917	47.153	46.96	1.8488	47.03	1.8514	47.09	1.8540	47.16	1.8565	47.22	1.8591
	-	5	44.587	45.297	44.80	1.7639	45.13	1.7767	45.45	1.7895	45.78	1.8023	46.10	1.8151
	-	3	46.752	47.252	46.88	1.8458	47.08	1.8534	47.27	1.8611	47.47	1.8688	47.66	1.8764
	-	2	47.835	48.210	47.92	1.8867	48.05	1.8918	48.18	1.8969	48.31	1.9020	48.44	1.9071
	-	1.5	48.376	48.676	48.44	1.9071	48.54	1.9110	48.64	1.9148	48.73	1.9186	48.83	1.9225
	-	1	48.917	49.153	48.96	1.9276	49.03	1.9301	49.09	1.9327	49.16	1.9353	49.22	1.9378

Size	Pitch		Minor dia.		Tap Drill Diameter									
	M	MF	Min. 6H	Max. 6H	80% Thread		75% Thread		70% Thread		65% Thread		60% Thread	
					mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch
M52	5	–	46.587	47.297	46.80	1.8427	47.13	1.8555	47.45	1.8682	47.78	1.8810	48.10	1.8938
	–	4	47.670	48.270	47.84	1.8836	48.10	1.8938	48.36	1.9040	48.62	1.9143	48.88	1.9245
	–	3	48.752	49.252	48.88	1.9245	49.08	1.9322	49.27	1.9398	49.47	1.9475	49.66	1.9552
	–	2	49.835	50.210	49.92	1.9654	50.05	1.9705	50.18	1.9756	50.31	1.9808	50.44	1.9859
	–	1.5	50.376	50.676	50.44	1.9859	50.54	1.9897	50.64	1.9935	50.73	1.9974	50.83	2.0012
M55	–	4	50.670	51.270	50.84	2.0017	51.10	2.0119	51.36	2.0222	51.62	2.0324	51.88	2.0426
	–	3	51.752	52.252	51.88	2.0426	52.08	2.0503	52.27	2.0580	52.47	2.0656	52.66	2.0733
	–	2	52.835	53.210	52.92	2.0835	53.05	2.0886	53.18	2.0938	53.31	2.0989	53.44	2.1040
	–	1.5	53.376	53.676	53.44	2.1040	53.54	2.1078	53.64	2.1117	53.73	2.1155	53.83	2.1193
M56	5.5	–	50.046	50.796	50.28	1.9797	50.64	1.9938	51.00	2.0078	51.36	2.0219	51.71	2.0360
	–	4	51.670	52.270	51.84	2.0411	52.10	2.0513	52.36	2.0615	52.62	2.0718	52.88	2.0820
	–	3	52.752	53.252	52.88	2.0820	53.08	2.0897	53.27	2.0973	53.47	2.1050	53.66	2.1127
	–	2	53.835	54.210	53.92	2.1229	54.05	2.1280	54.18	2.1331	54.31	2.1382	54.44	2.1434
	–	1.5	54.376	54.676	54.44	2.1434	54.54	2.1472	54.64	2.1510	54.73	2.1549	54.83	2.1587
M58	–	4	53.670	54.270	53.84	2.1198	54.10	2.1300	54.36	2.1403	54.62	2.1505	54.88	2.1607
	–	3	54.752	55.252	54.88	2.1607	55.08	2.1684	55.27	2.1761	55.47	2.1837	55.66	2.1914
	–	2	55.835	56.210	55.92	2.2016	56.05	2.2067	56.18	2.2119	56.31	2.2170	56.44	2.2221
	–	1.5	56.376	56.676	56.44	2.2221	56.54	2.2259	56.64	2.2298	56.73	2.2336	56.83	2.2374
M60	5.5	–	54.046	54.796	54.28	2.1372	54.64	2.1512	55.00	2.1653	55.36	2.1794	55.71	2.1934
	–	4	55.670	56.270	55.84	2.1985	56.10	2.2088	56.36	2.2190	56.62	2.2292	56.88	2.2395
	–	3	56.752	57.252	56.88	2.2395	57.08	2.2471	57.27	2.2548	57.47	2.2625	57.66	2.2701
	–	2	57.835	58.210	57.92	2.2804	58.05	2.2855	58.18	2.2906	58.31	2.2957	58.44	2.3008
	–	1.5	58.376	58.676	58.44	2.3008	58.54	2.3047	58.64	2.3085	58.73	2.3123	58.83	2.3162
M62	–	4	57.670	58.270	57.84	2.2773	58.10	2.2875	58.36	2.2977	58.62	2.3080	58.88	2.3182
	–	3	58.752	59.252	58.88	2.3182	59.08	2.3259	59.27	2.3335	59.47	2.3412	59.66	2.3489
	–	1	60.917	61.153	60.96	2.4000	61.03	2.4026	61.09	2.4051	61.16	2.4077	61.22	2.4103
	–	1.5	60.376	60.676	60.44	2.3796	60.54	2.3834	60.64	2.3872	60.73	2.3911	60.83	2.3949
M64	6	–	57.505	58.305	57.76	2.2742	58.15	2.2895	58.54	2.3049	58.93	2.3202	59.32	2.3356
	–	4	59.670	60.270	59.84	2.3560	60.10	2.3663	60.36	2.3765	60.62	2.3867	60.88	2.3969
	–	3	60.752	61.252	60.88	2.3969	61.08	2.4046	61.27	2.4123	61.47	2.4200	61.66	2.4276
	–	2	61.835	62.210	61.92	2.4379	62.05	2.4430	62.18	2.4481	62.31	2.4532	62.44	2.4583
	–	1.5	62.376	62.676	62.44	2.4583	62.54	2.4621	62.64	2.4660	62.73	2.4698	62.83	2.4737
M65	–	4	60.670	61.270	60.84	2.3954	61.10	2.4056	61.36	2.4159	61.62	2.4261	61.88	2.4363
	–	3	61.752	62.252	61.88	2.4363	62.08	2.4440	62.27	2.4517	62.47	2.4593	62.66	2.4670
	–	2	62.835	63.210	62.92	2.4772	63.05	2.4823	63.18	2.4875	63.31	2.4926	63.44	2.4977
	–	1.5	63.376	63.676	63.44	2.4977	63.54	2.5015	63.64	2.5054	63.73	2.5092	63.83	2.5130