



HIGH PERFORMANCE SOLID CARBIDE END MILLS 5-FLUTE STANDARD LENGTH (PLAIN SHANK)

Square	UGMH12
Chamfer	UGMG32
Corner Radius	UGMG34

- Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.
- Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

- Special roughing profile for machining Titanium and Titanium Alloys.
- Longer tool life with special coating.

Reinforced cutting edge

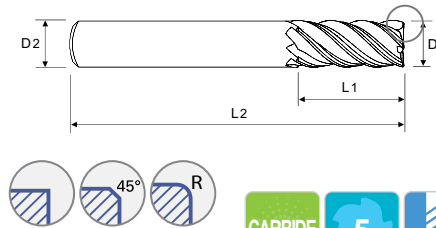

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square	Chamfer	Corner Radius				
				EDP No.	EDP No.	.015	.030	.060	.090	.125
				EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
1/8	1/8	1/4	1-1/2	UGMH12008	UGMG32008	UGMG34008	UGMG34950			
		3/8	1-1/2	UGMH12901	UGMG32901	UGMG34901	UGMG34951			
		1/2	2-1/2	UGMH12S902*		UGMG34S952*	UGMG34S953*			
		3/4	2-1/2	UGMH12S903*		UGMG34S954*	UGMG34S955*			
3/16	3/16	5/16	2	UGMH12012	UGMG32012	UGMG34012	UGMG34956			
		9/16	2	UGMH12904	UGMG32902	UGMG34902	UGMG34957			
		3/4	2-1/2	UGMH12S905*		UGMG34S958*	UGMG34S959*			
1/4	1/4	3/8	2	UGMH12016	UGMG32016	UGMG34960	UGMG34016	UGMG34961		
		1/2	2-1/2	UGMH12906		UGMG34962	UGMG34963	UGMG34964		
		3/4	2-1/2	UGMH12907	UGMG32903	UGMG34903	UGMG34904	UGMG34905		
		1	3	UGMH12S908*		UGMG34S965*	UGMG34S966*	UGMG34S967*		
		1-1/4	3	UGMH12S909*		UGMG34S968*	UGMG34S969*	UGMG34S970*		
5/16	5/16	7/16	2"	UGMH12020	UGMG32020	UGMG34971	UGMG34020	UGMG34972		
		13/16	2-1/2	UGMH12910	UGMG32904	UGMG34906	UGMG34907	UGMG34908		
		1	3	UGMH12S911*		UGMG34S973*	UGMG34S974*	UGMG34S975*		
3/8	3/8	1/2	2-1/2	UGMH12024	UGMG32024	UGMG34976	UGMG34024	UGMG34909	UGMG34977	
		1	3	UGMH12912	UGMG32905	UGMG34910	UGMG34911	UGMG34912	UGMG34978	
		1-1/4	3	UGMH12S913*		UGMG34S979*	UGMG34S980*	UGMG34S981*	UGMG34S982*	
		1-1/2	4	UGMH12S914*		UGMG34S983*	UGMG34S984*	UGMG34S985*	UGMG34S986*	
1/2	1/2	5/8	2-1/2	UGMH12032	UGMG32032	UGMG34032	UGMG34913	UGMG34914	UGMG34987	UGMG34988
		1	3	UGMH12915	UGMG32906	UGMG34915	UGMG34916	UGMG34917	UGMG34918	UGMG34919
		1-1/4	3-1/2	UGMH12916	UGMG32907	UGMG34920	UGMG34921	UGMG34922	UGMG34923	UGMG34924
		1-5/8	4	UGMH12S917*		UGMG34S989*	UGMG34S990*	UGMG34S991*	UGMG34S992*	UGMG34S993*
		2	4	UGMH12S918*		UGMG34S994*	UGMG34S995*	UGMG34S996*	UGMG34S997*	UGMG34S998*

CHAMFER KEY UGMG32

Mill Diameter (in.)	Chamfer Size
1/8	.004
3/16	.006
1/4	.007
5/16	.007
3/8	.011
1/2	.015
5/8	.015
3/4	.019
1	.019

Mill Dia.Tolerance (in)	Shank Dia.Tolerance
0 ~ -.0012	h5 * Shank Dia. ≥ Ø1/2 : h6

* Length of cut in excess of 3xD on 45° single-helix requires feed reduction of approximately 50%

NEXT PAGE ►

◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○	
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	◎	◎				

HIGH PERFORMANCE SOLID CARBIDE END MILLS





5-FLUTE STANDARD LENGTH (PLAIN SHANK)

Square	UGMH12
Chamfer	UGMG32
Corner Radius	UGMG34

- Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.
- Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

- Special roughing profile for machining Titanium and Titanium Alloys.
- Longer tool life with special coating.

Reinforced cutting edge

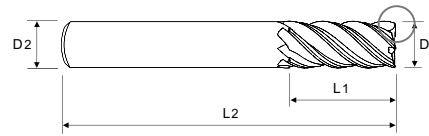

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	OAL (L2)	Square EDP No.	Chamfer EDP No.	Corner Radius						
						.015 EDP No.	.030 EDP No.	.060 EDP No.	.090 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.
5/8	5/8	3/4	3	UGMH12040	UGMG32040		UGMG34040	UGMG34925	UGMG34999	UGMG34801		
		1-1/4	3-1/2	UGMH12919	UGMG32908	UGMG34926	UGMG34927	UGMG34928	UGMG34929	UGMG34930		
		1-5/8	4	UGMH12920			UGMG34802	UGMG34803	UGMG34804	UGMG34805		
		2-1/8	4-1/2	UGMH125921*			UGMG345806*	UGMG345807*	UGMG345808*	UGMG345809*		
		2-1/2	5	UGMH125922*			UGMG345810*	UGMG345811*	UGMG345812*	UGMG345813*		
3/4	3/4	1	3-1/2	UGMH12048	UGMG32048		UGMG34048	UGMG34931	UGMG34932	UGMG34814	UGMG34815	UGMG34816
		1-1/2	4	UGMH12923	UGMG32909	UGMG34933	UGMG34934	UGMG34935	UGMG34936	UGMG34937	UGMG34938	UGMG34817
		1-7/8	5	UGMH12924			UGMG34818	UGMG34819	UGMG34820	UGMG34821	UGMG34822	UGMG34823
		2-1/4	5	UGMH12925			UGMG34824	UGMG34825	UGMG34826	UGMG34827	UGMG34828	UGMG34829
		2-3/4	5	UGMH125926*			UGMG345830*	UGMG345831*	UGMG345832*	UGMG345833*	UGMG345834*	UGMG345835*
		3-1/4	6	UGMH125927*			UGMG345836*	UGMG345837*	UGMG345838*	UGMG345839*	UGMG345840*	UGMG345841*
1	1	1-1/8	4	UGMH12064	UGMG32064		UGMG34064	UGMG34939	UGMG34940	UGMG34842	UGMG34843	UGMG34844
		1-1/2	4	UGMH12928	UGMG32910	UGMG34941	UGMG34942	UGMG34943	UGMG34944	UGMG34945	UGMG34946	UGMG34845
		2	5	UGMH12929	UGMG32911		UGMG34947	UGMG34948	UGMG34949	UGMG34846	UGMG34847	UGMG34848
		2-5/8	5	UGMH12930			UGMG34849	UGMG34850	UGMG34851	UGMG34852	UGMG34853	UGMG34854
		3-1/4	6	UGMH125931*			UGMG345855*	UGMG345856*	UGMG345857*	UGMG345858*	UGMG345859*	UGMG345860*
		4-1/4	7	UGMH125932*			UGMG345861*	UGMG345862*	UGMG345863*	UGMG345864*	UGMG345865*	UGMG345866*
1-1/4	1-1/4	1-1/2	4-1/2	UGMH12116				UGMG34116	UGMG34867	UGMG34868	UGMG34869	UGMG34870
		2	4-1/2	UGMH12933				UGMG34871	UGMG34872	UGMG34873	UGMG34874	UGMG34875
		2-5/8	5-1/2	UGMH12934				UGMG34876	UGMG34877	UGMG34878	UGMG34879	UGMG34880
		3-1/4	6	UGMH12935				UGMG34881	UGMG34882	UGMG34883	UGMG34884	UGMG34885
		4-1/2	7	UGMH125936*				UGMG345886*	UGMG345887*	UGMG345888*	UGMG345889*	UGMG345890*

* Length of cut in excess of 3xD on 45° single-helix requires feed reduction of approximately 50%

Mill Dia.Tolerance (in)	Shank Dia.Tolerance
0 ~ -.0012	h5 * Shank Dia. ≥ Ø1/2 : h6

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	36	10	29	32	38	15	29	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	◎	○	○	○

RECOMMENDED CUTTING CONDITIONS – INCH


UGMH12, UGMG32, UE5G32 UGMG34, UGMH06, UGMH07 SERIES

5 FLUTES - Side cutting



RPM = rev./min. Feed = in./min.
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)											
						1/8	3/16	1/4	5/16	3/8	1/2	9/16	5/8	11/16	3/4	1	1 1/4
P	1-5	Non-alloy steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470	470
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046
					RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440
	6-8	Low alloy steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470	470
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046
					RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440
	9	Low alloy steel	0.3D	1.5D	SFM (Vc)	330	330	330	330	330	330	330	330	330	330	330	330
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046
					RPM	10080	6720	5040	4030	3360	2520	2240	2020	1830	1680	1260	1010
10	High alloyed steel, and tool steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470	470	
				IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
				RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440	
11.1	High alloyed steel, and tool steel	0.3D	1.5D	SFM (Vc)	330	330	330	330	330	330	330	330	330	330	330	330	
				IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
				RPM	10080	6720	5040	4030	3360	2520	2240	2020	1830	1680	1260	1010	
M	12-13	Stainless steel (SUS 420, X40Cr13, 420)	0.3D	1.5D	SFM (Vc)	385	385	385	385	385	385	385	385	385	385	385	385
					IPT (fz)	.0003	.0004	.0009	.0010	.0012	.0018	.0020	.0021	.0022	.0024	.0028	.0033
					RPM	11760	7840	5880	4710	3920	2940	2610	2350	2140	1960	1470	1180
	14.1	Stainless steel (SUS 316, 316L, X5CrNiMo 17 12 2)	0.3D	1.5D	SFM (Vc)	270	270	270	270	270	270	270	270	270	270	270	270
					IPT (fz)	.0004	.0005	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	.0041
					RPM	8250	5500	4130	3300	2750	2060	1830	1650	1500	1380	1030	830
14.2	Stainless steel (SUS 630, PH 15-5)	0.3D	1.5D	SFM (Vc)	195	195	195	195	195	195	195	195	195	195	195	195	
				IPT (fz)	.0004	.0005	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	.0041	
				RPM	5960	3970	2980	2380	1990	1490	1320	1190	1080	990	740	600	
K	15-20	Grey cast iron	0.3D	1.5D	SFM (Vc)	350	350	350	350	350	350	350	350	350	350	350	
					IPT (fz)	.0006	.0008	.0017	.0019	.0025	.0031	.0034	.0038	.0041	.0044	.0050	.0057
					RPM	10700	7130	5350	4280	3570	2670	2380	2140	1940	1780	1340	1070
					IPM (FEED)	32	29	45	41	45	41	40	41	40	39	34	30
S	31-35	Heat Resistant Super Alloys (X12 NiCrSi 36-16, 1.4864, Inconel 718, NiCr20TiAl, 2.4631, NiCu30Al, 2.4375, G-X120Mn12, 1.3401)	0.1D	1.5D	SFM (Vc)	100	100	100	100	100	100	100	100	100	100	100	
					IPT (fz)	.0004	.0005	.0008	.0009	.0011	.0017	.0018	.0019	.0019	.0021	.0024	.0027
					RPM	3060	2040	1530	1220	1020	760	680	610	560	510	380	310
					IPM (FEED)	5	4	5	4	4	5	5	5	4	4	4	3
	36-37	Titanium Alloys (HB 400 Rm, HB 1050Rm TiAl6V4, 3.7165)	0.2D	1.5D	SFM (Vc)	225	225	225	225	225	225	225	225	225	225	225	
					IPT (fz)	.0004	.0004	.0011	.0011	.0013	.0022	.0023	.0024	.0025	.0027	.0031	.0036
					RPM	6880	4580	3440	2750	2290	1720	1530	1380	1250	1150	860	690
					IPM (FEED)	14	9	19	15	15	19	18	17	16	16	13	12



- NOTES:**
- ▶ Maximum recommended depth shown
 - ▶ Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less
 - ▶ Feed to be reduced by approximately 50% if L.O.C. (length of cut) is over 3xD
 - ▶ Reduce speed and feed recommendations for materials harder than listed
 - ▶ Recommendations above are based on ideal conditions.
Adjust parameters accordingly for smaller taper machining centers or less rigid conditions

YU-TP21 AMERICAS

BEST VALUE IN THE WORLD OF CUTTING TOOLS



FOR TITANIUM, STAINLESS STEELS AND ALLOY STEELS :
TOUGH MATERIALS
TAKE IT ON WITH TITANOX

TitaNox Power

INDUSTRY-LEADING SOLID CARBIDE END MILLS

HIGH-PERFORMANCE
MACHINING MADE EASY:

- Variable Helix and Pitch
- 4 Flute and 5 Flute
- Square End, Chamfer and Radius
- Standard and Extended Lengths
- Inch and Metric Sizes
- 5 Flute Heavy Cutting Solution
TitaNox Power HPC **NEW**

Take It On With

TitaNox Power

HIGH-PERFORMANCE MACHINING MADE EASY.

- Titanium
- Stainless Steels
- Alloy Steels



4 Flute

5 Flute

TitaNox-Power HPC
5 Flute



If you've been looking for a superior carbide end mill that won't back down when the going gets tough, it's time you look at TitaNox.


The TitaNox line is built to take on titanium, stainless steels, alloy steels, and more. With a choice of 4- and 5 flute designs and extra-rigid high-speed performance, TitaNox makes the perfect match for aerospace, power generation and medical applications.

TitaNox — Nothing Cuts Better.

With more choices in high-performance carbide end mills, YG-1 is the undisputed leader in end mill offerings. And with the TitaNox line, you have a full selection of extremely durable end mills built to take on the toughest materials in the business. From titanium to stainless steel and more—TitaNox rules. In either 4 flute or 5 flute configurations you get:

- ▶ YG-1 advanced coating for better wear resistance
- ▶ Better thermal stability
- ▶ Optimized edge design provides excellent performance in heavy cutting applications
- ▶ Excellent performance in difficult-to-machine materials
- ▶ Perfect solution for aerospace, power generation and medical applications
- ▶ Premium grade substrate for longer tool life

TitaNox Power 4 FLUTE DOUBLE CORE END MILLS




Let the Chips Fly.

For heavy cutting in slotting and profiling applications, our true double-core design provides faster chip evacuation and improved dimensional stability. Experience what a difference double-core design can make in your operation.

- ▶ Highly rigid double core adds stability and improves rigidity
- ▶ Unique 4 flute design provides excellent chip evacuation
- ▶ Variable flute design featuring multiple helix helps increase performance, reduce vibration and eliminate chatter

TitaNox Power 5 FLUTE MULTIPLE HELIX END MILLS



Strong Performance — Right to the Finish.


These new 5 flute end mills are built to handle high-speed machining with fine finishing ability.

- ▶ 5 flute multiple helix design for fast, fine finishing in tough materials
- ▶ Multiple-helix geometry delivers smooth cutting with reduced chatter
- ▶ The perfect choice for profiling, finishing, peel milling operations and more
- ▶ New HPC Solution for Heavy Cutting Applications

CASE STUDY

4 Flute Double Core End Mills vs. Competitors

Cutting Conditions	
Milling Method	Slotting 
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	Ø12(R1) x Ø12 x 26 x 80
RPM	1591 rev./min.
IPM	10 in./min.
Axial Depth	.470"
Coolant	Wet Cut
Overhang	1.41"
Machine	Machining Center

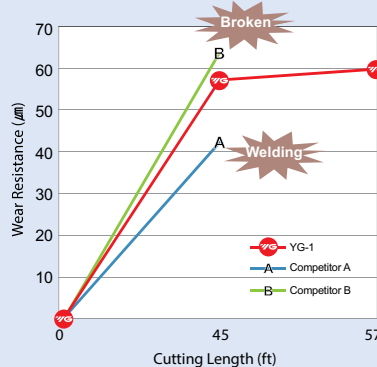

YG TitaNox-POWER Total Milling Length : 57 ft.



Competitor A Total Milling Length : 53 ft.




Competitor B Total Milling Length : 53 ft.




5 Flute Multiple Helix End Mills vs. Competitors


Cutting Conditions	
Milling Method	Down & Side Cutting 
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	Ø12 x Ø12 x 26 x 83
RPM	1591 rev./min.
IPM	15.669 in./min.
Axial Depth	.710"
Radial Depth	.141"
Coolant	Wet Cut
Machine	Machining Center

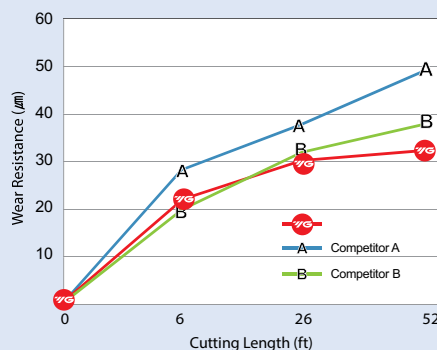


YG TitaNox-POWER Total Milling Length : 52 ft.



Competitor A Total Milling Length : 52 ft.




Competitor B Total Milling Length : 52 ft.




5 Flute TitaNox Power HPC vs. Competitor

Cutting Conditions	
Milling Method	Side Cutting 
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	3/4(R.03")x3/4x1-1/2x4"
RPM	2000 rev./min.
IPM	30 in./min.
Milling Method	Axial : .075" / Radial : 1.5"
Coolant	Wet Cut
Machine	Machining Center



YG TitaNox-POWER

Milling Length = 49.21ft



Competitor A

Broken at 46.58ft

