


# HIGH PERFORMANCE SOLID CARBIDE END MILLS

## 5-FLUTE EXTENDED LENGTH (PLAIN SHANK)

Square **UGMH06**  
 Corner Radius **UGMH07**

- Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.
- Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

- Special roughing profile for machining Titanium and Titanium Alloys.
- Longer tool life with special coating.

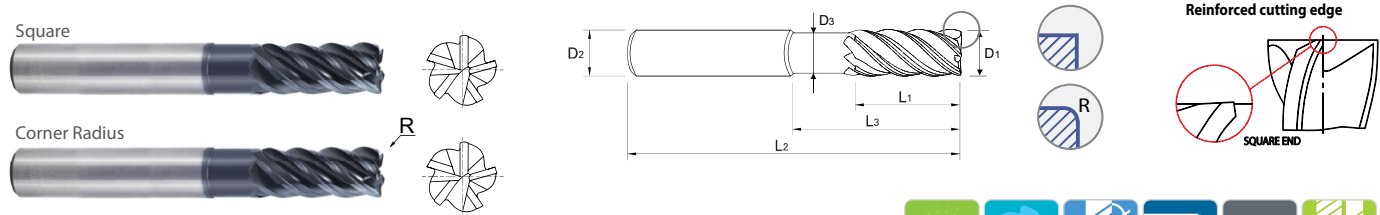

Unit : INCH

OD (D <sub>1</sub> )	SD (D <sub>2</sub> )	LOC (L <sub>1</sub> )	LBS (L <sub>3</sub> )	OAL (L <sub>2</sub> )	Neck Dia (D <sub>3</sub> )	Corner Radius						
						Square EDP No.	.030 EDP No.	.060 EDP No.	.090 EDP No.	.125 EDP No.	.190 EDP No.	.250 EDP No.
1/8	1/8	5/32	3/8	3	.113	UGMH06008	UGMH07008					
		5/32	1/2	3	.113	UGMH06901	UGMH07901					
		5/32	5/8	3	.113	UGMH06902	UGMH07902					
3/16	3/16	7/32	1/2	3	.176	UGMH06012	UGMH07012					
		7/32	3/4	3	.176	UGMH06903	UGMH07903					
		7/32	1	3	.176	UGMH06904	UGMH07904					
1/4	1/4	3/8	3/4	4	.230	UGMH06016	UGMH07016	UGMH07905				
		3/8	1-1/8	4	.230	UGMH06905	UGMH07906	UGMH07907				
		3/8	2-1/8	4	.230	UGMH06906	UGMH07908	UGMH07909				
3/8	3/8	1/2	1-1/8	4	.344	UGMH06024	UGMH07024	UGMH07910	UGMH07911			
		1/2	2-1/8	4	.344	UGMH06907	UGMH07912	UGMH07913	UGMH07914			
		1/2	3-1/8	5	.344	UGMH06923	UGMH07804	UGMH07805	UGMH07806			
		1/2	3-1/8	6	.344	UGMH06908	UGMH07915	UGMH07916	UGMH07917			
		1/2	4-1/8	6	.344	UGMH06909	UGMH07918	UGMH07919	UGMH07920			
1/2	1/2	5/8	1-1/2	4	.461	UGMH06032	UGMH07032	UGMH07921	UGMH07922	UGMH07923		
		5/8	2-1/4	4	.461	UGMH06910	UGMH07924	UGMH07925	UGMH07926	UGMH07927		
		5/8	3-3/8	5	.461	UGMH06924	UGMH07807	UGMH07808	UGMH07809	UGMH07810		
		5/8	3-3/8	6	.461	UGMH06911	UGMH07928	UGMH07929	UGMH07930	UGMH07931		
		5/8	4-1/8	6	.461	UGMH06912	UGMH07932	UGMH07933	UGMH07934	UGMH07935		
5/8	5/8	3/4	1-5/8	4	.586	UGMH06040	UGMH07040	UGMH07936	UGMH07937	UGMH07938		
		3/4	2-3/8	6	.586	UGMH06913	UGMH07939	UGMH07940	UGMH07941	UGMH07942		
		3/4	3-3/8	6	.586	UGMH06914	UGMH07943	UGMH07944	UGMH07945	UGMH07946		
		3/4	4-1/8	6	.586	UGMH06915	UGMH07947	UGMH07948	UGMH07949	UGMH07950		

Mill Dia. Tolerance (in)	Shank Dia. Tolerance
0 ~ - .0012	h5 * Shank Dia. ≥ Ø1/2 : h6

Feed to be reduced by approximately 50% if L.O.C. (Length Of Cut) is over 3xD

NEXT PAGE ►

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○	
ISO	N								S							H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	◎	◎				

SERIES


# HIGH PERFORMANCE SOLID CARBIDE END MILLS 5-FLUTE EXTENDED LENGTH (PLAIN SHANK)

Square **UGMH06**

Corner Radius **UGMH07**

- Suitable for Titanium, Titanium Alloys, Inconel and Stainless Steels.
- Optimized flute design for chip evacuation and rigidity when machining difficult-to-cut materials.

- Special roughing profile for machining Titanium and Titanium Alloys.
- Longer tool life with special coating.

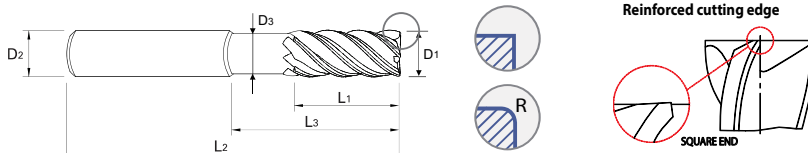

CARBIDE 5 43°/44°/45° PLAIN Coating Y p. 22

Unit : INCH

OD (D1)	SD (D2)	LOC (L1)	LBS (L3)	OAL (L2)	Neck Dia (D3)	Square EDP No.	Corner Radius					
							.030	.060	.090	.125	.190	.250
							EDP No.	EDP No.	EDP No.	EDP No.	EDP No.	EDP No.
3/4	3/4	1-1/8	2	4	.711	UGMH06048	UGMH07048	UGMH07951	UGMH07952	UGMH07953	UGMH07954	UGMH07955
		1-1/8	2-5/8	5	.711	UGMH06916	UGMH07956	UGMH07957	UGMH07958	UGMH07959	UGMH07960	UGMH07961
		1-1/8	3-1/4	6	.711	UGMH06917	UGMH07962	UGMH07963	UGMH07964	UGMH07965	UGMH07966	UGMH07967
		1-1/8	4-1/4	7	.711	UGMH06918	UGMH07968	UGMH07969	UGMH07970	UGMH07971	UGMH07972	UGMH07973
1	1	1-1/4	2-1/4	4	.961	UGMH06064	UGMH07064	UGMH07974	UGMH07975	UGMH07976	UGMH07977	UGMH07978
		1-1/4	2-5/8	5	.961	UGMH06919	UGMH07979	UGMH07980	UGMH07981	UGMH07982	UGMH07983	UGMH07984
		1-1/4	3-1/4	6	.961	UGMH06920	UGMH07985	UGMH07986	UGMH07987	UGMH07988	UGMH07989	UGMH07990
		1-1/4	4-1/4	7	.961	UGMH06921	UGMH07991	UGMH07992	UGMH07993	UGMH07994	UGMH07995	UGMH07996
		1-1/4	5-1/4	8	.961	UGMH06922	UGMH07997	UGMH07998	UGMH07999	UGMH07801	UGMH07802	UGMH07803

Mill Dia. Tolerance (in)	Shank Dia. Tolerance
0 ~ - .0012	h5 * Shank Dia. ≥ Ø1/2 : h6

Feed to be reduced by approximately 50% if L.O.C. (Length Of Cut) is over 3x D

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○	
ISO	N									S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	◎	◎				


# RECOMMENDED CUTTING CONDITIONS – INCH

## UGMH12, UGMG32, UE5G32 UGMG34, UGMH06, UGMH07 SERIES

5 FLUTES - Side cutting

RPM = rev./min. Feed = in./min.  
Vc = ft./min. fz = in./tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)												
						1/8	3/16	1/4	5/16	3/8	1/2	9/16	5/8	11/16	3/4	1	1 1/4	
P	1-5	Non-alloy steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470	470	
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
					RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440	
	6-8	Low alloy steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470		
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
					RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440	
	9	High alloyed steel, and tool steel	0.3D	1.5D	SFM (Vc)	330	330	330	330	330	330	330	330	330	330	330		
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
					RPM	10080	6720	5040	4030	3360	2520	2240	2020	1830	1680	1260	1010	
	10	High alloyed steel, and tool steel	0.3D	1.5D	SFM (Vc)	470	470	470	470	470	470	470	470	470	470	470		
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
					RPM	14360	9570	7180	5740	4790	3590	3190	2870	2610	2390	1800	1440	
	11.1	High alloyed steel, and tool steel	0.3D	1.5D	SFM (Vc)	330	330	330	330	330	330	330	330	330	330	330		
					IPT (fz)	.0004	.0007	.0013	.0015	.0020	.0025	.0027	.0030	.0033	.0035	.0040	.0046	
					RPM	10080	6720	5040	4030	3360	2520	2240	2020	1830	1680	1260	1010	
M	12-13	Stainless steel (SUS 316, X40Cr13, 420)	0.3D	1.5D	SFM (Vc)	385	385	385	385	385	385	385	385	385	385	385		
					IPT (fz)	.0003	.0004	.0009	.0010	.0012	.0018	.0020	.0021	.0022	.0024	.0028	.0033	
					RPM	11760	7840	5880	4710	3920	2940	2610	2350	2140	1960	1470	1180	
	14.1	Stainless steel (SUS 316, 316, X5CrNiMo 17 12 2)	0.3D	1.5D	SFM (Vc)	270	270	270	270	270	270	270	270	270	270	270		
					IPT (fz)	.0004	.0005	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	.0041	
					RPM	8250	5500	4130	3300	2750	2060	1830	1650	1500	1380	1030	830	
	14.2	Stainless steel (SUS 630, PH 15-5)	0.3D	1.5D	SFM (Vc)	195	195	195	195	195	195	195	195	195	195	195		
					IPT (fz)	.0004	.0005	.0012	.0013	.0015	.0025	.0026	.0027	.0028	.0030	.0035	.0041	
					RPM	5960	3970	2980	2380	1990	1490	1320	1190	1080	990	740	600	
K	15-20	Grey cast iron	0.3D	1.5D	SFM (Vc)	350	350	350	350	350	350	350	350	350	350	350		
					IPT (fz)	.0006	.0008	.0017	.0019	.0025	.0031	.0034	.0038	.0041	.0044	.0050	.0057	
					RPM	10700	7130	5350	4280	3570	2670	2380	2140	1940	1780	1340	1070	
S	31-35	Heat Resistant Super Alloys (X12 NiCrSi 36-16, 1.4864, Inconel 718, NiCr20TiAl, 2.4631, NiCu30Al, 2.4375, G-X120Mn12, 1.3401)	0.1D	1.5D	SFM (Vc)	100	100	100	100	100	100	100	100	100	100	100		
					IPT (fz)	.0004	.0005	.0008	.0009	.0011	.0017	.0018	.0019	.0019	.0021	.0024	.0027	
					RPM	3060	2040	1530	1220	1020	760	680	610	560	510	380	310	
36-37	Titanium Alloys (HB 400 Rm, HB 1050Rm TiAl6V4, 3.7165)	0.2D	1.5D	SFM (Vc)	225	225	225	225	225	225	225	225	225	225	225			
				IPT (fz)	.0004	.0004	.0011	.0011	.0013	.0022	.0023	.0024	.0025	.0027	.0031	.0036		
				RPM	6880	4580	3440	2750	2290	1720	1530	1380	1250	1150	860	690		



- NOTES:**
- ▶ Maximum recommended depth shown
  - ▶ Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x D1 or less
  - ▶ Feed to be reduced by approximately 50% if L.O.C. (length of cut) is over 3x D
  - ▶ Reduce speed and feed recommendations for materials harder than listed
  - ▶ Recommendations above are based on ideal conditions. Adjust parameters accordingly for smaller taper machining centers or less rigid conditions

**YU-TP21 AMERICAS**

BEST VALUE IN THE WORLD OF CUTTING TOOLS



FOR TITANIUM, STAINLESS STEELS AND ALLOY STEELS :  
TOUGH MATERIALS  
**TAKE IT ON WITH TITANOX**

**TitaNox Power**

INDUSTRY-LEADING SOLID CARBIDE END MILLS

HIGH-PERFORMANCE  
MACHINING MADE EASY:

- Variable Helix and Pitch
- 4 Flute and 5 Flute
- Square End, Chamfer and Radius
- Standard and Extended Lengths
- Inch and Metric Sizes
- 5 Flute Heavy Cutting Solution  
TitaNox Power HPC **NEW**

Take It On With

**TitaNox Power**

HIGH-PERFORMANCE MACHINING MADE EASY.

-  Titanium
-  Stainless Steels
-  Alloy Steels



4 Flute

5 Flute

TitaNox-Power HPC  
5 Flute



If you've been looking for a superior carbide end mill that won't back down when the going gets tough, it's time you look at TitaNox.


The TitaNox line is built to take on titanium, stainless steels, alloy steels, and more. With a choice of 4- and 5 flute designs and extra-rigid high-speed performance, TitaNox makes the perfect match for aerospace, power generation and medical applications.

### TitaNox — Nothing Cuts Better.

With more choices in high-performance carbide end mills, YG-1 is the undisputed leader in end mill offerings. And with the TitaNox line, you have a full selection of extremely durable end mills built to take on the toughest materials in the business. From titanium to stainless steel and more—TitaNox rules. In either 4 flute or 5 flute configurations you get:

- ▶ YG-1 advanced coating for better wear resistance
- ▶ Better thermal stability
- ▶ Optimized edge design provides excellent performance in heavy cutting applications
- ▶ Excellent performance in difficult-to-machine materials
- ▶ Perfect solution for aerospace, power generation and medical applications
- ▶ Premium grade substrate for longer tool life

## TitaNox Power 4 FLUTE DOUBLE CORE END MILLS

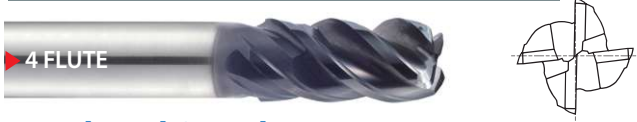

### Let the Chips Fly.

For heavy cutting in slotting and profiling applications, our true double-core design provides faster chip evacuation and improved dimensional stability. Experience what a difference double-core design can make in your operation.

- ▶ Highly rigid double core adds stability and improves rigidity
- ▶ Unique 4 flute design provides excellent chip evacuation
- ▶ Variable flute design featuring multiple helix helps increase performance, reduce vibration and eliminate chatter

## TitaNox Power 5 FLUTE MULTIPLE HELIX END MILLS



### Strong Performance — Right to the Finish.


These new 5 flute end mills are built to handle high-speed machining with fine finishing ability.

- ▶ 5 flute multiple helix design for fast, fine finishing in tough materials
- ▶ Multiple-helix geometry delivers smooth cutting with reduced chatter
- ▶ The perfect choice for profiling, finishing, peel milling operations and more
- ▶ New HPC Solution for Heavy Cutting Applications

## CASE STUDY

### 4 Flute Double Core End Mills vs. Competitors

Cutting Conditions	
Milling Method	Slotting
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	Ø12(R1) x Ø12 x 26 x 80
RPM	1591 rev./min.
IPM	10 in./min.
Axial Depth	.470"
Coolant	Wet Cut
Overhang	1.41"
Machine	Machining Center

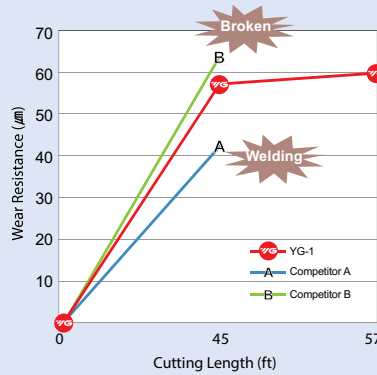

**TitaNox-POWER** Total Milling Length : 57 ft.



**Competitor A** Total Milling Length : 53 ft.




**Competitor B** Total Milling Length : 53 ft.



### 5 Flute Multiple Helix End Mills vs. Competitors


Cutting Conditions	
Milling Method	Down & Side Cutting
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	Ø12 x Ø12 x 26 x 83
RPM	1591 rev./min.
IPM	15.669 in./min.
Axial Depth	.710"
Radial Depth	.141"
Coolant	Wet Cut
Machine	Machining Center

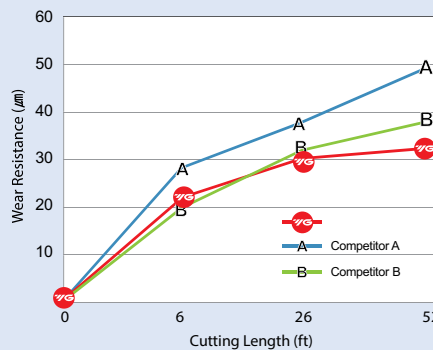


**TitaNox-POWER** Total Milling Length : 52 ft.



**Competitor A** Total Milling Length : 52 ft.




**Competitor B** Total Milling Length : 52 ft.




### 5 Flute TitaNox Power HPC vs. Competitor

Cutting Conditions	
Milling Method	Side Cutting
Work Material	- DIN : Ti6Al4V (Titanium) - WR : 3.7165.1
Size	3/4(R.03")x3/4x1-1/2x4"
RPM	2000 rev./min.
IPM	30 in./min.
Milling Method	Axial : .075" / Radial : 1.5"
Coolant	Wet Cut
Machine	Machining Center



**TitaNox-POWER** Milling Length = 49.21ft



**Competitor A** Broken at 46.58ft

