



DREAM DRILLS PRO




Wave Shape Cutting Edge

- Improve chip formation
- Low Cutting Force



140 Degree Point Angle

- Provides edge strength and Exceptional tool life
- Good Self Centering
- Low Torque



Micro-grained Carbide


- Achieving Excellent Wear Resistance
- Maximum Tool Life and High Performance

Optimized wide flute design

The unique flute structure provides good surface finish, longer tool life and requires less cutting force



Radius Shape




Helical Thinning

- Low Thrust
- Stable Torque
- Good Chip Breakage

Higher & Improved cutting conditions due to YG-1 Special Z-Coating Technology

(YG-1's Unique Silicon Based Coating: Nano-Layer Coating)


- Extremely High Hardness and Heat Resistance

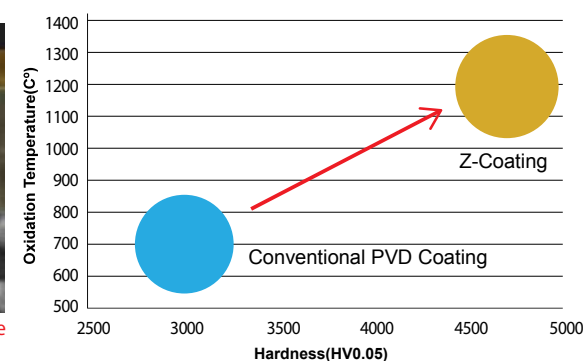

Performance Upgrade with Faster Cutting Speed

CASE STUDY


► SOLID CARBIDE DREAM DRILLS - PRO with Coolant Holes

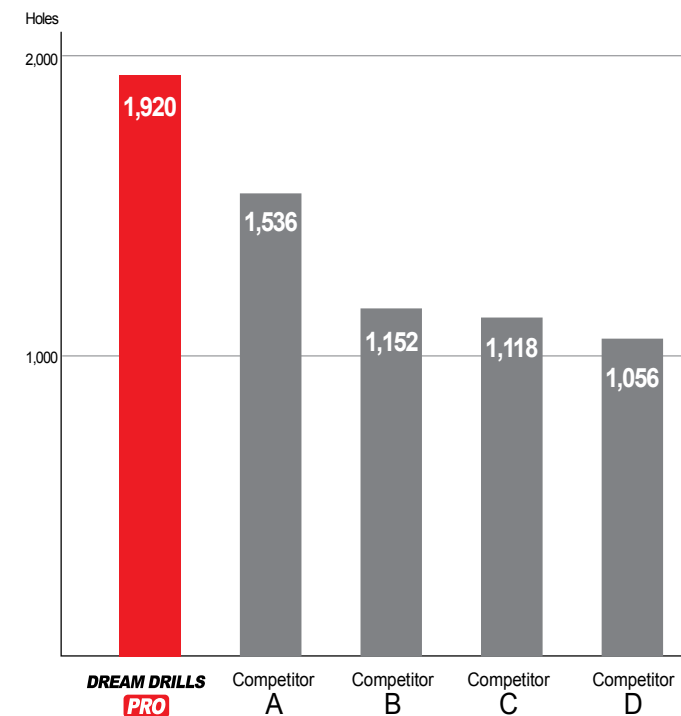

CUTTING CONDITION	
Work Material	DIN: 42CrMo4 ANSI: 4140 JIS: SCM440 Hardness: HRC30 (HB286)
O.D SIZE(mm)	Ø10.0 (.3937 inch)
RPM	14,856 rev./min.
Cutting Speed	140 m/min
Feed	0.30 mm/rev
Drilling Depth	45.0 mm
Coolant	Internal Cooling (20 bar) Water Soluble (9% Emulsion)
Machine	Machining Center

DREAM DRILLS PRO

Total Drilling 1,920 Holes

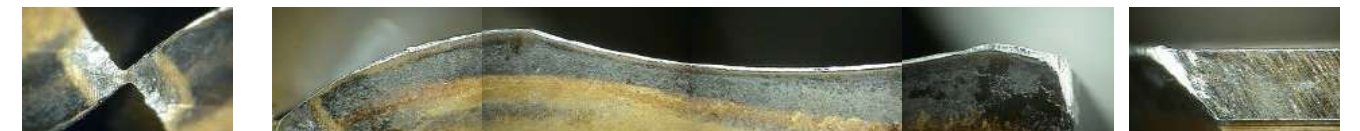

Competitor A

Total Drilling 1,536 Holes



Competitor B

Total Drilling 1,152 Holes



Competitor C

Total Drilling 1,118 Holes



Competitor D


Total Drilling 1,056 Holes



Z-COATED SOLID CARBIDE DREAM DRILLS
PRO without Coolant Holes (3XD)

DGN523 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRc30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

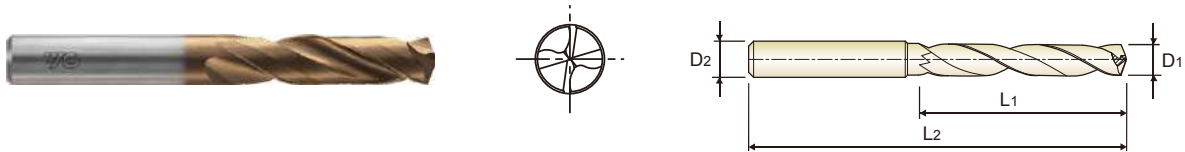

SHORT
3 × D

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN523030	3.0	6	20	62
DGN523031	3.1	6	20	62
DGN523032	3.2	6	20	62
DGN523033	3.3	6	20	62
DGN523034	3.4	6	20	62
DGN523035	3.5	6	20	62
DGN523036	3.6	6	20	62
DGN523037	3.7	6	20	62
DGN523038	3.8	6	24	66
DGN523039	3.9	6	24	66
DGN523040	4.0	6	24	66
DGN523041	4.1	6	24	66
DGN523042	4.2	6	24	66
DGN523043	4.3	6	24	66
DGN523044	4.4	6	24	66
DGN523045	4.5	6	24	66
DGN523046	4.6	6	24	66
DGN523047	4.7	6	24	66
DGN523048	4.8	6	28	66
DGN523049	4.9	6	28	66
DGN523050	5.0	6	28	66
DGN523051	5.1	6	28	66
DGN523052	5.2	6	28	66
DGN523053	5.3	6	28	66

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN523054	5.4	6	28	66
DGN523055	5.5	6	28	66
DGN523056	5.6	6	28	66
DGN523057	5.7	6	28	66
DGN523058	5.8	6	28	66
DGN523059	5.9	6	28	66
DGN523060	6.0	6	28	66
DGN523061	6.1	8	34	79
DGN523062	6.2	8	34	79
DGN523063	6.3	8	34	79
DGN523064	6.4	8	34	79
DGN523065	6.5	8	34	79
DGN523066	6.6	8	34	79
DGN523067	6.7	8	34	79
DGN523068	6.8	8	34	79
DGN523069	6.9	8	34	79
DGN523070	7.0	8	34	79
DGN523071	7.1	8	41	79
DGN523072	7.2	8	41	79
DGN523073	7.3	8	41	79
DGN523074	7.4	8	41	79
DGN523075	7.5	8	41	79
DGN523076	7.6	8	41	79
DGN523077	7.7	8	41	79

► Other shank types are available on your request.


► NEXT PAGE

© : Excellent ○ : Good																
ISO	P										M			K		
Material Description	Non-alloy steel					Low alloy steel					Stainless steel			Grey cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HRc	13	25	28	32	35	10	29	32	38	15	11	15	23	10	10	26
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S			H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400 Rm	1050 Rm	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Z-COATED SOLID CARBIDE DREAM DRILLS
PRO without Coolant Holes (3XD)

DGN523 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRc30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

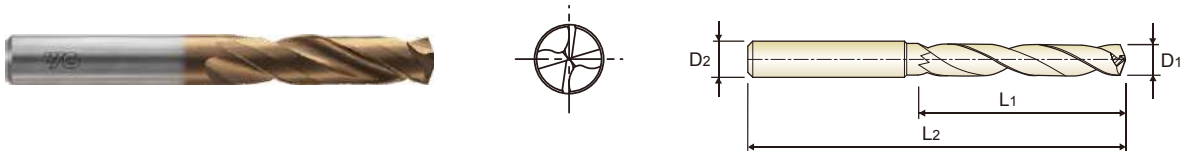

SHORT
3 × D

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN523078	7.8	8	41	79
DGN523079	7.9	8	41	79
DGN523080	8.0	8	41	79
DGN523081	8.1	10	47	89
DGN523082	8.2	10	47	89
DGN523083	8.3	10	47	89
DGN523084	8.4	10	47	89
DGN523085	8.5	10	47	89
DGN523086	8.6	10	47	89
DGN523087	8.7	10	47	89
DGN523088	8.8	10	47	89
DGN523089	8.9	10	47	89
DGN523090	9.0	10	47	89
DGN523091	9.1	10	47	89
DGN523092	9.2	10	47	89
DGN523093	9.3	10	47	89
DGN523094	9.4	10	47	89
DGN523095	9.5	10	47	89
DGN523096	9.6	10	47	89
DGN523097	9.7	10	47	89
DGN523098	9.8	10	47	89
DGN523099	9.9	10	47	89
DGN523100	10.0	10	47	89
DGN523101	10.1	12	55	102

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN523102	10.2	12	55	102
DGN523103	10.3	12	55	102
DGN523104	10.4	12	55	102
DGN523105	10.5	12	55	102
DGN523106	10.6	12	55	102
DGN523107	10.7	12	55	102
DGN523108	10.8	12	55	102
DGN523109	10.9	12	55	102
DGN523110	11.0	12	55	102
DGN523111	11.1	12	55	102
DGN523112	11.2	12	55	102
DGN523113	11.3	12	55	102
DGN523114	11.4	12	55	102
DGN523115	11.5	12	55	102
DGN523116	11.6	12	55	102
DGN523117	11.7	12	55	102
DGN523118	11.8	12	55	102
DGN523119	11.9	12	55	102
DGN523120	12.0	12	55	102
DGN523123	12.3	14	60	107
DGN523125	12.5	14	60	107
DGN523128	12.8	14	60	107
DGN523130	13.0	14	60	107
DGN523135	13.5	14	60	107

► Other shank types are available on your request.


► NEXT PAGE

© : Excellent ○ : Good																
ISO	P										M			K		
Material Description	Non-alloy steel					Low alloy steel					Stainless steel			Grey cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HRc	13	25	28	32	35	10	29	32	38	15	11	15	23	10	10	26
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S			H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400 Rm	1050 Rm	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Z-COATED SOLID CARBIDE DREAM DRILLS
PRO without Coolant Holes (3XD)

DGN523 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRC30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

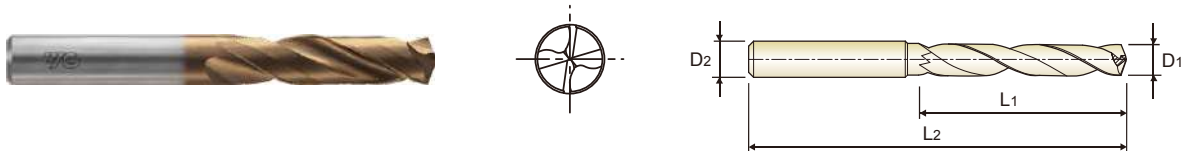

SHORT
3 × D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN523138	13.8	14	60	107
DGN523140	14.0	14	60	107
DGN523145	14.5	16	65	115
DGN523148	14.8	16	65	115
DGN523150	15.0	16	65	115
DGN523155	15.5	16	65	115
DGN523158	15.8	16	65	115
DGN523160	16.0	16	65	115
DGN523165	16.5	18	73	123
DGN523168	16.8	18	73	123


EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN523170	17.0	18	73	123
DGN523175	17.5	18	73	123
DGN523178	17.8	18	73	123
DGN523180	18.0	18	73	123
DGN523185	18.5	20	79	131
DGN523190	19.0	20	79	131
DGN523195	19.5	20	79	131
DGN523198	19.8	20	79	131
DGN523200	20.0	20	79	131

► Other shank types are available on your request.

Z-COATED SOLID CARBIDE DREAM DRILLS
PRO without Coolant Holes (5XD)

DGN526 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRC30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

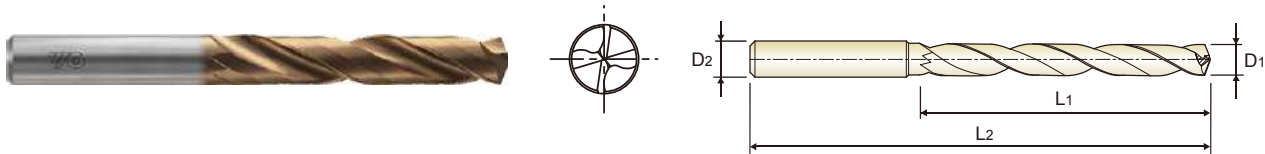

LONG
5 × D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN526010	1.0	3	8	55
DGN526011	1.1	3	12	55
DGN526012	1.2	3	12	55
DGN526013	1.3	3	12	55
DGN526014	1.4	3	12	55
DGN526015	1.5	3	16	55
DGN526016	1.6	3	16	55
DGN526017	1.7	3	16	55
DGN526018	1.8	3	16	55
DGN526019	1.9	3	16	55
DGN526020	2.0	4	21	57
DGN526021	2.1	4	21	57
DGN526022	2.2	4	21	57
DGN526023	2.3	4	21	57
DGN526024	2.4	4	21	57
DGN526025	2.5	4	21	57
DGN526026	2.6	4	21	57
DGN526027	2.7	4	21	57
DGN526028	2.8	4	21	57
DGN526029	2.9	4	21	57
DGN526030	3.0	6	28	66
DGN526031	3.1	6	28	66
DGN526032	3.2	6	28	66
DGN526033	3.3	6	28	66

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN526034	3.4	6	28	66
DGN526035	3.5	6	28	66
DGN526036	3.6	6	28	66
DGN526037	3.7	6	28	66
DGN526038	3.8	6	36	74
DGN526039	3.9	6	36	74
DGN526040	4.0	6	36	74
DGN526041	4.1	6	36	74
DGN526042	4.2	6	36	74
DGN526043	4.3	6	36	74
DGN526044	4.4	6	36	74
DGN526045	4.5	6	36	74
DGN526046	4.6	6	36	74
DGN526047	4.7	6	36	74
DGN526048	4.8	6	44	82
DGN526049	4.9	6	44	82
DGN526050	5.0	6	44	82
DGN526051	5.1	6	44	82
DGN526052	5.2	6	44	82
DGN526053	5.3	6	44	82
DGN526054	5.4	6	44	82
DGN526055	5.5	6	44	82
DGN526056	5.6	6	44	82
DGN526057	5.7	6	44	82

► Other shank types are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	34	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended																							

◎ : Excellent ○ : Good																					
ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

Z-COATED SOLID CARBIDE DREAM DRILLS
PRO without Coolant Holes (5XD)

DGN526 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRC30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology



LONG
5 × D

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN526058	5.8	6	44	82
DGN526059	5.9	6	44	82
DGN526060	6.0	6	44	82
DGN526061	6.1	8	53	91
DGN526062	6.2	8	53	91
DGN526063	6.3	8	53	91
DGN526064	6.4	8	53	91
DGN526065	6.5	8	53	91
DGN526066	6.6	8	53	91
DGN526067	6.7	8	53	91
DGN526068	6.8	8	53	91
DGN526069	6.9	8	53	91
DGN526070	7.0	8	53	91
DGN526071	7.1	8	53	91
DGN526072	7.2	8	53	91
DGN526073	7.3	8	53	91
DGN526074	7.4	8	53	91
DGN526075	7.5	8	53	91
DGN526076	7.6	8	53	91
DGN526077	7.7	8	53	91
DGN526078	7.8	8	53	91
DGN526079	7.9	8	53	91
DGN526080	8.0	8	53	91
DGN526081	8.1	10	61	103

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN526082	8.2	10	61	103
DGN526083	8.3	10	61	103
DGN526084	8.4	10	61	103
DGN526085	8.5	10	61	103
DGN526086	8.6	10	61	103
DGN526087	8.7	10	61	103
DGN526088	8.8	10	61	103
DGN526089	8.9	10	61	103
DGN526090	9.0	10	61	103
DGN526091	9.1	10	61	103
DGN526092	9.2	10	61	103
DGN526093	9.3	10	61	103
DGN526094	9.4	10	61	103
DGN526095	9.5	10	61	103
DGN526096	9.6	10	61	103
DGN526097	9.7	10	61	103
DGN526098	9.8	10	61	103
DGN526099	9.9	10	61	103
DGN526100	10.0	10	61	103
DGN526101	10.1	12	71	118
DGN526102	10.2	12	71	118
DGN526103	10.3	12	71	118
DGN526104	10.4	12	71	118
DGN526105	10.5	12	71	118

► Other shank types are available on your request.


► NEXT PAGE

◎ : Excellent ○ : Good																							
ISO	P										M			K									
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	34	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended																							

Z-COATED SOLID CARBIDE DREAM DRILLS
PRO without Coolant Holes (5XD)

DGN526 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRC30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

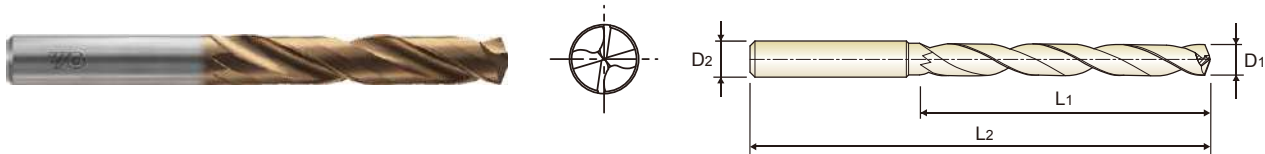

LONG
5 × D

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN526106	10.6	12	71	118
DGN526107	10.7	12	71	118
DGN526108	10.8	12	71	118
DGN526109	10.9	12	71	118
DGN526110	11.0	12	71	118
DGN526111	11.1	12	71	118
DGN526112	11.2	12	71	118
DGN526113	11.3	12	71	118
DGN526114	11.4	12	71	118
DGN526115	11.5	12	71	118
DGN526116	11.6	12	71	118
DGN526117	11.7	12	71	118
DGN526118	11.8	12	71	118
DGN526119	11.9	12	71	118
DGN526120	12.0	12	71	118
DGN526122	12.2	14	77	124
DGN526125	12.5	14	77	124
DGN526128	12.8	14	77	124
DGN526130	13.0	14	77	124
DGN526135	13.5	14	77	124
DGN526138	13.8	14	77	124
DGN526140	14.0	14	77	124

Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Z-Coating	D1	D2	L1	L2
DGN526142	14.2	16	83	133
DGN526145	14.5	16	83	133
DGN526148	14.8	16	83	133
DGN526150	15.0	16	83	133
DGN526151	15.1	16	83	133
DGN526152	15.2	16	83	133
DGN526155	15.5	16	83	133
DGN526158	15.8	16	83	133
DGN526160	16.0	16	83	133
DGN526165	16.5	18	93	143
DGN526170	17.0	18	93	143
DGN526173	17.3	18	93	143
DGN526175	17.5	18	93	143
DGN526177	17.7	18	93	143
DGN526180	18.0	18	93	143
DGN526185	18.5	20	101	153
DGN526190	19.0	20	101	153
DGN526193	19.3	20	101	153
DGN526195	19.5	20	101	153
DGN526200	20.0	20	101	153

► Other shank types are available on your request.

◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended																						

Z-COATED SOLID CARBIDE DREAM DRILLS
PRO with Coolant Holes (5XD)

DGN508 SERIES

- Drilling for Carbon Steels, Alloy Steels (HB225-325), Pre-hardened Steels (HRc30-50), Cast Iron
- Wave shape cutting edge to improve chip formation for low cutting force
- Helical thinning for low thrust, stable torque and good chip breakage
- Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology



LONG
5 × D

EDP No.	Drill Diameter D1	Shank Diameter D2	Flute Length L1	Overall Length L2
Z-Coating				
DGN508106	10.6	12	71	118
DGN508107	10.7	12	71	118
DGN508108	10.8	12	71	118
DGN508109	10.9	12	71	118
DGN508110	11.0	12	71	118
DGN508111	11.1	12	71	118
DGN508112	11.2	12	71	118
DGN508113	11.3	12	71	118
DGN508114	11.4	12	71	118
DGN508115	11.5	12	71	118
DGN508116	11.6	12	71	118
DGN508117	11.7	12	71	118
DGN508118	11.8	12	71	118
DGN508119	11.9	12	71	118
DGN508120	12.0	12	71	118
DGN508125	12.5	14	77	124

► Other shank types are available on your request.

EDP No.	Drill Diameter D1	Shank Diameter D2	Flute Length L1	Overall Length L2
Z-Coating				
DGN508130	13.0	14	77	124
DGN508135	13.5	14	77	124
DGN508140	14.0	14	77	124
DGN508145	14.5	16	83	133
DGN508150	15.0	16	83	133
DGN508155	15.5	16	83	133
DGN508160	16.0	16	83	133
DGN508165	16.5	18	93	143
DGN508170	17.0	18	93	143
DGN508175	17.5	18	93	143
DGN508180	18.0	18	93	143
DGN508185	18.5	20	101	153
DGN508190	19.0	20	101	153
DGN508195	19.5	20	101	153
DGN508200	20.0	20	101	153

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42
HB											200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																				

◎ : Excellent ○ : Good

RECOMMENDED CUTTING CONDITIONS

DGN523, DGN526 SERIES without COOLANT HOLES

Vc = m/min
RPM = rev/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)		Vc	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	2	Non-alloy steel	85	RPM	27,060	13,530	120	RPM	12,730	9,550	7,640	6,370
			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	
	3		85	RPM	27,060	13,530	120	RPM	12,730	9,550	7,640	6,370
			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	
	4	Low alloy steel	85	RPM	27,060	13,530	120	RPM	12,730	9,550	7,640	6,370
			FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18	
	5		75	RPM	23,870	11,940	95	RPM	10,080	7,560	6,050	5,040
			FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18	
	6		85	RPM	27,060	13,530	120	RPM	12,730	9,550	7,640	6,370
			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	
	7		75	RPM	23,870	11,940	95	RPM	10,080	7,560	6,050	5,040
			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.10-0.20	0.12-0.24	
	8		75	RPM	23,870	11,940	95	RPM	10,080	7,560	6,050	5,040
			FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18	
	9	High alloyed steel, and tool steel	36	RPM	11,460	5,730	50	RPM	5,310	3,980	3,180	2,650
			FEED	0.02-0.04	0.03-0.05		FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16	
	10		60	RPM	19,100	9,550	80	RPM	8,490	6,370	5,090	4,240
			FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18	
	11		35	RPM	11,140	5,570	45	RPM	4,770	3,580	2,860	2,390
			FEED	0.02-0.04	0.03-0.05		FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16	
M	12	Stainless steel	60	RPM	19,100	9,550	85	RPM	9,020	6,760	5,410	4,510
			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	
	13		45	RPM	14,320	7,160	55	RPM	5,840	4,380	3,500	2,920
			FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18	
K	15	Grey cast iron	85	RPM	27,060	13,530	120	RPM	12,730	9,550	7,640	6,370
			FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26	
	16		80	RPM	25,460	12,730	95	RPM	10,080	7,560	6,050	5,040
			FEED	0.04-0.06	0.04-0.06		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	
	17	Nodular cast iron	85	RPM	27,060	13,530	120	RPM	12,730	9,550	7,640	6,370
			FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26	
	18		60	RPM	19,100	9,550	85	RPM	9,020	6,760	5,410	4,510
			FEED	0.04-0.06	0.04-0.06		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	
	19	Malleable cast iron	75	RPM	23,870	11,940	95	RPM	10,080	7,560	6,050	5,040
			FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26	
	20		60	RPM	19,100	9,550	85	RPM	9,020	6,760	5,410	4,510
			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22	

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)						
					8.0	10.0	12.0	14.0	16.0	18.0	20.0
P	2	Non-alloy steel	120	RPM	4,770	3,820	3,180	2,730	2,390	2,120	1,910
			FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40	
	3		120	RPM	4,770	3,820	3,180	2,730	2,390	2,120	1,910
			FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40	
	4	120	RPM	4,770	3,820	3,180	2,730	2,390	2,120	1,910	
		FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32		
	5	95	RPM	3,780	3,020	2,520	2,160	1,890	1,680	1,510	
		FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32		
	6	Low alloy steel	120	RPM	4,770	3,820	3,180	2,730	2,390	2,120	1,910
			FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40	
	7		95	RPM	3,780	3,020	2,520	2,160	1,890	1,680	1,510
	FEED		0.16-0.28	0.20-0.30	0.21-0.30	0.22-0.35	0.25-0.36	0.28-0.38	0.30-0.40		
8	95	RPM	3,780	3,020	2,520	2,160	1,890	1,680	1,510		
	FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32			
9	High alloyed steel, and tool steel	50	RPM	1,990	1,590	1,330	1,140	990	880	800	
		FEED	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26	0.18-0.28		
10		80	RPM	3,180	2,550	2,120	1,820	1,590	1,410	1,270	
	FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32			
11	45	RPM	1,790	1,430	1,190	1,020	900	800	720		
	FEED	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26	0.18-0.28			
M	12	Stainless steel	85	RPM	3,380	2,710	2,250	1,930	1,690	1,500	1,350
			FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40	
	13		55	RPM	2,190	1,750	1,460	1,250	1,090	970	880
				FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
K	15	Grey cast iron	120	RPM	4,770	3,820	3,180	2,730	2,390	2,120	1,910
			FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44	
	16	95	RPM	3,780	3,020	2,520	2,160	1,890	1,680	1,510	
		FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40		
	17	Nodular cast iron	120	RPM	4,770	3,820	3,180	2,730	2,390	2,120	1,910
			FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44	
	18	85	RPM	3,380	2,710	2,250	1,930	1,690	1,500	1,350	
		FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40		
19	Malleable cast iron	95	RPM	3,780	3,020	2,520	2,160	1,890	1,680	1,510	
		FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44		
20	85	RPM	3,380	2,710	2,250	1,930	1,690	1,500	1,350		
	FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40			